SAMS

Steven Simrin

The Waite Group's® MS-DOS® Bible

Fourth Edition

Best seller

Complete DOS 5 Coverage!

- *Expert guide to all aspects of MS-DOS*
- *Comprehensive reference table to DOS commands*
- *Complete coverage through DOS 5*

Information Jump Table

To use this table, first find the major topic you are interested in, and then locate the specific task or command that you wish to perform. Both major topics and specific tasks or commands are listed alphabetically. See the table of contents for a complete list of DOS commands.

Batch Files

- AUTOEXEC.BAT, *93*
- Batch file commands, *54-68*
- Batch file description, *50*
- Creating a batch file, *51*
- Environment variables in batch files, *68-70*
- Replaceable parameters, *52*

Code Pages

- Code page description, *640*
- Code page programming guidelines, *643*
- Code page switching, *641-642*

Commands

- Changing directories (CHDIR), *393*
- Checking disk status (CHKDSK), *395*
- Clearing the display screen (CLS), *401*
- Comparing two disk (DISKCOMP), *441*
- Comparing two files (COMP), *404*
- Copying a disk (DISKCOPY), *442*
- Copying a file (COPY), *407*
- Creating a subdirectory (MKDIR), *494*
- Date setting (DATE), *416*
- Deleting a file (DEL), *417*
- Displaying the directory (DIR), *434*
- Displaying a file's contents (TYPE), *544*
- Entering a command, *367*
- Erasing a file (ERASE), *455*
- Formatting a disk (FORMAT), *467*
- Internal vs external commands, *368*
- Moving a file (MOVE), *666*
- Removing a subdirectory (RMDIR), *524*
- Renaming a file (REN), *518*
- Specifying a search path (PATH), *506*
- Time setting (TIME), *540*
- Undeleting a file (UNDELETE), *544*
- Wildcards in commands, *371*

The Environment

- Adjusting the environment size, *222*
- Batch files and the environment, *68-70*
- Description of MS-DOS environment, *222*
- Parents, children, and their environment, *222-224*

Files

- Batch files, *50-51*
- COM and EXE files, *221-222, 456*
- Displaying the contents of a file, *544*
- File allocation table (FAT), *185-203*
- File directories, *38-44, 189-198*
- File management, *34-47*
- Filenames and filename extensions, *26*
- System files, *186*

Hard (Fixed) Disk

- Booting with a hard disk, *16-23*
- Extended DOS partition, *21*
- Hard disk partitions, *16*
- Installing DOS on a hard disk, *16*
- 32-Mbyte limit on partition size, *16-17*

Memory Under MS-DOS

- Expanded memory, *229-256*
- Expanded memory device drivers, *239*
- Extended memory, *235-236*
- Memory allocation, *225*
- Memory restrictions, *210-211*
- Memory structure and management, *209-225*
- MEM utility program, *487*
- Program segment prefix (PSP), *215*

(continues on inside back cover)

The Waite Group's®
MS-DOS® Bible

The Waite Group's® MS-DOS® Bible

Fourth Edition

Steven Simrin

SAMS

A Division of Macmillan Computer Publishing

11711 North College, Carmel, Indiana 46032 USA

©1991 by The Waite Group®, Inc.

FOURTH EDITION
FIRST PRINTING—1991

All rights reserved. No part of this book shall be reproduced, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from the publisher. No patent liability is assumed with respect to the use of the information contained herein. Although every precaution has been taken in the preparation of this book, the publisher and author assume no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein. For information, address SAMS, 11711 N. College Ave., Carmel, IN 46032.

International Standard Book Number: 0-672-22789-4
Library of Congress Catalog Card Number: 91-61545

From The Waite Group®:

Development Editors
Mitchell Waite
James Stockford

Technical Reviewer
Harry Henderson

Managing Editor
Joel Fugazzotto

Chapter Opening Art
Bob Johnson

From SAMS:

Publisher
Richard K. Swadley

Publishing Manager
Joseph Wikert

Managing Editor
Neweleen Trebnik

Production Editor
Jodi Jensen

Manuscript Editor
Lynn Brown
Brown Editorial Service

Editorial Assistant
San Dee Phillips

Cover Artist
Kevin Caddell

Illustrator
William. D. Basham

Indexer
Sue VandeWalle

Production Assistance
Jill D. Bomaster
Phil Kitchell
Bob LaRoche
Anne Owen
Howard Peirce
Tad Ringo
Suzane Tully
Johnna VanHoose
Lisa Wilson

Composed in Garamond and MCP Digital by Macmillan Computer Publishing
Printed in the United States of America

Overview

Preface to the Fourth Edition xxi
Preface to the First Edition xxiii
Introduction xxxi

Part 1 MS-DOS Tutorials 1

1 Starting MS-DOS 3
2 MS-DOS Files 25
3 Directories, Paths, and Trees 33
4 MS-DOS Batch Files 49
5 Configuring Your System 77
6 Redirection, Filters, and Pipes 97
7 The DOSSHELL Interface 107
8 EDIT, the MS-DOS Text Editor 149
9 Extended Keyboard and Display Control 161
10 Disk Structure and Management 181
11 Memory Structure and Management 209
12 Expanded Memory 229
13 Terminate and Stay Resident Programs 257
14 MS-DOS Device Drivers 291
15 DEBUG 315
16 LINK 353

Part 2 MS-DOS Commands 367

Part 3 Appendixes 557

A MS-DOS Interrupts and Function Calls 559
B Some Undocumented Features of MS-DOS 629
C Practical Batch Files 633
D Code Pages and Code Page Switching 639
E The Edlin Text Editor 645
F An Assembly Language Primer 671
G ASCII Cross-Reference Tables 677
Index 689

Contents

Preface to the Fourth Edition xxi
Preface to the First Edition xxiii
Introduction xxxi

Part 1 MS-DOS Tutorials 1

1 Starting MS-DOS 3

Booting MS-DOS 5
Setting the Date 6
Setting the Time 7
The System Prompt 8
The MS-DOS Command Line 9
Date and Time Defaults 10
Date and Time Stamps 10
Rebooting with Ctrl-Alt-Del 10
Backing Up the System Disk 11
Copying Disks on Two-Drive Systems 13
Copying Disks on One-Drive Systems 13
Formatting a Disk 14
Changing Disk Drives 15
Installing MS-DOS on a Hard Disk 16
Disk Partitions and FDISK 16
Starting FDISK 17
Creating Partitions 18
Activating the Primary DOS Partition 21
Other FDISK Options 22
Formatting the Hard Disk 23

2 MS-DOS Files 25

Filenames and Extensions 26
File Specifications 28
Copying a File 28
Two-Drive Systems 29
One-Drive Systems 29
Wildcards 30
The ? Wildcard 31
The * Wildcard 31

3 Directories, Paths, and Trees 33

File Management 34
Hierarchical File Systems 34
Setting Up a Hierarchical File System 37
Paths 37
Creating a Subdirectory 38
Changing the Current Directory 39
A Word About Parents 40
Putting Files into a Subdirectory 40
Looking at the Tree 43
Removing a Subdirectory 44
The PATH Command 45
Using the Search Path 45
The APPEND Command 47

4 MS-DOS Batch Files and Macros 49

What Is a Batch File? 50
Creating a Batch File 51
Replaceable Parameters 52
Wildcards and Replaceable Variables 53
PAUSE 54
REM 56
ECHO 57
Using ECHO to Send a Blank Line to the Screen 59
Suppressing ECHO OFF 59
GOTO 60

IF 62
IF EXIST 62
IF String1==String2 62
IF ERRORLEVEL n 63
IF NOT 63
FOR 64
SHIFT 65
CALL 66
Calling a Batch File Module 66
Calling Batch File Modules Without CALL 67
Using Environment Variables 68
Macros 70
Creating Macros 71
Replaceable Parameters, Redirection, and Pipes in Macros 72
Creating a Macro to Move Files 73
Listing Macros Stored in Memory 75

5 Configuring Your System 77

System Parameters 78
Environment Variables 79
Creating User-Defined Environment Variables 80
Installable Device Drivers 81
Standard Device Drivers 82
Installable Device Drivers 82
Device Statements 82
CONFIG.SYS 83
Creating CONFIG.SYS 83
Executing the Statements in CONFIG.SYS 84
Roles of the System Parameters 85
Using CONFIG.SYS—A Working Example 92
AUTOEXEC.BAT 93

6 Redirection, Filters, and Pipes 97

Standard Input and Standard Output Devices 98
Reserved Device Names 98
Redirecting an MS-DOS Command 99
Filters 101
SORT 101

FIND 103
MORE 105
Pipes 105
Redirection Versus Piping 106

7 The DOSSHELL Interface 107

Graphical and Command Line Interfaces 108
Overview 110
Starting DOSSHELL 111
Some DOSSHELL Basics 111
Moving Around in DOSSHELL 114
Opening the Menu Bar 114
Activating a Selection Area 116
Highlighting and Selecting Items 116
Using DOSSHELL 119
The View Menu 119
The File Menu 122
The Options Menu 143
The Tree Menu 147
The Help Menu 148

8 EDIT, the MS-DOS Text Editor 149

Starting EDIT 150
The EDIT Screen 151
Editing 154
Scrolling 154
Positioning the Cursor 156
Selecting Text 157
Deleting, Moving, Copying, and Replacing Text 157
Managing Files 158
Searching 159
Options 160
Conclusion 160

9 Extended Keyboard and Display Control 161

Using ANSI.SYS 162
An Example 168

Getting ESC into a File 169
Keyboard Reassignment 170
Function Keys 172
Some Useful Applications of Keyboard Reassignment 172
Screen Control 174

10 Disk Structure and Management 181

Structure of MS-DOS Disks 182
Tracks and Sectors 182
Floppy Disks 182
Hard Disks 184
Formatting 185
The Boot Record 185
File Allocation Table and File Directory 185
System Files 186
Interchangeability of System Files 188
Examining the File Directory and the FAT 189
File Directory 189
File Allocation Table 193
Exploring with DEBUG 198
Looking at the File Directory 198
Loading the FAT 202
Looking at the FAT 203
MS-DOS File Management 204
Structure of the File Control Block 204
Using an FCB 206
File Handles 207

11 Memory Structure and Management 209

Computer Memory 210
Memory Segments 210
Accessing Memory 210
Booting MS-DOS 211
Program Segment Prefix 215
Executable Files 221
The Environment 222
Environment Size 222
Passing an Environment to a Child 224
Memory Allocation 225

12 Expanded Memory 229

The 640-Kbyte Limit 230
8088/86 Computers 231
80286, 80386, and 80486 Computers 232
Fundamentals of Expanded Memory 232
Expanded Memory Terminology 233
The Expanded Memory Specification 235
Expanded Memory Implementation 235
The Evolution of Expanded Memory 236
LIM EMS 3.2 236
AQA EEMS 237
LIM EMS 4.0 237
Using Expanded Memory 238
The Required Steps 238
Checking for Expanded Memory 239
Getting the EMM Version Number 241
Determining How Much Expanded Memory Is Available 241
Determining the Page Frame's Segment Address 241
Allocating Expanded Memory Pages 242
Mapping Logical Pages to the Page Frame 242
Exploring Expanded Memory with DEBUG 243
Starting DEBUG 244
Writing to and Reading from the Page Frame 247
Context Switching 249
Deallocating Pages 254
EMS 4.0 Enhancements 255
Conclusion 256

13 Terminate and Stay Resident Programs 257

TSRs—An Overview 258
Loading a TSR 258
Modifying the Interrupt Vector Table 261
Guidelines for a Peaceful Coexistence 263
Chaining 264
The Problem of Reentry 265
File Handles and TSRs 268
POPCLOCK—An Example of a TSR 269
Initialization 270
The Interrupt Handlers 271
Popping the Clock 274

14 MS-DOS Device Drivers 291

Using Device Drivers 292
Character and Block Devices 293
Adding a New Device 293
Structure of Device Drivers 294
Device Header 294
Function of Device Drivers 298
Installation 298
Locating a Driver 298
Request Header 299
Calling the Driver 301
Device Commands 303

15 DEBUG 315

DEBUG Commands 317
Introductory DEBUG 321
Starting DEBUG 321
Ending DEBUG 321
Displaying Memory Contents 321
Entering Data with DEBUG 327
Advanced DEBUG 329
Registers and Flags 329
DEBUG Initialization 329
Looking at Registers with DEBUG 330
Unassembling with DEBUG 332
Program Execution with DEBUG 336
Single-Stepping Through a Program 339
Assembling with DEBUG 341
Naming a File with DEBUG 342
Loading a File with DEBUG 343
Storing Data with DEBUG 345
Comparing Blocks of Memory 346
Searching Memory 347
Moving Data in Memory 348
Filling Memory 349
Sending Data to a Port 350
Reading Data from a Port 350
Hexadecimal Arithmetic with DEBUG 351
Proceeding Through a Loop 351
Using DEBUG with Expanded Memory 352

16 LINK **353**

Overview of LINK 354
VM.TMP 354
Starting LINK 354
Startup Method 1 355
Startup Method 2 357
Startup Method 3 358
LINK Switches 359
The /High Switch 359
The /Dsallocate Switch 360
The /Linenumber Switch 360
The /Map Switch 360
The /Pause Switch 362
The /Stack:[Number] Switch 362
The /No Switch 363

Part 2 MS-DOS Commands **367**

APPEND 372
ASSIGN 378
ATTRIB 380
BACKUP 382
BREAK 388
BUFFERS 389
CALL 392
CHCP 392
CHDIR 393
CHKDSK 395
CLS 401
COMMAND 401
COMP 404
COPY 407
COUNTRY 413
CTTY 414
DATE 416
DEL 417
DEVICE 418
DEVICEHIGH 433

DIR	434
DISKCOMP	441
DISKCOPY	442
DOS	444
DOSKEY	446
DRIVPARM	452
ECHO	454
ERASE	455
EXE2BIN	455
FASTOPEN	457
FC	459
FCBS	462
FDISK	463
FILES	464
FIND	465
FOR	466
FORMAT	467
GOTO	473
GRAFTABL	474
GRAPHICS	475
IF	477
INSTALL	479
JOIN	480
KEYB	481
KEYBxx	484
LABEL	484
LASTDRIVE	485
LOADHIGH	486
MEM	487
MIRROR	491
MKDIR	494
MODE	495
MORE	504
NLSFUNC	505
PATH	506
PAUSE	507
PRINT	508

PROMPT 512
RECOVER 515
REM 517
RENAME 518
REPLACE 518
RESTORE 521
RMDIR 524
SELECT 525
SET 528
SETVER 529
SHARE 531
SHELL 533
SHIFT 534
SORT 534
STACKS 535
SUBST 536
SWITCHAR 537
SWITCHES 539
SYS 539
TIME 540
TREE 542
TRUENAME 542
TYPE 544
UNDELETE 544
UNFORMAT 548
VER 551
VERIFY 552
VOL 552
XCOPY 553

Part 3 Appendixes **557**

A MS-DOS Interrrupts and Function Calls **559**

What Is an Interrupt? 560
The MS-DOS Function Dispatcher 560

Interrupts and High-Level Programming Languages 561
Accessing the ROM BIOS 562
ENVSIZE.PAS 562
BRK_OFF.C 565
The MS-DOS Interrupts 570
The MS-DOS Functions 573
The "Reserved" Functions 574
Error Codes 574

B Some Undocumented Features of MS-DOS 629

Undocumented Interrupts 630
Undocumented Functions 631

C Practical Batch Files 633

D Code Pages and Code Page Switching 639

Overview 640
What Is Code Page Switching? 641
Code Page Switching Must Be Supported 641
Hardware and Prepared Code Pages 642
Switching Code Pages 642
Some Code Page Programming Guidelines 643

E The EDLIN Text Editor 645

Creating a File with EDLIN 646
Modifying an Existing File with EDLIN 646
The B Option 647
Ending EDLIN 647
EDLIN Commands 648
INSERT 650
LIST 653
EDIT 656
MS-DOS Editing Keys 656
DELETE 659
SEARCH 660

REPLACE 662
WRITE 664
APPEND 664
END 665
QUIT 665
MOVE 666
COPY 667
PAGE 668
TRANSFER 669

F An Assembly Language Primer 671

What Is Assembly Language Programming? 672
The MS-DOS Hardware 672
Segment Registers 672
Stack Pointer Registers 673
Index Registers 673
General-Purpose Registers 673
The Instruction Pointer Register 673
The Flags Register 673
Register Storage Capacity 673
Accessing Memory 674
Assembly Language Statements 674

G ASCII Cross-Reference Tables 677

Hexadecimal to Decimal Conversion 687
Decimal to Hexadecimal Conversion 688

Index 689

Preface

to the Fourth Edition

Two events stand out as being particularly significant in the 10-year history of MS-DOS. The first was the release of MS-DOS 2.0. Version 2.0 introduced the hierarchical directory structure and with it support for hard disk drives. Version 2.0 also introduced installable device drivers. These features were and continue to be necessary to support the development and use of the vast array of software and hardware that has made DOS-based computers so popular.

The second significant event in the history of DOS is the release of MS-DOS 5. DOS 5 represents a commitment to the future of MS-DOS by Microsoft Corporation. Publication of this fourth edition of *MS-DOS Bible* coincides with the release of MS-DOS 5.

Toward the end of the 1980s, the corporate strategy of Microsoft was to eventually replace MS-DOS with a new operating system known as OS/2. Development of OS/2 centered around an alliance Microsoft had formed with IBM. But over time, Microsoft and IBM became aware of the fact that users of MS-DOS were extremely reluctant to relinquish their investment in DOS software in order to switch to OS/2. This awareness caused both companies to reevaluate the OS/2 strategy. IBM, at least publicly, stuck by its guns, stating that its strategy for the personal computer marketplace would continue to center around OS/2. Microsoft, although not abandoning OS/2, switched gears and said that its strategy would center around MS-DOS.

The development and marketing of MS-DOS 5 demonstrates Microsoft's commitment to this changed strategy. Microsoft subjected the operating system to one year of rigorous beta testing at more than 5,000 sites prior to its release. Microsoft is aggressively marketing DOS 5 through software retailers in an effort to achieve as widespread a distribution as possible. Microsoft has made a significant investment in DOS 5, which bodes well for the future of the operating system. This is good news for users and developers who have an investment in the DOS environment.

The features introduced in DOS 5, although not revolutionary, address some of the opeating system's long-standing deficiencies. Perhaps most significant is DOS 5's ability to more efficiently use memory above the 640-Mbyte address, thereby freeing up more of the precious lower memory for use by application programs.

DOS 5 provides a DOSSHELL interface that is a tremendous improvement over the version introduced in DOS 4. The new interface is more useful, faster, and (not surprisingly) no longer modeled after the OS/2 interface. The new DOSSHELL also has a task switcher that enables you to work in different application programs simultaneously.

DOS 5 also contains several new and useful utilities. There is a command-line editing program that can be used to quickly reexecute or modify previous commands. This program also provides DOS 5 with a command macro facility. Other utilities in DOS 5 include a help facility, a program to recover erased files, another program to recover inadvertently formatted disks, a disk caching program, and a full-screen text editor that features pull-down menus and supports the use of a mouse.

This new edition of *MS-DOS Bible* includes thorough coverage of all the new features found in DOS 5. The objectives of the book remain the same as they have been through the previous three eidtions. The book is intended to provide an up-to-date, comprehensive discussioin of all aspects of MS-DOS. The book is self-contained; no prior knowledge of DOS is assumed. People with little or no knowledge of MS-DOS will find a thorough discussion of the fundamental information needed to become comfortable with the operating system. More advanced users and programmers will find all aspects of using and programming MS-DOS thoroughly discussed.

Once again, the author would like to acknowledge and thank the staffs of The Waite Group and SAMS for their help in producing this edition of *MS-DOS Bible*.

Preface

to the First Edition

This book is about MS-DOS, the powerful disk operating system developed by Microsoft for microcomputers. MS-DOS is the manager of your computer. It is responsible for supervising the flow of information into and out of your machine and for controlling the interaction of the various parts of your computer system. This book will show you how to master MS-DOS and take advantage of its enormous capabilities. It is an easy-to-use guide, written to provide you with a ready reference to both the fundamentals and the more-advanced aspects of MS-DOS.

When I first began using MS-DOS, I quickly realized that I was virtually on my own. While it was easy to find material on the basics of MS-DOS, most advanced sources of information were hard to find and often quite sketchy in their treatment. Many questions came up for which I could find no answer. I would spend hours poring over user's manuals, magazine articles, and how-to books. Often my searches were fruitless, and I would end up sitting in front of my computer, trying to figure things out for myself. Of course, experimenting is half the fun of using a computer, but it can be frustrating when you are in a hurry or you simply aren't in the mood for experimenting. I determined to spare others some of these "laboratory experiments" and share the results of my research.

The result has been this book. *MS-DOS Bible* is for all users of MS-DOS, from beginners to computer professionals. It begins with starting up your system and creating, editing, and managing files. It moves on to data handling and customizing your keyboard. Then it covers such advanced topics as exploring with DEBUG, using LINK, and understanding the structure of MS-DOS.

This book features:

- A learn-by-doing approach
- Jump tables for quick access of specific topics

- Step-by-step tutorials
- Coverage of the basics up through advanced programming information
- A special in-depth section on MS-DOS commands
- Appendixes listing error messages, function calls and interrupts, practical batch files, and ASCII codes

MS-DOS Bible assumes no prior knowledge on your part. Each topic is discussed in a logical fashion from beginning to end, without relying on computerese. Those of you who are interested in only an overview of a topic can skim for highlights. Those who are interested in details will find them here, presented thoroughly and clearly.

Acknowledgments

I am grateful to all who provided assistance during the writing of *MS-DOS Bible*. In particular, I would like to thank Mike Van Horn of The Waite Group, who initially suggested that I write this book.

Many thanks to Mary Johnson, also of The Waite Group, who acted as my editor. Finally, special thanks to family members and friends who gave valuable encouragement and moral support throughout the project.

Trademarks

All terms mentioned in this book that are known to be trademarks or service marks are listed below. In addition, terms suspected of being trademarks or service marks have been appropriately capitalized. SAMS cannot attest to the accuracy of this information. Use of a term in this book should not be regarded as affecting the validity of any trademark or service mark.

Apple and Macintosh are registered trademarks of Apple Computer, Inc.

Ashton-Tate is a registered trademark of Ashton-Tate.

AST is a registered trademark of AST Research, Inc.

COMPAQ is a registered trademark of COMPAQ Computer Corporation.

CP/M is a registered trademark of Digital Research.

DESQView is a trademark of Quarterdeck Office Systems.

EPSON is a registered trademark of EPSON America, Inc.

Everex is a trademark of Everex Systems, Inc.

IBM and Quietwriter are registered trademarks of International Business Machines Corporation.

Intel is a trademark of Intel Corporation.

LaserJet and ThinkJet are registered trademarks of Hewlett-Packard Co.

Lotus is a registered trademark of Lotus Development Corporation.

Mace UnFrag and Mace Utilities are registered trademarks of Paul Mace Software, Inc.

CodeView, Microsoft, Microsoft Windows, and MS-DOS are registered trademarks of Microsoft Corporation.

Norton Utilities is a trademark of Peter Norton Computing, Inc.

IBM ProPrinter, PS/2, OS/2, and Quietwriter are registered trademarks of International Business Machines Corporation.

Quadram is a registered trademark of Quadram.

SideKick is a registered trademark of Borland International.

UNIX is a registered trademark of AT&T Bell Laboratories.

The Waite Group and The Waite Group's are registered trademarks of The Waite Group, Inc.

WordPerfect is a registered trademark of WordPerfect Corporation.

WordStar is a registered trademark of MicroPro International Corporation.

Steven Simrin is a veterinarian living in Kensington, California. He began working with microcomputers following graduation from veterinary school. He is currently a postdoctoral fellow at the University of California, San Francisco. His research interests include the use of computerized databases as a tool in the evaluation of medical technologies.

Introduction

This book explains the MS-DOS operating system. Its primary goal is to provide a comprehensive, easy-to-understand guide to MS-DOS.

The material is presented sequentially from fundamental to advanced. For those readers new to MS-DOS, topics such as booting the system, using the commands, and file organization are discussed in the early chapters. Advanced topics—such as TSR programming, device drivers, DEBUG, and LINK—are discussed in the final chapters. The middle chapters cover the material needed to understand the advanced topics. Batch files, DOSSHELL, and the internal structure of MS-DOS are discussed fully, with programming examples provided.

This book is meant to be self-contained. No assumptions are made regarding the reader's level of computer expertise. Goals as diverse as maximizing your efficiency in using MS-DOS to writing fully functional TSR programs are addressed.

All versions of MS-DOS and PC DOS up to, and including, DOS 5 are covered.

What Is MS-DOS?

MS-DOS stands for *M*icro*S*oft *D*isk *O*perating *S*ystem. An *operating system* is a computer program that coordinates the activities of a computer. The operating system is responsible for setting guidelines under which common computer tasks are carried out. A *disk* operating system is one that is used with disks (or diskettes). And Microsoft Corporation is the manufacturer of MS-DOS.

The three chief functions of an operating system are

- Transferring data between the computer and various peripheral devices (terminals, printers, floppy disks, hard disks, and so on). This transfer of data is called input/output, or I/O.
- Managing computer files.
- Loading computer programs into memory and initiating program execution.

MS-DOS handles all these duties admirably, as you will soon find out. In fact, one of the advantages of using MS-DOS is that it is simple to learn yet provides you with some very sophisticated, complex functions.

The Operating System and You

Without an operating system, a computer is like a wild, untamed beast—lightning fast, with incredible strength, but uncontrollable by humans. An operating system harnesses the speed and strength of the computer, converting its power into a useful tool.

How much you need to know about your computer's operating system depends largely on what tasks you wish to carry out. If you are primarily concerned with loading programs and copying files, you need understand only the most fundamental aspects of the operating system. On the other hand, if you are a systems programmer, you need to be familiar with the most intimate details of the operating system. Those of you who want to use the operating system to maximize the usefulness of your microcomputer are somewhere in-between.

Whichever category you fall into, the more familiar you are with your operating system, the better you can apply its capabilities to your own goals. The purpose of this book is to assist you in attaining those goals.

A Brief History of MS-DOS

The origin of MS-DOS can be traced to 1980, when Seattle Computer Products developed a microcomputer operating system for use as an in-house software development tool. Originally called QDOS, the system was renamed 86-DOS in late 1980 after it had been modified.

The rights to 86-DOS were purchased by Microsoft Corporation, which had contracted with IBM to produce an operating system for IBM's

new line of personal computers. When the IBM PC hit the market in 1981, its operating system was a modified version of 86-DOS called PC DOS version 1.0.

Shortly after the IBM PC was released, "PC-compatible" personal computers began to appear. These computers used an operating system called MS-DOS version 1.0. Microsoft had made available to the manufacturers of these machines an operating system that was a near replica of PC DOS—the now-famous MS-DOS.

The only significant difference between any of these operating systems was at the "systems level." Each operating system had to be customized for the particular machine on which it was to run. Generally speaking, these changes were apparent only to the systems programmer whose job was to "fit" the operating system to the machine. The users of the various operating systems were not aware of any significant differences.

Since the initial release of PC DOS and MS-DOS, both operating systems have evolved along identical paths. Version 1.1 was released in 1982. The major change in 1.1 was double-sided disk drive capability. (Version 1.0 could be used only with single-sided disk drives.) Version 1.1 also allowed the user to redirect printer output to a serial port.

Version 2.0 was released in 1983. A major advancement over the earlier versions, it was designed to support a fixed (hard) disk and included a sophisticated hierarchical file directory, installable device drivers, and file handles.

MS-DOS 3.0 (released in 1984) provided improved support for fixed disks and microcomputers linked on a computer network. Subsequent versions through 3.3 (released in 1987) continued this trend.

MS-DOS 4.0, released in 1988, provided an alternative graphic user interface (DOSSHELL), an expanded memory device driver, support for hard disk partitions larger than 32 Mbytes, and several new commands and command options.

MS-DOS 5.0, released in 1991, improves the graphics interface; introduces a full-screen text processor (EDIT); and provides access to extended memory for the operating system, device drivers, and application programs.

Although this book is titled *MS-DOS Bible*, the information presented in it applies equally to PC DOS and MS-DOS. Unless otherwise noted, the names MS-DOS, PC DOS, and DOS are interchangeable. Versions 1.0 and 1.1 will be referred to as MS-DOS 1 or 1.X. Versions 2.0, 2.10, and 2.11 will be referred to as MS-DOS 2 or 2.X. Versions 3.0, 3.1, 3.2, and 3.3 will be referred to as MS-DOS 3 or 3.X. Versions 4.0 and 4.01 will be referred to as MS-DOS 4 and MS-DOS 4.X. Versions 5.0 and later will be referred to as 5.X.

Organization and Contents of This Book

This book is divided into three parts:

- Tutorials on various MS-DOS topics
- Discussions of MS-DOS commands
- Appendixes covering functions and interrupts, undocumented features of MS-DOS, practical batch files, code pages, assembly language programming, ASCII codes, and hexadecimal arithmetic

Part 1—MS-DOS Tutorials—consists of 16 chapters, arranged in order from those most fundamental to the use of MS-DOS to those required by programmers. Tutorials within the chapters provide hands-on learning aids, guiding you through the concepts presented in the chapter.

Part 2—MS-DOS Commands—explains over 80 MS-DOS commands. Because MS-DOS is a "command-driven" system (it takes action in response to commands that you enter), this part emphasizes the purpose of each command and the procedure for using it.

Part 3—Appendixes—contains supplemental material related to many of the topics covered in the book. Appendix A has a general introduction to the MS-DOS interrupts and function calls and then offers detailed discussions of each. Appendix B discusses some undocumented, but widely used, features of MS-DOS. Appendix C presents a simple menu-driven system that is constructed using batch files. Appendix D discusses code pages: what they are and how they are used. Appendix E discusses EDLIN, the original DOS text editor, Appendix F is a primer on assembly language programming. It is provided so that readers with little or no assembly language experience may understand the assembly language programs presented in the book. Appendix G contains two ASCII cross-reference tables and explains hexadecimal to decimal conversion and vice-versa.

Chapter Summaries

Here is a brief summary of each of the 16 chapters covered in Part 1.

- **Chapter 1, Starting MS-DOS:** everything you need to know to begin using MS-DOS. Booting the system, backing up the system disks, and hard disk installation are covered. The important task of hard disk partitioning and formatting is covered.

- **Chapter 2, MS-DOS Files:** the fundamentals of data storage, naming and copying files.
- **Chapter 3, Directories, Paths, and Trees:** file management techniques, including creating directories and subdirectories and using the PATH command.
- **Chapter 4, MS-DOS Batch Files:** what batch files are and how to create them. How to use replaceable parameters and execute batch file commands.
- **Chapter 5, Configuring Your System:** how you can modify MS-DOS according to your use requirements and preferences. Use of the system files AUTOEXEC.BAT and CONFIG.SYS is discussed in this chapter.
- **Chapter 6, Redirection, Filters, and Pipes:** advanced data-handling features of MS-DOS.
- **Chapter 7, Using DOSSHELL:** a complete discussion of the use of the DOS 5 graphical user interface. The chapter also discusses the use of program start commands, which allow you to customize the DOSSHELL interface.
- **Chapter 8, EDIT, the MS-DOS Text Editor:** how to use EDIT to create and modify files.
- **Chapter 9, Extended Keyboard and Display Control:** techniques for customizing your keyboard and display screen.
- **Chapter 10, Disk Structure and Management:** how MS-DOS organizes and manages data stored on disk, including discussion of the file directory, the file allocation table, and the MS-DOS system files.
- **Chapter 11, Memory Structure and Management:** how MS-DOS organizes and manages memory, including explanation of program loading, the program segment prefix, the MS-DOS environment, and memory control blocks.
- **Chapter 12, Expanded Memory:** a thorough overview of expanded memory: what it is, why it is necessary, how to use it, and how it works.
- **Chapter 13, Terminate and Stay Resident Programs:** what they are, how they function, and guidelines for "well-behaved" TSRs. A fully functional pop-up TSR is presented.
- **Chapter 14, MS-DOS Device Drivers:** what they are and how they function. A device driver skeleton that can be used to build a working device driver is presented.

- **Chapter 15, DEBUG:** exploring the inner workings of your computer, examining and modifying computer programs, and using DEBUG commands.
- **Chapter 16, LINK:** modifying object code into relocatable modules, combining separate object modules into a single relocatable module, and using LINK switches.

How to Use This Book

This book can be used in several ways. It can be read in order, from start to finish, or it can be read in skip-around fashion. Experienced users of MS-DOS will probably use this latter method. The generous use of cross-references throughout the book will help hit-and-miss users fill in information gaps.

Before you begin your exploration of MS-DOS, you should be aware of some of the conventions used in this book.

Screen Output and User Input

Unless noted otherwise, text identical to that appearing on the computer screen is printed in a special typeface:

```
Current date is Tue 7-08-1987
Enter new date: _
```

Note that the underscore character (_) indicates the position of the cursor.

Text that you are to type (user input) is shown in a **bold** version of the same special typeface:

```
Current date is Tue 7-08-1987
Enter new date: 6/01/1991
```

If you are entering information from a tutorial, be sure to type it exactly as shown, including blank spaces and punctuation marks.

Note that in EDLIN, the MS-DOS text editor (appendix E), the asterisk is used as a prompt; and in DEBUG, an MS-DOS utility (chapter 15), the hyphen is used as a prompt. For example, in the following EDLIN command

```
*2L
```

you would not enter the * because it is the EDLIN prompt; you would enter only 2L. The same is true for DEBUG commands:

```
-d
```

All you enter is `d`.

Commands

Special command keys are shown with an initial capital letter, like this: Esc, Del, Alt. The carriage return is indicated as Enter. Commands using control characters are shown as Ctrl-D, Ctrl-N. On-screen, such commands are represented as `^d`, `^n`. This is the same as Ctrl-D and Ctrl-N in this book's notation. In either case, you press the Ctrl key and the letter simultaneously. You do not have to shift to capitalize the letter.

Entering commands into your computer is easy. When you see the MS-DOS prompt (`A:\>` or `C:\>`), simply type the command and press Enter to signal MS-DOS that you are finished. On some keyboards, the Enter key may appear as Return or ↵. In any case, you must press the Enter key in order for the computer to respond.

Commands may be entered in uppercase letters, lowercase letters, or a combination. It makes no difference to MS-DOS. This book shows commands entered in lowercase, because that is the way most people will enter them. In typing your command, be sure to include all punctuation and blank spaces as shown. Always leave a space between the command and the drive indicator and between a command and a filename. If you don't, MS-DOS may become confused and not execute your command properly.

Do not type a lowercase "L" for the number 1, and do not use an uppercase "O" for a zero. MS-DOS does not recognize one for the other. If you have entered a command and it doesn't work, check your typing. You may have made a typing error or failed to enter the appropriate punctuation or spacing.

A Word About Disks and Disks

Throughout this book we will be discussing MS-DOS operations that use data stored on floppy disks and hard (fixed) disks. Unless otherwise noted, the word "disk" will refer to both floppy disks and hard disks.

PART

1

MS-DOS Tutorials

- Starting MS-DOS
- MS-DOS Files
- Directories, Paths, and Trees
- MS-DOS Batch Files and Macros
- Configuring Your System
- Redirection, Filters, and Pipes
- The DOSSHELL Interface
- EDIT, the MS-DOS Text Editor
- Extended Keyboard and Display Control
- Disk Structure and Management
- Memory Structure and Management
- Expanded Memory
- Terminate and Stay Resident Programs
- MS-DOS Device Drivers
- DEBUG
- LINK

CHAPTER

1

Starting MS-DOS

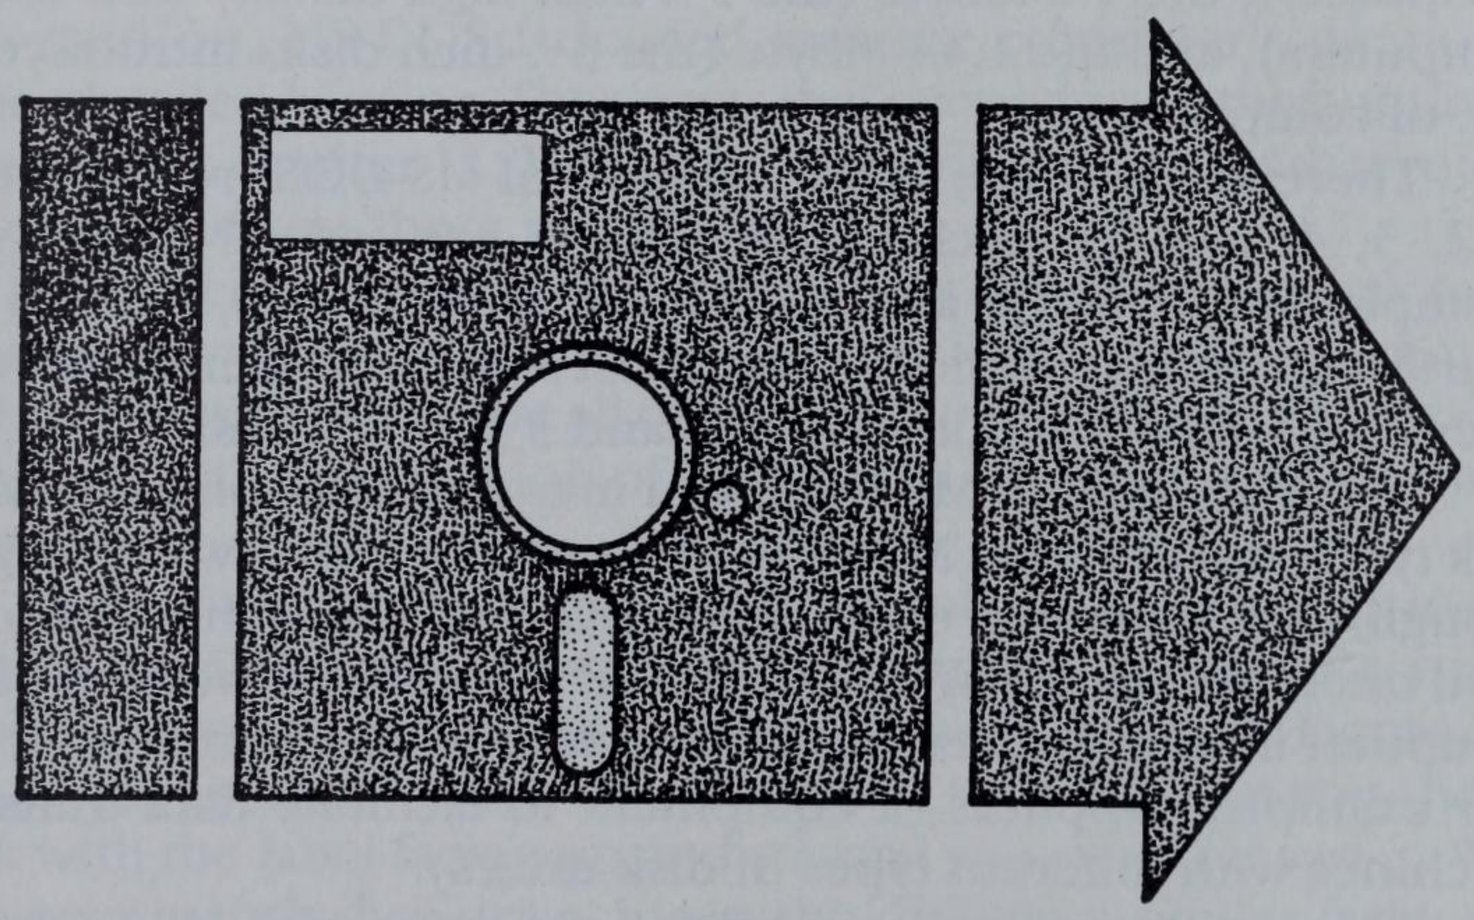

Booting MS-DOS
Backing Up the System Disk
Formatting a Disk
Changing Disk Drives
Installing MS-DOS on a Hard Disk

This chapter explains how to start using MS-DOS. The chapter covers a fairly wide range of material, primarily because of the variety of needs that must be addressed.

When MS-DOS was first released, each user received a single 5¼-inch floppy disk, which contained a copy of the entire operating system. Very few of the early PC-type computers had hard disk drives. Therefore, the first books on using MS-DOS (including the first edition of *MS-DOS Bible*) assumed that everyone would be using a system with one or two 5¼-inch floppy disk drives and no hard drive.

The situation has changed dramatically over the years. Most MS-DOS computers now have one or more hard drives. Some systems have 5¼-inch floppy drives; others have 3½-inch floppy drives. Some systems have both. There are also five different types of 5¼-inch disks (160 Kbytes, 180 Kbytes, 320 Kbytes, 360 Kbytes, and 1.2 Mbytes) and two different types of 3½-inch disks (720 Kbytes and 1.44 Mbytes). Of these, the most widely used are the 360-Kbyte (the standard 5¼-inch double density disk used in XT-type computers), the 1.2-Mbyte (the 5¼-inch high density disk used in AT-type computers), and the 1.44-Mbyte (the 3½-inch disks introduced in the PS/2 line of computers).

There are now five major versions of MS-DOS (referred to as MS-DOS 1, 2, 3, 4, and 5). Each major version has several minor versions—for example, MS-DOS 3.30 and MS-DOS 4.01. Versions 3, 4, and 5 are generally distributed on two or more disks. Most suppliers offer these versions of the operating system on both 5¼-inch and 3½-inch disks.

If you are new to MS-DOS, you may find this combination of different disk types and different MS-DOS versions a little overwhelming. Be assured, though, that long-time users of MS-DOS are also somewhat overwhelmed (and often frustrated) by this situation. A significant portion of the personal computer industry exists solely to service the needs created by this situation (for example, suppliers of equipment to facilitate data transfers between machines with different types of disk drives).

This chapter will tell you how to get going with MS-DOS, regardless of the MS-DOS version you are using, the type of disk drive(s) on your computer, or the presence or absence of a hard disk drive on your system.

The chapter begins by discussing how to load MS-DOS into your computer's memory (a process referred to as *booting*). The next section discusses the important task of making backup copies of your MS-DOS system disks. You should make your backups before doing anything else with MS-DOS. The chapter's third section discusses how to install MS-DOS on a hard disk drive. *Installation* is the process whereby MS-DOS is copied from your floppy disk(s) onto the hard disk. You can then put the disks away for

safekeeping and subsequently use the hard disk copy of the operating system. Many versions of DOS now come with customized installation programs. Generally these programs are easy to follow and perform the installation process efficiently. Refer to the documentation accompanying your version of DOS for details on the use of your installation program.

MS-DOS *files* and *disk directories* are mentioned throughout this chapter. You may want to briefly refer to chapters 2 and 3 as you are reading this chapter for a quick introduction to these two important concepts. Two files with special meaning to MS-DOS are named AUTOEXEC.BAT and CONFIG.SYS. The role of these files is discussed fully in chapter 5.

Booting MS-DOS

MS-DOS is supplied on one or more floppy disks, which come with your computer or can be purchased from a software vendor. When your computer is turned on, MS-DOS is loaded into the computer's memory through a process called *booting*. The events that occur during the booting process are discussed in chapter 11. This section describes the steps that you need to take the first time you "boot up" MS-DOS.

In order for a disk to be used to boot MS-DOS, the disk must contain a set of *system files*. If your version of MS-DOS is supplied on more than one disk, it is possible that not all of the disks are "bootable." Refer to the manual supplied with your version of MS-DOS to determine which disk is used for booting.

Before you turn on your computer, place the boot disk in drive A. Refer to the manual supplied with your computer or contact your computer supplier if you are uncertain as to the location of drive A. Figure 1-1 illustrates the insertion of a 5¼-inch disk into drive A. Notice that you should hold the disk with the label facing up and toward you as you insert it. When you are using a 3½-inch disk drive, insert the disks in a similar fashion. The major difference between using 3½-inch and 5¼-inch disks is that, with the larger disks, you must close a door on the drive following insertion.

After the disk is properly inserted, go ahead and turn on your computer. For a time it may appear that little if anything is happening. Actually, a series of checks is being run to verify that all is well inside your computer. Eventually the *cursor*, the small flashing light that marks your place on the screen, will appear. You will hear some whirring and clicking from the disk drive, and the drive's indicator light will flash on. The light indicates that MS-DOS is being loaded from the disk into computer memory.

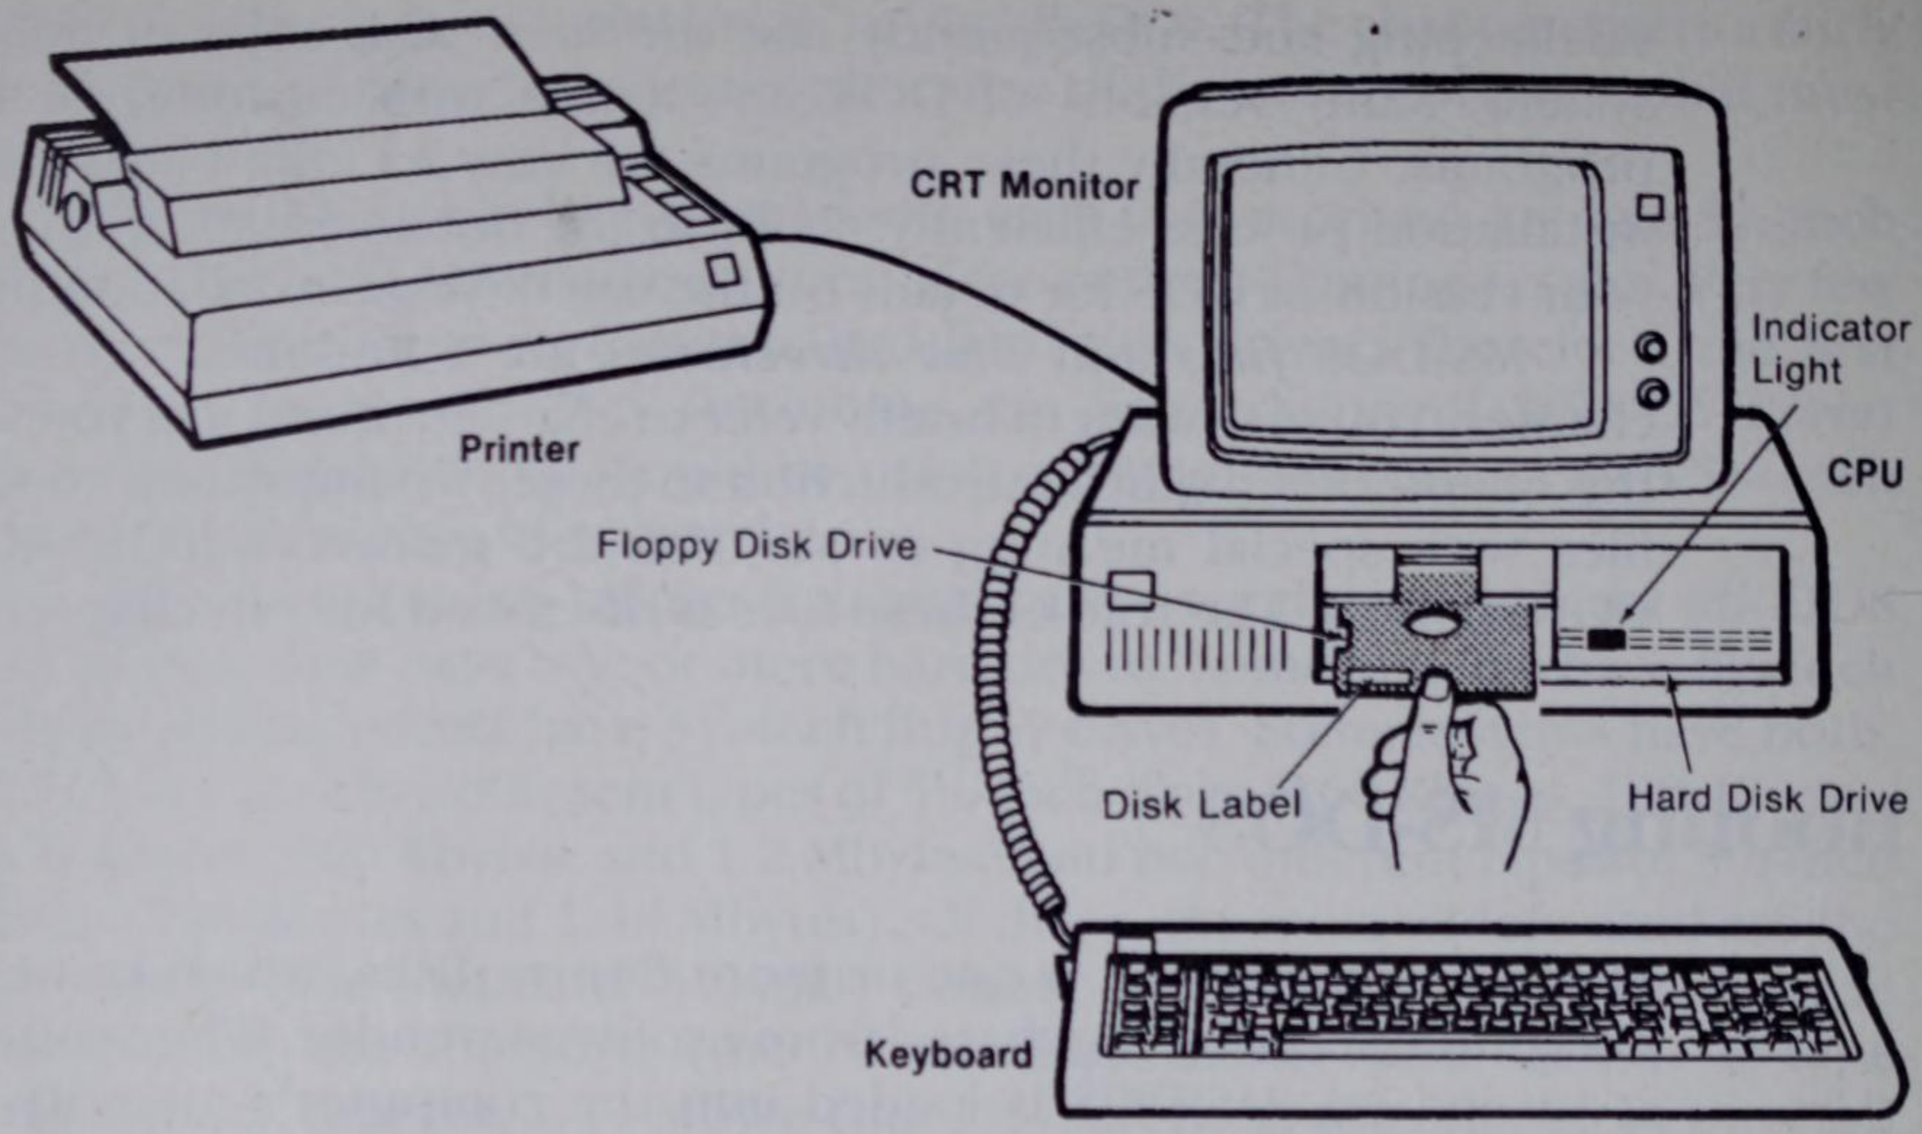

Figure 1-1. Major components of typical microcomputer systems.

Setting the Date

Now that MS-DOS has been loaded into memory, you are ready to set the date. Your display screen should look something like this:

```
Current date is Tue 01-01-1980
Enter new date: _
```

In the last line of the display, MS-DOS prompts you to enter a new date (today's date). The date that you enter will be used by MS-DOS as a *date stamp* to help identify all files stored on disk during the current work session. Having to enter a date may seem inconvenient to you, but that date might be important months from now when you are trying to locate a file.

Notice that the second-to-the-last line of the display shows the "current date." This is the date that MS-DOS was manufactured and first stored on a disk. This date will be displayed each time that you boot MS-DOS.

To enter the new date, follow these steps:

1. Type the number of the current month; for example, 01 = January, 02 = February, and so on. The leading zero in the number may be omitted. (January, for example, may be entered as "1" or "01".)

2. Type a dash (-), slash (/), or period (.) to separate the month from the day.
3. Type the number of the day of the month. Again, a leading zero may be omitted.
4. Type a dash (-), slash (/), or period (.) to separate the day from the year.
5. Type the year. MS-DOS will accept any year in the range 1980 through 2099. You do not have to type all four digits of the year, only the last two (1992 may be entered as either "1992" or "92").
6. Press the Enter key.

The new date should appear on the screen:

```
Current date is Tue 01-01-1980
Enter new date: 10/30/92      ←Enter
```

After you press Enter, MS-DOS checks to make sure that the date you have specified is valid (the screen will display the message `Invalid date` if it is not) and then stores the date in memory. The date is stored in memory only while your computer is turned on. When you switch off the power, the date is lost and must be reentered the next time you boot the system.

Setting the Time

Once you have entered a valid date, MS-DOS prompts you to enter the new time (the present time). The time that you enter will be used by MS-DOS as a *time stamp* to help identify all files stored on disk during the current work session. Like entering the date, entering the time may seem to be a nuisance, but you may be glad you did six months from now.

```
Current date is Tue 01-01-1980
Enter new date: 10/30/92
Current time is: 0:01:01.58
Enter new time:
```

Notice that the "current time" is displayed in the second to the last line. This is the time of day that MS-DOS was manufactured and first stored on a disk. It will be displayed each time that you boot MS-DOS.

To enter the new time, follow these steps:

1. Type the hour of the day. Any number in the range 01 through 24 is valid. A leading zero may be omitted (01 and 1 are both valid).

2. Type a colon (:) to separate the hours from the minutes.
3. Type the minutes. A leading zero is optional.
4. (Optional) Type a colon followed by the seconds. After entering the seconds, you may specify hundredths of a second by typing a period (.) and the hundredths of the second.
5. Press the Enter key.

   The new time should appear on the screen:

```
Current date is Tue 01-01-1980
Enter new date: 10/30/92
Current time is: 0:01:01.58
Enter new time: 9:40      ←Enter
```

After you have pressed Enter, MS-DOS checks whether the time you have specified is valid (the screen will display the message `invalid time` if it is not) and then stores the time in memory. The time is updated several times a second by your computer's internal timer. The current time is stored in memory only while your computer is turned on. When you switch off the power, the time is lost.

If it has a battery-powered clock card, your computer will maintain the current date and time while the machine is turned off. When you subsequently turn your computer back on, the correct date and time will be displayed. The date and time will not be correct if your computer does not have a battery-powered clock.

The System Prompt

Once a valid date and time have been entered, MS-DOS displays its *system prompt* (`A>`). Notice that a blinking cursor follows the `A>` prompt. The prompt and the blinking cursor are your signal from MS-DOS that it is ready for use:

```
Current date is Tue 01-01-1980
Enter new date: 10/30/92
Current time is: 0:01:01.58
Enter new time: 9:40

Microsoft(R) MS-DOS(R) Version 5.00
 Copyright Microsoft Corp. 1981-1991.
A>
```

The A> prompt tells you that the A drive is currently active. Most MS-DOS computers boot off a hard disk drive which is generally the C drive, in which case the DOS prompt is C>. The concept of the active (or default) disk drive is discussed later in this chapter.

Many of the examples in this book show the DOS prompt as C:\>. This prompt says that the C drive is active and the *root directory* (represented by the "\") is also active. The root directory is discussed in chapter 3. For now, just be aware that you can modify the DOS system prompt so that it displays both the active drive and the active directory. Refer to the discussion of the PROMPT command in Part 2 for a presentation of the very popular and useful technique.

The MS-DOS Command Line

MS-DOS is a *command-driven* operating system. This means that there is a set of commands that you use to tell the operating system what tasks you wish it to perform. To enter a command, type its name on the MS-DOS *command line*.

The command line is indicated by the system prompt. MS-DOS stores everything you type after the system prompt, until you press the Enter key, as part of the command line. Only when you press the Enter key does MS-DOS begin to analyze what you have typed.

The command line has two parts, the *head* and the *tail*. The head is the name of a command or other program you wish to run. The tail is separated from the head by a space character. When MS-DOS analyzes the command line, it treats the text preceding the first space character as the head and looks for a command or program with a name that matches the head. MS-DOS saves everything that follows the first space character (no matter what you type) as the tail. When MS-DOS loads the command or program with the matching name, it "passes" the tail to that program. It is the job of the program, not MS-DOS, to process the command line tail. For instance, if you type "Willy don't you weep" on the command line, MS-DOS will look for a program named WILLY and pass "don't you weep" to WILLY for processing.

Each MS-DOS command is designed to do a certain job, and part of its design enables you to control it in various ways, depending on what options and parameters the particular command has been designed to accept from the command line tail. In order to use an MS-DOS command, you simply have to learn its name and what it will accept on the command line tail. Some commands work without needing any information from the command line tail. Other commands require additional information, such as the name of a disk drive, a file, or a directory. Many commands are designed to respond to *options*, otherwise known as *switches*, which generally take the form of a slash character followed by a single letter—for example, */s*.

Date and Time Defaults

Although entering the new date and time is a good work habit, there may be occasions when you decide not to enter the date and time. If so, simply press the Enter key. The date and time will be set to the *default values,* the preset values used by MS-DOS unless you specify otherwise. In this case, the default values are the "current" date and time that are displayed by MS-DOS each time you boot the system. There is no correlation between these values and the date and time that you are actually using the computer. If you choose the default values, the screen will leave a blank in place of the new time and date:

```
Current date is Tue 01-01-1980
Enter new date:      ←Enter
Current time is: 0:01:01.58
Enter new time:      ←Enter

Microsoft(R) MS-DOS(R) Version 5.00
 Copyright Microsoft Corp. 1981-1991
A>
```

Date and Time Stamps

While MS-DOS is running, the computer's internal timer is used to update the present time, changing the value that is stored in memory several times a second. MS-DOS will also update the present date whenever the time reaches midnight (24:00:00.00).

When MS-DOS stores a file on a disk, the current date and time are stored on the disk along with other information about the file. These date and time stamps can be viewed by using the DIR command (more about DIR later). Date and time stamps can help you keep track of when a file was created or last modified, but they are accurate only if you entered the correct date and time when you booted MS-DOS.

Rebooting with Ctrl-Alt-Del

The procedure just described for booting MS-DOS is known as a *cold boot* because it began with the computer turned off. However, MS-DOS can also be started (or restarted) with the computer turned on. Naturally, this is known as a *warm boot*.

With the computer running, place your MS-DOS system disk in drive A, close the drive door, and press the Ctrl-Alt-Del keys simultaneously. MS-DOS

will be loaded (or reloaded) into memory. Just as it does for a cold boot, MS-DOS will prompt you to enter the current date and time.

Backing Up the System Disk

If you are using MS-DOS for the first time, you should make a *backup copy*, or duplicate, of your system disk before proceeding any further. The method used to make a backup depends on whether your system has two floppy disk drives or just one floppy disk drive. We will describe the method for two-drive systems first.

Note: If your system has a hard disk, determine whether it has one or two floppy disk drives and then use the appropriate method. In hard disk systems, it is especially important for you to back up the system disk before using the hard disk, because you might inadvertently erase the system disk when you are setting up the hard disk.

MS-DOS uses a program called DISKCOPY.COM to copy disks. The program is supplied as a file on one of the MS-DOS system disks. The first step in backing up your system disks is to find the disk that contains DISKCOPY.COM.

The MS-DOS command DIR (for DIRectory) is used to display the names of the files contained on a disk. The command

```
dir a: /w
```

tells MS-DOS to display the names of the files on the disk in drive A using the wide (/w) format. The wide format simply allows more filenames to be displayed at one time.

With the disk you used to boot the system in drive A, go ahead and enter **dir a: /w**. Throughout this book, the word *enter* means to type the text that is indicated and then press the Enter key. You should see something like this after entering the command:

```
A>dir a: /w
 Volume in drive A has no label
 Directory of  A:\

COMMAND  COM  ANSI     SYS  COUNTRY  SYS  DISPLAY  SYS  DRIVER   SYS
FASTOPEN EXE  FDISK    COM  FORMAT   COM  KEYB     COM  KEYBOARD SYS
MODE     COM  NLSFUNC  EXE  PRINTER  SYS  REPLACE  EXE  SELECT   COM
SYS      COM  VDISK    SYS  XCOPY    EXE  EGA      CPI  LCD      CPI
4201     CPI  5202     CPI
      22 File(s)       9216 bytes free
```

What you see is the list of the names of the files contained on the boot disk. It is likely that the actual list displayed on your system will differ somewhat from this list. That simply means that the disk used to boot your computer contains a different set of files than the disk used in this example.

We are looking for the file DISKCOPY.COM, and it is not contained in the drive A listing. If the listing on your screen does contain the entry DISKCOPY COM, you have the disk you need. Otherwise, replace the disk in drive A with another of the MS-DOS system disks and reenter the command **dir a: /w**. Repeat the process until you find the file DISKCOPY.COM. In the following listing, the entry for DISKCOPY.COM appears in the second column of the third row:

```
A>dir a: /w

 Volume in drive A has no label
 Directory of  A:\

APPEND   EXE  ASSIGN   COM  ATTRIB   EXE  BACKUP   COM  BASIC    COM
BASICA   COM  CHKDSK   COM  COMMAND  COM  COMP     COM  DEBUG    COM
DISKCOMP COM  DISKCOPY COM  EDLIN    COM  FIND     EXE  FORMAT   COM
GRAFTABL COM  GRAPHICS COM  JOIN     EXE  LABEL    COM  MORE     COM
PRINT    COM  RECOVER  COM  REPLACE  EXE  RESTORE  COM  SHARE    EXE
SORT     EXE  SUBST    EXE  TREE     COM  XCOPY    EXE  BASIC    PIF
BASICA   PIF  MORTGAGE BAS
        32 File(s)      43008 bytes free

A>
```

The disk copying process can begin once you have located DISKCOPY.COM. You will need one blank disk for each MS-DOS system disk. The blank disks must be the same size as the system disks, and the storage capacity of the blank disks must be the same as or greater than each of the system disks. The blank disks are referred to as the *target disks*. The original system disks are referred to as the *source disks*.

Instead of using blank disks as targets, you can use disks that contain files that you no longer need. *All existing files* on the target disks *will be destroyed* by the backup process. You can use the DIR command to make sure that prospective target disks do not contain any files that you want to save. (Chapter 2 explains how to copy a file that you want to save from one disk to another.)

Copying Disks on Two-Drive Systems

If your computer has two floppy disk drives of the same size, you begin the disk copying process by entering the command **diskcopy a: b:**. MS-DOS will respond with the following message:

```
Insert SOURCE diskette in drive A:

Insert TARGET diskette in drive B:

Press any key to continue . . .
```

The source is the MS-DOS system disk that is currently in disk drive A. Insert one of your target disks in drive B and press any key. MS-DOS will make an exact copy of the source disk on the target.

When the copying process is completed, MS-DOS will display the following query:

```
Copy another diskette (Y/N)?
```

Press **y** if MS-DOS is supplied on more than one system disk. You will be prompted to insert the next system disk as the source and another blank disk as the target. Repeat the process until you have made backup copies for each of the MS-DOS system disks. Press **n** in response to the copy query after you have copied the final system disk.

You should use the backup system disks for your future work with MS-DOS. Place the original system disks somewhere where they will be safe and use them only to make additional backup copies as you need them.

Copying Disks on One-Drive Systems

If your computer has a single floppy disk drive, begin the disk copying process with the same command used on two-drive systems: **diskcopy a: b:**. Now though the operating system displays the following:

```
Insert SOURCE diskette in drive A:

Press any key to continue . . .
```

the disk containing DISKCOPY.COM is your source, so go ahead and press any key. MS-DOS will read from the disk and then display the following:

```
Insert TARGET diskette in drive A:

Press any key to continue . . .
```

This is your prompt to remove the source disk and insert the target disk. This process is called *disk swapping*. MS-DOS will prompt you to repeat the swapping process until the target disk contains a complete copy of the source disk.

When the copying process is completed, MS-DOS will display the following query:

```
Copy another diskette (Y/N)?
```

Press **y** if MS-DOS is supplied on more than one system disk. You will be prompted to insert the next system disk as the source and another blank disk as the target. Repeat the process until you have made backup copies for each of the MS-DOS system disks. Press **n** in response to the copy query after the final system disk has been copied.

You should use the backup system disks for your future work with MS-DOS. Place the original system disks somewhere where they will be safe and use them only to make additional backup copies as you need them.

Computers with 5¼-inch and 3½-inch Disk Drives

On systems with both a 5¼-inch disk drive and a 3½-inch disk drive, one of the drives will be assigned drive letter A and the other letter B. On these systems, the command `diskcopy a: b:` will not work, because the drives are not the same size. Instead, you must use the command **diskcopy a: a:** (or **diskcopy b: b:**). MS-DOS will prompt you to swap disks as described in the section headed Copying Disks on One-Drive Systems.

Formatting a Disk

Before a disk can store data that is usable by MS-DOS, it must be *formatted*. During formatting, the disk is divided into parcels called *sectors*, which are readable by MS-DOS. Formatting also analyzes the disk for defects and sets

up a file directory. Most (but not all) versions of MS-DOS will automatically format a disk, if necessary, when the DISKCOPY command is used to back up a disk.

If you use an unformatted disk for your system backup and your version of MS-DOS does not automatically format when you use DISKCOPY, MS-DOS will display the following message:

```
Disk error reading drive A
Abort, Retry, Ignore?
```

Insert the system disk containing the file FORMAT.COM in drive A (use the DIR command to locate the file). Enter **format a:**. MS-DOS will prompt you as follows:

```
A>format a:      ←Enter
Insert new diskette for drive A:
and strike any key when ready
```

Remove the system disk from drive A and replace it with the disk that is to be formatted. Formatting destroys all existing data on a disk, so make sure that the disk does not contain any data that you will need later on. (If you want to abort the formatting process at this point, press Ctrl-C.) Press any key to format the disk in drive A. MS-DOS will tell you when formatting is complete:

```
Formatting...Format complete

  362496 bytes total disk space
  362496 bytes available on disk

Format another (Y/N)?n      ←you press n
A>
```

The formatted disk can now be removed from drive A and may be used to store data.

Changing Disk Drives

Most MS-DOS commands involve storing and/or retrieving data on a disk. You can specify which drive MS-DOS is to use by including the letter designator of the appropriate drive in the MS-DOS command. If you do not specify a drive in the command, MS-DOS assumes that the disk is in the *default drive.*

MS-DOS displays the letter of the *current* default drive in the system prompt. When you start MS-DOS from a diskette, the A drive is the default, and MS-DOS displays the prompt A>.

To change the default drive, type the letter of the drive you wish to be the new default, type a colon, and then press Enter:

```
A>b:        ←Enter
A>
```

The colon tells MS-DOS that b refers to a disk drive. If you omit the colon, MS-DOS will assume that b is a command and will try to execute it. The A drive light will come on for a second or two, and MS-DOS will search for a command named "B". When b is not found, MS-DOS will display an error message and then prompt you to enter another command:

```
A>b
Bad command or file name
A>
```

Installing MS-DOS on a Hard Disk

Most people using MS-DOS install the operating system on their hard disk. *Installation* is the process of copying the MS-DOS *system files* and the MS-DOS *external files* from the system disks onto the hard disk. The system files are the files required to make the hard disk bootable. The external files contain the MS-DOS *utility programs*. DISKCOPY.COM and FORMAT.COM are examples of MS-DOS external files.

A hard disk must be partitioned and formatted before MS-DOS can be installed on it. The MS-DOS program used to partition hard disks is called FDISK.

Disk Partitions and FDISK

A hard disk consists of a stack of *platters*. Each platter has two surfaces used to store data. Each platter surface is divided into a series of concentric circles called *tracks*. All tracks of equal diameter are grouped together to form a *cylinder*. The outermost group of tracks on each platter forms cylinder 0, the second-outermost group forms cylinder 1, and so on.

Before a hard disk can be used, contiguous cylinders must be grouped together to form *partitions*. Each partition "belongs" to a particular operating system. This means that for each partition there is only one operating

system that can store files in that partition. Most people just have partitions that belong to MS-DOS on their hard disks, but partitions for XENIX, CP/M, and other operating systems can coexist on a single hard disk, right along with one or more MS-DOS partitions.

FDISK, the MS-DOS utility program used to establish hard disk partitions, has evolved considerably over the years. The MS-DOS 2.X version of FDISK allows just a single MS-DOS partition on each hard disk. The partition is limited to 32 Mbytes of storage capacity.

The MS-DOS 3.0/3.2 versions of FDISK allow each hard disk to have up to four MS-DOS partitions. Each partition is assigned its own drive letter, and partitions are still limited to 32 Mbytes.

The MS-DOS 3.3 version of FDISK allows you to create a *primary* and *extended* MS-DOS partition on each hard disk. The primary partition is still limited to 32 Mbytes, but there is no limit to the size of the extended partition. The extended partition may be divided into multiple *logical drives*, each logical drive being assigned its own drive letter. Each hard disk must have one primary partition. Use of the PC DOS 3.3 version of FDISK is illustrated later in this section.

The MS-DOS 4.X and 5.X versions of FDISK can be used to create a single partition as large as the disk's total storage capacity. Removal of the 32-Mbyte limitation is one of the major enhancements of MS-DOS 4.X. and 5.X.

Starting FDISK

The example presented here uses the PC DOS 3.30 version of FDISK to partition a previously nonpartitioned 40-Mbyte hard disk. Users of 3.3 and previous versions of MS-DOS can follow the same procedure. (Versions 4 and 5 add additional capabilities to this command.) Two 20-Mbyte partitions are created. If you are using a version other than PC DOS 3.30, your screens may differ somewhat from those presented here. Nonetheless, the general concepts presented are applicable to all versions of FDISK.

Start FDISK by first locating the backup system disk containing the file FDISK.COM. Recall that the DIR command is used to obtain a listing of the files contained on a disk. After you locate FDISK.COM, go ahead and enter **fdisk**. The program starts and you see a display similar to this:

```
IBM Personal Computer
Fixed Disk Setup Program Version 3.30
Copyright IBM Corp. 1983, 1987

FDISK Options

Current Fixed Disk Drive: 1
```

```
Choose one of the following:

     1. Create DOS partition
     2. Change active Partition
     3. Delete partition
     4. Display Partition Information


Enter choice: [1]

Press ESC to exit FDISK
```

This is the FDISK Options menu. The first time you use FDISK, your objective is to create a partition for use by DOS. Before proceeding, though, a word of warning. You must be *very* careful when using FDISK. It is possible to wipe out an entire partition of data with FDISK. If you are uncertain about what is happening, press the Esc key until you return to the DOS command prompt (A>).

Entering 1 will cause FDISK to display the Create DOS Partition menu, shown here:

```
Create DOS Partition

Current Fixed Disk Drive: 1

1. Create Primary DOS partition
2. Create Extended DOS partition


Enter choice: [1]

Press ESC to return to FDISK Options
```

Creating Partitions

All hard disks partitioned with the 3.3, 4.X, and 5.X versions of FDISK are required to have one primary DOS partition. If you choose selection **1** from the Create DOS Partition menu, FDISK displays the Create Primary DOS Partition menu:

```
Create Primary DOS Partition

Current Fixed Disk Drive: 1
.
.
.
```

```
Do you wish to use the maximum size
for a DOS partition and make the DOS
partition active (Y/N).........? [n]
```

As you can see, FDISK wants to know whether it should create the largest DOS partition possible. Because the example is being carried out on a 40-Mbyte drive, the largest possible primary partition is 32 Mbytes (remember that this example is using PC DOS 3.30, which has a 32-Mbyte limit). However, in this example you decide to divide the drive into two 20-Mbyte partitions. Therefore, you do not want the largest possible partition, so you enter **n** in response to the question. This produces the following:

```
Create Primary DOS Partition

Current Fixed Disk Drive: 1

Total disk space is  976 cylinders.
Maximum space available for partition
is  771 cylinders.

Enter partition size.........: [ 488]

No partitions defined

Press ESC to return to FDISK Options
```

There are a total of 976 cylinders on the 40-Mbyte disk. A maximum of 771 cylinders may be used for the primary DOS partition (this corresponds to a 32-Mbyte partition). The number 488 is entered on the `Enter partition size` line, because you want the new partition to occupy one-half of the disk's total capacity (20 Mbytes is one-half of 40 Mbytes, and 488 cylinders is one-half of 976 cylinders). FDISK displays the following updated partition information after you specify the size of the primary partition:

```
Create Primary DOS Partition

Current Fixed Disk Drive: 1

Partition Status   Type  Start  End Size
 C: 1              PRI DOS     0  487  488
```

Press the Esc key to return to the FDISK Options menu, enter **1** (`Create DOS partition`), and then enter **2**. FDISK displays the Create Extended DOS Partition menu:

```
Create Extended DOS Partition

Current Fixed Disk Drive: 1

Partition Status   Type  Start  End Size
 C: 1            PRI DOS     0  487  488


Total disk space is  976 cylinders.
Maximum space available for partition
is  488 cylinders.

Enter partition size.....: [ 488]
```

FDISK displays the current partition information and states that 488 cylinders are available to use as a partition. This represents the remaining half of the disk's storage capacity. This is the default size for the extended partition, so simply press the Enter key to accept the default. FDISK automatically displays the updated partition information:

```
Create Extended DOS Partition

Current Fixed Disk Drive: 1

Partition Status   Type  Start  End Size
 C: 1            PRI DOS     0  487  488
    2            EXT DOS   488  975  488

Extended DOS partition created

Press ESC to return to FDISK Options
```

Once the extended partition has been created, FDISK will prompt you to define the extended partition's logical drives:

```
Create Logical DOS Drive(s)

No logical drives defined

Total partition size is  488 cylinders.

Maximum space available for logical
drive is  488 cylinders.

Enter logical drive size.....: [ 488]

Press ESC to return to FDISK Options
```

An extended partition consists of one or more logical drives. Each logical drive has a unique drive letter assigned to it. In the example, you want the entire extended partition to be a single logical drive, so simply press the Enter key. This creates a single logical drive that is 488 cylinders in size. FDISK displays the updated information:

```
Create Logical DOS Drive(s)

Drv Start End  Size
D:  488   975  488

All available space in the Extended DOS
partition is assigned to logical drives.

Logical DOS drive created, drive letters
changed or added
Press ESC to return to FDISK Options
```

FDISK also tells you that the entire extended partition is to be referred to using drive letter D.

Activating the Primary DOS Partition

After you have defined the partitions, you designate one of them as being "active." The *active partition* is the partition that is read during the boot-up process. Only one partition on the disk is active at a time. On systems where the hard disk contains more than one operating system, the active partition determines which operating system boots up when the computer is turned on.

You activate the primary DOS partition by first returning to the FDISK Options menu (press Esc to return) and then pressing **2** (Change Active Partition). FDISK displays the Change Active Partition menu:

```
Set active Partition

Current Fixed Disk Drive: 1

Partition Status   Type  Start  End Size
 C: 1              PRI DOS     0  487  488
    2              EXT DOS   488  975  488

Total disk space is  976 cylinders.

Enter the number of the partition you
want to make active.............: [1]
```

In this case you want to activate partition number 1, so enter **1** on the `Enter the number` line. FDISK updates the partition information:

```
Set active Partition

Current Fixed Disk Drive: 1

Partition Status   Type  Start  End Size
 C: 1        A   PRI DOS     0  487  488
    2            EXT DOS   488  975  488

Total disk space is  976 cylinders.
```

Notice that the `Status` column for partition 1 now contains an `A`, indicating that partition 1 is active.

Once the primary partition is activated, you can quit FDISK by pressing the Esc key two times. FDISK will prompt you to reboot your computer.

After rebooting, you are ready to format the hard disk and then install DOS. Before leaving our discussion of FDISK, however, let us mention the other selections available on the FDISK Options menu.

Other FDISK Options

In addition to creating and activating DOS partitions, there are three other actions that you can take from the FDISK Options menu.

You can use FDISK to delete existing DOS partitions. Remember that all data in a partition is lost when the partition is deleted. If the disk contains an extended DOS partition, that partition must be deleted before the disk's primary DOS partition can be deleted.

The size of an existing partition cannot be changed. You must delete the existing partition and then create a new partition.

You can also use FDISK to simply display the current partition information. It is probably a good idea to display the partition information before you make any changes with FDISK. This will help you avoid making costly mistakes.

FDISK examines and modifies the partition information of one hard disk at a time. If your computer has more than one hard drive, a fifth option (`Select Next Fixed Disk Drive`) will be displayed in the FDISK Options menu. This option directs FDISK to move on and access the partition information of the next drive in the system.

Formatting the Hard Disk

Two logical drives were created in the example using FDISK. The logical drive in the primary DOS partition is referred to as logical drive C; the logical drive in the extended partition is referred to as logical drive D. Each logical drive must be *formatted* before DOS can use it.

If you reformat a drive that already contains some data, the existing data becomes unavailable to DOS. Although it is possible to retrieve data from accidentally reformatted drives using programs such as Norton Utilities, PC-Tools, and Mace Utilities, such situations are better avoided. These programs are very good, but trying to rescue data from a reformatted hard disk is strenuous, time consuming, and often not completely successful. *Be very careful whenever you are formatting a hard disk drive!*

FORMAT is the DOS utility program used to format both floppy disks and hard disks. Using the DIR command, locate the backup system disk that contains the file FORMAT.COM. The examples that follow use FORMAT to format drive C.

The command to format drive C is `format c:`, but we are going to want drive C to be bootable. This means that DOS will automatically be loaded into memory from drive C each time the computer is turned on. In order to accomplish this, we need the command `format c: /s`. The `/s` is a *command switch* that tells DOS to format drive C and also make it bootable by placing a copy of the DOS system files on the drive. The following example illustrates the use of FORMAT. The example assumes that a backup system disk containing the file FORMAT.COM is in drive A.

```
A>format c: /s      ←enter command
WARNING, ALL DATA ON NON-REMOVABLE DISK      ←DOS issues warning
DRIVE C: WILL BE LOST!
Proceed with Format (Y/N)?y

Format complete
System transferred

  21170176 bytes total disk space
     79872 bytes used by system
     30720 bytes in bad sectors
  21059584 bytes available on disk


A>
```

Notice that FORMAT issues a warning and asks whether you want to proceed before it begins to format. You should enter **n** if you are at all uncertain about what you are doing.

The message `System transferred` indicates that the files required for booting have been copied to drive C. The final four lines report the following:

1. The total storage space on disk drive C
2. The amount of storage used by the system files
3. The amount of storage unavailable for use ("bad sectors"—most disks have some)
4. The amount of storage currently available on disk drive C

Drive C is now ready for use by DOS. It is also bootable so that it can be used to start up DOS.

Drive D also needs to be formatted before it is usable. This is done with the command `format d:`, because there is no need for drive D to be bootable.

CHAPTER

2

MS-DOS Files

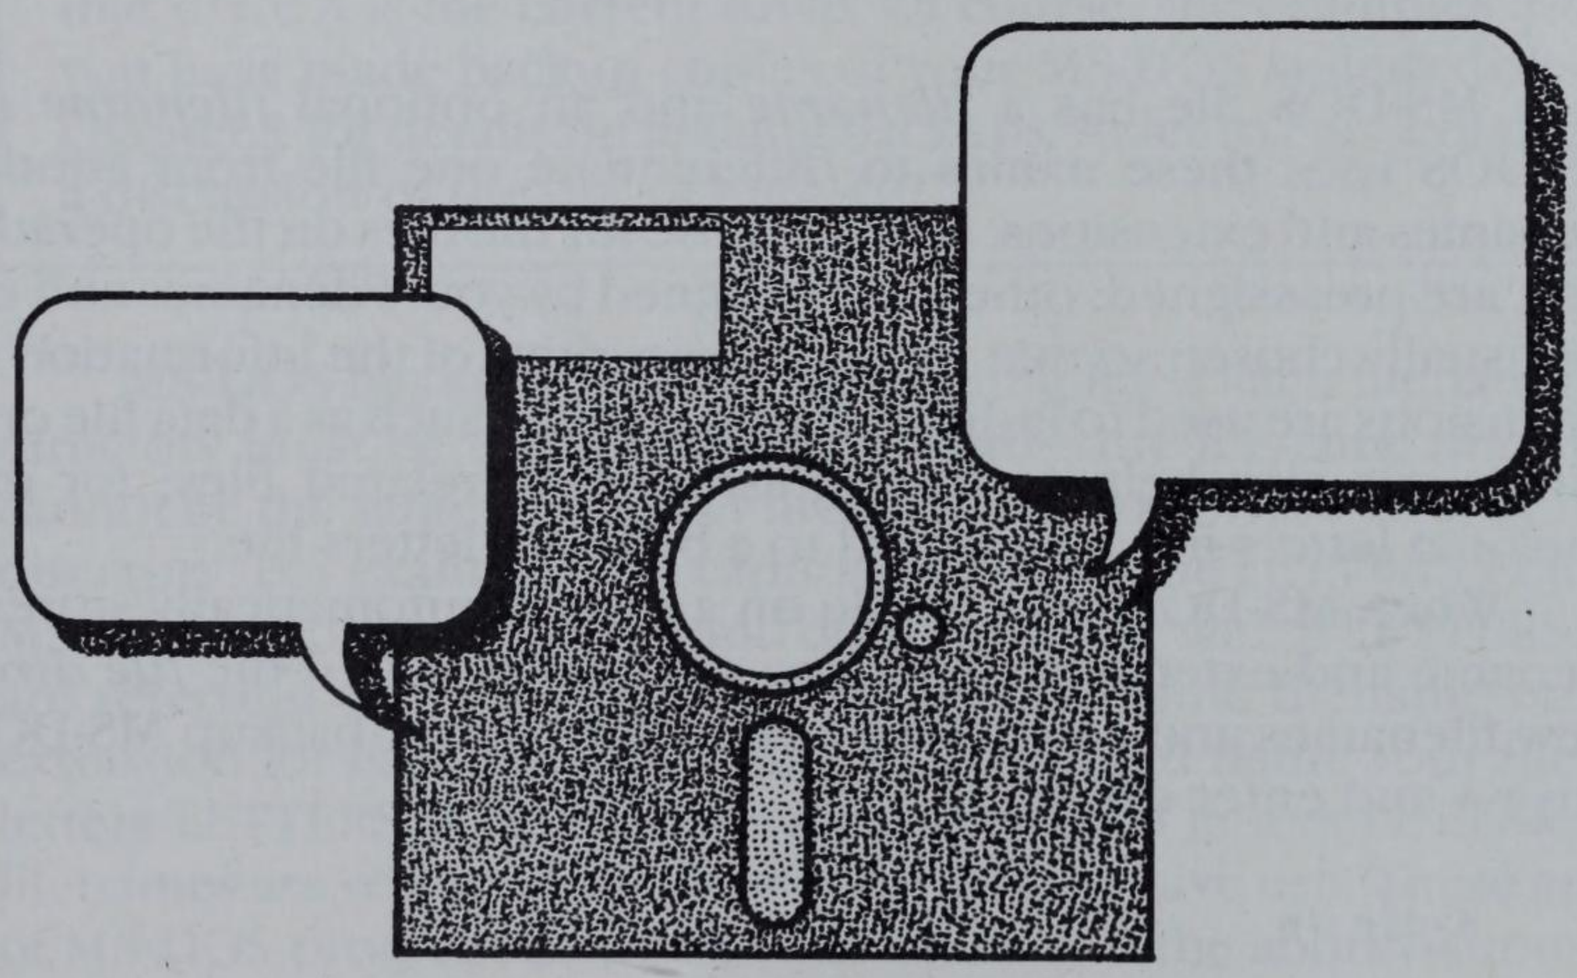

Filenames and Extensions
File Specifications
Copying a File
Wildcards

One of the chief responsibilities of an operating system is the management of computer files. A *computer file* is similar to any other type of file in that it is a collection of related information stored in one place. Unlike paper files, which are stored in filing cabinets or desk drawers, computer files are stored on disks. They are then loaded into the computer's memory when the information they contain is to be used. The operating system controls both the storing and the loading of computer files.

This chapter will explain how files are named and what information MS-DOS needs to know about files in order to work with them. The procedures for copying files and for using "wildcards" in files are also explained.

If your computer has a hard disk, you may want to skim this chapter and the next before installing MS-DOS on your hard disk. Installation of MS-DOS is covered in chapter 1.

Filenames and Extensions

Each MS-DOS file has a *filename* and an optional *filename extension*. MS-DOS uses these names to differentiate one file from another. Some filenames and extensions, such as those for the files on the operating system disk, are preassigned; others are assigned by you. Filenames and extensions are usually chosen so that they are descriptive of the information in the file. Extensions are used to indicate the *type* of file, such as a data file or a text file. Extensions also help to distinguish closely related files; for example, a personal letters file as opposed to a business letters file.

When MS-DOS stores a file on a disk, it automatically stores the file's filename and extension in an area of the disk called the *file directory*. To view filenames and extensions, insert one of your backup MS-DOS disks in drive A and enter **dir /w**:

```
A>dir /w

 Volume in drive A has no label
 Volume Serial Number is 203D-10CC
 Directory of  A:\

COMMAND  COM  ASSIGN   COM  ATTRIB   EXE  BASIC    COM  BASICA   COM
COMP     COM  DEBUG    COM  DISKCOMP COM  EDLIN    COM  FILESYS  EXE
FIND     EXE  IFSFUNC  EXE  JOIN     EXE  LABEL    COM  MEM      EXE
MODE     COM  MORE     COM  MORTGAGE BAS  SHARE    EXE  SORT     EXE
SUBST    EXE  TREE     COM  XCOPY    EXE
       23 File(s)      30208 bytes free

A>
```

The command **dir /w** directs MS-DOS to display the filenames and extensions of the files in the current directory of the default drive. (The concept of the current directory is discussed in the following chapter.) The default drive in the example is drive A (as indicated by the command line prompt **A>**). The display that you obtain may differ somewhat from that just presented. The first filename and extension is **COMMAND COM**, the second, **ASSIGN COM**, and so on. The last line indicates that there are 23 files in the directory and that the disk has 30,208 bytes of storage space that are free.

Note on Examples

Because this chapter's purpose is to introduce the fundamental concept of MS-DOS files, all of the examples presented assume that MS-DOS is not yet installed on a hard disk. Additionally, the examples assume that the system prompt has not been modified with the command PROMPT. The MS-DOS command line is represented by A>, indicating that drive A is the current drive. Of course, the examples assume that you have made backup copies of your MS-DOS system disks. Refer to chapter 1 for details on making backups. Refer to Part 2 of this book for a discussion of the use of PROMPT.

MS-DOS has specific rules for naming files. Each filename in the same directory must be unique. In other words, the filename *and* its extension cannot be the same as another filename and extension already in use in that directory. For example, you cannot give the name LETTERS.PER to two files; MS-DOS becomes confused and does not know which LETTERS.PER file you are referring to. You can, however, use the same filename but a different extension for each file. For example, you could name your file of business letters LETTERS.BUS and your file of personal letters LETTERS.PER. A few filenames are reserved by MS-DOS for its exclusive use. These are the names of MS-DOS program files and commands and the abbreviations for devices (such as PRN for printer). Check your user's guide for a list of reserved names.

Filenames must take the following form:

filename.extension

The *filename* is one to eight characters in length. The *extension,* which is optional, is one to three characters in length. A period (.) is used to separate the filename from the extension. If you accidentally enter a filename with more than eight characters and you do not enter an extension, MS-DOS will automatically place a period after the eighth character, use the next three characters as the extension, and disregard the remaining characters. If you

enter a filename with more than eight characters and you also enter an extension, MS-DOS signals an error. If your extension has more than three characters, MS-DOS ignores the extra characters.

MS-DOS allows only certain characters to be used in filenames and extensions. These are

letters of the alphabet
numbers 0 through 9
special characters $ # & @ ! % ( ) - { } ' _ ` ^ ~

MS-DOS treats uppercase and lowercase letters alike, so you may use any combination of capital and lowercase letters in filenames and extensions. In this book, filenames discussed in the text will be capitalized (the LETTERS.PER file).

File Specifications

In order for MS-DOS to work with a file, it must know the file's filename and filename extension. In addition, it must know which disk drive contains the file. A disk drive is specified by a letter, called a *drive designator*. The first disk drive is specified by a drive designator of "A:" and is called "drive A." The second drive has a drive designator of "B:" and is called "drive B." A hard disk is usually specified as "C:" and is called "drive C."

The drive designator combines with the filename and the extension to form the *file specification*, or *filespec* for short. The filespec contains the drive designator followed by the filename and filename extension (if there is an extension). For example, if a file with the filename INSTRUCT and the extension TXT were located on disk drive A, its complete filespec would be A:INSTRUCT.TXT (or a:instruct.txt).

Copying a File

One of the most frequently performed tasks of an operating system is the copying of computer files stored on floppy disks. An experienced user routinely copies all valuable computer files at regular intervals. That way, if one copy of the file is damaged or destroyed, a backup is available.

The procedures for copying a file differ slightly, depending on whether your system has one or two floppy disk drives. This section first describes the procedure for copying a file with a two-drive system and then describes the procedure for a one-drive system.

In copying a file, the first drive is called the *source drive* and the second the *target drive*. As you may recall from chapter 1, the same terminology is used for disks. The disk containing the original file is the *source disk,* and the disk receiving the copy is the *target disk*.

Two-Drive Systems

To copy a file using a system with two floppy disk drives, insert the source disk (the disk containing the file to be copied) in drive A. Place the formatted target disk in drive B. (Refer to chapter 1 for help in formatting a disk.)

In the example shown here, the file INSTRUCT.TXT is on the disk in drive A. To copy the file onto the disk in drive B, type the word **copy**, then type the filespec of the file to be copied, and finally type the filespec of the copy:

```
A>copy a:instruct.txt b:instruct.txt
```

Press Enter. The copying process will start, and MS-DOS will display a message when the copying is completed.

```
        1 File(s) copied
A>
```

Hard Drive Systems

When copying a file to a hard drive, you need to use the drive letter of the hard drive in the filespec of the copy. For example, to copy INSTRUCT.TXT from drive A to a hard disk with drive letter C, enter the following command

```
A>copy a:instruct.txt c:instruct.txt
```

You may leave out the drive letter specifier for the source file if the source file is on the default disk drive. Similarly, you may leave out the drive letter specifier of the target file if the target is to reside on the default drive.

One-Drive Systems

To copy a file using a one-drive system, insert the source disk into the system drive. Type **copy**, then type the filespec of the file to be copied, and finally type the filespec of the copy:

```
A>copy a:instruct.txt b:instruct.txt
```

Press Enter. MS-DOS will store as much of the file in memory as possible. The following message will then be displayed:

```
Insert diskette for drive B: and strike
any key when ready
```

This is MS-DOS's way of telling you that the system drive is now *logical* drive B (see the DEVICE command in Part 2 for a discussion of physical and logical drives). It is also your cue to insert in the system drive the formatted target disk (the disk on which the file copy will be written). Refer to chapter 1 if you need help in formatting disks.

Note: The preceding message may be displayed before the red light on the disk drive goes off. If so, wait until the light goes off before you change disks.

Once the disk for logical drive B is in place, press any key to continue the operation. MS-DOS will write to the disk that portion of the file previously stored in memory. If the memory is not large enough to hold the entire file, MS-DOS will display the following message:

```
Insert diskette for drive A: and strike
any key when ready
```

This message says that the system drive is now logical drive A. Remove the target disk and insert the disk containing the original file. Press any key. Continue to follow MS-DOS's instructions. Remember that the original file is on the disk "for drive A" and the copy is on the disk "for drive B." MS-DOS will tell you when the copy procedure has been completed:

```
        1 File(s) copied
A>
```

Wildcards

Wildcards are special symbols (sometimes called *global characters*) that are used to stand for one or more specific characters in a filename or extension. MS-DOS provides two wildcard symbols that you may use to specify files in MS-DOS commands—the question mark and the asterisk.

The question mark (?) is used to represent a *single character* in a filename or extension, whereas the asterisk (*) is used to represent a *group of characters* in a filename or extension. You will find wildcards are very handy, especially in the DIR, COPY, ERASE, and RENAME commands, because these commands frequently work for groups of files at one time.

The ? Wildcard

Imagine that you have a disk containing several files, including these four:

last.txt
list.txt
lost.txt
lust.txt

Say that you wanted to copy each of these files. There are two ways you could accomplish this. You could use the COPY command four times, specifying a different file each time, or you could use COPY one time, using a wildcard character in the filespec. If you chose the second way, your command would look like this:

```
A>copy a:l?st.txt b:l?st.txt
```

The **?** in the second position of the filename indicates that the second character is wild. MS-DOS is instructed to execute the command on all files on the disk in drive A that have an "L" as the first character in the filename, an "S" as the third character, a "T" as the fourth character, and a filename extension of .TXT. Any character in the second position is acceptable according to this command.

The * Wildcard

Using an asterisk or star (*) in a filename or filename extension tells MS-DOS that all characters in the position of the * are wild. In addition, all characters to the right of the * are wild. As an example, say that you want to refresh your memory regarding the files on the system disk. In particular, you want to see which system files have a filename beginning with "F" and a filename extension of .COM. Insert your working system disk in drive A and enter the following command (refer to Part 2 of this book for a complete discussion of DIR):

```
A>dir f*.com/w
FORMAT    COM          FDISK         COM
        2 File(s)                  84992 bytes free
```

MS-DOS interprets the filespec **f*.com** to mean any file that has a filename beginning with "F" and a filename extension of .COM. The **/w** simply directs MS-DOS to display only the filenames and directory names.

A filespec may contain more than one wildcard character. For example, f*.com is equivalent to f???????.com. In the following example, wildcards are used in the filespec to indicate that all the files on the disk in drive A should be copied onto the disk in drive B:

```
A>copy a:*.* b:*.*
```

Don't be afraid to experiment with wildcards in MS-DOS commands. They can be a tremendous timesaver once you are familiar with their use. *A word of caution though: Make sure that you have backup copies of any important files before you start playing with wildcards.* It's very easy for even an experienced MS-DOS user to inadvertently wipe out many hours of work with a misplaced wildcard.

CHAPTER

3

Directories, Paths, and Trees

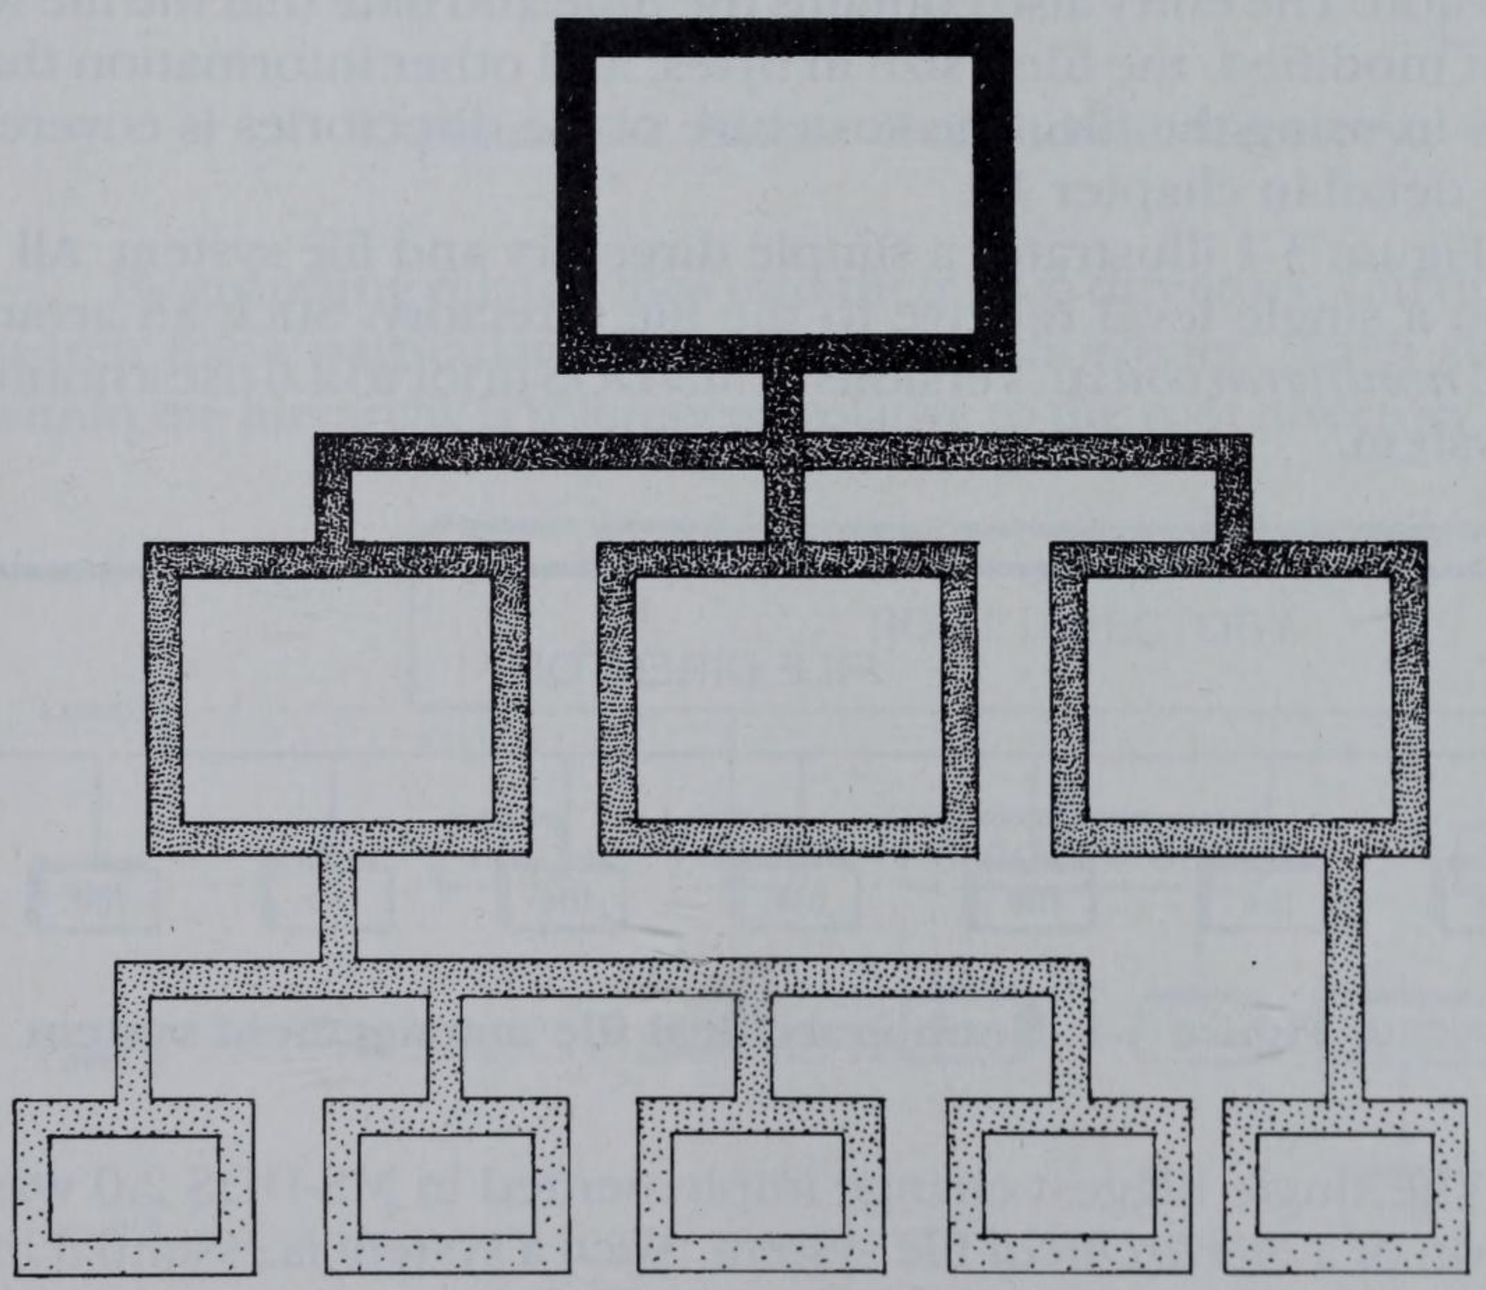

File Management
Setting Up a Hierarchical File System

Chapter 2 covered the basics of what a file is, how it is named, and the information that MS-DOS needs to know about a file in order to use it. Chapter 2 also explained some basic procedures for copying files. This chapter will discuss the way files are managed by MS-DOS.

If your computer has a hard disk, you may want to skim this chapter and chapter 2 before installing MS-DOS on your hard disk. Hard disk installation is discussed in chapter 1.

File Management

The basis of file management is the *file directory*. The file directory is an area on the disk that is set aside during the formatting process. The file directory serves as a table of contents for the files stored on the disk. For each file stored, there is a corresponding entry in the file directory.

Each entry in the file directory stores a filename and a filename extension. The entry also contains the time and date that the file was created or last modified, the file's size in bytes, and other information that MS-DOS needs in using the file. The structure of file directories is covered in much more detail in chapter 10.

Figure 3-1 illustrates a simple directory and file system. All of the files are on a single level relative to the file directory. Such an arrangement is called *nonhierarchical*. Versions of MS-DOS prior to 2.0 use a nonhierarchical file system.

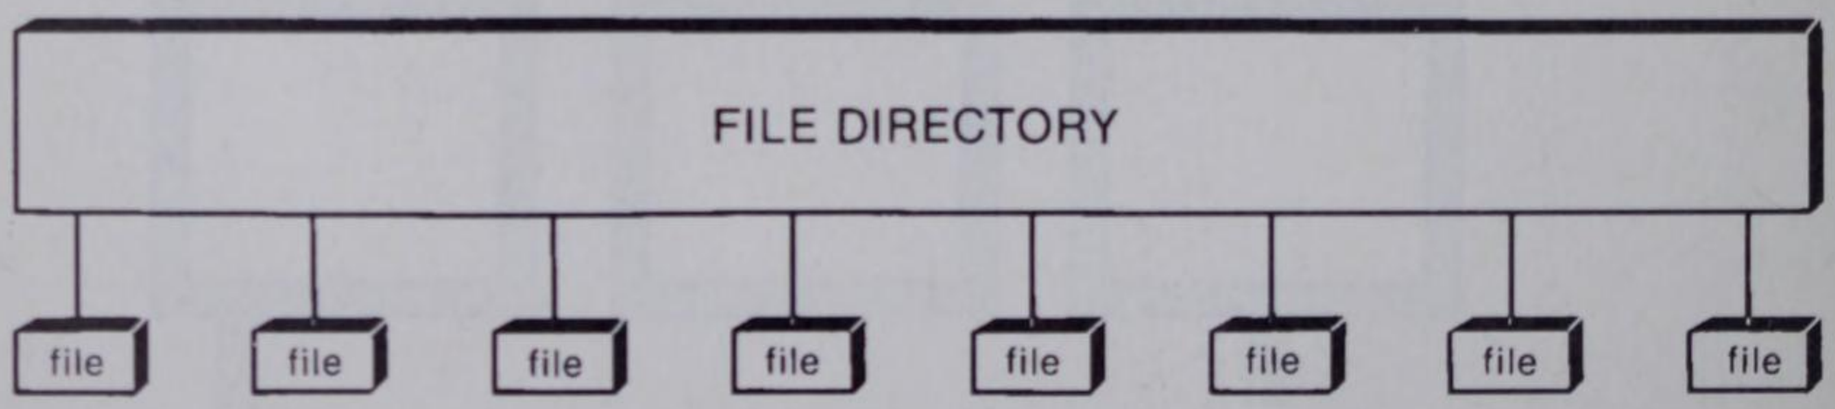

Figure 3-1. Nonhierarchical file management system.

The single biggest change implemented in MS-DOS 2.0 was the introduction of a *hierarchical* file system. Such a system is essential in managing the large number of files stored on hard disks.

Hierarchical File Systems

It is not unusual for hard disks to store hundreds or even thousands of files. Handling such a large number of files requires a more efficient storage and retrieval system than that used by nonhierarchical systems.

The Root Directory

MS-DOS 2.0 and subsequent versions use a hierarchical file system (figure 3-2). In this type of system, files and groups of files are divided into a series of levels, beginning with the file directory at the uppermost level. The file directory is called the *root directory*, because all the other levels branch out from it. The file directory can contain the names of single files as well as other directories. These directories are called *subdirectories* and can themselves contain the names of files or other subdirectories.

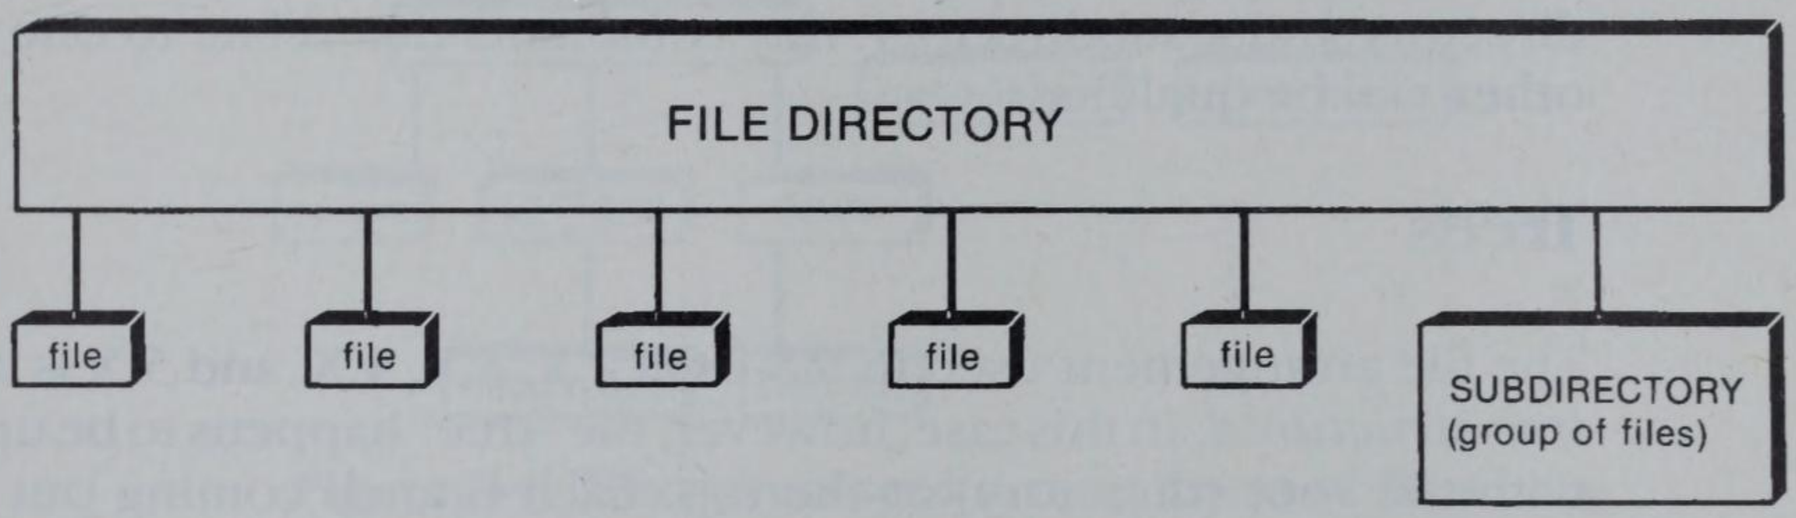

Figure 3-2. Single files and subdirectory.

By grouping related files into their own directory, the time necessary to search for a particular file on a disk is shortened. Each succeeding level within the hierarchy is referenced relative to the root directory (see figure 3-3).

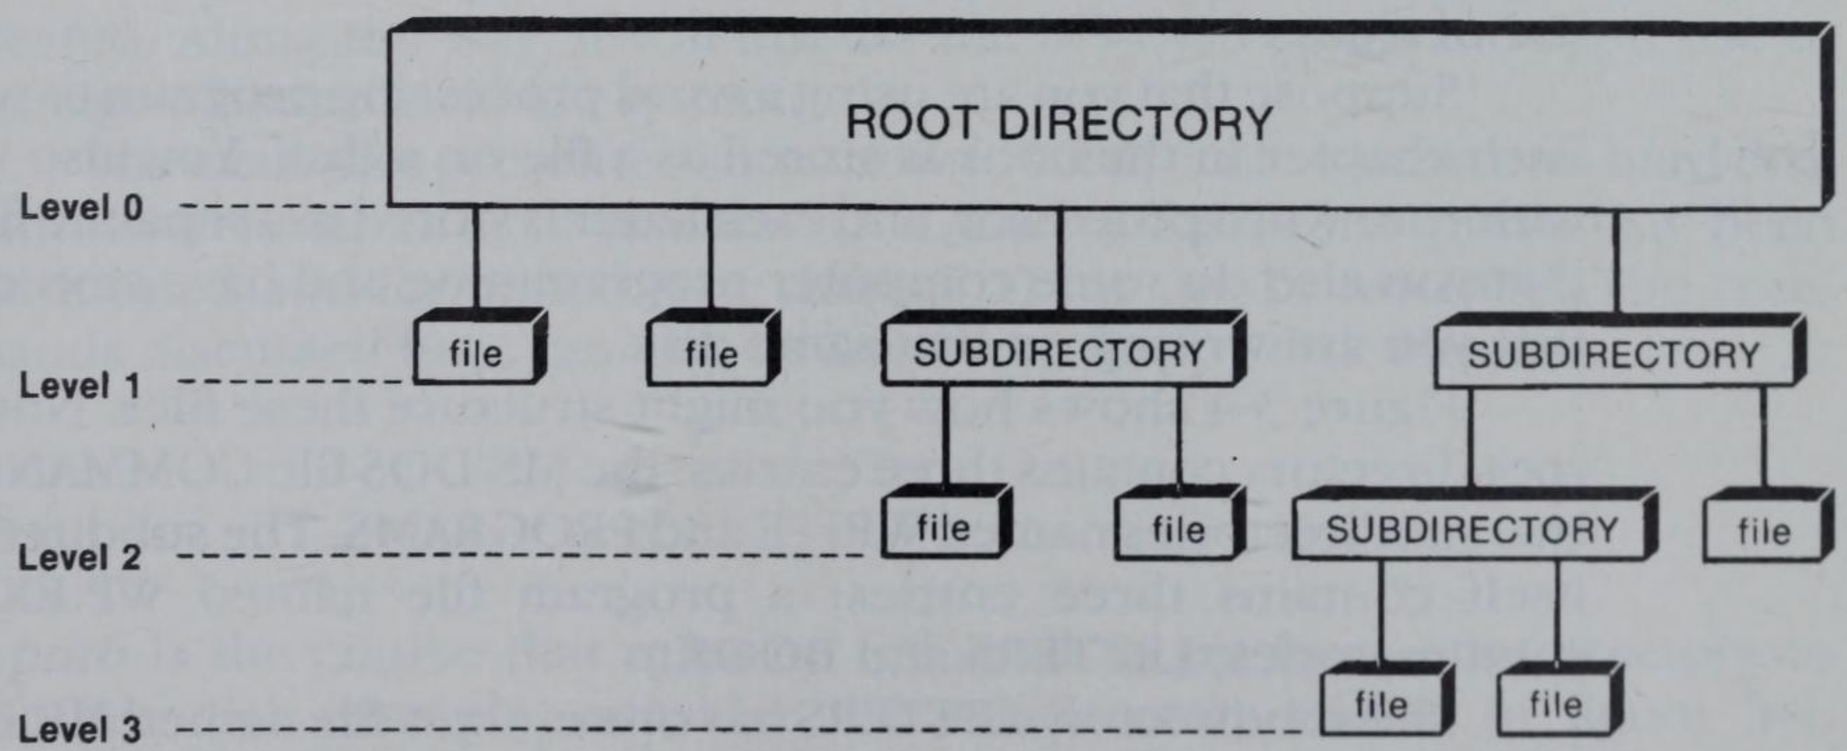

Figure 3-3. Hierarchical file management system.

When you use the DIR command to list the contents of the root directory, DOS will display both filenames and subdirectory names. For each file, the directory entry will show the filename and extension, the size of the

file in bytes, and the time and date when the file was created or last modified. Files that are subdirectories are signified by the notation _DIR_ for directory. MS-DOS will also show the total number of files (including subdirectories) and the number of free bytes remaining on the disk.

The number of entries that the root directory can hold is limited. On single-sided, 5¼-inch disks, the limit is 64 files and/or subdirectories. On double-sided, 5¼-inch disks, the limit is 112. On high density (1.2-Mbyte) 5¼-inch disks, the limit is 224. A 720-Kbyte, 3½-inch disk has a limit of 112 files and subdirectories. A 1.4-Mbyte, 3½-inch disk has a limit of 128 entries.

Note: From this point on, the word *directory* will refer to both a root directory and a subdirectory. Any comments that relate to one but not the other will be qualified.

Trees

The file arrangement used in MS-DOS 2.X, 3.X, 4.X, and 5.X is described as *tree-structured.* In this case, however, the "tree" happens to be upside down, with the root (directory) at the top. Each branch coming out of the root corresponds to an entry, either a file or a subdirectory (a group of related files). Secondary branches arise from each subdirectory in level 1, tertiary branches arise from subdirectories in level 2, and so on.

This tree-structured arrangement allows each subdirectory and its entries to be treated as though there were no other data stored on the disk. This can make life much more tolerable when you are dealing with a hard disk containing several hundred files. Let's look at a typical example of the use of trees.

Suppose that you are using a word processing program to write a book. Each chapter in the book is stored as a file on a disk. You also write letters with your word processor, and each letter is stored in a separate file. Suppose that you also do some computer programming and have stored a program that you are writing on that same disk.

Figure 3-4 shows how you might structure these files. Notice that the root directory contains three entries: the MS-DOS file COMMAND.COM and two subdirectories named WRITE and PROGRAMS. The subdirectory WRITE itself contains three entries: a program file named WP.EXE and two subdirectories, LETTERS and BOOK.

The subdirectory LETTERS has one entry: a file named HILBURN.DOC. The subdirectory BOOK also has one entry: a file named START.DOC. The subdirectory PROGRAMS contains two files—GWBASIC.EXE and LIFEX.BAS.

By structuring your data in this way, the files are separated into functional groups. For example, the subdirectory WRITE contains the word processing program (WP.EXE) and the documents that have been created by that program. These documents have been placed in separate subdirectories

according to their subject matter. The subdirectory PROGRAMS contains the BASIC interpreter and one BASIC program.

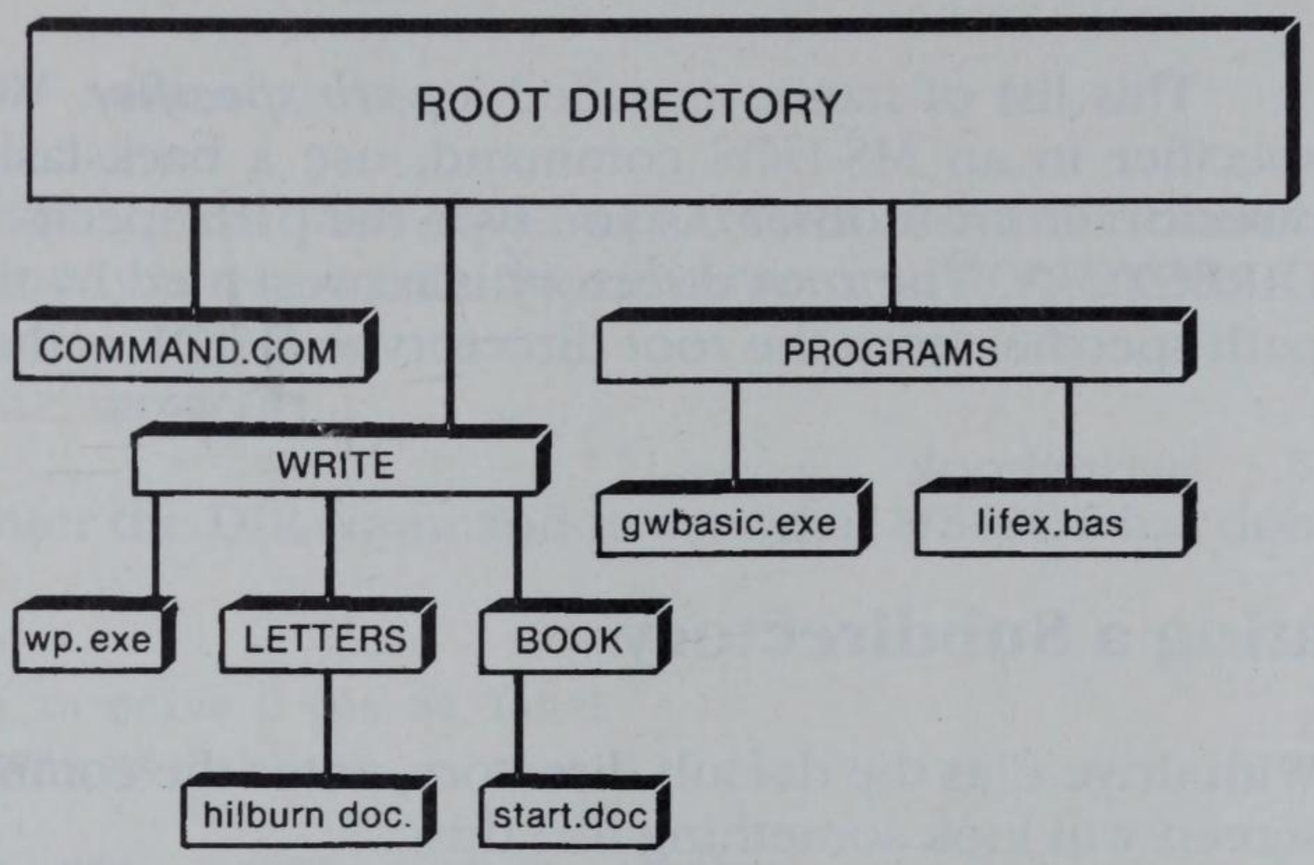

Figure 3-4. Tree-structured arrangement of files.

Setting Up a Hierarchical File System

This section will explain how the file structure shown in figure 3-4 was created. Along the way, it will discuss the MS-DOS commands you use to manage a hierarchical file system.

The examples presented show how to set up a file system on a hard disk with drive letter C. It is assumed that the hard disk has previously been partitioned and formatted (see chapter 1) for use by MS-DOS. The commands discussed here can also be used with floppy disk files.

Paths

A *path* is the course that must be followed to get from one directory to another. For example, consider the subdirectory BOOK in figure 3-4. Suppose that you want to travel from the root directory to BOOK. What path would you take? Starting at the root directory, you would pass through the subdirectory WRITE and from there to the subdirectory BOOK.

In the same way, MS-DOS 2.X, 3.X, 4.X, and 5.X find a file by taking a particular path to the directory containing that file. You tell MS-DOS which path to take by specifying the start of the path and the subdirectories to use.

The path from the root directory to BOOK is:

ROOT DIRECTORY→WRITE→BOOK

This list of names is called a *path specifier*. When you enter a path specifier in an MS-DOS command, use a backslash (\) to separate one directory from another. As you type the path specifier, do not enter ROOT DIRECTORY. The root directory is represented by the first backslash. The path specifier from the root directory to BOOK is therefore

\write\book

Creating a Subdirectory

With drive C as the default directory, enter the command **dir**. Your display screen will look something like this:

```
C:\>dir

 Volume in drive C has no label
 Directory of C:\

COMMAND  COM  25307   3-17-90   12:00p
        1 File(s)   10510200 bytes free
```

The line `Directory of C:\` tells you that MS-DOS is displaying the names of the entries in the root directory (\) of the disk in drive C. In this case, the root directory contains only one entry, the MS-DOS file COMMAND.COM.

Now we will begin expanding the directory to include some subdirectories. The MS-DOS command MKDIR (MaKe DIRectory) is used to create a subdirectory. Let's use MKDIR to create the three subdirectories WRITE, PROGRAMS, and BUSINESS.

Before we do that though, let's go over the rules for naming subdirectories. Like filenames, subdirectory names can be up to eight characters long, with an optional extension of three characters. Each subdirectory must have a name that does not match the name of any file or subdirectory contained in the same directory. The valid characters used in the name are the same as those for filenames.

To create a subdirectory, type **mkdir** or (**md** for short) and then type the path specifier of the subdirectory being created. In entering your command, you may omit the path if the new subdirectory will be entered in the *current directory* (the directory in which you are now working). Later, this section discusses the current directory in more detail.

Now we are ready to create the subdirectory WRITE. Type **mkdir** or **md** followed by a backslash to indicate that the subdirectory will be an entry in the root directory; then type the name of the new subdirectory:

```
C:\>mkdir \write
```

When you press Enter, MS-DOS creates the new subdirectory. In a similar fashion, you can create the subdirectory PROGRAMS:

```
C:\>mkdir \programs
```

Now let's enter the DIR command to see what MS-DOS has done:

```
C:\>dir
 Volume in drive C has no label
 Directory of C:\

COMMAND  COM    25307  3-17-90   12:00p
WRITE          <DIR>    9-17-90   11:42a
PROGRAMS       <DIR>    9-17-90   11:43a
        3 File(s)   10505080 bytes  free
```

If you are following along on your computer, the size of your COMMAND.COM file may not be 25,307 bytes. The date/time stamps on your disk will certainly differ from those shown here. The important points are that three subdirectories have been created and that they are entered in the root directory. The subdirectories are identified by the label <DIR>. Notice that creating three (empty) subdirectories used up 5,120 bytes of disk space. (Compare the number of free bytes before and after the subdirectories were created.)

Changing the Current Directory

A path tells MS-DOS the route to take to a particular directory. If an MS-DOS command does not specify a path, MS-DOS will attempt to execute the command in the current directory. At any given time, each drive on the system has a current directory.

The MS-DOS command CHDIR (CHange DIRectory) is used to change a drive's current directory. To use CHDIR, type **chdir** (or **cd** for short) followed by the path specifier of the desired directory.

In this tutorial, the current directory on drive C is the root directory. Entering the CHDIR command without any specifiers causes MS-DOS to display the path specifier of the current directory. Type **chdir**:

```
C:\>chdir
C:\
```

The backslash means that the root directory is the current directory on drive C.

We can make WRITE the current directory by including the path specifier to WRITE in the CHDIR command:

```
C:\>chdir \write
```

The first directory in a path specifier may be omitted if it is the current directory. Because the preceding command was invoked while the root directory was the current directory, the command could have been entered as

```
C:\>chdir write
```

To verify that WRITE is now the current directory, type **chdir** without a path specifier. MS-DOS will display the path to the current directory:

```
C:\>chdir
C:\WRITE
```

A Word About Parents

All subdirectories are entries in another directory. WRITE, PROGRAMS, and BUSINESS are entries in the root directory. A directory is said to be the *parent directory* of the subdirectories that it contains as entries. The root directory is the parent directory of WRITE, PROGRAMS, and BUSINESS.

Putting Files into a Subdirectory

Now that WRITE is the current directory, let's put some files in it. We will start off by putting a copy of the file WP.EXE in WRITE. This is done simply by making a copy of the file. Place a disk with the file WP.EXE in drive A and enter the following command:

```
C:\>copy a:wp.exe c:
```

A Typical Setup

A typical way to set up directories on a hard disk is to create a subdirectory named \DOS to store the MS-DOS utility files (such as FORMAT.COM, EDLIN.COM, and MORE.COM). Another subdirectory named \SYS is created to store the MS-DOS device drivers (such as VDISK.SYS and ANSI.SYS). Many users also put the MS-DOS files with the extension CPI in subdirectory \SYS. You may also want to create a subdirectory named \PRGMS to hold your application programs. You might want a separate subdirectory in \PRGMS for each application program. In general, minimizing the number of files in the hard disk's root directory makes navigation through the disk's contents much easier.

This command instructs MS-DOS to copy the file WP.EXE to drive C. Because no paths were included in the command, MS-DOS will look for WP.EXE in the current directory on drive A (in this case, the root directory) and copy it to the current directory on drive C. WRITE is the current directory on drive C, so WP.EXE will be copied into WRITE.

The MKDIR command can be used to create a subdirectory in WRITE. Recall that to use this command you must type **mkdir** (or **md**) followed by the path to the new subdirectory.

The current directory is WRITE, so the path to the subdirectory LETTERS (see figure 3-4) is WRITE\LETTERS. But remember that the first directory in a path may be omitted when it is the current directory. Therefore, to create LETTERS, enter the following command:

```
C:\>mkdir letters
```

The subdirectory BOOK is created in the same way:

```
C:\>mkdir book
```

Now that we have established the three subdirectories, let's place some files in them. Notice that the subdirectory LETTERS in figure 3-4 contains the file HILBURN.DOC. However, before we enter HILBURN.DOC in LETTERS, let's make LETTERS the current directory:

```
C:\>cd letters
```

Now place a disk with the file HILBURN.DOC in drive A and enter

```
C:\>copy a:hilburn.doc c:
```

Next we will copy the file START.DOC into the subdirectory BOOK. Let's begin by making BOOK the current directory. Recall that the current directory is LETTERS. The path from LETTERS is WRITE\BOOK. But entering the command **cd write\book** results in an `Invalid directory` message. The reason for this is that WRITE is the parent directory of LETTERS. The parent of a directory is represented in MS-DOS commands by two periods (..). The path specifier from LETTERS to BOOK is therefore **..\book**. To make BOOK the current directory, enter the following command:

```
C:\>cd ..\book
```

Note that this command could also have been entered as **cd \write \book**.

Now we can copy START.DOC into BOOK by inserting a disk with START.DOC in drive A and entering

```
C:\>copy a:start.doc c:
```

Before going any further, let's step back and see what we have accomplished. First, though, we will make WRITE the current directory. WRITE is the parent directory of the current directory (BOOK), so we can make WRITE the current directory by entering

```
C>cd ..
```

Note that this command could also have been entered as **cd \write**.

To make sure that WRITE is now the current directory, type **cd** without a path specifier. MS-DOS will display the path from the root directory to the current directory:

```
C:\>cd
C:\WRITE
```

Let's use the DIR command to display the contents of the current directory:

```
C:\>dir

 Volume in drive C has no label
 Directory of   C:\WRITE

.            <DIR>     9-17-90   11:42a
..           <DIR>     9-17-90   11:42a
WP      EXE    72960  6-20-85    5:02p
LETTERS      <DIR>     9-17-90   2:00p
BOOK         <DIR>     9-17-90   2:00p
       5 File(s)    10262392 bytes free
```

Notice that the first two lines contain periods rather than names. The single period (.) in line 1 designates the current directory. The two periods in line 2 represent the parent directory of the current directory. The next three lines show the file and subdirectories that have been entered in WRITE.

Completing the remainder of the file structure shown in figure 3-4 is simply a matter of repeating some of our previous steps. First, we make the root directory the current directory:

```
C:\>cd \
```

Then we create the subdirectory PROGRAMS as an entry in the root directory:

```
C:\>md programs
```

Next we change the current directory to PROGRAMS. A disk with the files GWBASIC.EXE and LIFEX.EXE is placed in drive A, and the files are copied into PROGRAMS:

```
C:\>cd \programs
C:\>copy a:gwbasic.exe c:
C:\>copy a:lifex.bas c:
```

This completes the construction of the directory and file structure shown in figure 3-4.

Looking at the Tree

As the number of files and subdirectories on a disk increases, the organization of the disk becomes more and more complex. TREE is an MS-DOS command that you can use to construct a map of a disk's tree structure. To demonstrate this command, place your working system disk in drive A,

making sure that the file TREE.COM is on the working system disk. Enter the command **a:tree c:/f**. This command tells MS-DOS to display the tree of directories found on fixed (hard) disk C. The **/f** switch directs MS-DOS to list the files on the fixed disk as well. Your screen looks something like this:

```
C:\>a:tree c:/f

TREE: Full-disk sub-directory listing - Version 3.30
Copyright 1987 XYZ Data Systems, Inc.

C:\COMMAND.COM                                  17664 bytes
C:\WRITE
C:      \WP.EXE                                 72960 bytes
C:      \LETTERS
C:              \HILBURN.DOC                     4608 bytes
        1 file(s)
C:      \BOOK
C:          \STARTING.DOC                       15360 bytes
  3 file(s)

C:\PROGRAMS
C:          \GWBASIC.EXE                        57344 bytes
C:          \LIFEX.BAS                           7808 bytes
  2 file(s)
                                10109816 bytes free
                                10592256 bytes total

End of listing
```

Verify for yourself that this listing contains all the information in figure 3-4. Notice that it also contains the size of each file on the disk.

In DOS 4 and 5 you can specify the listing of a specific directory and its subdirectories; to do so, follow the drive letter with the pathname for the directory.

Removing a Subdirectory

You use the MS-DOS command RMDIR (ReMove DIRectory), RD for short, to remove a subdirectory from a disk. To use RMDIR, type **rmdir** (or **rd**) and then type the path to the subdirectory. However, before you can remove the subdirectory, you must empty it of any files and/or subdirectories that it contains.

Suppose that you want to remove the subdirectory BOOK from the hard disk (figure 3-4). The first step is to erase all the files entered in BOOK. This can be accomplished by using the MS-DOS command ERASE and the wildcard *.* (see chapter 2). After you enter the following command,

MS-DOS will ask whether you are sure that you want to erase all the files in the specified subdirectory:

```
C:\>erase \write\book *.*
Are you sure? (Y/N) y
```

Because you responded "yes," MS-DOS erased the files in BOOK, and the subdirectory can now be removed by entering:

```
C:\>rmdir \write\book
```

The PATH Command

An *executable file* is a set of directions that the computer executes in order to perform a specific task. An executable file may be an application program (such as a word processing program), an external MS-DOS command (such as TREE), or a batch file (see chapter 5). When you enter the name of an executable file, MS-DOS looks for the file in the current directory. The PATH command is used to tell MS-DOS where to look for an executable file that is not in the current directory.

To use the command, type **path** followed by the path(s) that you want MS-DOS to follow in its search for the executable file. If you want to specify more than one path, separate each path from the next with a semicolon. If you enter **PATH** without any parameters, MS-DOS will display the command paths that were set the last time the PATH command was used. If you enter PATH followed by just a semicolon, MS-DOS will cancel the command paths that were set by the previous PATH command. The following example sets up a DOS search path so that the operating system searches for files in the subdirectories C:\DOS, C:\SYS, and C:\PRGMS:

```
C:\>path c:\dos;c:\sys;c:\prgms
```

Using the Search Path

Pretend that you are using a word processing program to write several different types of documents. Let's say that you are writing a computer book, a novel, personal letters, business letters, save-the-whales letters, and miscellaneous letters. Let's also say that you are a very prolific writer. You have already written 30 chapters in both the computer book and the novel, and you have a total of 400 letters that are evenly divided among the personal,

business, whale, and miscellaneous categories. Each of your chapters and each of your letters is saved as one file on your hard disk. That's a total of 460 files just for your word processor. How can you use MS-DOS to organize these files?

There is no single right way to organize any hard disk system. The best approach is to try one system, see if you like it, and change to another system if you don't. Here is one way you might organize your files. Create a separate subdirectory for each of the different categories of word processing documents. These subdirectories will be entered in the root directory of the hard disk. Into each subdirectory enter the corresponding documents. Finally, enter a copy of the file WP.EXE (the word processing program) in the root directory. Figure 3-5 shows how the files might be structured on your imaginary hard disk.

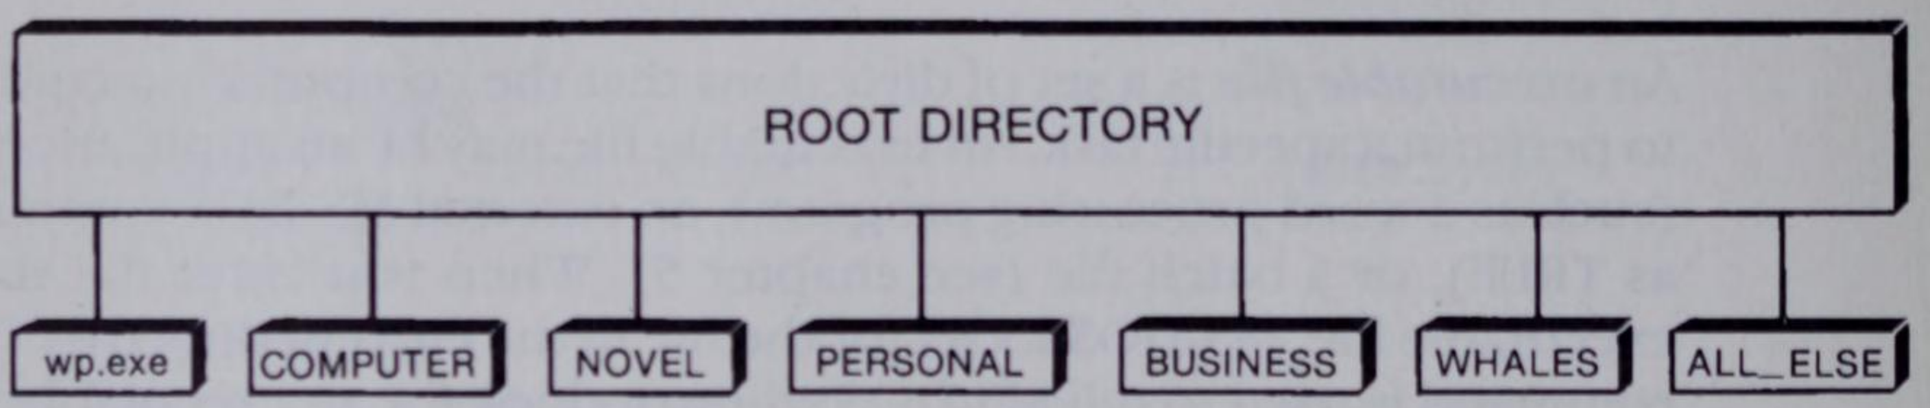

Figure 3-5. Organizing files by grouping them into subdirectories.

In a typical computer work session, you might sit down to do some work on your novel. You might want to quickly review some of the already-completed chapters and then revise your latest chapter. For the time being, you aren't concerned about your 100 save-the-whales letters or anything else on the hard disk that is not part of your novel.

First, make NOVEL the current directory on drive C:

```
C:\>cd \novel
C:\>
```

Now, if you want a list of the chapters that you have written, all you have to do is type **dir/w**, the MS-DOS command for displaying a directory of filenames. Only the files in the NOVEL subdirectory will be displayed. (See Part 2 for a discussion of DIR.)

```
C:\>dir /w

 Volume in drive C is HARD_DISK
 Directory of C:\novel

.           ..          CHAPT01 DOC CHAPT02 DOC CHAPT03 DOC
CHAPT04 DOC CHAPT05 DOC CHAPT06 DOC CHAPT07 DOC CHAPT08 DOC
CHAPT09 D0C CHAPT10 DOC CHAPT11 DOC CHAPT12 DOC CHAPT13 DOC
CHAPT14 DOC CHAPT15 DOC CHAPT16 DOC CHAPT17 DOC CHAPT18 DOC
CHAPT19 DOC CHAPT20 DOC CHAPT21 DOC CHAPT22 DOC CHAPT23 DOC
CHAPT24 DOC CHAPT25 DOC CHAPT26 DOC CHAPT27 DOC CHAPT28 DOC
CHAPT29 DOC CHAPT30 DOC
       32 File(s)  352224 bytes free

C:\>
```

If you want to copy all the chapters of your novel onto a disk in drive B, simply type **copy *.doc b:**. Only the chapters of your novel will be copied; the other files on the disk will not.

The preceding example showed you how designating the subdirectory NOVEL as the current directory "shielded" MS-DOS from the other files on the disk. However, using subdirectories in this way can also cause some problems. For example, to start the word processor, you enter **wp**. MS-DOS will search the current directory for the file WP.EXE but won't be able to find it in the NOVEL directory. You will need to give MS-DOS some directions. This is where the PATH command comes in.

Before starting the word processor, enter the following command:

```
C:\>path c:\write
```

This command tells MS-DOS that if it can't find an executable file in the current directory, it should look in the directory C:\WRITE. MS-DOS will now be able to load and execute the word processing program when you enter **wp**.

The APPEND Command

PATH will direct MS-DOS only to executable files. Executable files have a filename extension of COM, EXE, or BAT. PATH will not direct application programs to data files. For example, many programs come with on-line help files. If the program is running and it needs to access a help file, the information provided by PATH is of no value, because the help file is not executable.

The APPEND command, implemented in MS-DOS 3.2, 3.3, 4.X, and 5.X, is designed to eliminate this problem. APPEND is used just like PATH. For example, the following command is valid:

```
append c:\programs
```

This command tells MS-DOS to look in the directory PROGRAMS when searching for both executable and nonexecutable files.

APPEND is a very valuable command, and it is discussed more thoroughly in Part 2 of this book. Part 2 also discusses some annoying bugs in APPEND that you should know about before using this command.

CHAPTER

4

MS-DOS Batch Files and Macros

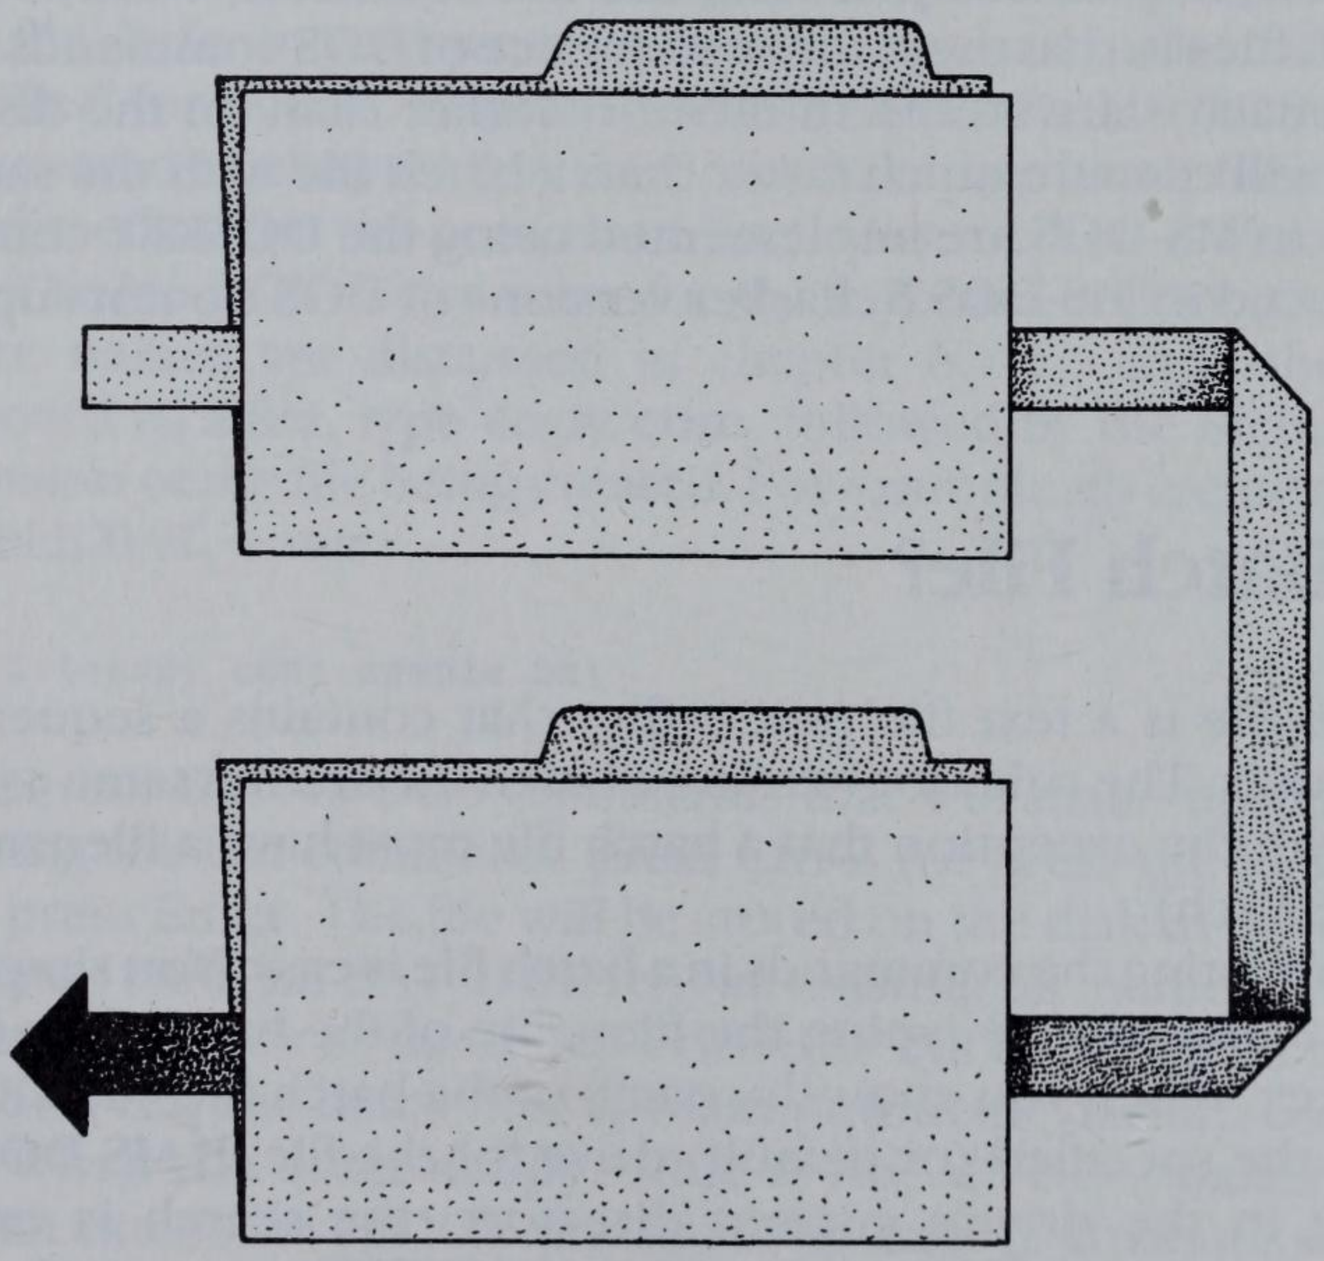

What Is a Batch File?
Creating a Batch File
Replaceable Parameters
Wildcards and Replaceable Variables
Using Environment Variables
Macros

Computers are useful tools because they are capable of performing repetitive tasks without getting bored. Computers can maintain the same level of efficiency regardless of how many times they carry out the same task. Computer users, on the other hand, become bored rather easily when performing repetitive tasks, and a bored computer user tends to be inefficient and error-prone.

One repetitive task that computer users are often faced with is entering a series of commands over and over again. If you find yourself in this situation, don't despair, because MS-DOS offers a way out. It enables you to take a series of commands and store them in a special kind of file called a *batch file*. This "batch" of MS-DOS commands can then be used over and over again, always producing the same result. This chapter will explain batch files and show you some MS-DOS features that can be used in conjunction with batch files. (See appendix C for examples of batch files used to implement a menu-driven disk maintenance system.)

This chapter also discusses the use of *macros*. Macros are very similar to batch files in that they store a sequence of DOS commands. The difference is that macros are stored in memory rather than on the disk. Therefore, a macro will execute much faster than a batch file with the same commands. Macros in MS-DOS are implemented using the DOSKEY command that was introduced in MS-DOS 5. Earlier versions of DOS do not support the use of macros.

What Is a Batch File?

A *batch file* is a text file (ASCII file) that contains a sequence of MS-DOS commands. The rules for naming a batch file are the same as those for other files, with the exception that a batch file must have a filename extension of .BAT (BATch).

Executing the commands in a batch file is easy. You simply give MS-DOS a *start command* by typing the filename of the batch file and pressing the Enter key. When you enter the name of the batch file, MS-DOS searches the disk in the specified (or default) drive for the file. If MS-DOS does not find the file in the drive's current directory, the search is extended to any directories specified by the PATH and APPEND commands. (Both of these commands are discussed in Part 2.)

When MS-DOS locates the batch file, the first command in the file is loaded into memory, displayed on the screen, and executed. This process is repeated until all of the commands in the batch file have been executed.

You can stop the execution of a batch file at any time by pressing the Ctrl-Break key combination. When you press Ctrl-Break, MS-DOS will ask you the following question:

```
Terminate batch job (Y/N)? _
```

If you enter **Y**, execution of the batch file will be stopped and the MS-DOS prompt will be displayed. Entering **N** will stop only the command currently being executed. Execution will continue with the next command in the batch file.

Creating a Batch File

You can create a batch file by using a word processor to create an ASCII (plain text) file. Refer to your word processor's manual under "ASCII files" or "DOS text files" for details. You can also use EDIT, the MS-DOS text editor, which is discussed in chapter 8. A third way to create batch files is by entering the text directly from the command line. This method is discussed here.

The MS-DOS device name for the keyboard is CON (CONsole). (MS-DOS device names are discussed in chapter 6.) To copy the input from the keyboard to a file, type **copy con:**, followed by the filename and filename extension of the file being created. For example, to create a batch file named SAMPLE.BAT, enter

```
C:\>copy con: sample.bat
```

Then enter the MS-DOS commands that will make up the batch file. After entering the last command, press Ctrl-Z (or press the F6 function key) and then press Enter. The file will be stored on the disk in the default drive with the name SAMPLE.BAT. If there is an existing file named SAMPLE.BAT in the current directory of the default drive, it will be replaced by the new file.

You can use batch files to make automatic backup copies of important files. When you enter **xcopy *.doc a: /m**, MS-DOS makes a copy of all files with an extension of DOC that have the archive attribute set. The command also instructs MS-DOS to clear each file's attribute after the copy is made. As is discussed in chapter 10 and Part 2, the operating system sets a file's archive attribute each time the file is modified. Therefore, the effect of this XCOPY command is to copy those DOC files in the current directory that have been modified since they were last copied. This handy command can be combined with the command for starting a word processor batch file:

```
C:\>copy con c:\batch\write.bat
wp
xcopy *.doc a: /m
^Z      ←press Ctrl-Z and Enter

C:\>
```

The listing creates a batch file named WRITE.BAT and stores it in directory C:\BATCH. The batch file is executed by entering **write** at the MS-DOS command line. The DOS search path should contain **c:\batch** so that WRITE will start, regardless of which directory is current.

The batch files begin by executing the **wp** command. This starts the word processor. The command assumes that the DOS search path contains the directory holding the word processor's files. Of course, the command also assumes that **wp** starts the word processor. You will need to modify this if your word processor is started with another command.

The batch file is set up so that the command **xcopy *.doc a: /m** is automatically executed when the word processor program terminates. All of the modified document files (assumed to have the extension DOC) are copied to the current directory of the disk in drive A. Thus WRITE.BAT provides an automatic backup facility for word processing document files.

Replaceable Parameters

Batch file commands may contain one or more *replaceable parameters.* A *parameter* is a command item that gives additional information to MS-DOS, such as the name of the file on which the command is to be performed. A *replaceable* parameter is a variable that is replaced with a string of characters (such as a filename). A batch file replaceable parameter is written by using a percentage sign (%) followed by a single digit. Up to 10 different replaceable parameters may be included in a batch file. You specify the character string that is to be substituted for each replaceable parameter when the batch file is called up in the batch file start command.

Substitution of character strings for the replaceable variables takes place according to the order in which the character strings are included in the start command. The first string is substituted for the replaceable variable %1, the second string is substituted for %2, and so on. MS-DOS automatically substitutes the file specification of the batch file for the replaceable variable %0.

Replaceable variables increase the flexibility of batch files. As an example, we will create a batch file with the DOS command TYPE. TYPE is used to view a text file's contents. One problem with TYPE is that if the text file is

large, the content will scroll off the screen before you have a chance to view it. You can overcome this problem by "piping" the output of TYPE to the MS-DOS *filter* named MORE. Piping and filters are discussed in chapter 6, but basically what happens is that when you pipe output into MORE, the output is displayed one screenful at a time. Therefore, by entering the command **type bigfile.txt ¦ more** you can display the contents of BIGFILE.TXT one screenful at a time (the ¦ symbol creates the pipe). We can put this command in a batch file. Let us call it DISPLAY.BAT:

```
C:\>copy con c:\batch\display.bat
type bigfile.txt ¦ more
^Z

C:\>
```

Now when you enter the command **display**, your screen will display BIGFILE.TXT one screenful at a time. In order for the batch file to operate correctly, either the APPEND search path must contain the directory storing BIGFILE.TXT or the file must be in the current directory. The batch file also assumes that the directory holding the file MORE.COM (an external DOS file) is contained in the DOS search path.

A major limitation of DISPLAY.BAT is that it can only be used to display BIGFILE.TXT. The batch file can be modified, using replaceable parameters, so that it can display any text file:

```
C:\>copy con c:\batch\display.bat
type %1 ¦ more
^Z

C:\>
```

Now the command you use to start the batch file is **display *filename***, where ***filename*** is the complete filename (filename and filename extension, separated by a period) of any text file. When the batch file executes, the filename is substituted for replaceable parameter %1 and the file's contents are displayed one screenful at a time.

Wildcards and Replaceable Variables

The character strings included in a batch file start command can include the MS-DOS wildcards ? and *. When a string containing a wildcard is specified for a replaceable variable, the batch file command containing the variable is

executed one time for each file that matches the string. Consider the following batch file:

```
C:\>copy con: c:\batch\display2.bat
copy %1 con:
^Z

        1 File(s) copied
```

This batch file copies a file (represented by the replaceable parameter %1) to the display screen (con). The file to be copied is specified in the start command. When the specified file is found, its contents are displayed on the screen.

Notice that this file has been given the name DISPLAY2.BAT. If the file had been named DISPLAY.BAT, it would have written over the existing file named DISPLAY.BAT.

Start the batch file with the command **display2 *.txt**. MS-DOS will search the current directory for each file matching the wildcard (*.txt) and display each file's contents. Please refer to chapter 2 for more information on the use of wildcards.

Occasionally, one of the filenames in a batch file will contain a percent sign. To prevent MS-DOS from confusing the filename with a replaceable parameter, type the sign two times when you list the file. For example, if you want to include the file HIHO%.TXT in a batch file, it should be listed as HIHO%%.TXT.

PAUSE

The PAUSE command can be used in a batch file when you want to temporarily suspend execution of the batch file. When MS-DOS encounters PAUSE, it ceases execution of the batch file and displays the following message:

```
Strike a key when ready...
```

Pressing any key, except the Ctrl-C combination, will resume execution of the batch file.

Pressing Ctrl-C causes MS-DOS to display the message:

```
Abort batch job (Y/N)? _
```

Entering **Y** terminates batch file execution. Entering **N** resumes execution of the batch file.

As you will see in the next example, the PAUSE command can be used to give you time to change disks during batch file execution. The following batch file automatically makes two copies of a file. The original file, the first copy, and the second copy can each be assigned any valid filename and filename extension that you wish. The two copies will be on different disks. The batch file will pause after making the first copy so that a second disk can be put in drive A:

```
C:\>copy con: c:\batch\copytwo.bat*
wp.exe
copy %1 a:%2
pause
copy %1 a:%3
^Z

        1 File(s) copied
```

To execute this batch file, type **copytwo**, followed in order by the filename and filename extension of the file to be copied, the filename and filename extension of the first copy, and the filename and filename extension of the second copy. Execution of the batch file begins when you press Enter:

```
C:\>copytwo new.doc old1.doc old2.doc

C:\>WP.EXE
```

This command loads and executes the word processor. When control is returned to MS-DOS, execution of the batch file continues:

```
C:\>COPY NEW.DOC A:OLD1.DOC
       1 File(s) copied

C:\>PAUSE
Strike any key when ready ...5

C:\>COPY NEW.DOC A:OLD2.DOC
       1 File(s) copied
```

Again, notice that the string characters in the start command replaced the variables in the batch file. After the first copy (OLD1.DOC) is made, the PAUSE command temporarily halts batch file execution. This enables you to put a new disk in the A drive. Batch file execution continues when a key (the **5** in this case) is pressed. The file is copied a second time (OLD2.DOC), completing execution of the batch file.

The PAUSE command may also be used to display messages. When PAUSE is entered in a batch file, it can be followed by a character string. The string may be up to 121 characters long. The string will be displayed when the batch file is executed:

```
C:\>copy con: copytwo.bat
wp.exe
copy %1 a:%2
pause put disk number2 in drive a
copy %1 a:%3
^Z
        1 File(s) copied
```

The only difference between this batch file and the one in the previous example is that a message will be displayed when the PAUSE command is executed:

```
C:\>COPY NEW.DOC A:OLD1.DOC
        1 File(s) copied

C:\>PAUSE PUT DISK NUMBER 2 IN DRIVE A
Strike any key when ready ... 5

C:\>COPY NEW.DOC A:OLD2.DOC
        1 File(s) copied
```

REM

You can use the REM (REMark) command to display a message during the execution of a batch file. Enter **rem** in the batch file, followed by the message that you want to display. The message can be up to 123 characters long. For example, enter the following:

```
C:\>copy con: copytwo.bat
wp.exe
rem making copy number 1
copy %1 a:%2
pause put disk number 2 in drive a
rem making copy number 2

copy %1 a:%3
^Z
        1 File(s) copied
```

The REM commands will help you follow the batch file's execution:

```
C:\>REM MAKING COPY NUMBER 1

C:\>COPY NEW.DOC A:OLD1.DOC
       1 File(s) copied

C:\>PAUSE PUT DISK NUMBER 2 IN DRIVE A
Strike any key when ready ...5

C:\>REM MAKING COPY NUMBER 2

C:\>COPY NEW.DOC A:OLD2.DOC
       1 File(s) copied
```

If the REM message includes any of the symbols ¦, <, or >, enclose the entire message in quotation marks, as in the following:

```
C:\>rem "dir > foo"
```

The quotation marks prevent MS-DOS from getting confused about the role of the special symbol(s). Each of these symbols is discussed fully in chapter 5.

ECHO

As you have already seen, under normal circumstances MS-DOS displays the commands in a batch file on the screen immediately before it executes them. With the ECHO command, you can control whether the commands are displayed.

To use ECHO in a batch file, type **echo**, followed by either **on** or **off**. ECHO ON causes MS-DOS commands to be displayed in the normal fashion. ECHO OFF suppresses the display of all MS-DOS commands including REM commands. However, ECHO OFF does not suppress any messages that are produced while commands are being executed.

If there is no ECHO command in a file, the default state is ECHO ON. ECHO is automatically turned ON when a batch file is terminated. Entering ECHO without any parameters causes MS-DOS to display the current ECHO state (ON or OFF). The following batch file demonstrates the use of ECHO. The examples assume that the directory C:\BATCH already exists.

```
C:\>copy con: c:\batch\example1.bat
rem this message will not be displayed
rem this message will be displayed
rem because echo is on
echo off        ←ECHO is turned off
rem this message will not be displayed
rem because echo is now off
echo        ←ECHO state is displayed
echo on        ←ECHO is turned on
rem echo is back on
echo        ←ECHO state is displayed
^Z
        1 File(s) copied

C:\>example1

C:\>REM THIS MESSAGE WILL BE DISPLAYED

C:\>REM BECAUSE ECHO IS ON

C:\>ECHO OFF
ECHO is off

C:\>REM ECHO IS BACK ON

C:\>ECHO
ECHO is on
```

In the preceding example, the first two REM commands are displayed, because ECHO is initially in the default ON state. The third command in the batch file turns ECHO OFF, so the next two REM commands are not displayed. The sixth command (ECHO) verifies that the ECHO state is OFF. The seventh command then turns ECHO back ON, and the final REM command is displayed. The last command in the file (ECHO) verifies that ECHO is back ON. If a message is entered in a batch file following ECHO, the message will be displayed regardless of the ECHO state:

```
C:\>copy con: c:\batch\example2.bat
echo off
rem this message will not be displayed
echo but this one will be
echo on
rem this will be displayed
echo so will this ... twice
^Z
        1 File(s) copied
```

```
C:\>example2

C:\>ECHO OFF
BUT THIS ONE WILL BE

C:\>REM THIS WILL BE DISPLAYED

C:\>ECHO SO WILL THIS ... TWICE
SO WILL THIS ... TWICE
```

The first command in this batch file turns ECHO OFF. With ECHO OFF, the first REM command is not displayed. The third command in the file is an ECHO command. Because ECHO is OFF, the command is not displayed, but the message within the ECHO command (`THIS WILL BE DISPLAYED`) *is* displayed. The fourth command in the file turns ECHO ON so that the following REM command is displayed. The final command in the file is an ECHO command. ECHO is ON, so this command is displayed, and then the message within the command is displayed again.

Using ECHO to Send a Blank Line to the Screen

Often the text on a display screen is easier to read if it is occasionally interspersed with a blank line. With this in mind, it would be helpful if you could use ECHO to send a blank line to the screen. Unfortunately, no simple way exists to do this for all versions of MS-DOS.

The command "ECHO " (ECHO followed by two spaces) will send a blank line to the screen under MS-DOS 2.X, but not 3.X, 4.X, or 5.X. The command ECHO. (ECHO followed by a period) will send a blank line to the screen under 3.X, 4.X, and 5.X, but not 2.X. You have to be tricky if you want something that works under all versions.

The command ECHO ^H (ECHO followed by a space and a Ctrl-H character) will send a blank line to the screen under 2.0 and subsequent versions. This method requires you to install the ANSI.SYS device driver (chapter 9). Many word processors allow you to place control characters in a text file. If you do not have a word processor with this capability, use your word processor to enter ECHO * and then use DEBUG (chapter 15) to replace the * with a Ctrl-H character. Ctrl-H is the same as the backspace character (ASCII value 008).

Suppressing ECHO OFF

With MS-DOS 3.3, 4X, and 5.X you can suppress the display of a line in a batch file by preceding the line with an at sign (@). One place where this is useful

is in suppressing the display ECHO OFF at the start of a batch file. As an example, no display is generated from the following batch file:

```
@echo off
rem this is a test
```

Without the @, the ECHO OFF command will be displayed.

Those using MS-DOS 3.2 or earlier versions can employ a trick to make it appear as though ECHO OFF is not displayed. To begin, you must have ANSI.SYS installed as the keyboard device driver. (Chapter 9 gives an explanation of how to do this.) Then start your batch file with the following two lines:

```
echo off
echo ^[[s^[[1A^[[K^[[u
```

Note that each ^[is a single escape character, not two separate characters. With most word processors you can place escape characters in a text file. You can also use DEBUG (chapter 15) to replace dummy characters with escape characters (escape characters have ASCII value 1BH). In table 9-1, note how the second ECHO command is a sequence of instructions for ANSI.SYS. The screen device driver is instructed to

^[[s	Save the current position of the cursor
^[[1A	Move the cursor up one line
^[K	Erase from the cursor to the end of the line
^[[	Restore the cursor to its original position

In this way, `echo off` is displayed on the screen but is erased before it can be read.

GOTO

The GOTO command is used to transfer control within a batch file. GOTO directs the batch file to jump to a labeled line within the batch file. A *line label* in a batch file consists of a colon (:) followed by up to eight characters. For example, enter the following:

```
C:\>copy con: example3.bat
rem this is the first line
rem this is the second line
goto four
```

```
rem this is the third line
:four
rem this is the fourth line
^Z
        1 File(s) copied

C:\>example3

C:\>REM THIS IS THE FIRST LINE
C:\>REM THIS IS THE SECOND LINE

C:\>GOTO FOUR
C:\>REM THIS IS THE FOURTH LINE
```

The first two commands in the batch file are executed. Execution then jumps to the `:four` label and continues with the final command in the batch file.

The label in a GOTO command can be a replaceable variable. This allows the execution of the batch file to jump to a line that is determined by a parameter included in the batch file start command. The following example shows how this works:

```
C:\>copy con: example3.bat
goto %1
:one
rem this is one
goto finish
:two
rem this is two
goto finish
:three
rem this is three
:finish
^Z
        1 File(s) copied

C:\>example3 three

C:\>GOTO THREE
C:\>REM THIS IS THREE
```

When this batch file is called up, the character string `three` is included in the start command. When the first command in the batch file is executed, `THREE` replaces the variable `%1`. Execution then jumps to the label `:three`. The REM command (`this is three`) is executed. The final line in the batch file is another line label. Line labels are not displayed during batch file execution.

IF

You can use the IF command to create commands in a batch file that will be executed if a specified condition is true. There are three types of conditions that IF can test: IF EXIST, IF *String1==String2*, and IF ERRORLEVEL.

IF EXIST

The first condition is called the EXIST condition. This conditional statement checks whether a specified file exists. If the file exists, the condition has been met and the command executes. Consider the following command in a batch file:

```
if exist somefile.dat type somefile.dat
```

In executing this command, MS-DOS determines first whether the file SOMEFILE.DAT exists on the default drive. Then, if the file exists, MS-DOS executes the command to type the file. If SOMEFILE.DAT does not exist, MS-DOS skips to the next batch command.

IF may be used to check for files on a drive other than the default. Simply precede the file specified in the IF command with the appropriate drive letter designator (such as A: or B:).

IF can check for files only in the current directory of a drive. To check a directory other than the current one, you must first make that directory the drive's current directory. Directories are discussed in chapter 3.

IF *String1==String2*

The second type of condition that may be tested by an IF statement is whether two character strings are identical. Consider the following batch file:

```
C:\>copy con: example4.bat
echo off
if %1==roses goto roses
if %1==candy goto candy
if %1==perfume goto perfume
echo you are in big trouble
goto finish
:roses
echo you sent roses. how thoughtful.
goto finish
:candy
echo you sent candy. how sweet.
```

```
goto finish
:perfume
echo you sent perfume. how romantic.
:finish
^Z

        1 File(s) copied

C:\>example4 perfume

C:\>ECHO OFF
YOU SENT PERFUME. HOW ROMANTIC.
```

Each of the IF statements compares a replaceable variable to a character string. Note that the IF statements use double equal signs (==). The string parameter that is included in the batch file start command replaces the variable in each IF statement. When the condition tested by an IF statement is true, the command contained in that statement is executed; in this case, execution branches to the PERFUME line label.

Notice that this batch file begins with the command `echo off`. This results in a screen display that is much less cluttered and easier to read.

IF ERRORLEVEL *n*

ERRORLEVEL is a system variable maintained by MS-DOS and used to monitor error conditions. Many of the MS-DOS commands set ERRORLEVEL if an error is encountered during execution of the command. The type of error encountered determines the value to which ERRORLEVEL is set. Application programs can also use DOS service functions 31H and 4CH to set ERRORLEVEL (see appendix A). The statement

```
IF ERRORLEVEL n command
```

tells MS-DOS that if ERRORLEVEL is equal to or greater than `n`, MS-DOS should execute `command`. Refer to the discussion of the individual MS-DOS commands for details on how they set ERRORLEVEL.

IF NOT

An IF NOT statement can also test whether a condition is false. Consider the following statement:

```
if not exist somefile.bak copy somefile.txt somefile.bak
```

This statement tests for the nonexistence of a file. If the file does not exist, the MS-DOS command within the IF statement is executed. IF NOT may be used to test any condition that may be tested with IF.

FOR

The FOR command enables you to execute a batch file command repeatedly on a set of specified parameters. The syntax (or rules) of FOR can become a little involved, so let's begin with an example:

```
for %%a IN (file1 file2 file3) DO del %%a
```

As you can see, a FOR statement begins with the word `for`, followed by a dummy variable. A dummy variable has no meaning. Its function is to serve as a placeholder for the parameters that will be "plugged" into the FOR statement. The dummy variable must be preceded by two percent signs (%%). The variable is followed by the word `IN`, which must be entered in uppercase. `IN` is followed by the set of parameters on which the command is to operate. The set of parameters is usually a list of files. In our example, three files are specified as parameters. The set of parameters is followed by `DO`, which must also be entered in uppercase. `DO` is followed by the command that is to be executed. In the example, the command `del %%a` is executed three times, deleting sequentially the files `file1`, `file2`, and `file3`.

A FOR statement is useful when you want to execute a command on a group of files that cannot be specified with wildcards. Suppose that three text files named EXAMPLE1.BAT, PROGRAM.TXT, and LETTER existed on a disk and that you wanted a printed copy of each file. You could enter the command **copy example.bat prn**, sit back and wait while the file is being printed, enter the same command for PROGRAM.TXT, wait again, and then enter the command for LETTER. If you do this, you will spend a lot of time sitting around, waiting for the computer to print each file.

The following command, included in a batch file, will perform the same task without all that wasted time:

```
for %%a IN (example.bat program.txt letter) DO copy %%a prn
```

The three text files will be printed, and you had to enter only one command.

FOR commands are not limited to use in batch files. They can be used as standard MS-DOS commands and will execute repeatedly on a set of parameters. When FOR commands are used in this fashion, the dummy variable is preceded by only one percent sign.

Any file specified as a parameter in a FOR command must be located in the current directory of the specified or default disk drive. Current directories are discussed in chapter 3.

SHIFT

The SHIFT command enables you to specify more than 10 parameters in a batch file start command. Recall that a batch file can normally contain up to 10 replaceable variables. A list of character strings, included in the start command, sequentially replaces the variables as the batch file is executed. The first string specified replaces the variable %1, the second string replaces %2, and so on. The replaceable variable %0 is reserved for the file specification of the batch file.

The SHIFT command "shifts" the parameters one position to the left. The first parameter in the start command replaces %0, the second parameter replaces %1, and so on. Each time a SHIFT command is executed, the parameters shift one position to the left. The following batch file should help clarify the use of SHIFT:

```
C:\>copy con: example6.bat
echo off
echo %0 %1 %2 %3 %4 %5 %6 %7 %8 %9
shift
echo %0 %1 %2 %3 %4 %5 %6 %7 %8 %9
shift
echo %0 %1 %2 %3 %4 %5 %6 %7 %8 %9
shift
echo %0 %1 %2 %3 %4 %5 %6 %7 %8 %9
^Z
       1 File(s) copied

C:\>example6 00 01 02 03 04 05 06 07 08 09 10

C:\>ECHO OFF
EXAMPLE6 00 01 02 03 04 05 06 07 08
00 01 02 03 04 05 06 07 08 09
01 02 03 04 05 06 07 08 09 10
02 03 04 05 06 07 08 09 10
```

The batch file echoes the current values of the variables four times. The first time, **%0** is EXAMPLE6, **%1** is 00, and so on. After one **shift**, **%0** is 00, **%1** is 01, and so on. Notice that after the third **shift**, only nine of the variables have a value. (For another, more practical, application of SHIFT, refer to the batch file presented at the end of this chapter.)

CALL

The concept of *modular programming* is widely accepted by computer programmers. Modular programming refers to the practice of dividing a computer program into small modules, each module being responsible for a single function (such as performing a calculation or copying a file). Programmers try to write modules that are reusable, meaning that a module written for one program can be reused in another program. This saves programmers from having to "reinvent the wheel" each time they write a program. The other big attraction of modular programming is that small modules are easy to debug, unlike large programs that can be very difficult to debug. Programmers use existing modules by issuing a "call." A *call* is a command to invoke a module.

Calling a Batch File Module

Batch file programming lends itself well to the development of reusable batch file modules. Unfortunately, with versions of MS-DOS prior to 3.3, it is cumbersome to call a batch file module. To illustrate the problem, let's see what happens when the following two batch files are executed:

```
C:\>copy con one.bat
echo starting one
two
echo ending one
^Z
    1 File(s) copied

C:\>copy con two.bat
echo starting two
echo ending two
^Z
    1 File(s) copied
```

Now here is what happens when we call ONE.BAT:

```
C:\>one

C:\>echo starting one
starting one

C:\>two

C:\>echo starting two
starting two
```

```
C:\>echo ending two
ending two

C:\>
```

ONE.BAT echoes its starting message and then calls TWO.BAT. TWO.BAT displays its starting and ending messages, and its execution terminates. However, control is then passed to DOS (rather than back to ONE.BAT), and ONE.BAT's ending message does not get displayed. This failure to display ONE.BAT's ending message can be overcome with a small modification of ONE.BAT, namely, the use of the CALL command to execute TWO.BAT.

```
C:\>copy con one.bat
echo starting one
call two
echo ending one
^Z
    1 File(s) copied
```

Now we can see that control returns to ONE after TWO is executed:

```
C:\>one

C:\>echo starting one
starting one

C:\>call two

C:\>echo starting two
starting two

C:\>echo ending two
ending two

C:\>echo ending one
ending one
```

See Using Environment Variables in this chapter for another example using CALL.

Calling Batch File Modules Without CALL

CALL is implemented in MS-DOS 3.3 only. Batch files running under earlier versions of MS-DOS can call other batch files by loading a *secondary command processor* and having the secondary command processor execute

the second batch file. The following version of ONE.BAT works under versions 2.X and 3.X of MS-DOS. See the discussion of COMMAND in Part 2 for details on the use of a secondary command processor.

```
C:\>copy con one.bat
echo starting one
rem
rem The command "command /c two" invokes a secondary command
rem processor which loads two.bat. When two.bat terminates
rem execution, control is passed back to one.bat.
rem
command /c two
echo ending one
^Z
    1 File(s) copied
C:\>
```

Using Environment Variables

Batch files running under MS-DOS 3.X, 4.X, and 5.X can access and modify the MS-DOS environment variables (the environment and environment variables are discussed in chapter 11). To reference an environment variable from within a batch file, use the variable's name preceded and followed by a percent sign. Thus, if a batch file contains the command ECHO %PATH%, the current directory search path is displayed.

The following batch file, ADD2PATH.BAT, can be used to append additional search paths to the current PATH variable. The batch file is called with a command having this format:

```
add2path newpath1;newpath2;newpath3...
```

where each `newpath` is a search path (for example, a:\subdir2). The batch file loops one time for each newpath entered on the command line. Each loop appends the replaceable variable `%1` to the end of PATH. The SHIFT command then moves the next newpath on the command line into variable `%1`. The command that is after the loop label checks whether the end of the command line has been reached. Notice the double quotes around `%1`.

```
echo off
echo ^[[s^[[1A^[[K^[[u
rem
rem                                   ADD2PATH.BAT
rem
```

```
rem This batch file adds a search path to an existing PATH
rem variable. The syntax for using ADD2PATH is as follows:
rem
rem             ADD2PATH newpath1;newpath2 ...
rem
rem Each "newpath1", "newpath2", and so on, specifies a new
rem search path, which is added to the existing PATH variable.
rem The "newpath's" may be separated by a semicolon, space,
rem tab, or equal sign.
rem
rem The batch file uses "%path%" to access the current PATH
rem variable and append the newpaths to it. The total number
rem of characters that may be added to the PATH variable is
rem limited by 2 factors: (1) Each time ADD2PATH is invoked,
rem there is a limit on the number of characters that can be
rem entered on the command line, and (2) there is a limit on
rem the number of characters that can be stored in the DOS
rem environment (see chapter 12 of MS-DOS Bible). DOS will
rem display:
rem             Out of environment space
rem
rem if the limit is reached.
rem
rem ADD2PATH "loops" one time for each new path specifier
rem entered, exiting after all have been processed.
rem The new PATH variable is displayed when execution
rem terminates.
rem
rem NOTE: The echo commands at the start of this batch file
rem require ANSI.SYS to work correctly. See chapter 8 of
rem MS-DOS Bible.
rem
:loop
rem exit if all parameters have been read
if "%1"=="" goto exit
rem append %1 to existing path
set path=%path%;%1
rem shift parameters one to left
shift
goto loop
:exit
echo PATH=%path%
echo.
```

ADD2PATH.BAT is useful if you want to add information to the end of PATH without having to enter the existing path string on the command line. If you want to modify PATH from the command line (using SET PATH=), you

are limited by the 149-character restriction imposed by capacity of MS-DOS's keyboard buffer. Therefore, you may not be able to set as long a PATH variable as you would like. Using ADD2PATH.BAT, you are limited only by the size of your DOS environment (the size of which can be adjusted; see chapter 11).

ADD2PATH.BAT is also useful for adding search paths that you do not ordinarily use but need for a particular application. The following batch file could be used to initialize MS-DOS to use such an application:

```
echo off
rem                WP_INIT.BAT
rem
rem A batch file to initialize MS-DOS to use "WP"
rem
rem Append WP's directory to PATH
call add2path \wp
rem
rem Set up working directories
c:
cd \letters\aug_81
cd a:\letters\aug_81
rem
rem Load the word processor
wp
rem
rem copy any new or modified files upon exit
xcopy *.* a: /m
```

Macros

Macros are essentially batch files that are stored in memory. Clearly, an advantage of macros is that they execute much faster than batch files. Another advantage is that because they are in memory, they can be executed from any directory, regardless of the contents of the DOS search path.

The major disadvantage of macros in general is that they disappear each time you turn off the computer. This is not a tremendous problem, because you can include the commands to create your macros in AUTOEXEC.BAT (see chapter 5). MS-DOS macros also have their own particular limitations, which users simply must live with. These limitations are as follows:

- MS-DOS macros are limited to 127 characters. This includes the characters in the macro's name and the characters used to separate commands. Thus, macros are best suited for automating simple tasks that have only a few steps.
- Once a macro is running, you need to enter Ctrl-C for each command in the macro when you want to terminate its execution. Termination of a batch file requires a single Ctrl-C.
- MS-DOS macros use the dollar sign ($) in replaceable parameters, to redirect input and output, and for separating commands. This makes batch files and macros incompatible in many cases.
- Macros cannot use GOTO to branch. They cannot call other macros, nor can they be called from batch files. However, macros can call batch files.
- Macros cannot use ECHO OFF, so your screen can get messy. However, you can turn your display on and off from macros with the commands CTTY NUL and CTTY CON.

Creating Macros

MS-DOS macros are created using the DOSKEY command. DOSKEY is an external command introduced with MS-DOS 5. Earlier versions of DOS do not support macros.

You create a macro by entering

```
doskey
```

followed by the name you want to give the macro, an equal sign, and then the command(s) you want to include in your macro. Your DOS search path should contain the directory storing DOSKEY.COM before you try to create a macro. The following example creates a macro named dw that displays the contents of the current directory using the wide format:

```
doskey dw=dir/w
```

You could include a space on either side of the =, but it's best to compact your macros as much as possible because they are limited to 127 total characters. There is no limit on the length of the macro's name. However the characters in the name are counted in determining the macro's total length. Once a macro has been created, you can execute it by entering its name at the command line.

Commands in a macro are separated by `$t`. The following example modifies dw so that it lists separately the files with no extension and the files with an extension of TXT:

```
doskey dw=dir *. /w$tdir *.txt /w
```

Notice that spaces are not required around each **$t**.

Replaceable Parameters, Redirection, and Pipes in Macros

MS-DOS macros can contain replaceable parameters. They can also redirect and pipe (redirection and pipes are discussed in chapter 6). The symbols used for these functions differ from the symbols used for the same functions in batch files. For example, in macros, replaceable parameter number 1 is represented as **$1** instead of %1, and the symbol for redirection of output is **$g** rather than >. All of the symbols for replaceable parameters are described in table 4-1. See chapter 6 for a general discussion of redirection and pipes.

Table 4-1. Macro and Conventional Symbols for Replaceable Parameters, Redirection, and Piping.

Macro Symbol	*Conventional Symbol*	*Function*
$0		Single replaceable. All parameter text entered on the command line is assigned as a single parameter to $0.
$1–$9	=%1–%9	Same as replaceable parameters %1–%9 used in batch files.
$L (or $l)	<	Redirects input.
$G (or $g)	>	Redirects output.
GG (or gg)	>>	Appends output to an existing file.
$B (or $b)	¦	Pipes output.

These differences in the use of symbols are unfortunate, for two reasons. First, the differences contribute to the incompatibility between macros and batch files. It would be helpful if the only difference between macros and batch files was where they are stored. Such is not the case in

MS-DOS. Second, use of the $ prevents you from using valid DOS commands (such as PROMPT PG) or determining environment variable values in macros.

Creating a Macro to Move Files

DOS does not have a command to move a file from one directory to another. We will create a macro to do the job. Beware, though, before going on. This macro has some *serious limitations*. One of these limitations, described in a moment, is so serious that you may want to avoid using this macro altogether. Nonetheless, the macro is useful when used carefully. It is also illustrative of both the capabilities and limitations of MS-DOS macros. The macro's limitations are discussed below.

The following command creates the macro. The command is entered as a single line even though it appears as more than one line here:

```
doskey move=copy $1 $2$1$tif exist $2.\$1 if not
"$2"=="" del$1$tif exist $2.\$1 echo File moved to $2
directory.
```

The DOSKEY command creates a macro called MOVE, which takes two parameters. The first parameter ($1) is the name of the file to be moved. The second parameter ($2) is the path specifier of the destination directory. The individual commands in the macro are separated by `$t`.

The first command in the macro copies the file to the destination directory.

The second command in the macro is a nested IF statement. The first IF checks whether the file was copied by determining whether the destination directory contains a file whose name matches that of the file to be moved. The second IF checks to make sure a destination directory was specified. If a destination were not specified, the first command would become

```
copy test.txt
```

This is invalid, so no copy would take place.

The original file is deleted if both of the IF tests are true.

The period (.) that follows $2 in the second command is needed in case the root is specified as the destination. Say the file to be moved is TEST.TXT and you want to move it to the root directory. The macro would be started by entering

```
move test.txt \
```

If the second command in the macro did not have a period, it would get translated to

```
if exist \\test.txt if not "\"=="" del
```

This is an invalid command. With the period, the second command gets translated to

```
if exist \.\test.txt if not "\"=="" del
```

which is valid. Recall from chapter 3 that a single period is used to represent a directory and two periods are used to represent its parent. Thus, \.\TEST.TXT is the same as \TEST.TXT.

The macro's third command repeats the first IF check and, if true, echoes the location of the copied file.

There are at least two limitations with MOVE. First, we cannot include a drive or path specifier for the file to be moved. Let's see what would happen if you tried to do this. Say we want to move C:\TMP\NAMES to the directory C:\BUSINESS. We would execute the macro with

```
move c:\tmp\names c:\business
```

The first command in the macro would get translated to

```
copy c:\tmp\names c:\business.\c:\tmp\business
```

which obviously will fail. Fortunately, the second command will test as false, and the original file won't get deleted.

The second limitation is more serious and possibly even fatal (hopefully only for the macro). Let's say NAMES is the file to be moved. We want to move it to \TMP. What if \TMP already has a file called NAMES? The copy command will fail, but the two IF tests will be true. The original file will be deleted without a copy having been made—definitely something we want to avoid.

Should you use MOVE? Obviously that's up to you, but it's probably too dangerous. The point in presenting MOVE is to demonstrate how macros work and get you thinking about how to overcome their limitations. Maybe one of you readers will come up with a way to fix MOVE, given that macros are limited to 127 characters, that GOTOs are not allowed, and that termination of a macro requires a Ctrl-C for each command in the macro.

A good way to develop macros such as MOVE is to put the DOSKEY command that defines the macro in a batch file. Executing the batch file will then load the macro into memory. If the macro does not work correctly, go back and edit the batch file. Then reexecute the batch file. Continue this

process until the macro works correctly. You can then execute the batch file whenever you want to load the macro. You could also put the final version of the DOSKEY command in AUTOEXEC.BAT (discussed in chapter 5) and have the macro load each time DOS boots.

Listing Macros Stored in Memory

Use the DOSKEY switch **/dmacs** to list the name and commands of each macro loaded in memory. The list can be redirected (using >) to a text file. The text file could then be edited and be used to save the macros for future use.

CHAPTER

5

Configuring Your System

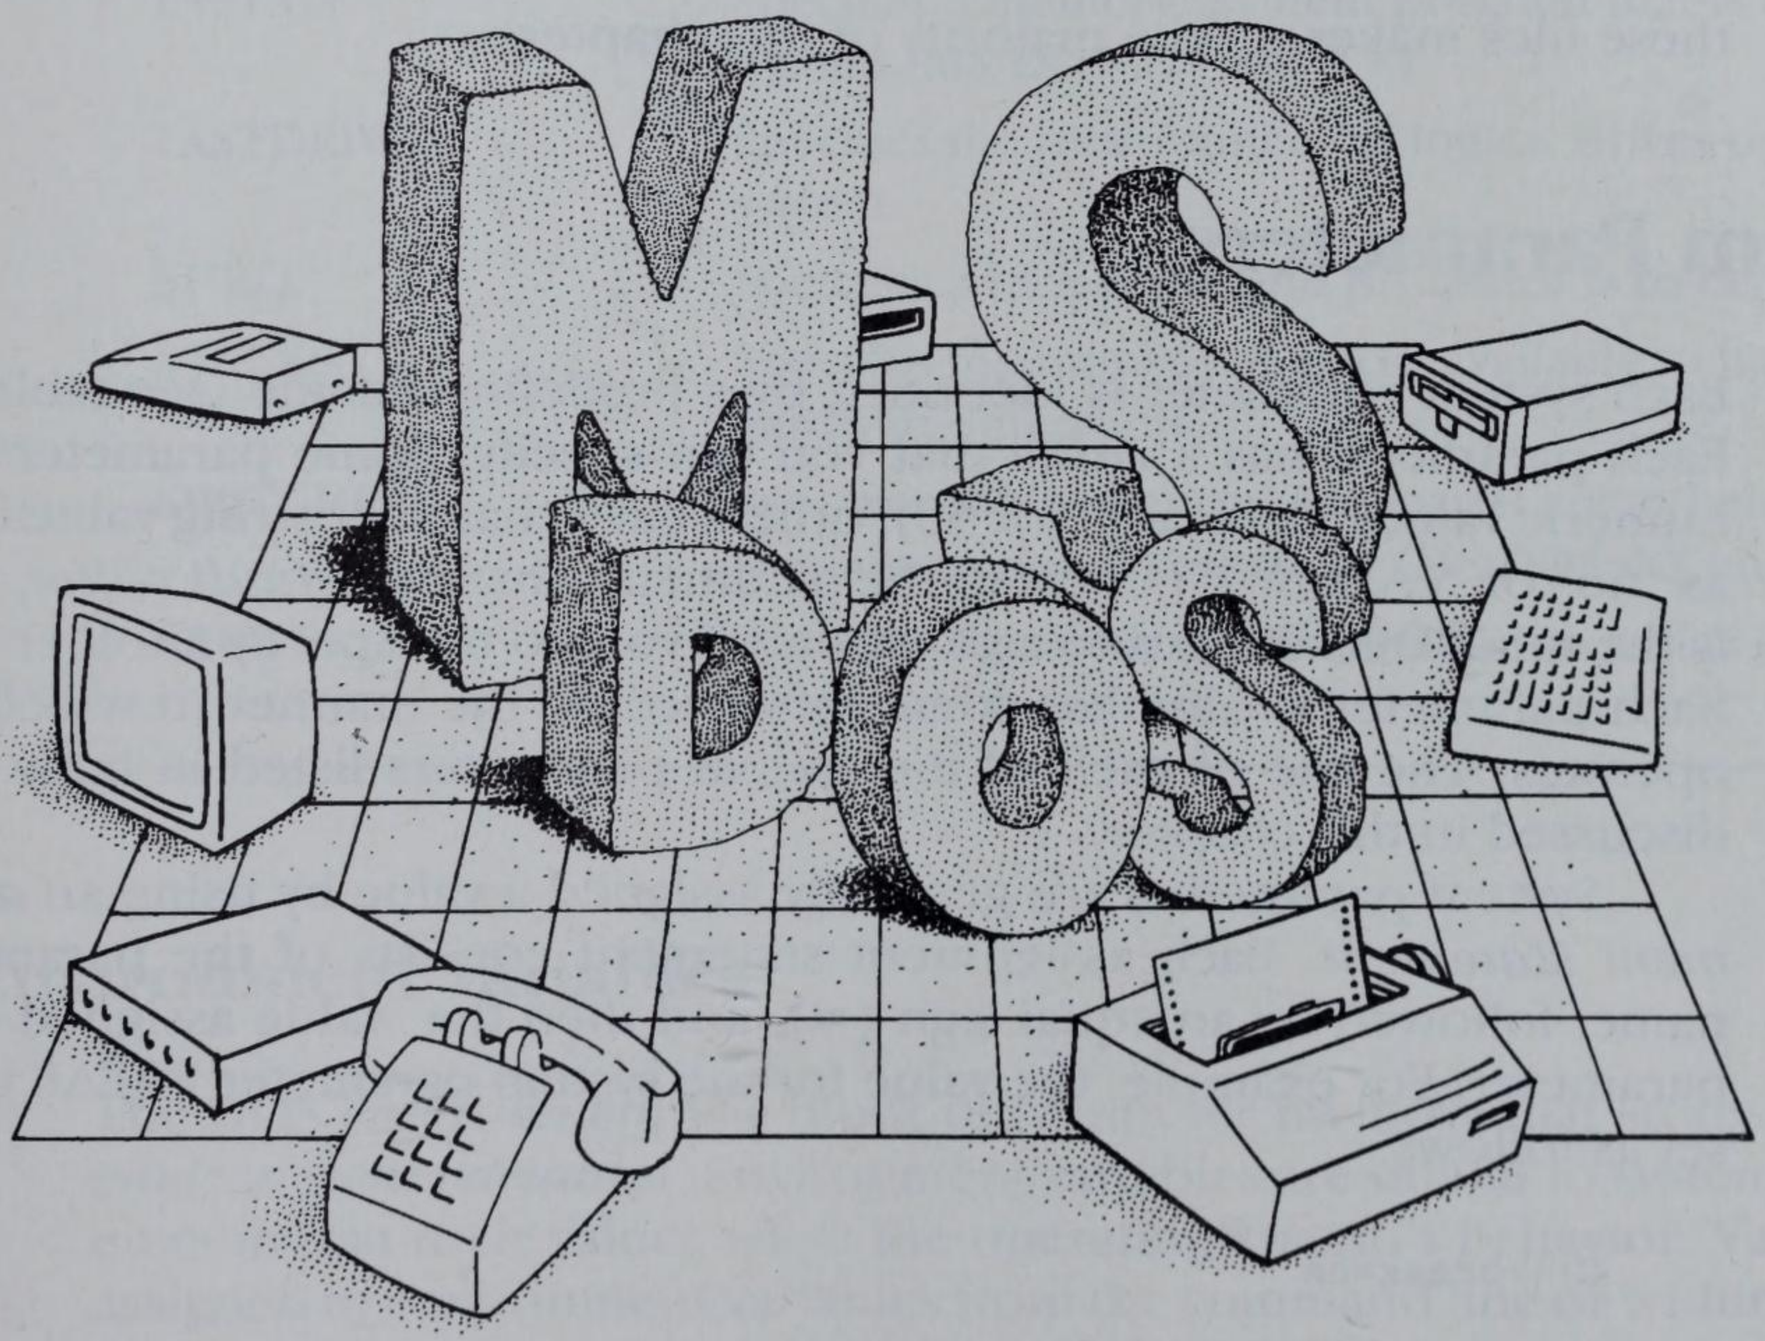

System Parameters
Installable Device Drivers
CONFIG.SYS
AUTOEXEC.BAT

The dictionary defines *configuration* as the "arrangement of parts." System configuration refers to the arrangement of parts in a computer system. This chapter takes a somewhat narrower perspective and discusses the configuration of DOS. Specifically, we look at how you, as the person using the operating system, can configure it to install and use a RAM disk drive, speed up disk access, use a mouse or other peripheral device, and generally modify the function of the system to work optimally for your needs.

DOS is configured in two ways:

- By assigning values to a set of variables known as the DOS *system parameters*
- By installing *device drivers*

This chapter begins by discussing what these terms mean.

DOS configuration is generally carried out through the use of two special files: CONFIG.SYS and AUTOEXEC.BAT. A discussion of the use of these files makes up the majority of this chapter.

System Parameters

Each system parameter is identified by a predefined name (see table 5-1). Each parameter has a *value* that you can specify. Some parameters have numeric values (such as 10 or 50); others have character string values (such as "no" or "c:\;c:\dos"). Most of the parameters have a *default value*, which is the value DOS assigns to a parameter if you do not specify another value. Each parameter's value has some influence on the manner in which DOS operates. The use of each of the system parameters listed in table 5-1 is discussed in this chapter.

System parameters are generally assigned a value by using an *assignment statement*. Each assignment statement consists of the parameter's name, followed by an equal sign (=), and then the value assigned to the parameter. For example, the value for the system parameter BREAK can be set as follows:

```
C:\>break=on
```

or

```
C:\>break=off
```

The system parameter FILES is assigned a value of 50 as follows:

```
C:\>files=50
```

Most of the system parameters listed in table 5-1 may have values assigned to them *only* through the use of assignment statements contained in a special file named CONFIG.SYS. Much more will be said about this file later in this chapter.

Table 5-1. DOS System Parameters

Parameter Name	*Function*
BREAK	Controls the frequency with which DOS checks for Ctrl-Break
BUFFERS	Sets the number of disk buffers
COUNTRY	Specifies country-specific formatting information
FCBS	Sets the number of file control blocks
FILES	Sets the number of available file handles
INSTALL	Specifies a memory resident program that is to be loaded (MS-DOS 4.X and 5.X)
LASTDRIVE	Specifies the total number of logical drives on the system
SHELL	Specifies which command processor is to be used
STACKS	Specifies the number of stacks available to handle hardware interrupts
SWITCHES	Specifies that enhanced keyboards are to behave like conventional keyboards (MS-DOS 4.X and 5.X)
VERIFY	Specifies that each write operation to a disk is to be verified for accuracy

Environment Variables

The DOS *environment* is a block of computer memory that stores a list of *environment variables*. Environment variables are similar to system parameters in that their values affect the operating system's behavior. Values are assigned to environment variables from the command line or within a batch file, *not* from statements contained in CONFIG.SYS.

PATH, APPEND, COMSPEC, and PROMPT are predefined environment variables that have special meaning to DOS.

The value assigned to the PATH variable, along with the value assigned to the APPEND variable, specifies the directories in which DOS is to search for files not located in the current directory. You assign a value to the PATH

variable by typing **path**, followed by an equal sign (=), followed by the directories to be searched. You separate each directory from the next with a semicolon. As an example, the following statement directs DOS to search the directories C:\PRGMS\WORD, C:\DOS, and C:\UTILS for files not located in the current directory:

```
C:\>path=c:\prgms\word;c:\dos;c:\utils
```

You can assign a value to the APPEND variable in a similar fashion. The value of the PATH and APPEND variables can be changed from the command line or from within a batch file.

The value assigned to the COMSPEC variable specifies where DOS is to locate the special file COMMAND.COM when a part of that file, known as the *transient portion*, needs to be reloaded into memory. DOS automatically assigns a value to COMSPEC during the boot-up process. You can change the value of the COMSPEC variable by using the SET command. As an example, the following command sets COMSPEC to a value of `c:\dos`:

```
C:\>set comspec=c:\dos
```

The value assigned to the PROMPT variable determines the system prompt that is displayed on the DOS command line. You can assign a value to the variable by typing **prompt** followed by the character string that you wish to appear as a prompt. DOS provides a set of special characters that can be used to specify a prompt. For example, if the PROMPT variable has the value `$p$g`, the system prompt consists of the drive letter of the default disk drive, followed by a colon, followed by the path to the current directory, followed by the greater than (>) symbol. See the discussion of PROMPT in Part 2 for further information on the PROMPT special characters.

Creating User-Defined Environment Variables

You can use the SET command to create *user-defined* environment variables. Many application programs require the use of such variables. For example, some compilers are programmed to search the DOS environment for the user-defined variable LIB. The value assigned to the variable tells the compiler where to look for its library files. Prior to using the compiler, the user must assign a value to LIB as follows:

```
C:\>set lib=c:\lib
```

In a similar fashion, you can use the SET command to change the value of an existing environment variable.

You can delete a user-defined environment variable by assigning a value of null (no value) to the variable. As an example, the following command removes LIB from the environment:

```
C:\>set lib=
```

You can display all of the environment variables, along with the value assigned to each, by entering the command SET. The following example illustrates how this works.

```
C:\>set
COMSPEC=C:\
PATH=C:\;C:\DOS
PROMPT=$P$G
HERCGB102=true
PCPLUS=C:\PRGMS\PCPLUS\

C:\>
```

Installable Device Drivers

In computer jargon, the terms *peripheral device* and *I/O device* both refer to any hardware component that is external to memory and the central processing unit (CPU). The most common devices are keyboards, monitors, disk drives, printers, modems, and mice.

Computer devices send input to memory and the CPU (keyboard, mouse), receive output from memory and the CPU (printer, monitor), or both send input and receive output (disk drives, modems).

Each device uses its own *communications protocol* to communicate with the computer. The protocol specifies how the device is to respond when it receives a certain signal from the computer. For example, a disk drive will begin to spin when it receives a certain signal from the computer, and the disk drive will send the computer a block of data when it receives another specific signal. Similarly, other devices carry out their special functions in response to specific signals from the computer.

The communications protocol for each device is specified in a computer program called a *device driver*. Because each type of device has its own communications protocol, each device requires its own device driver.

Standard Device Drivers

All versions of DOS contain a set of standard device drivers, which are built into the system. These include drivers for the keyboard, monitor, floppy disk drive, and line printer. Hard drive device drivers are also built into DOS 2.0 and subsequent versions. These device drivers are automatically loaded into memory and are available for use each time the system is booted up.

Installable Device Drivers

As DOS has become more popular, the variety of devices used by computers running DOS has increased dramatically. RAM disk drives, EGA monitors, VGA monitors, mice, laser printers, plotters, CD ROM readers, network interface cards, and expanded memory boards all require device driver support. DOS does not provide this support directly. Rather, it provides a standard method by which the manufacturers of these devices may install their own device drivers into DOS. This ability to use *installable device drivers* greatly extends the capabilities of DOS and DOS computers.

Installable device drivers control communications between the computer and devices that do not have standard device drivers. They also can be used to replace standard drivers. The set of standard drivers is loaded into memory whenever DOS boots up. However, if an installable device driver for a standard device (such as the keyboard) is loaded into memory, the installable driver is used instead of the standard driver.

This selection process comes about as follows. DOS constructs a list that contains information about each device driver currently in memory. All of the installable device drivers are listed ahead of the standard device drivers. When the system needs the services of a driver for a particular device (say, the keyboard), DOS scans down this list until it finds the first entry for a driver of the device. Because the installable devices are listed first, the installable device driver is used instead of the standard device driver.

This section discusses how to use installable device drivers. Refer to chapter 14 for a discussion of the structure of MS-DOS device drivers.

Device Statements

Most devices are supplied with a floppy disk that contains the required installable device driver. The driver is designed by the device's manufacturer specifically for use with the particular device.

Installable device drivers are loaded into memory through the use of *device statements*. A device statement consists of the word *device*, followed by an equal sign (=), followed by the file specifier of the device driver. All

device statements *must* be placed in a special file named CONFIG.SYS. Device statements cannot be entered from the command line or placed in batch files. CONFIG.SYS is discussed in the next section.

The following is an example of a device statement. The statement instructs DOS to load the device driver named ANSI.SYS into memory. The driver is located on the C drive, in the directory \DOS.

```
C:\>device=c:\dos\ansi.sys
```

Most device drivers have a filename extension of SYS. ANSI.SYS is an installable device driver for the keyboard and display monitor. You can use ANSI.SYS to control the cursor's position on the screen, clear the screen display, control the display attributes, set the display mode, and reassign values to individual keys on the keyboard. Use of ANSI.SYS is discussed in chapter 9.

CONFIG.SYS

The first section in this chapter discussed assignment statements, which are used to assign values to DOS system parameters, and device statements, which are used to load installable device drivers into memory. Most assignment statements and *all* device statements must be used as entries in a special file named CONFIG.SYS. This section discusses CONFIG.SYS. A sample file that contains two assignment statements and one device statement is created. This section also discusses the way in which DOS reads the statements contained in CONFIG.SYS.

Creating CONFIG.SYS

CONFIG.SYS is a DOS text file. This means that CONFIG.SYS can be created or modified using EDLIN or any word processor operating in text (nondocument) mode. CONFIG.SYS can also be created directly from the keyboard. Be careful, though, because the method illustrated here will overwrite an existing CONFIG.SYS file. A typical CONFIG.SYS file consists of the following:

```
C:\>copy con config.sys
break=on
files=20
device=c:\dos\vdisk.sys
^Z
        1 File(s) copied
C:\>
```

The command **copy con config.sys** directs DOS to copy the keyboard input (the keyboard has the device name CON) into a new file named CONFIG.SYS.

The first line in the new file is an assignment statement that assigns a value of **on** to the system parameter BREAK. The value of BREAK determines the frequency with which DOS checks whether the Ctrl-Break key combination has been pressed. Checking occurs more frequently when BREAK is set to **on**.

The second line in CONFIG.SYS is an assignment statement that sets the FILES parameter to have a value of **20**. The value of FILES determines the number of file handles available to the system. Most programs written to run under DOS versions 2 or later require one file handle for each file that is open.

The third line in the new file is a device statement that loads the device driver named VDISK.SYS. VDISK.SYS is a device driver for a RAM drive. A *RAM drive* is a portion of computer memory that stores files in much the same manner as a conventional disk drive. Access times are much shorter on a RAM drive because memory, rather than a conventional disk drive, is being read. The other difference between RAM drives and conventional drives is that the files stored in RAM drives are volatile. This means that the files disappear when the computer is turned off unless you save or copy them to a physical drive.

Returning to the sample CONFIG.SYS file, entering Ctrl-Z (or pressing the F6 function key) signals DOS that the input for CONFIG.SYS is complete. DOS subsequently writes the new file to the disk and then displays the command line prompt. The statements in the new CONFIG.SYS are ready to be executed when DOS is subsequently rebooted.

> You can use the EDLIN text file editor (or any other text-based editor) as an alternative to the `copy con config.sys` command. EDLIN enables you to modify an existing file; COPY CON does not. Despite what many people say about it, EDLIN is convenient for creating and modifying short text files. If you do a lot of "quick and dirty" text editing, you should consider trying EDLIN. Use of EDLIN is discussed in appendix E.

Executing the Statements in CONFIG.SYS

During the boot-up process, DOS checks whether a file named CONFIG.SYS is stored in the *root directory* of the boot drive. If so, DOS reads each of the statements in CONFIG.SYS, loads the specified device drivers, and assigns

values to the specified system parameters. If the root directory does not contain CONFIG.SYS, DOS uses the standard device drivers and sets the system parameters to their default values.

The statements in CONFIG.SYS are read at boot time only. The statements cannot be executed from the DOS command line, nor can they be executed as part of a batch file. If the contents of CONFIG.SYS are modified, none of the changes go into effect until DOS is subsequently rebooted.

Up to this point, the information presented in this chapter has been a general description of the role of DOS system parameters, installable device drivers, and the CONFIG.SYS file. The role of each of the system parameters is discussed in the remainder of this section.

Roles of the System Parameters

A general discussion of the DOS system parameters was presented at the beginning of this chapter. This section discusses the role of each of the parameters. The value of each of the system parameters is set using assignment statements contained in CONFIG.SYS. Additionally, BREAK and VERIFY may be assigned values using assignment statements contained in batch files or entered at the command line.

BREAK

The BREAK parameter (DOS versions 2, 3, 4, and 5) helps you control the manner in which DOS checks whether Ctrl-Break has been pressed.

The Ctrl-Break key combination is a signal to DOS to stop whatever it is doing (such as executing a command or running a program), display the system's command line prompt, and wait for the user to enter a command. Thus, Ctrl-Break acts as a sort of emergency brake on the system.

If the BREAK parameter is assigned a value of on, DOS checks in a continuous fashion for Ctrl-Break. If BREAK is assigned a value of off, DOS only checks for Ctrl-Break when keyboard, printer, display screen, or serial port I/O occurs. On and off are the only values that may be assigned to BREAK.

If you are running programs that have long periods of disk access (such as database applications or program compiling), it may be advantageous to have BREAK set to on. The disadvantage of this setting is that the system runs somewhat slower, because DOS frequently checks for Ctrl-Break.

Most commercial application programs "trap" Ctrl-Break. This means that the programs recognize when Ctrl-Break has been pressed and intercept the signal before it gets to DOS. In such cases, the application program determines what action to take when Ctrl-Break is pressed. The value of the BREAK parameter does not affect these programs.

The BREAK parameter is unusual in that its value can be set with a statement in CONFIG.SYS, a statement contained in a batch file, or a statement entered at the DOS command line. The default value for BREAK is `off`. You can enter **break** (without additional parameters) to see the BREAK parameter's current value.

BUFFERS

The BUFFERS parameter (DOS versions 2, 3, 4, and 5) is used to set the number of disk buffers. You may be able to speed up your system by setting BUFFERS to the appropriate value.

A *disk buffer* is an area of computer memory that stores data that is read from a disk. Each buffer stores 512 bytes. When a program requests some data that is stored on a disk, DOS first determines which disk sector is storing the data. The operating system then checks the disk buffers to see whether one of them already holds the contents of the required sector. If so, no additional access to the disk is required. If none of the buffers contains the sought-after data, DOS reads the entire sector containing the data into one of the disk buffers. Thus, even if the application program requests only a 128-byte block of data, the entire 512-byte sector that contains the data is read into memory.

Increasing the number of disk buffers will increase the number of disk sectors that DOS can store in memory at any one time. This increase reduces the number of disk accesses required, thereby improving program execution time. The degree of improvement depends primarily on the pattern of disk access required by the program. If disk access tends to follow a random pattern, as would be the case in querying a large database, increasing the number of disk buffers should significantly improve performance. Alternatively, if disk access is primarily sequential, as is the case with most word processing applications, simply increasing the number of disk buffers will generally not result in as dramatic an improvement in performance. The DOS 4.X version of BUFFERS does support a second parameter, which is used to specify the number of *look-ahead* sectors. Use of this parameter can improve the performance of programs that perform a large amount of sequential disk access.

Each disk buffer requires a total of 528 bytes of memory. Therefore, a trade-off exists wherein increasing the number of buffers decreases the amount of memory available for application programs. If your system has less than 256 Kbytes of RAM, a large number of buffers (more than 15) may slow your programs down.

Many application programs recommend a minimum number of buffers for optimal program performance. It is often beneficial to experiment with the number of disk buffers you use. Database applications generally do well

with about 20 disk buffers. Programs that perform sequential disk access generally do well with 10–15 disk buffers. Bear in mind that the more buffers there are in the system, the longer it will take DOS to search all the buffers.

The default value for BUFFERS is 2 unless any of the following conditions holds:

Default Value of	If
3	The system disk drive is > 360 Kbytes
5	Memory size is > 128 Kbytes
10	Memory size is > 256 Kbytes
15	Memory size is > 512 Kbytes

You can set the BUFFERS parameter to any value in the range 1–99. Disk buffers can be placed in expanded memory with DOS 4. If expanded memory is used, the BUFFERS parameter can have a value up to 10,000. Users of DOS 5 can use the command to place buffers in extended memory (see the discussion of BUFFERS in Part 2 for details).

COUNTRY

The value of the COUNTRY parameter (DOS versions 3, 4, and 5) determines which country-specific format is used for the date, time, currency, and other parameters. You need to set the value only if a non-U.S. format is required. Refer to appendix D for additional information on the use of code page switching and the use of non-U.S. formats.

FCBS

The FCBS parameter (DOS versions 3, 4, and 5) is used to limit the number of file control blocks that are available at any one time. A *file control block (FCB)* is an area of memory that stores information about files that have been opened by DOS. Generally speaking, only programs written for DOS 1.X use file control blocks. Programs written for later versions of DOS use file handles.

Experience with computer networks has shown that a large number of FCBs can degrade the performance of a network of DOS computers. Therefore, the parameter FCBS was implemented in DOS 3, 4, and 5 to limit the number of FCBs that can be used at any one time.

Use of the FCBS parameter requires that network file sharing be implemented. *Network file sharing* describes the situation in which computers on a network can directly access files of other network computers.

File sharing is implemented through the network operating system or using the DOS command SHARE. The value of the FCBS parameter has no effect if file sharing is not implemented. You can disregard this parameter unless you are receiving error messages indicating a lack of file control blocks.

FILES

The value of the FILES parameter (DOS versions 2, 3, 4, and 5) sets the number of file handles that are available at any one time. The FILES parameter is set to a default value of 8 if no value is specified for it in CONFIG.SYS.

Most programs written to run under DOS 2, 3, 4, and 5 require one file handle for each open file. Many commercial programs require several files to be open at a single time. In order to use these programs you must set the FILES parameter to a certain minimum value. As an example, the spell checker of Microsoft Word 4.0 requires 15 file handles. Its spell checker will not run if FILES has a value less than 15.

Generally the application program determines whether the value of FILES is too low. Thus, the error message displayed varies depending on the particular application. In general, if you try to run a program and you get a message such as `Increase FILES` or `No free file handles`, you should increase the value of the FILES parameter by modifying CONFIG.SYS and rebooting your system. Setting FILES equal to 20 will accommodate most DOS applications.

The maximum value for FILES is 255. No more than 20 file handles can be used by a given program.

INSTALL

INSTALL (DOS 4 and 5) is not a system parameter, because it does not have a value assigned to it. Rather, it is a DOS command that can be used to load into memory the following "DOS extensions":

FASTOPEN.EXE
KEYB.COM
NLSFUNC.EXE
SHARE.EXE

Once they are loaded, these extensions remain in memory as a functional component of DOS.

INSTALL is discussed here because its use and command structure are similar to the use and structure of assignment statements. The use is similar because INSTALL can only be used in CONFIG.SYS. The structure is similar

because an INSTALL statement begins with **install**, followed by an equal sign (=), followed by the path and filename of the DOS extension that is being installed. For example, the following statement is used to install FASTOPEN. The file FASTOPEN.EXE is stored on the C drive, in directory \DOS.

```
C:\>install=c:\dos\fastopen.exe c:=(50,25)
```

FASTOPEN is a DOS 4 and 5 utility program that improves file access time by storing file directory information in memory. Its use, and use of the other extensions mentioned above, is discussed in Part 2.

Any of the DOS extensions that can be loaded with INSTALL can also be loaded from AUTOEXEC.BAT or the DOS command line. The advantage in using INSTALL is that DOS allocates memory to the extensions in a more orderly fashion than when the other loading methods are used.

LASTDRIVE

The value of the LASTDRIVE parameter (DOS versions 3, 4, and 5) sets the highest drive letter available for use by the system. DOS ignores LASTDRIVE if it is set to a value that is less than the number of physical drives on the system. For example, if a computer has two floppy drives and one hard drive, DOS will ignore the statement `lastdrive=B`.

Any RAM drives, multiple partition drives, network drives, or logical drives created with DOS commands SUBST or JOIN must be taken into account when you set the LASTDRIVE parameter. For example, if a computer has two floppy drives, one hard drive with two DOS partitions, a RAM drive, and two logical drives, LASTDRIVE must be set to a value of "G" or greater.

The primary purpose of the LASTDRIVE parameter is to support local area networks. In a network environment, the DOS command SUBST is often used to make a subdirectory on one computer appear to be a disk drive on another computer. Each of these *virtual disk drives* requires a unique drive letter. The value of the LASTDRIVE parameter determines how many drive letters (and thereby how many virtual drives) a computer can have. If you are using a network, the network documentation will probably suggest a value for LASTDRIVE.

SHELL

The SHELL parameter (DOS versions 2, 3, 4, and 5) was originally implemented to allow users to load and use a command processor other than COMMAND.COM. Although some people may actually be using SHELL for this purpose, it is most commonly used for two other purposes.

You can use the SHELL parameter to specify for use a copy of the COMMAND.COM file that is located somewhere other than in the root directory of the boot drive. This is important in DOS 4, where the DOS SHARE facility is required when using disk partitions larger than 32 Mbytes in size. In such cases, the SHELL parameter must be initialized to load a copy of COMMAND.COM that is stored in the same subdirectory as the file SHARE.EXE. For example, if the file SHARE.EXE is stored in the directory C:\DOS, the following assignment statement must be placed in CONFIG.SYS:

```
C:\>shell=c:\dos\command.com /p
```

The second common use of the SHELL parameter is to increase the size of the DOS environment. The environment, which was discussed earlier in this chapter, has a default size of 160 bytes. An assignment statement of the following form can be used to create a larger environment:

```
C:\>shell=c:\dos\command.com /e:xxxx
```

The ***xxxx*** specifies the environment size. In DOS 3.1, ***xxxx*** specifies the number of 16-byte blocks (paragraphs) in the environment. In DOS 3.2 and subsequent versions, ***xxxx*** specifies the actual number of bytes in the environment (the number is automatically rounded up to the nearest multiple of 16). You should increase the size of the DOS environment if you get an `Out of environment space` message.

STACKS

Use the STACKS parameter (DOS versions 3.2, 3.3, 3, 4, and 5) to set the number and size of the stacks that DOS uses to handle hardware interrupts. A *hardware interrupt* is a signal generated by a device (such as the keyboard or a disk drive) that tells DOS the device needs attention. When this happens, DOS must stop what it is doing and take care of ("service") the device. But DOS cannot simply abandon whatever it is working on. It must save some information, so that it may resume its work after the hardware device is serviced. This required information is saved in a portion of memory called a *stack*.

Hardware interrupts can be *nested*. This means that when one interrupt is being serviced, another interrupt can occur. When the second is being serviced, a third can occur, and so on. The pool of stacks required in servicing these interrupts can become exhausted if the interrupts occur in rapid enough succession.

If there is an inadequate number of stacks, the computer will display a message like `Internal Stack Failure, System Halted` and freeze up. You

then must switch the computer off and then back on to restart it. If this should occur, use the STACKS parameter to increase the number and/or the size of the available stacks.

Computers with 80286, 80386, or 80486 CPUs default to a STACKS value of 0,0 (0 stacks of size 0 bytes). Under these conditions, hardware interrupts are handled in a somewhat different fashion than was just outlined.

Computers with 80286 or 80386 CPUs default to a STACKS value of 9,128 (9 stacks of size 128 bytes). 8088 and 8086 computers are also given 9 stacks of 128 bytes if the CONFIG.SYS file contains the statement stacks=.

Reasonable guidelines for using the STACKS parameter are as follows:

- Increase the number of stacks to 15 if you get a message indicating stack failure.
- Increase the number to 20 if the error persists.
- Increase the stack size to 256 bytes if the error still persists.

If you still get an error after increasing the number and size of stacks, try to determine which application(s) causes the error and contact your computer's manufacturer for advice.

SWITCHES

The SWITCHES parameter (DOS versions 4 and 5) is used to control the activity of enhanced keyboards. These newer keyboards have some keys (F11 and F12 function keys, and a set of cursor keys separate from the number pad) that are not found on the older keyboards. Naturally, the new keys generate scan codes not generated by the older keys. (All keys generate a *make scan code* when pressed and a *break scan code* when released. The make and break scan codes are unique for each key.)

Some application programs cannot process the scan codes generated by the newer keys. In such cases, these scan codes may confuse the program or even cause the system to crash. This problem can be avoided by setting the SWITCHES parameter to /K. This instructs DOS to simply ignore the scan codes generated by the new keys.

VERIFY

DOS performs a series of checks to verify that each disk write is performed correctly when the VERIFY parameter is set to equal "on". You can set the value of VERIFY from the DOS command line or within a batch file in versions 2 and 3. In DOS versions 4 and 5 you can set VERIFY either from the command

line, within a batch file, or with a statement contained in CONFIG.SYS. Because DOS disk writes are generally very accurate, setting VERIFY to "on" usually accomplishes nothing, other than slowing DOS down.

Using CONFIG.SYS—A Working Example

Now that all of the system parameters have been discussed, let us take a look at a typical CONFIG.SYS file. Listing 5-1 is the CONFIG.SYS file I used while writing this book. We will go through and discuss it line by line.

Listing 5-1. A typical CONFIG.SYS file.

```
break=on
files=20
device=c:\dos\vdisk.sys
buffers=20
lastdrive=e
shell=c:\dos\command.com /p /e:256
device=c:\sys\emm.sys
device=c:\dos\ansi.sys
install=c:\dos\fastopen.exe c:
```

The first three lines in listing 5-1 were discussed earlier in Creating CONFIG.SYS.

The line `buffers=20` sets the number of disk buffers. If most of your work is word processing, you should expect your system to primarily perform sequential disk access. Twenty disk buffers is a lot for sequential access, and it may be more than you actually need. But in my experience, the large number of buffers does not seem to necessarily slow down things.

The line `lastdrive=e` specifies that the system may have up to five disk drives. Say your system has two floppy drives, a hard disk, and a RAM disk. With LASTDRIVE set to e you can add at most one more drive. Remember that this is any type of drive, including logical drives. Therefore, you would need to change the value of LASTDRIVE if you wanted to create two logical drives (say, with the SUBST command).

The assignment statement `shell=c:\dos\command.com /p /e:256` performs two functions. First, it tells DOS to load the copy of COMMAND.COM that is stored in subdirectory \DOS on drive C. This is necessary because SHARE.EXE is in the same subdirectory. In order to implement the DOS 4 support for large disk partitions, COMMAND.COM must be loaded from the subdirectory containing SHARE.EXE.

The second function of the SHELL assignment statement is to increase the size of the DOS environment. The statement specifies an environment size of 256 bytes.

The next two lines in listing 5-1 are device statements. The first statement specifies loading of the driver EMM.SYS. This is the device driver for the expanded memory board in my system. See chapter 12 for a discussion of expanded memory.

The next device statement instructs DOS to load the ANSI.SYS device driver. Use of this driver is discussed in chapter 9.

The final statement in listing 5-1 installs the program FASTOPEN in memory. The parameter `c:`, which is located at the end of the command, specifies that information for the directories on drive C is to be stored in memory.

This concludes the discussion of listing 5-1. Before ending our discussion of CONFIG.SYS, the following points are worth repeating:

- CONFIG.SYS must be in the root directory of the boot drive.
- Most of the commands used in CONFIG.SYS cannot be used in batch files or entered at the DOS command line.
- Any changes made to CONFIG.SYS do not take effect until the system is subsequently rebooted.

AUTOEXEC.BAT

The AUTOEXEC.BAT file is similar to CONFIG.SYS in that it is also a text file that is automatically read by DOS during the boot-up process (CONFIG.SYS is read and executed before AUTOEXEC.BAT). AUTOEXEC.BAT also must be stored in the root directory of the boot drive if it is to be executed automatically. Like CONFIG.SYS, AUTOEXEC.BAT enables you to configure DOS to suit your particular needs.

But AUTOEXEC.BAT is different from CONFIG.SYS. AUTOEXEC.BAT is a batch file (see chapter 4) and it may contain any batch file command. As it boots, MS-DOS executes the commands in the AUTOEXEC.BAT file, but you can invoke the sequence of commands in AUTOEXEC.BAT at any time by typing **autoexec** on the command line.

The sequence of commands in the AUTOEXEC.BAT file is used to perform a set of tasks that you wish to be executed each time the system is booted. Typical uses include setting the DOS search path, initializing environment variables required by programs, setting the system prompt, and starting up an application program. AUTOEXEC.BAT is also generally used to perform certain types of system initialization such as redirecting parallel printer output to a serial port or initializing the DOS print spooler.

DOS will not prompt for the date and time during boot-up if AUTOEXEC.BAT is present (unless the file contains the command DATE and/or the command TIME).

Listing 5-2 contains the AUTOEXEC.BAT file on the computer used in the writing of this book. The contents of the file illustrate some typical uses of AUTOEXEC.BAT.

Listing 5-2. A typical AUTOEXEC.BAT file.

```
path=c:\prgms\word;c:\procomm;c:\dos;c:\utils;c:\bat
prompt=$p$g
set pcplus=c:\procomm\
set hercgb102=true
set lib=c:\lib
cd c:\books\dos
word config
xcopy *.* b: /m
```

The first line in listing 5-2 sets the DOS search path. This is the list of directories that DOS searches when it cannot find a file in the current directory.

In this example, the directory `c:\prgms\word` contains the files for the word processor. The directory `c:\procomm` contains the files for the communications package. The directory `c:\dos` contains the DOS files. The directory `c:\utils` contains the Norton Utilities along with other utility programs. Finally, the directory `c:\bat` contains batch files.

When you set up your search path, remember that DOS searches the subdirectories in the order in which you list them. Therefore, the subdirectories that you use most should be listed first, and those that you use least should be listed last.

The next line in listing 5-2 sets the system prompt so that it displays the currently active directory. This can help you remember where you are currently located within the directory hierarchy.

The next three lines are SET commands that create and assign values to three environment variables. The variable `pcplus` is required by the communications software. The variable `hercgb102` is required for the word processor to work properly. The variable `lib` is required by the C compiler. Which, if any, environment variables you require and the values to which they must be set are determined by the application software that you are using. Refer to the software documentation for information specific to your applications.

The next line in the AUTOEXEC.BAT file in listing 5-2 is a CD command to change the directory. The command sets the subdirectory `\books\dos` on drive C as the active directory. The next command (`word config`) starts up the word processor, instructing it to load a document file named CONFIG.

The final command in listing 5-2 is automatically executed on exiting from the word processor. The XCOPY command checks each file in the current directory and determines which files have the archive attribute set.

Those files with a set attribute are copied to drive B, and the attribute is cleared. (The `/m` parameter instructs XCOPY to check the archive attribute.) Because DOS sets a file's archive attribute each time the file is modified, this final command in the AUTOEXEC.BAT file automatically makes a backup copy of any document files that were used.

CHAPTER

6

Redirection, Filters, and Pipes

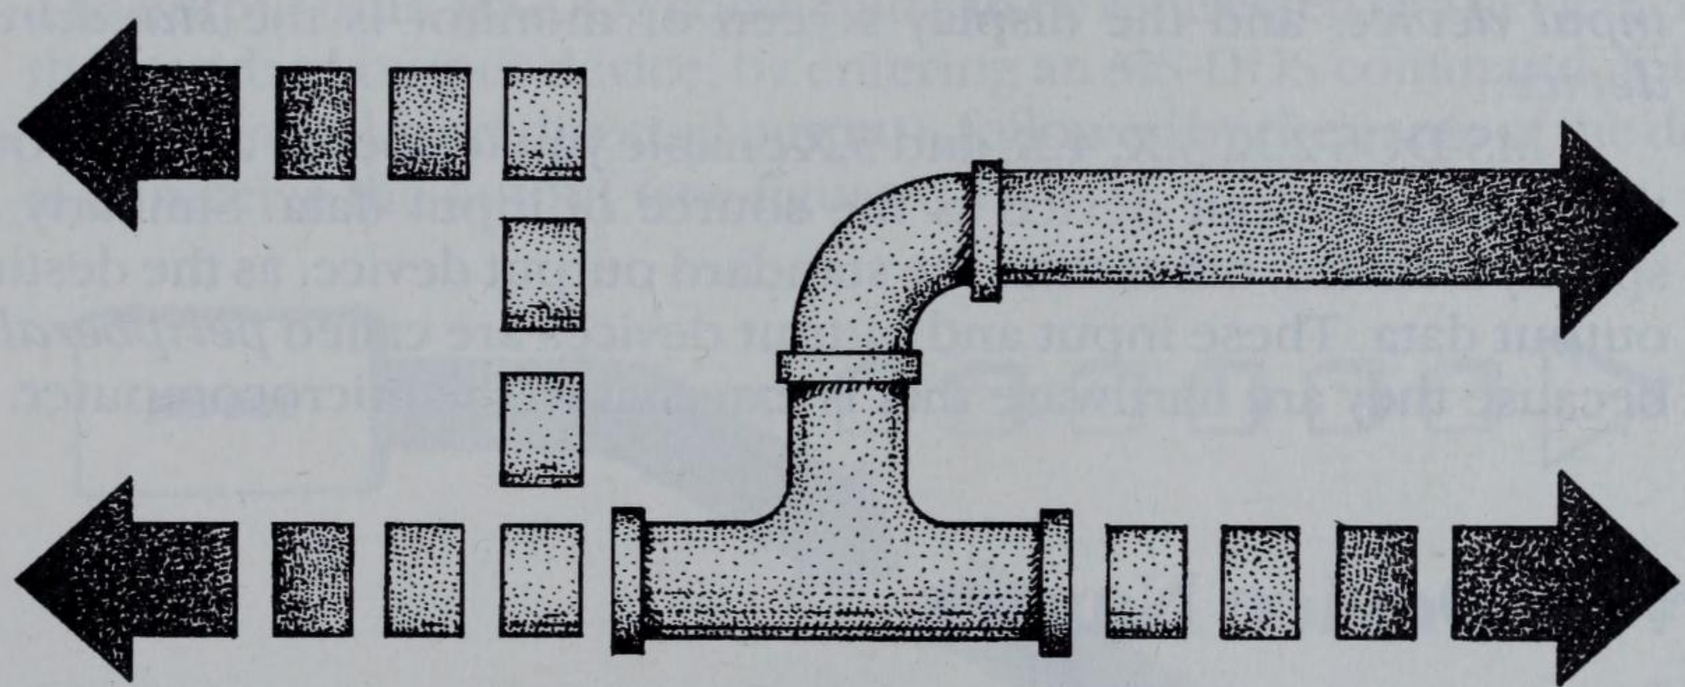

Standard Input and Standard Ouput Devices
Reserved Device Names
Redirecting an MS-DOS Command
Filters
Pipes
Redirection Versus Piping

Input and *output* are the processes through which computers receive and send data. Versions 2.X, 3.X, 4.X, and 5.X of MS-DOS enable you to modify these processes through the use of some sophisticated data management techniques known as *redirection, filtering,* and *piping.* You can use these techniques and their associated MS-DOS commands to build your own information pipeline. Like a plumber, you can redirect the flow of information from one place to another, have the information modified through a filter, and then pipe the output to a final destination. This chapter will explain how to use these special techniques with MS-DOS 2.X, 3.X, 4.X, and 5.X.

Standard Input and Standard Output Devices

As your own experience proves, most of the time you use the keyboard to enter data into your computer, and for most operations this data is sent to the display screen for your viewing. The keyboard is therefore the *standard input device,* and the display screen or monitor is the *standard output device.*

MS-DOS 2.X, 3.X, 4.X, and 5.X enable you to specify a device other than the standard input device as the source of input data. Similarly, you can specify a device, other than the standard output device, as the destination of output data. These input and output devices are called *peripheral devices*, because they are hardware that is external to the microcomputer.

Reserved Device Names

When you designate an input or output device different from the standard one, you must give MS-DOS the correct name for that peripheral device. Each device, such as a printer or modem, has a standard name recognized by MS-DOS and reserved for use with that device only. There is even a dummy device for testing purposes. Table 6-1 lists the device names and the peripheral devices to which they refer.

Table 6-1. MS-DOS Reserved Names for Peripheral Devices

Reserved Name	*Peripheral Device*
AUX	First asynchronous communications port
COM1, COM2, COM3, COM4	Asynchronous communications ports 1 through 4
CON	board and display screen (CONsole)
LPT1, LPT2, LPT3	First, second, and third parallel printers
NUL	device (for testing)
PRN	First parallel printer

Redirecting an MS-DOS Command

The output of an MS-DOS command can be redirected to a device, other than the standard output device, by entering an MS-DOS command, followed by > (the symbol for redirected output), followed by the name of the device that is to receive the output (see figure 6-1).

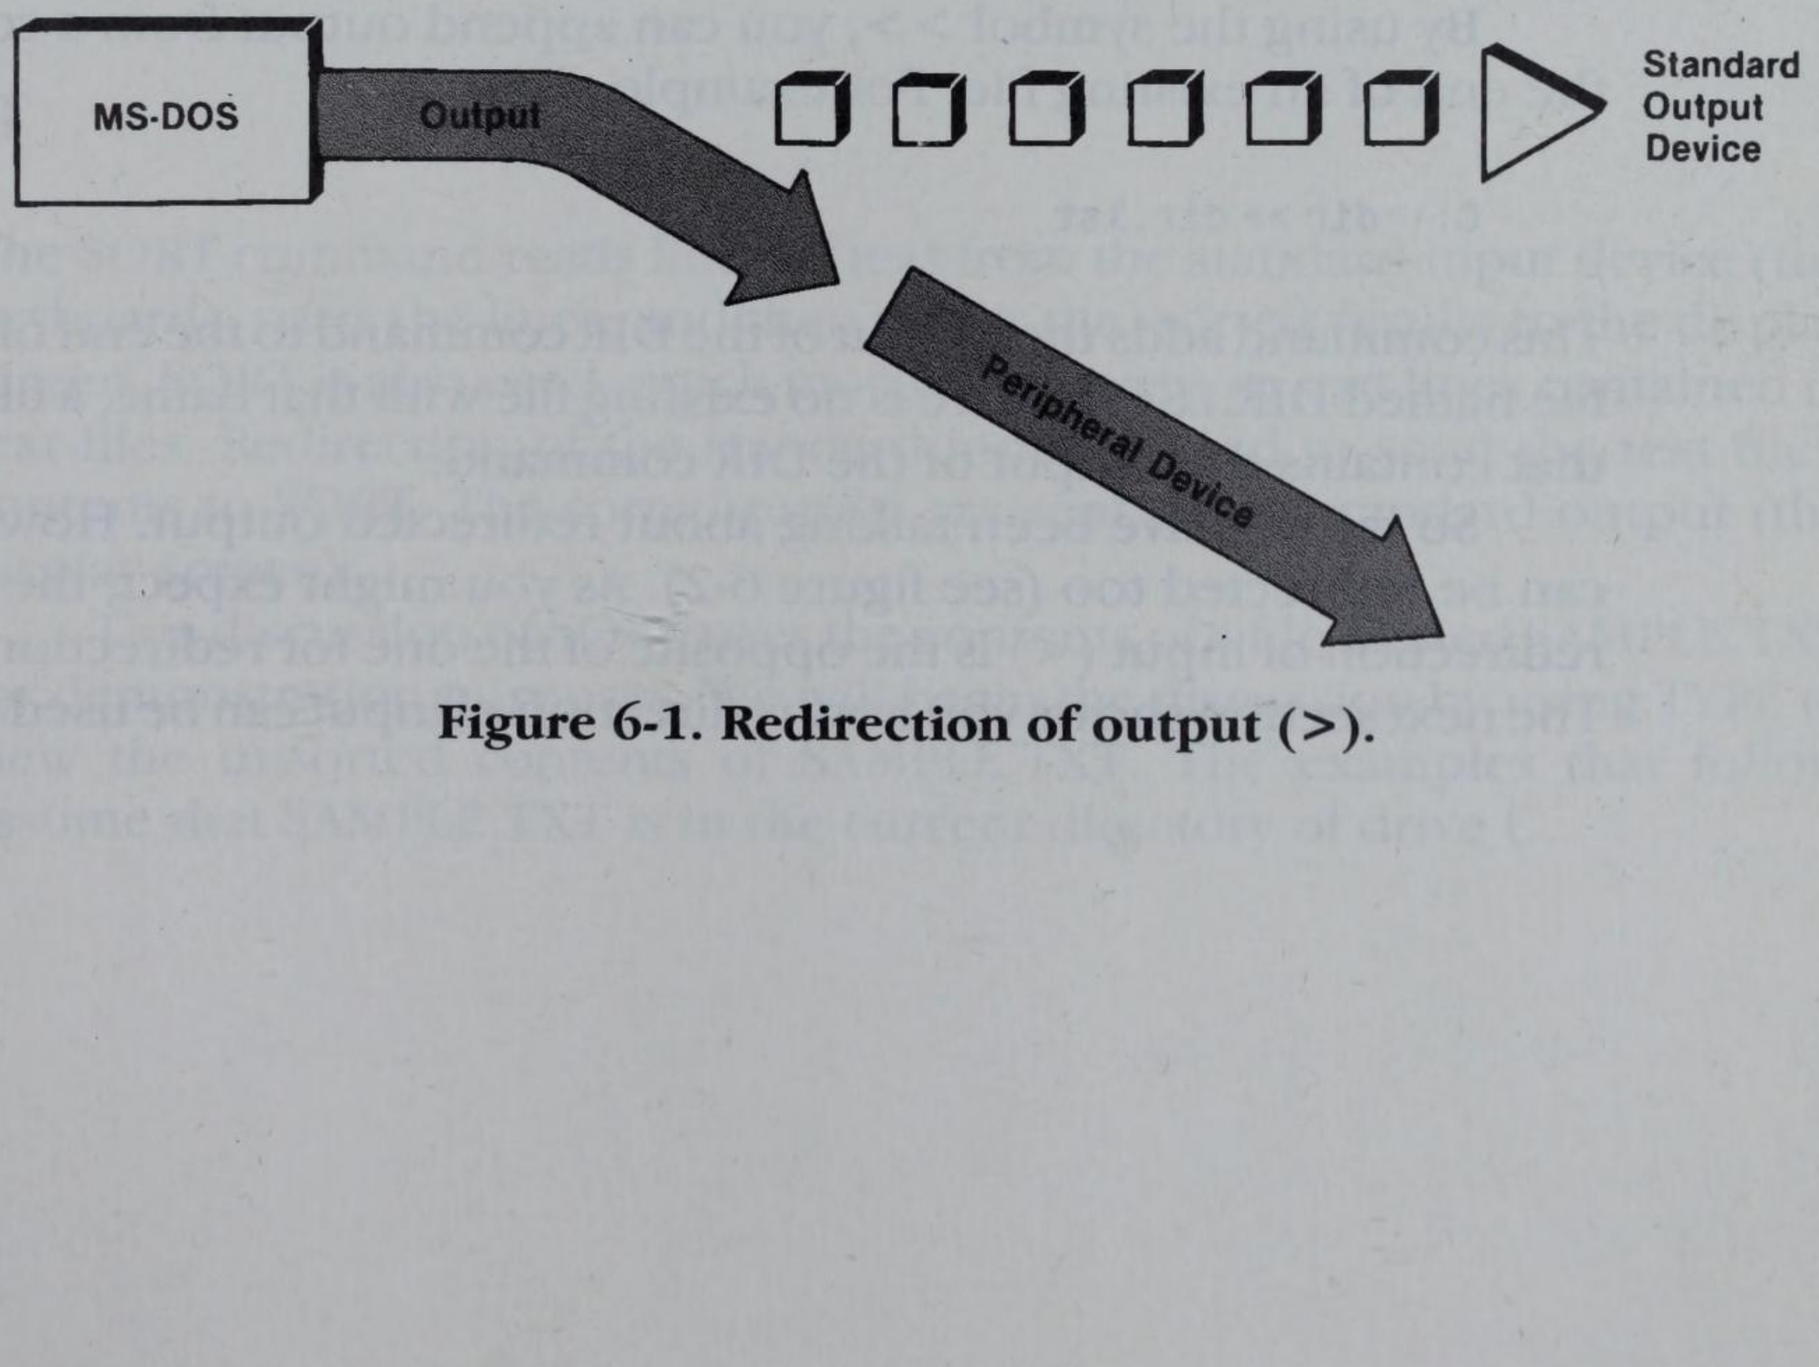

Figure 6-1. Redirection of output (>).

Let's look at an example using the MS-DOS command TYPE, which is used to display the contents of a file on the screen. When the command **type myfile** is entered, the contents of MYFILE can be viewed on the display screen.

Enter the following command to redirect output to the printer. Be sure to turn your printer on first or your system will "hang" until you do.

```
C:\>type myfile > prn
```

Because you used PRN—the reserved device name for the parallel printer—in your command, MS-DOS recognizes that the output of **type myfile** is to be redirected to the printer. No screen display results from this command.

In addition to the devices listed in table 6-1, MS-DOS also recognizes files as peripheral devices. This means that you can redirect output to an MS-DOS file. For example, the following command stores the output of the command DIR in a file named DIR.LST:

```
C:\>dir > dir.lst
```

If a file named DIR.LST already exists on the disk in the default drive, it will be overwritten by this command. The data already in the file will be lost, replaced by the output of the command.

By using the symbol >>, you can append output from a command to the end of an existing file. For example:

```
C:\>dir >> dir.lst
```

This command adds the output of the DIR command to the end of an existing file named DIR.LST. If there is no existing file with that name, a file is created that contains the output of the DIR command.

So far we have been talking about redirected output. However, input can be redirected too (see figure 6-2). As you might expect, the symbol for redirection of input (<) is the opposite of the one for redirection of output. The next section shows you how redirection of input can be used with filters.

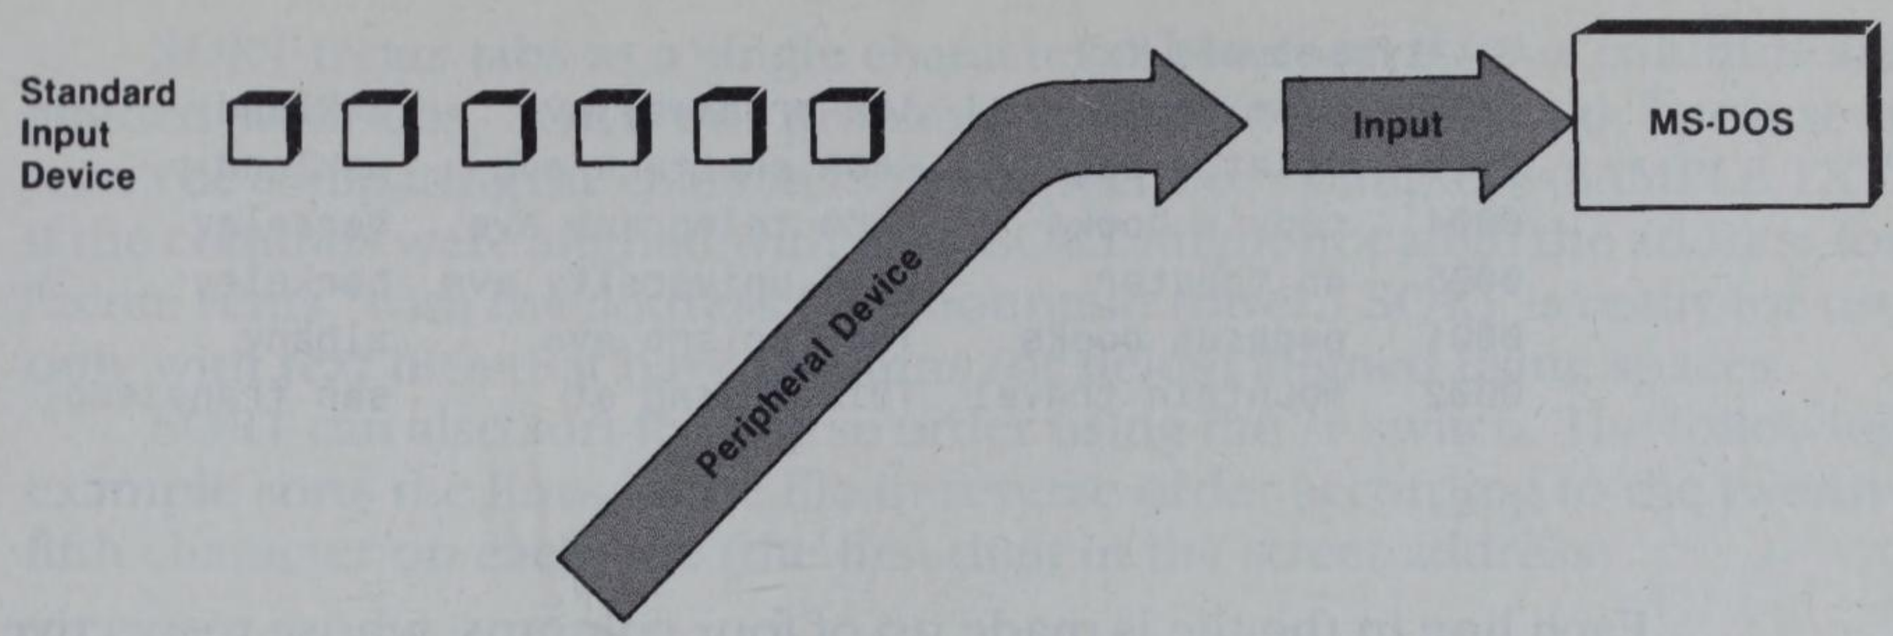

Figure 6-2. Redirection of input (<).

Filters

A *filter* is an MS-DOS command (or a computer program) that accepts data from an input device, rearranges or "filters" the data, and then outputs the filtered data to the designated output device. MS-DOS 2.X, 3.X, 4.X, and 5.X contain three filter commands: SORT, FIND, and MORE. As we discuss these commands, we will also elaborate on the concept of redirection.

SORT

The SORT command reads lines of text from the standard input device (the keyboard), sorts the lines, and then writes the sorted results to the display screen. SORT is also used, much more commonly, to sort lines contained in text files. Redirection of the standard input is used to send the text file's contents to SORT. The sorted results are sent to the standard output (the display screen).

This discussion of SORT uses the contents of a file named SAMPLE.TXT for demonstration purposes. We will begin the discussion by using TYPE to view the unsorted contents of SAMPLE.TXT. The examples that follow assume that SAMPLE.TXT is in the current directory of drive C.

```
C:\>type sample.txt
0006   acme rents        100 broadway ave     oakland
0003   flint's bbq       6609 shattuck ave    oakland
0004   cody's books      2460 telegraph ave   berkeley
0005   uc theater        2036 university ave  berkeley
0001   pegasus books     1855 solano ave      albany
0002   mountain travel   1215 irving st       san francisco

C:\>
```

Each line in the file is made up of four columns, whose respective contents are an account number, the name of a business, the business street address, and the city address.

SORT is an external MS-DOS command. This means that either the file SORT.EXE must be in the current directory or the directory containing SORT.EXE must be in the DOS search path.

The input redirection symbol (<) is used to send the contents of a text file to SORT. SORT sorts the lines in the file according to the first character on each line and sends the results to the display screen:

```
C:\>sort < sample.txt
0001   pegasus books     1855 solano ave      albany
0002   mountain travel   1215 irving st       san francisco
0003   flint's bbq       6609 shattuck ave    oakland
0004   cody's books      2460 telegraph ave   berkeley
0005   uc theater        2036 university ave  berkeley
0006   acme rents        100 broadway ave     oakland

C:\>
```

The SORT command switch */+n* can be used to sort according to the character in any position on the line. In the following example, SORT is used to sort the lines according to the business name. The first character in the business name is the eighth character on the line.

```
C:\>sort /+8 < sample.txt
0006   acme rents        100 broadway ave     oakland
0004   cody's books      2460 telegraph ave   berkeley
0003   flint's bbq       6609 shattuck ave    oakland
0002   mountain travel   1215 irving st       san francisco
0001   pegasus books     1855 solano ave      albany
0005   uc theater        2036 university ave  berkeley

C:\>
```

SORT treats tabs as a single character. Therefore, if your columns are aligned with tabs, SORT will probably appear to be confused, because it won't be comparing the characters you expect. For example, in SAMPLE.TXT, if the columns were aligned with tabs, SORT might not align the address for "acme rents" with the address for "mountain travel." SORT is really for use only with text files that have columns (or fields) aligned using spaces.

SORT can also sort in reverse order using the **/r** switch. The following example sorts the lines in the file in reverse order according to the twenty-fifth character on each line (the first digit in the street address).

```
C:\>sort /r /+25 < sample.txt
0003   flint's bbq      6609 shattuck ave    oakland
0004   cody's books     2460 telegraph ave   berkeley
0001   pegasus books    1855 solano ave      albany
0005   uc theater       2036 university ave  berkeley
0002   mountain travel  1215 irving st       san francisco
0006   acme rents       100 broadway ave     oakland

C:\>
```

Notice that when the characters in the position of comparison are identical, a comparison is made at the next position.

The output from SORT can be redirected to another device such as the printer (using **> PRN**) or to a text file. The following listing shows how the result of the previous example could be redirected to a file named ADDRESS.TXT:

```
C:\>sort /r /+25 < sample.txt > address.txt

C:\>
```

FIND

The FIND command searches a line of standard input for a specified sequence of characters. The line is echoed to the display screen if it contains the sequence. FIND is also used, much more commonly, to find the lines in a text file that contain a specific character sequence.

FIND is an external MS-DOS command. The requirements for its use are identical to those described for SORT. The examples that follow use the text file SAMPLE.TXT, which is displayed in the earlier discussion of SORT.

To enter the command, type **find**, followed by the sequence of characters on which to base the search, followed by the name of the text file to be

searched. The sequence of characters must be enclosed in quotation marks. FIND reads lines of text from the standard input device (the keyboard) if a filename is not specified. The following example looks for the line of text that contains the sequence **flint's**:

```
C:\>find "flint's" sample.txt

---------- SAMPLE.TXT
0003   flint's bbq      6609 shattuck ave    oakland

C:\>
```

FIND can also be used to locate the lines that do not contain a sequence of characters. The following example demonstrates how the **/v** switch can be used to locate the businesses not in **berkeley**.

```
C:\>find /v "berkeley" sample.txt

---------- SAMPLE.TXT
0006   acme rents       100 broadway ave     oakland
0003   flint's bbq      6609 shattuck ave    oakland
0001   pegasus books    1855 solano ave      albany
0002   mountain travel  1215 irving st       san francisco

C:\>
```

The **/c** switch displays a count of the lines in a text file that contain the specified sequence. The following example counts the number of businesses in **oakland**:

```
C:\>find /c "oakland" sample.txt

---------- SAMPLE.TXT: 2
C:\>
```

The **/n** switch can be used to display the lines found, along with a line number that identifies the line's position in the file:

```
C:\>find /n "books" sample.txt

---------- SAMPLE.TXT

[3]0004   cody's books     2460 telegraph ave   berkeley
[5]0001   pegasus books    1855 solano ave      albany

C:\>
```

As was illustrated with SORT, the output from FIND can be redirected to a text file.

MORE

The MS-DOS command MORE is a filter that displays one screenful of data at a time. MORE is an external MS-DOS command. This means that MORE is not stored in memory when MS-DOS is booted. Therefore, in order to use MORE, a disk containing the file MORE.COM must be in the current directory of one of the system drives. In the following examples, MORE.COM and SAMPLE.TXT are located in the current directory of drive C.

Data is input to MORE by redirection:

```
C:\>more < sample.txt
```

This command redirects the data in the file SAMPLE.TXT as input to the filter MORE. MORE outputs the data, 23 lines at a time, to the standard output device. When the screen is filled, the prompt `-- MORE --` is displayed. Pressing any key gives another filled screen of data. The process is repeated until the entire file has been displayed.

You can redirect the output from MORE to a device other than the standard output device. The following command sends 23 lines of SAMPLE.TXT at a time to the printer:

```
C:\>more < sample.txt > prn
```

The prompt `-- More --` will also be sent to the printer.

Pipes

Pipes are connections between two programs, two commands, or a command and a program. Pipes allow data that is output from one program to be redirected as input to a second program (see figure 6-3).

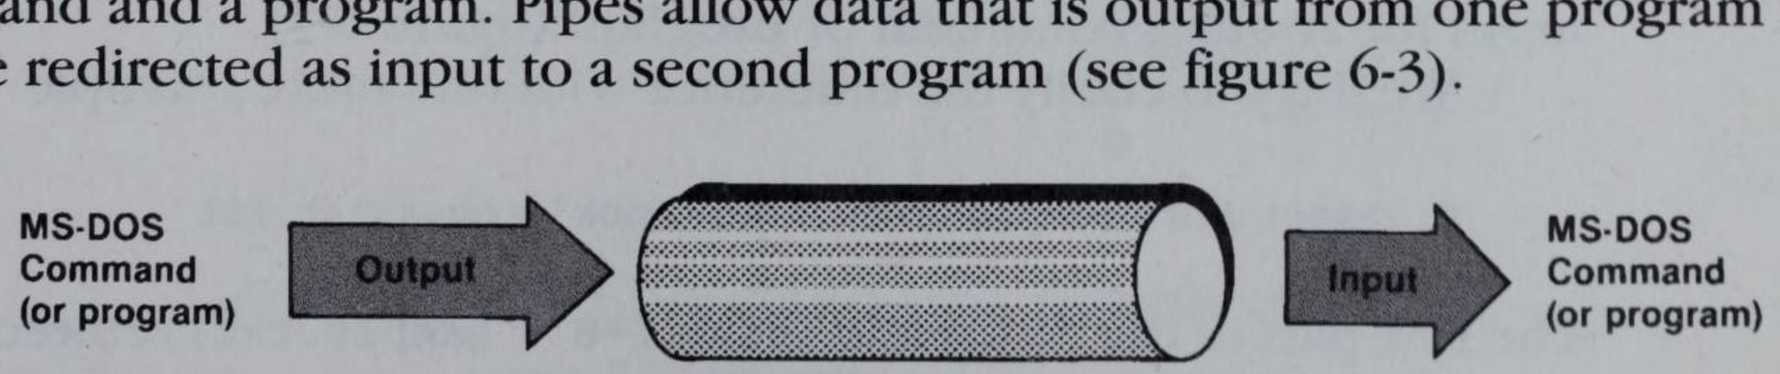

Figure 6-3. Piping a command's output to become input for a second command.

The MS-DOS symbol for a pipe is a vertical bar (¦). To redirect the output from one command (or program) to another, type the first command, followed by a vertical bar, followed by the second command.

Consider the following command:

```
C:\>dir ¦ find "-85 "
```

This command directs MS-DOS to send the output of the DIR command (usually sent to the display screen) as input to the FIND filter. FIND searches each line of the input for the character string "**-85** ". The result is that all the files in the current directory with a 1985 date stamp are displayed on the screen. (Date stamps are discussed in chapter 1.) Any files with a filename or filename extension containing "**-85**" would also be displayed.

A command may contain more than one pipe. In the preceding command, the output of the FIND filter is sent to the screen. The output can be redirected with another pipe:

```
C:\>dir ¦ find "-85 " ¦ sort /+14
```

Now, the output of the FIND command is piped to the SORT filter, which sorts the 1985 files according to their size (the fourteenth column of each line). The sorted output is sent to the display screen. Try this command with one of your own files. Remember that FIND and SORT are external MS-DOS commands; therefore, the files FIND.EXE and SORT.EXE must be in the current directory of the specified (or default) drive.

Redirection Versus Piping

The difference between redirection and piping can be a little confusing. *Redirection* refers to the modification of input from, or output to, peripheral devices (see table 6-1 and figures 6-1 and 6-2). *Piping* refers to the conversion of the output from an MS-DOS command or computer program into the input for another command or program (figure 6-3).

We'll try to clarify the difference with one more example:

```
C:\>sort /+6 < sample.txt ¦ find "book" > bookstor.lst
```

The first part of the command (**sort /+6 < sample.txt**) redirects the file as input to SORT. The output from the SORT program is piped to the FIND program. The output from FIND is redirected to the file BOOKSTOR.LST.

Redirection and piping are not restricted to MS-DOS commands. Any program that runs under MS-DOS can be written to support redirection and piping. For example, many of the public domain DOS utility programs (such as the ubiquitous WordStar file strippers) support these features.

CHAPTER

7

The DOSSHELL Interface

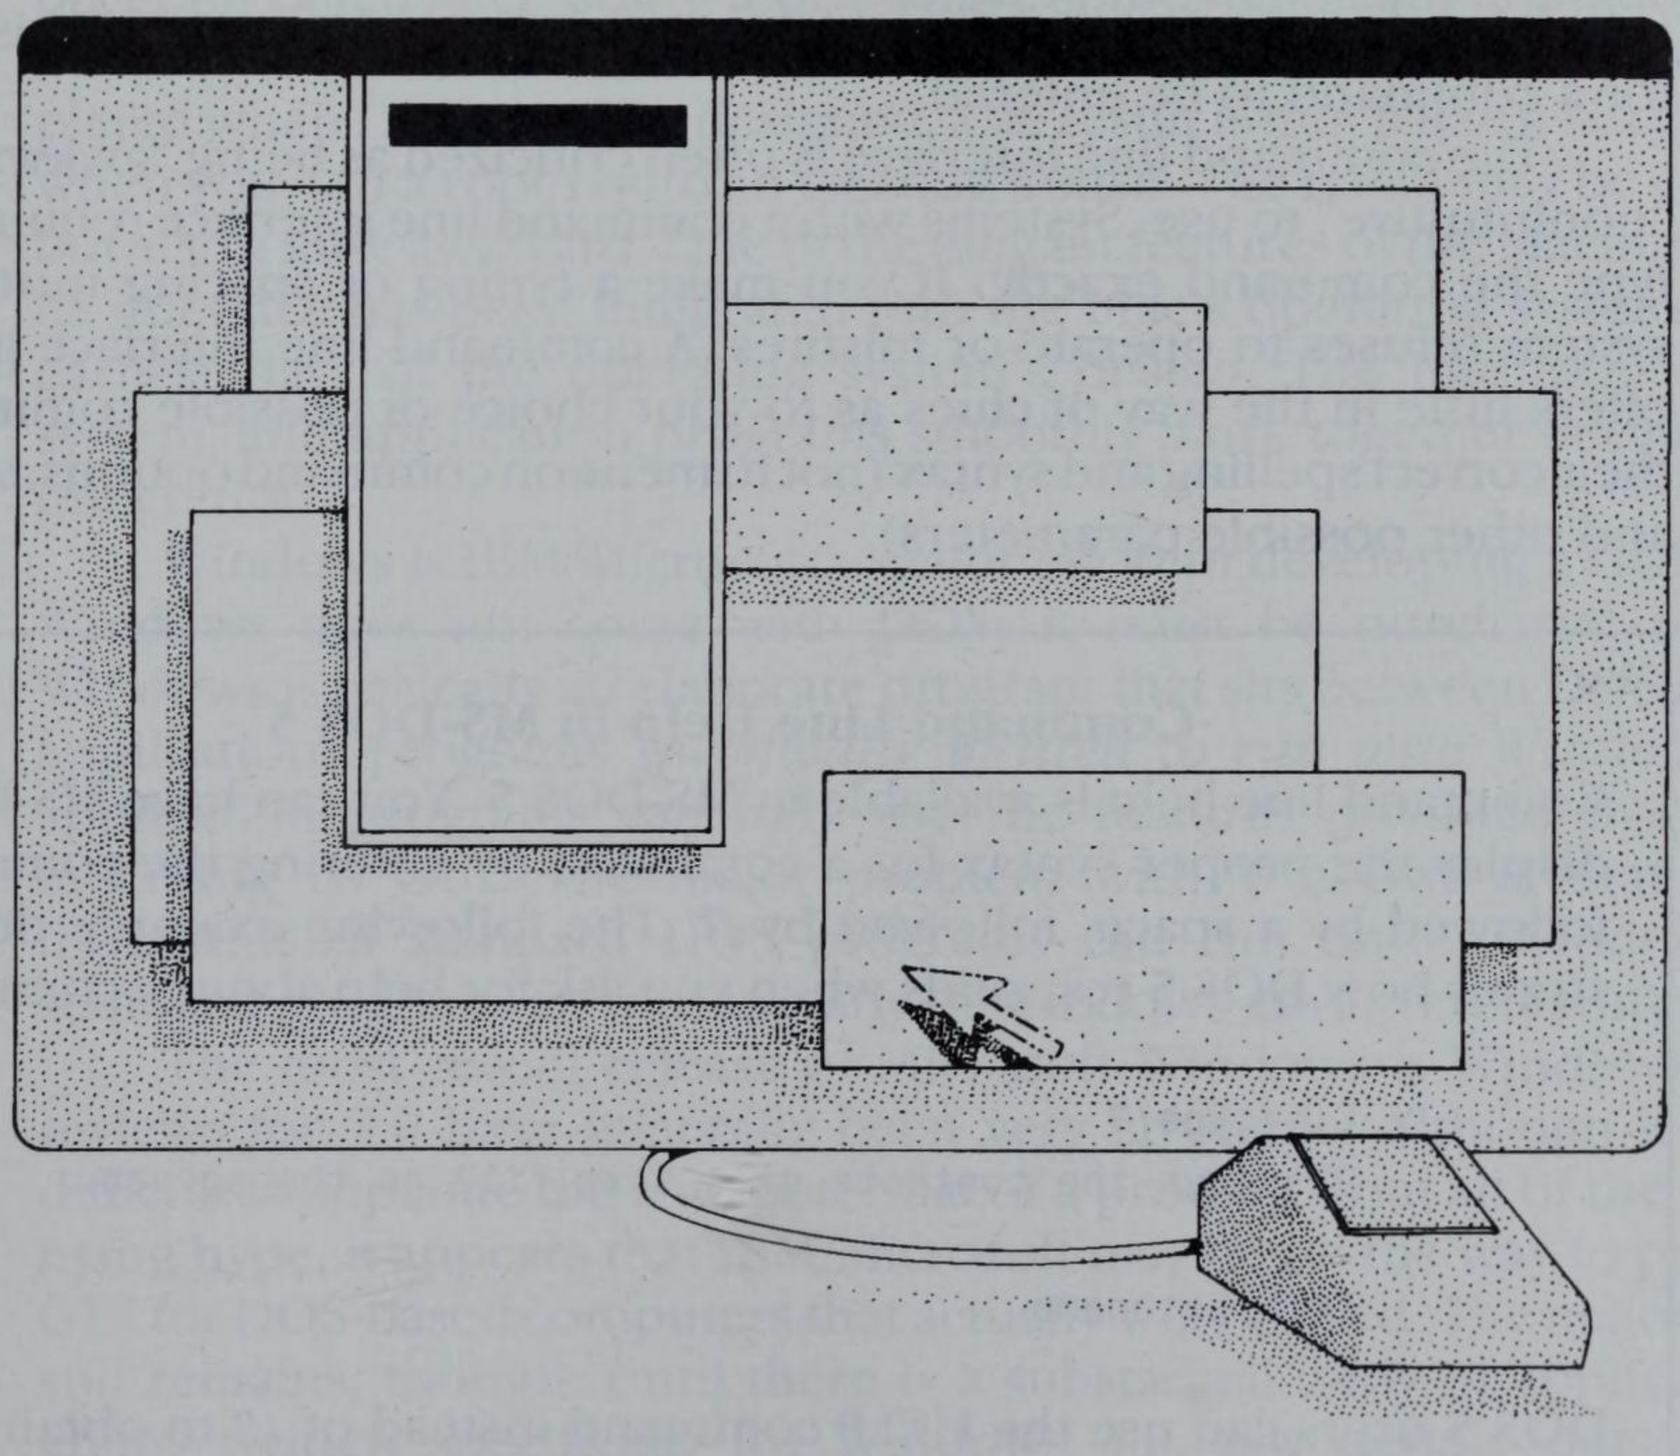

Graphical and Command Line Interfaces
Overview
Starting DOSSHELL
Moving Around in DOSSHELL
Using DOSSHELL

DOSSHELL is an alternate user interface that comes with DOS 4 and 5. DOSSHELL has many desirable features not available from the standard DOS command line, including pull down menus, dialog boxes, windowing, and (in DOS 5) switching among several different programs. Use of the DOSSHELL interface is discussed in this chapter.

Graphical and Command Line Interfaces

A *shell program* interprets your requests to run other programs. Another term for shell program is *command interpreter*. The standard DOS shell program is COMMAND.COM. Broadly speaking, COMMAND.COM provides support for the DOS *command line interface*. The command line interface is indicated by the familiar `C>`, which stares at you whenever DOS is waiting for a command to be entered.

The command line interface is often criticized as being "awkward" and "nonintuitive" to use. Systems with a command line interface require you to type the command exactly. If you make a typing or spacing mistake, the system refuses to operate or misfires. A command line interface generally offers little in the way of clues as to your choice of possible commands or their correct spelling and syntax (not to mention command options, switches, and other possible parameters).

Command Line Help in MS-DOS 5

Command line help is available in MS-DOS 5. You can have MS-DOS 5 display the proper syntax for a command by entering the command, followed by a space, followed by /?. The following example demonstrates how DOS 5 responds when you ask for help about a command.

```
C:\>type/?
Displays the contents of a text file on the screen.

TYPE pathname
```

DOS 5 users can use the HELP command instead of /? to obtain the same information. The syntax for the command is HELP, followed by a space, followed by the command for which you need help. The /? method is generally faster and (at least with DOS 5.0) more comprehensive.

Many people feel that a *graphical user interface* (affectionately known as a GUI), such as that employed by the Apple Macintosh, is easier to use. A tremendous amount of expense and time, from both industry and academia, has gone into developing the Macintosh-type interface used today. The essential idea of the interface is to structure the computer screen to represent a desktop. Computer files are represented on the screen by symbols resembling manila file folders. Operations carried out on the screen are represented as operations commonly performed on or around a desktop. For example, files are moved from one directory to another by using the mouse to "drag" the corresponding folder from one location on the screen to another.

The major problem in developing a GUI for DOS is that the job is being done after-the-fact. DOSSHELL and the much more elaborate DOS add-on program called Microsoft Windows have some significant limitations simply because they are add-ons. They are enhancements that were not contemplated when DOS was first designed. The result is much like what you obtain when you add a room onto an existing house: The result may be acceptable but also a little awkward. One of the elegant features of the Macintosh is that its interface has been integrated into the Mac's operating system from the earliest days of the operating system's design. The interface, operating system, and application programs smoothly work together because of this integration.

Windows is IBM/Microsoft's major effort in developing a GUI for DOS. Windows does not come with DOS; it must be purchased separately. Windows is basically an elaborate program that sits between DOS and those applications programs *specifically written to run with Windows*. These application programs can fully use the features provided by Windows, including its GUI. The major problem with Windows is that although thousands of standard DOS programs can run under Windows, these standard programs cannot use any of Windows advanced features.

The most recent release of Microsoft Windows is Windows 3.0. The reviews for 3.0 have generally been very favorable. Although it is always difficult to separate the true potential of a product from all of the accompanying hype, it appears that IBM/Microsoft may be on the way to providing a GUI for DOS-based computers that actually will be used. The major problem still remains, though. Until there is a substantial body of application programs written specifically for Windows 3.0, few people outside of the computing industry will pay any attention to it.

DOSSHELL is really a program that runs under DOS rather than a true add-on enhancement to the operating system like Windows. The result is that standard DOS programs work with DOSSHELL. Not surprisingly, though, the DOSSHELL interface is really very limited in its capabilities when compared to Windows or the Mac interface.

DOSSHELL was introduced with DOS 4 and modified in DOS 5. The MS-DOS 5.0 version of DOSSHELL is presented in this chapter. Although earlier versions have a somewhat different appearance and are missing some of the newer version's features, most of the concepts presented in this chapter are applicable to all versions of DOSSHELL.

Overview

DOSSHELL displays a full-screen representation of your computer's file system. One major advantage of this display is that it conveys much more information about where files are located relative to each other than does the command line interface. You can move between file directories, using the keyboard or a mouse, examining the contents of each directory along the way.

The other major advantage is that the filenames on the screen are "objects" linked to the corresponding file. Files can be "tagged" by using the keyboard or mouse to highlight the filename. This facilitates all operations involving the manipulation of files, such as copying, moving, and deleting them. DOSSHELL enables you to tag a set of files for an operation. These tagging operations are more flexible than are the wildcard operations available from the command line.

You can start any program from the DOSSHELL interface by selecting the program's executable file. In addition, data files can be "associated" with an executable file. When you subsequently select the data file, the associated executable file starts up using the data in the file you selected. For example, if you have a WordPerfect document stored in the file CHAPTER7.DOC, you can associate that file with the WordPerfect executable file WP.EXE. Each time you then select CHAPTER7.DOC, WordPerfect starts up and automatically loads CHAPTER7.DOC.

DOSSHELL also enables you to set aside a portion of the screen to list your *DOSSHELL programs*. Using these programs you can quickly access the programs you frequently use.

The MS-DOS 5.0 version of DOSSHELL has a facility called a *task swapper*, which you use to switch between running programs without terminating execution of any of the programs. The task swapper has some serious limitations, but it can be useful in some situations. Use of the swapper is discussed later in this chapter.

DOSSHELL also has a "context-sensitive" help facility. This means that whenever you are using DOSSHELL, helpful information relevant to the task you are trying to perform is available from DOSSHELL itself.

Starting DOSSHELL

Before you start DOSSHELL for the first time, make sure that the DOS search path contains the directory that has the DOSSHELL files. The MS-DOS 5.0 DOSSHELL files include DOSSHELL.EXE and DOSSHELL.COM. Other versions of DOSSHELL have similar filenames. Most DOS 4 and DOS 5 installation programs put the DOSSHELL files in the same directory as the other DOS system files. Refer to the discussion of PATH in Part 2 of this book if you are unfamiliar with the DOS search path.

Once your search path is set up, you can start DOSSHELL by entering **DOSSHELL** at the DOS command line. You can also include the line `DOSSHELL` in your AUTOEXEC.BAT file if you want the program to start each time you boot your computer.

First, DOSSHELL scans the disk directory on your default drive. This can take several seconds, particularly if your disk is a large, highly fragmented hard disk. Fragmentation occurs when files are not stored in contiguous sections on the disk. This often happens when one file is deleted and a larger file is added to the disk. You can "defragment" your disk by using one of several commercially available programs, such as Norton Utilities or PC-Tools. Defragmentation will significantly decrease the amount of time required for DOSSHELL to scan the disk directory.

Once the directory is scanned, DOSSHELL's loading process is completed and it is ready to be used (figure 7-1). Notice in figure 7-1 that DOSSHELL has slightly different displays for graphics and text modes. Although most of the illustrations in this chapter are in graphics mode, there is no difference between the way DOSSHELL functions in text mode versus graphics mode. Unless the text states otherwise, all of the material in this chapter is applicable to both text and graphic modes.

Some DOSSHELL Basics

The first thing a user typically wants to know about any program being used for the first time is how to exit the program. There are several ways to do this with DOSSHELL, but the simplest way is to press the F3 key. This will terminate DOSSHELL and return you to the DOS command line.

If your computer beeps and DOSSHELL refuses to stop running, it is probably because there is a menu or dialog box that must be closed before you exit the program. Menus and dialog boxes are discussed a little further along in this chapter, but if all you want to do is exit DOSSHELL, simply press the Esc key to close the open file and then press F3.

DOSSHELL's appearance on your screen should resemble figure 7-1 the first time you run the program. However, there are alternative "views" that DOSSHELL can display. Those views will be discussed later in this chapter. You will be able to follow the discussion in this section best if you use the view shown in figure 7-1 (A). If you don't have the same view, press Esc until your computer beeps, then press the following key sequence: Alt, V, F. Your DOSSHELL view should now closely match one of the screens in figure 7-1.

You can temporarily suspend DOSSHELL and escape to the DOS command line by pressing the combination Shift-F9. This enables you to enter one or more DOS commands in the normal fashion. When you are done at the command line, return to DOSSHELL by entering the command **EXIT**.

The *menu bar* runs across the top of the screen. The menu bar contains five menus: Files, Options, View, Tree, and Help.

There are five *selection areas* in the DOSSHELL interface. The *disk drive selection area* is just below the menu bar on the left side of the screen. Each disk drive on your system is represented by a letter shown next to a floppy drive or hard drive icon in this area. Drive letters for any RAM disk drives are included, as are any drive letters created with the DOS command SUBST.

The *directory tree selection area* takes up most of the upper left half of the screen. This area displays the directory structure of the currently selected disk drive. In graphics mode each directory is represented by an icon (or symbol) that resembles a manila file folder. A plus sign (+) on the folder indicates that the directory contains one or more subdirectories. A minus sign (–) indicates the directory's subdirectories are being displayed. There are no icons in text mode. Instead, the minus and plus signs are contained within a pair of square brackets.

The *file selection area* is in the upper right half of the screen. This area displays the files of the currently selected directory. The files' names, sizes, and date stamps are displayed. The time stamps are not displayed. In graphics mode, all COM and EXE files are represented by a rectangular icon with a single horizontal line crossing it. All other files have another icon that appears to represent a text file. Unfortunately, any file that is not a COM or EXE file gets this icon. Thus, device drivers and text files have the same icon. There are no file icons in text mode.

The bottom portion of the screen contains the *program selection area*. This area contains a list of *DOSSHELL programs*. DOSSHELL programs are similar to batch files. They contain one or more DOS commands and can be set to run regular DOS programs. They can also use replaceable parameters, just like batch files. We will take an in-depth look at DOSSHELL programs later in this chapter.

The *task list selection area* is the fifth DOSSHELL selection area. It may or may not be displayed on your system at this point. The description of this selection area appears later in the chapter.

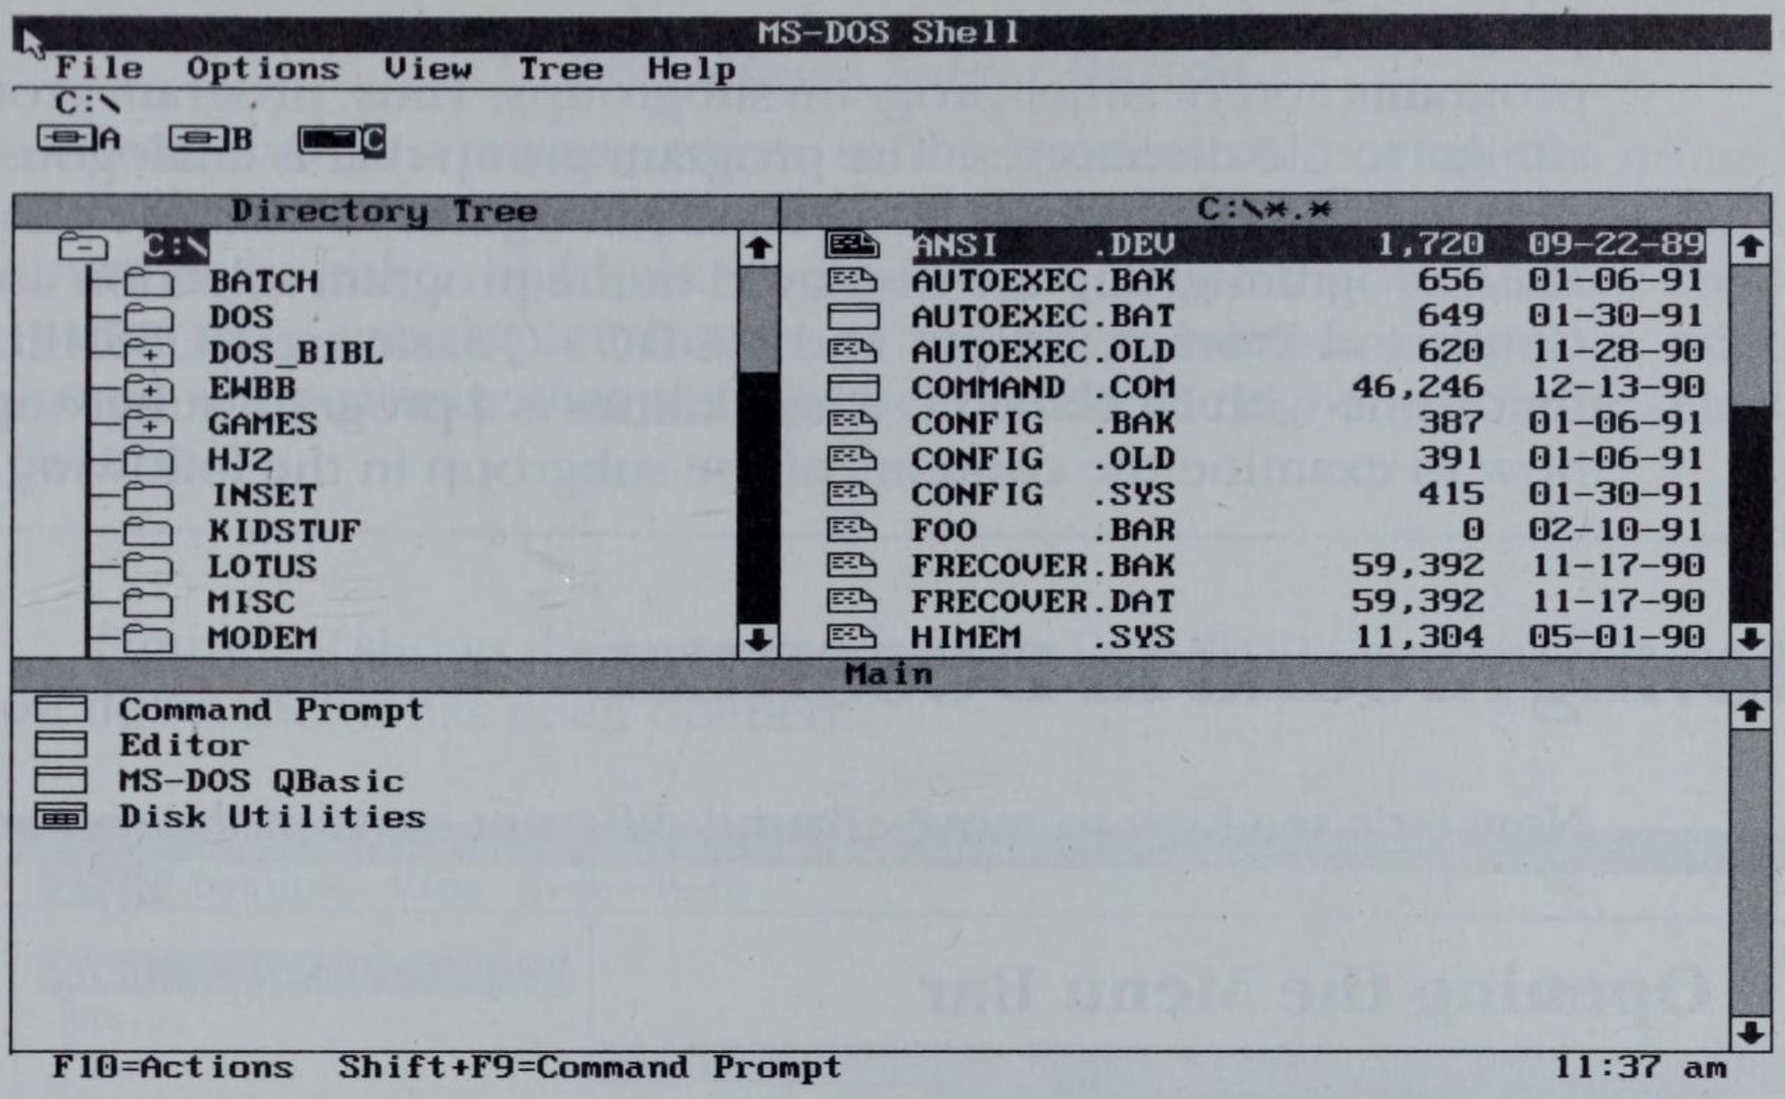

A. DOSSHELL in graphics mode.

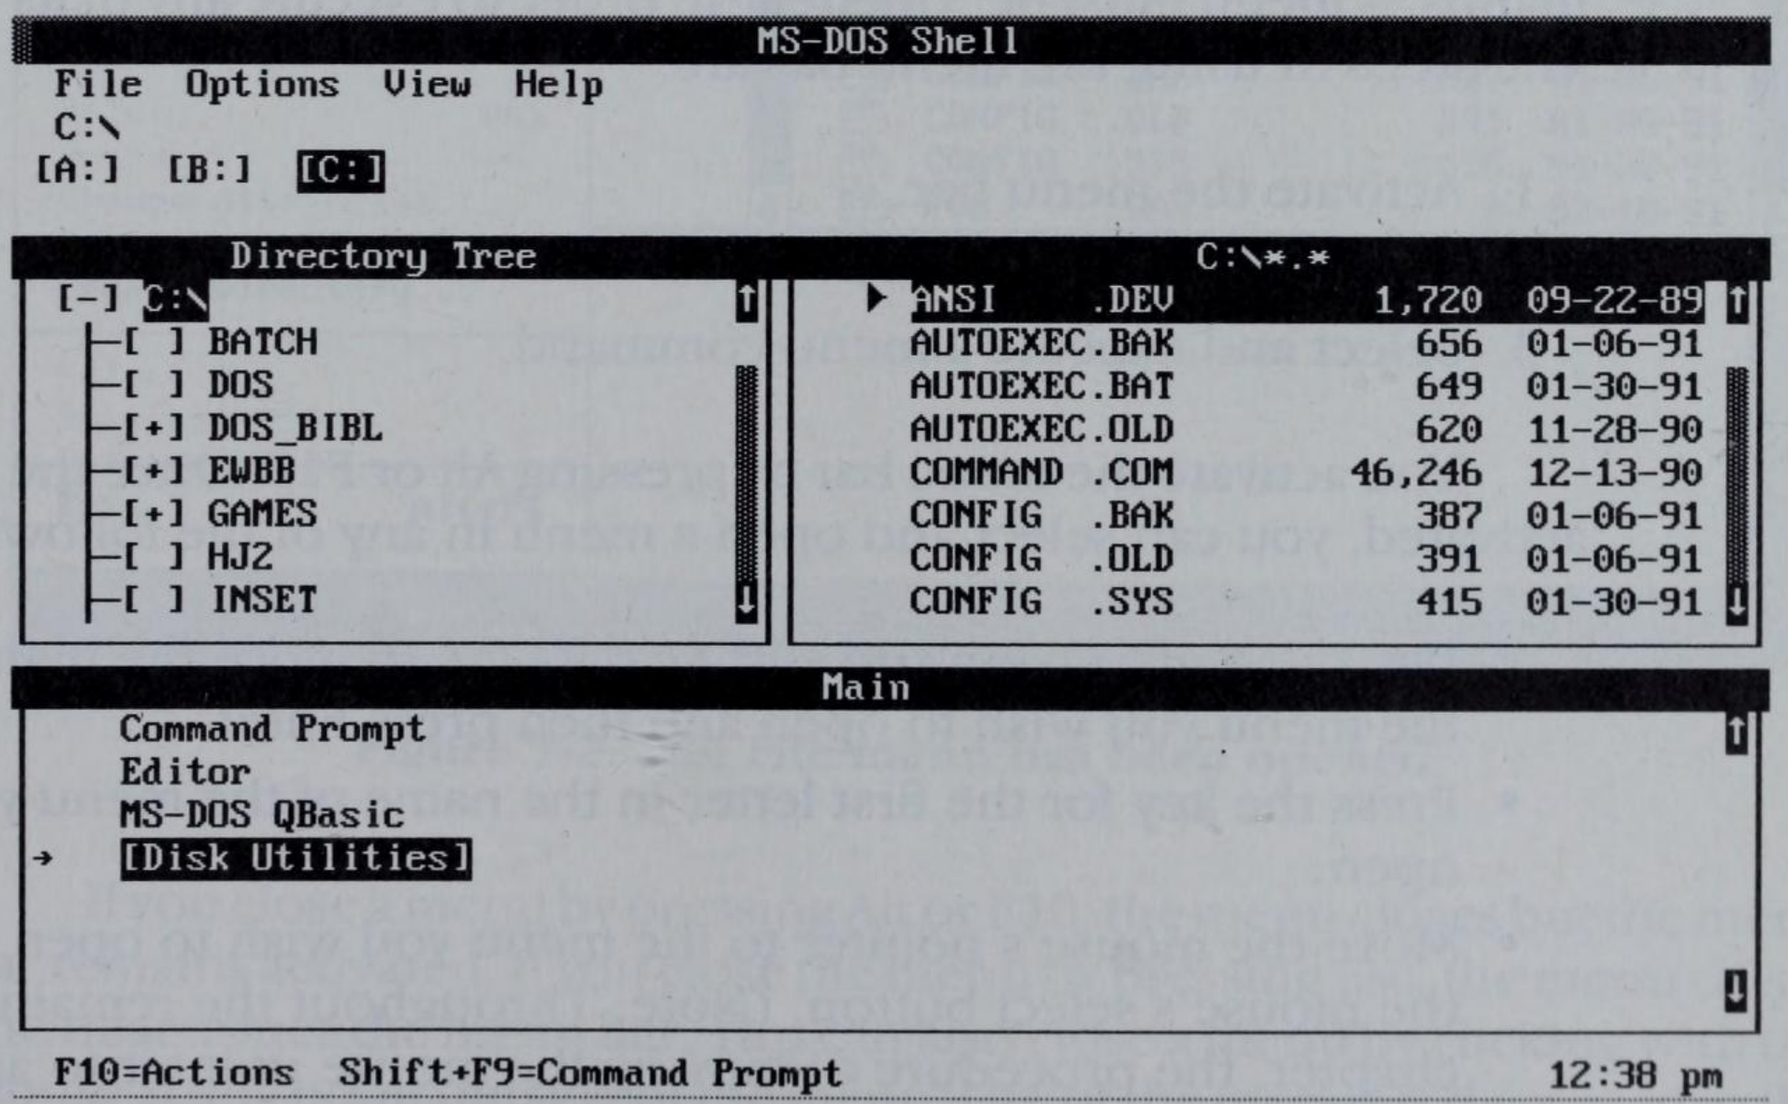

B. DOSSHELL in text mode.

Figure 7-1. DOSSHELL is loaded and ready to be used.

DOSSHELL programs are grouped together into *program groups*. Each program group has a name. A program group may contain DOSSHELL programs and/or other program subgroups. Thus, program groups are very similar to file directories. The program group that is analogous to the root directory is called *Main*. You can see in figure 7-1 that the contents of the Main program group are displayed in the program selection area. MS-DOS Command Prompt, Editor, and MS-DOS QBasic are DOSSHELL programs that come with DOSSHELL. Disk Utilities is a program subgroup. You'll see how to examine the contents of the subgroup in the following section.

Moving Around in DOSSHELL

Now let's see how to move around different parts of the screen.

Opening the Menu Bar

Most of what you do with DOSSHELL is handled through the menu bar. The menu bar contains a group of menus. Each menu contains a set of commands. A menu must be "opened" in order to execute any of its commands. The steps in using the menu bar are

1. Activate the menu bar.
2. Select and open a menu.
3. Select and execute a menu command.

You activate the menu bar by pressing Alt or F10. Once the menu bar is activated, you can select and open a menu in any of the following ways:

- Use the Right Arrow and Left Arrow keys to move the highlight bar to the menu you wish to open and then press Enter.
- Press the key for the first letter in the name of the menu you wish to open.
- Move the mouse's pointer to the menu you wish to open and press the mouse's select button. (Note: Throughout the remainder of this chapter, the procedure of moving the mouse pointer to an item and pressing the select button will be referred to as *clicking*.)

The Mouse Select Button

Selection with a mouse refers to the process of moving the mouse pointer to an item on the screen and clicking with one of the mouse's buttons to either highlight or otherwise activate the item. Most computer mice use the left button as the select button. Generally, mice come with software that you can use to make the right button the select button.

Figure 7-2 shows the appearance of the DOSSHELL screen after the File pull down menu has been opened.

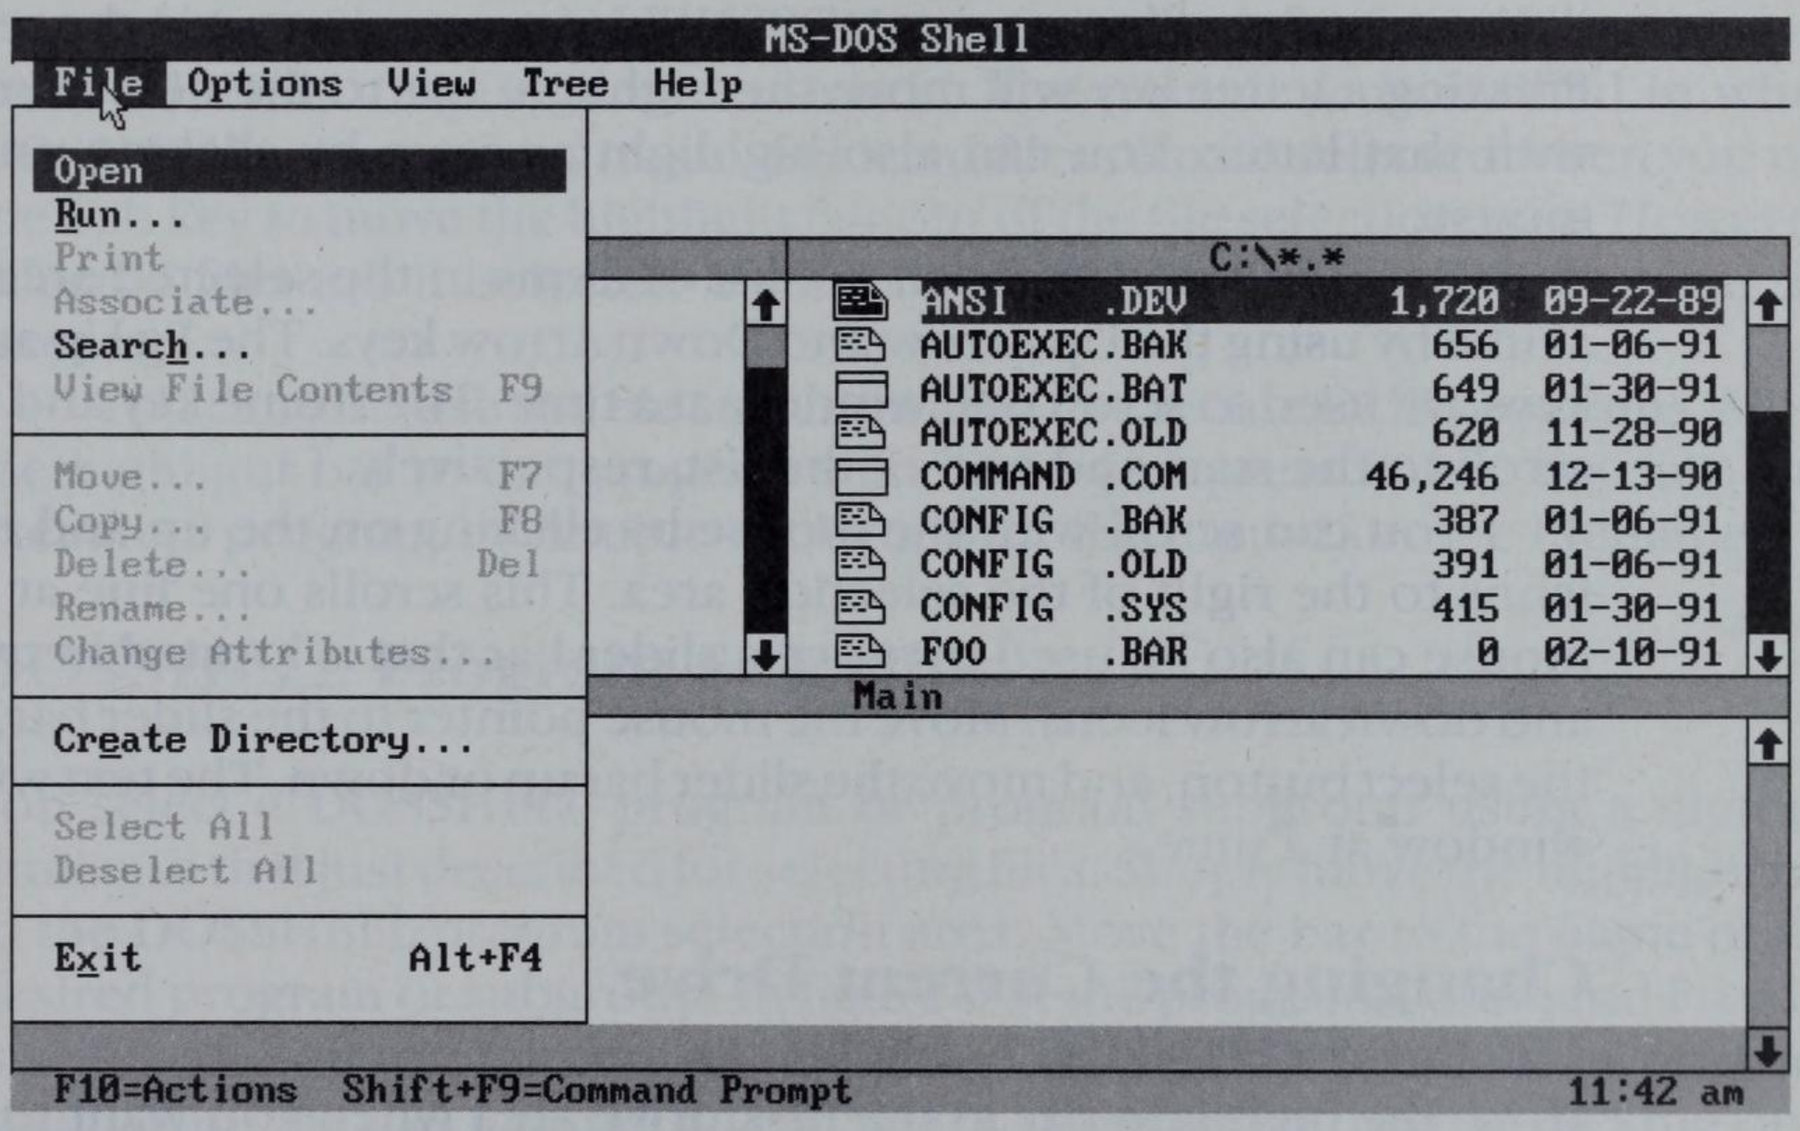

Figure 7-2. The File menu has been opened.

If you close a menu by pressing Alt or F10, the menu closes but the menu bar remains activated. If you close the menu by pressing Esc, the menu closes and deactivates the menu bar. You can also close a menu by clicking with the mouse at any point outside of the menu. Use of the menus is discussed in the section titled Using DOSSHELL.

Activating a Selection Area

At any one time, one of the selection areas is active. The active area is indicated by the highlight bar. In figure 7-2, the program area is active. You make an area active by using the Tab key to move the highlight bar from one selection area to the next. Press Shift-Tab simultaneously to move the highlight bar in the opposite direction. An area can also be activated by clicking on any part of it with the mouse.

Highlighting and Selecting Items

Use the keyboard's arrow keys to change the highlighted item (drive letter, directory name, filename, or DOSSHELL program name) in the selected area. Pressing a letter key will move the highlight bar to the next item beginning with that letter. You can also highlight an item by clicking on it with the mouse.

You can scroll through the list of items in the selected area one line at a time by using the Up Arrow and Down Arrow keys. The Pg Up and Pg Down keys are used to scroll one window at a time. The Home key and the End key scroll to the start and end of the list, respectively.

You can scroll with the mouse by clicking on the up and down arrow icons to the right of the selection area. This scrolls one line at a time. The mouse can also be used to move a slider bar that is located between the up and down arrow icons. Move the mouse pointer to the slider bar, hold down the select button, and move the slider bar up or down. The text will scroll one window at a time.

Changing the Current Drive

Move the highlight bar in the disk drive area when you want to change the current disk drive. The directory tree displayed in the directory tree selection area changes whenever you change the current drive. You must press Enter to make the computer actually read the disk drive. You also must reread the current drive after you add, delete, or rename files. If you don't, any changes made won't be known to DOSSHELL.

Changing the Current Directory

Move the highlight bar in the directory tree drive area when you want to change the current directory. The files in the current directory are listed in the file selection area.

A plus symbol (+) indicates that a directory contains one or more subdirectories that are "collapsed" (not displayed). You can expand or collapse the subdirectories of the highlighted directory by pressing the + or – key. You can also click with the mouse on the plus sign to "expand" (display) the subdirectories. Click on a minus sign to collapse a directory's subdirectories.

File Selection

Move the highlight bar within the file selection area to select a file. As you will see in the following section, file selection is required in carrying out many DOSSHELL operations. You will also see that you can select more than one file at a time. This is very useful for performing operations on a set of files.

Selected files are indicated by a triangle to the left of the filename when the DOSSHELL display is in text mode. The triangle icon is filled in when DOSSHELL is in graphics mode. Selected files remain selected when you use the Tab key to move the highlight bar out of the file selection area. However, selected files are deselected if you click with the mouse anywhere on the screen.

You can also use the file selection area to execute DOS programs. Move the highlight bar to the program's filename and press Enter. You can also execute a program by double-clicking with the mouse on the filename.

DOSSHELL Program Selection

You select a DOSSHELL program or program subgroup using a method similar to that just described for selecting files. Simply move the highlight bar to the DOSSHELL program selection area. Move the bar to the name of the desired program or subgroup. In figure 7-3, the program Command Prompt is selected. You can execute a highlighted DOSSHELL program by pressing Enter. You can also execute a DOSSHELL program by double-clicking on it with the mouse.

Recall that a program subgroup is a set of DOSSHELL programs. To access the programs in a subgroup, simply move the highlight bar to the subgroup's name and press Enter (or double-click). Disk Utilities is a standard DOSSHELL subgroup. Figure 7-4 shows the programs in this subgroup. Notice that the first program listed is entitled Main. This item is selected to return to the main program group (figure 7-3)

The next section ties together the information presented so far in this chapter and illustrates how to use DOSSHELL. The section will also show you how to create your own DOSSHELL programs and program subgroups.

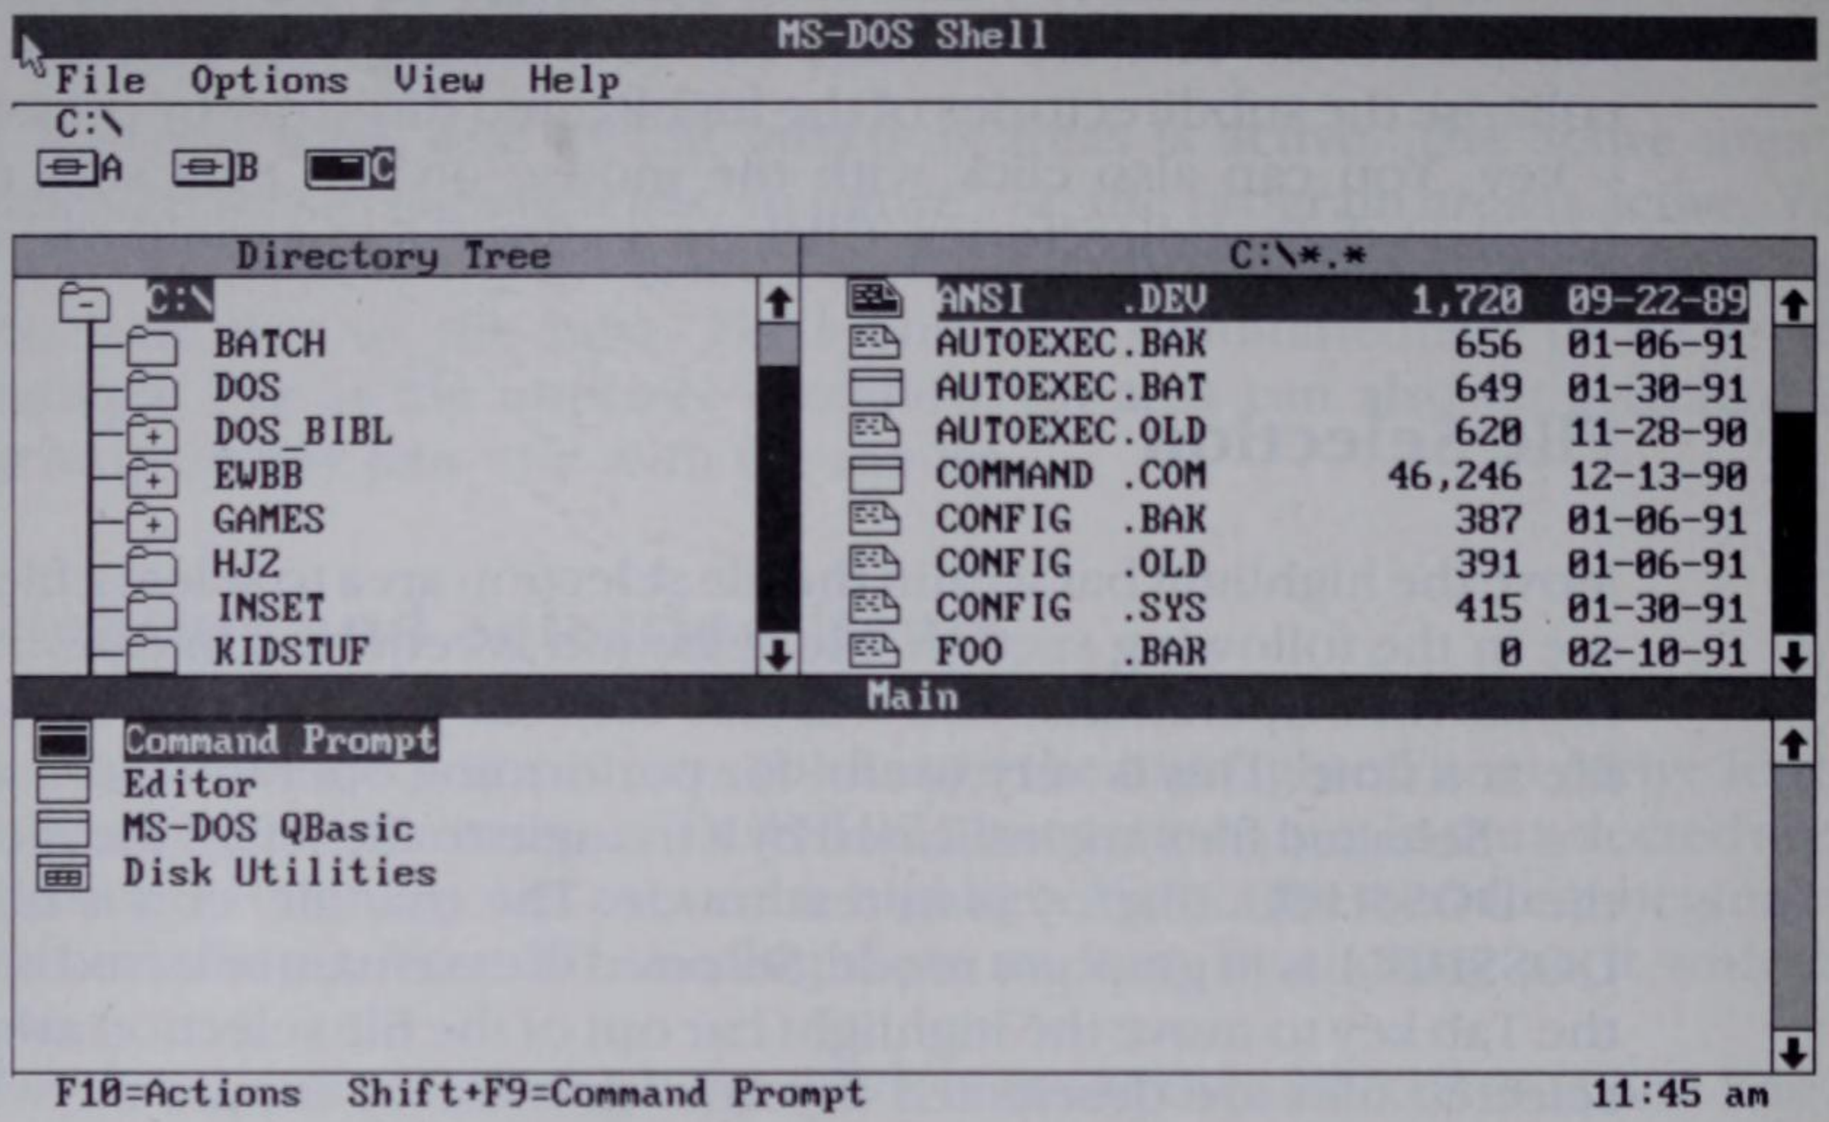

Figure 7-3. The DOSSHELL program Command Prompt is selected.

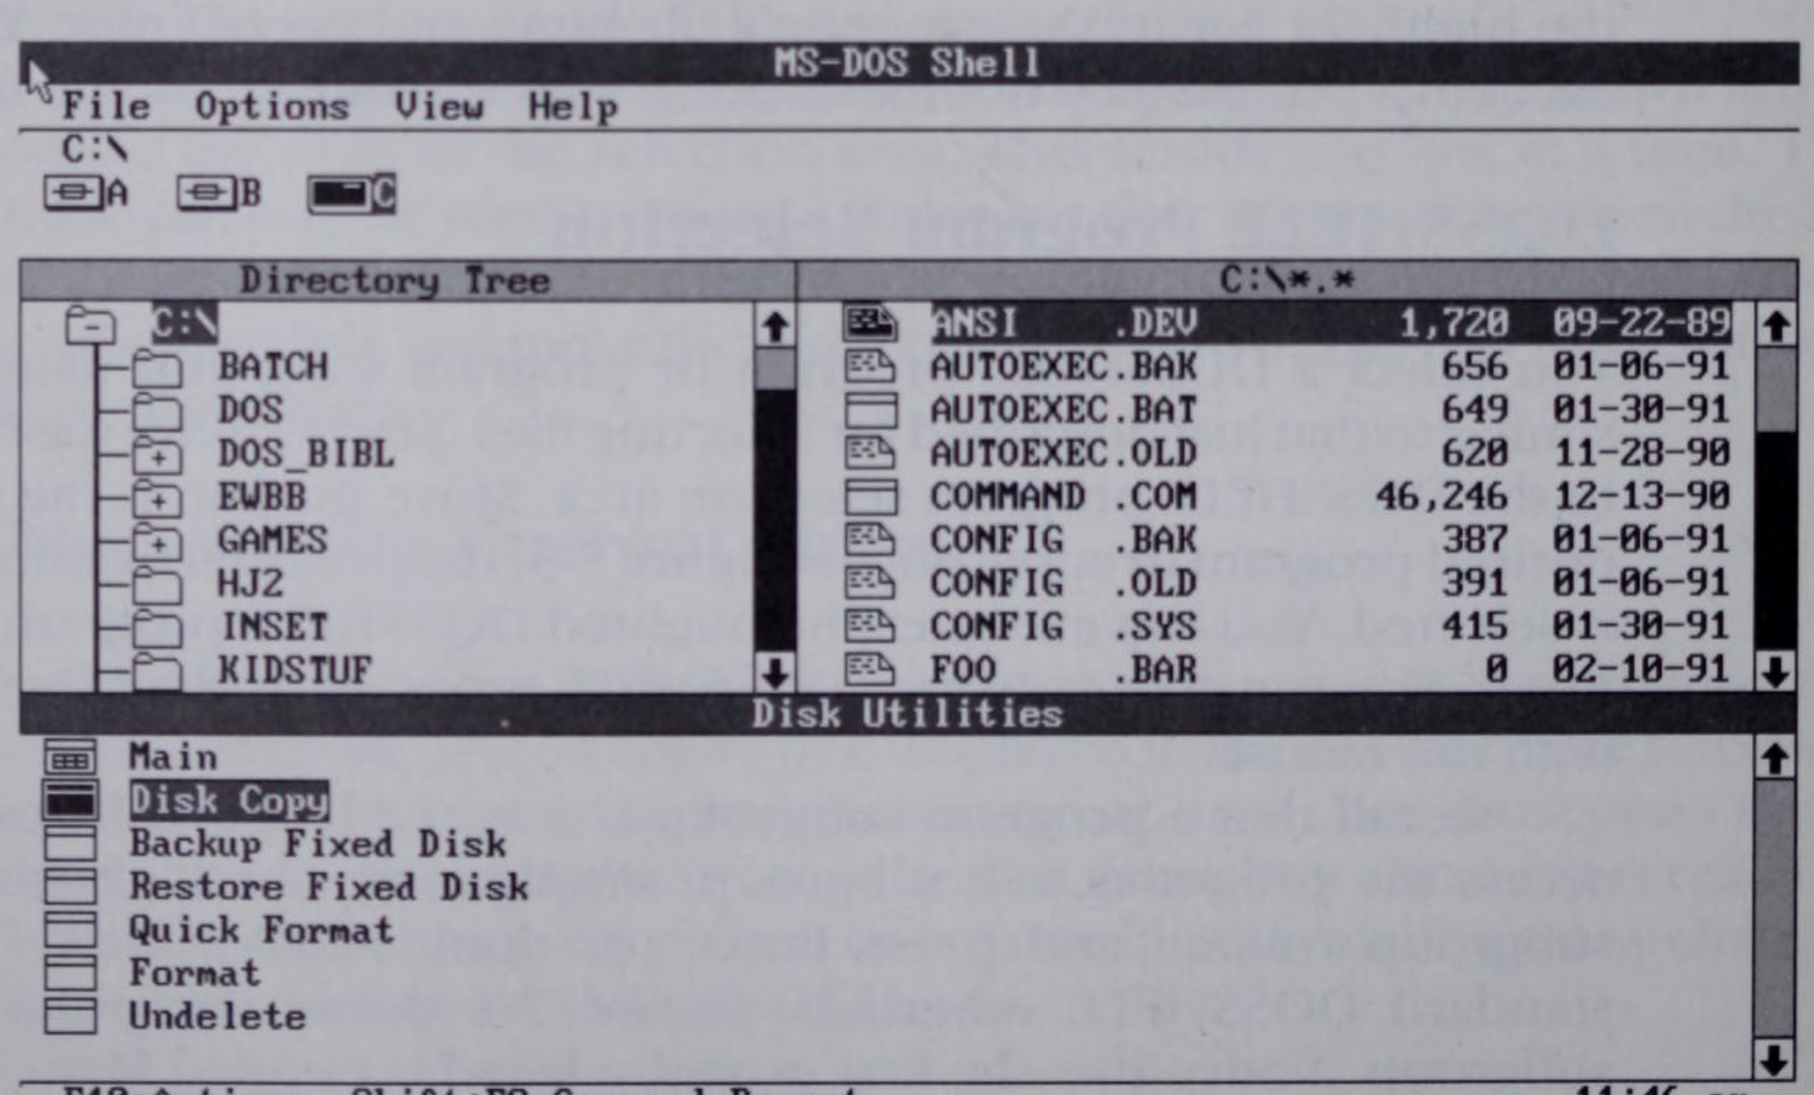

Figure 7-4. The programs in the Disk Utilities subgroup are displayed.

Using DOSSHELL

The menu bar functions as DOSSHELL's command center. All of the menu commands are discussed in this section. Many examples are presented so that you can determine the most appropriate application of DOSSHELL to your own needs.

The View Menu

The View menu enables you to modify DOSSHELL's display format. Open the View menu by pressing Alt and V. The View menu contains six commands, the first five of which control DOSSHELL's display format (figure 7-5).

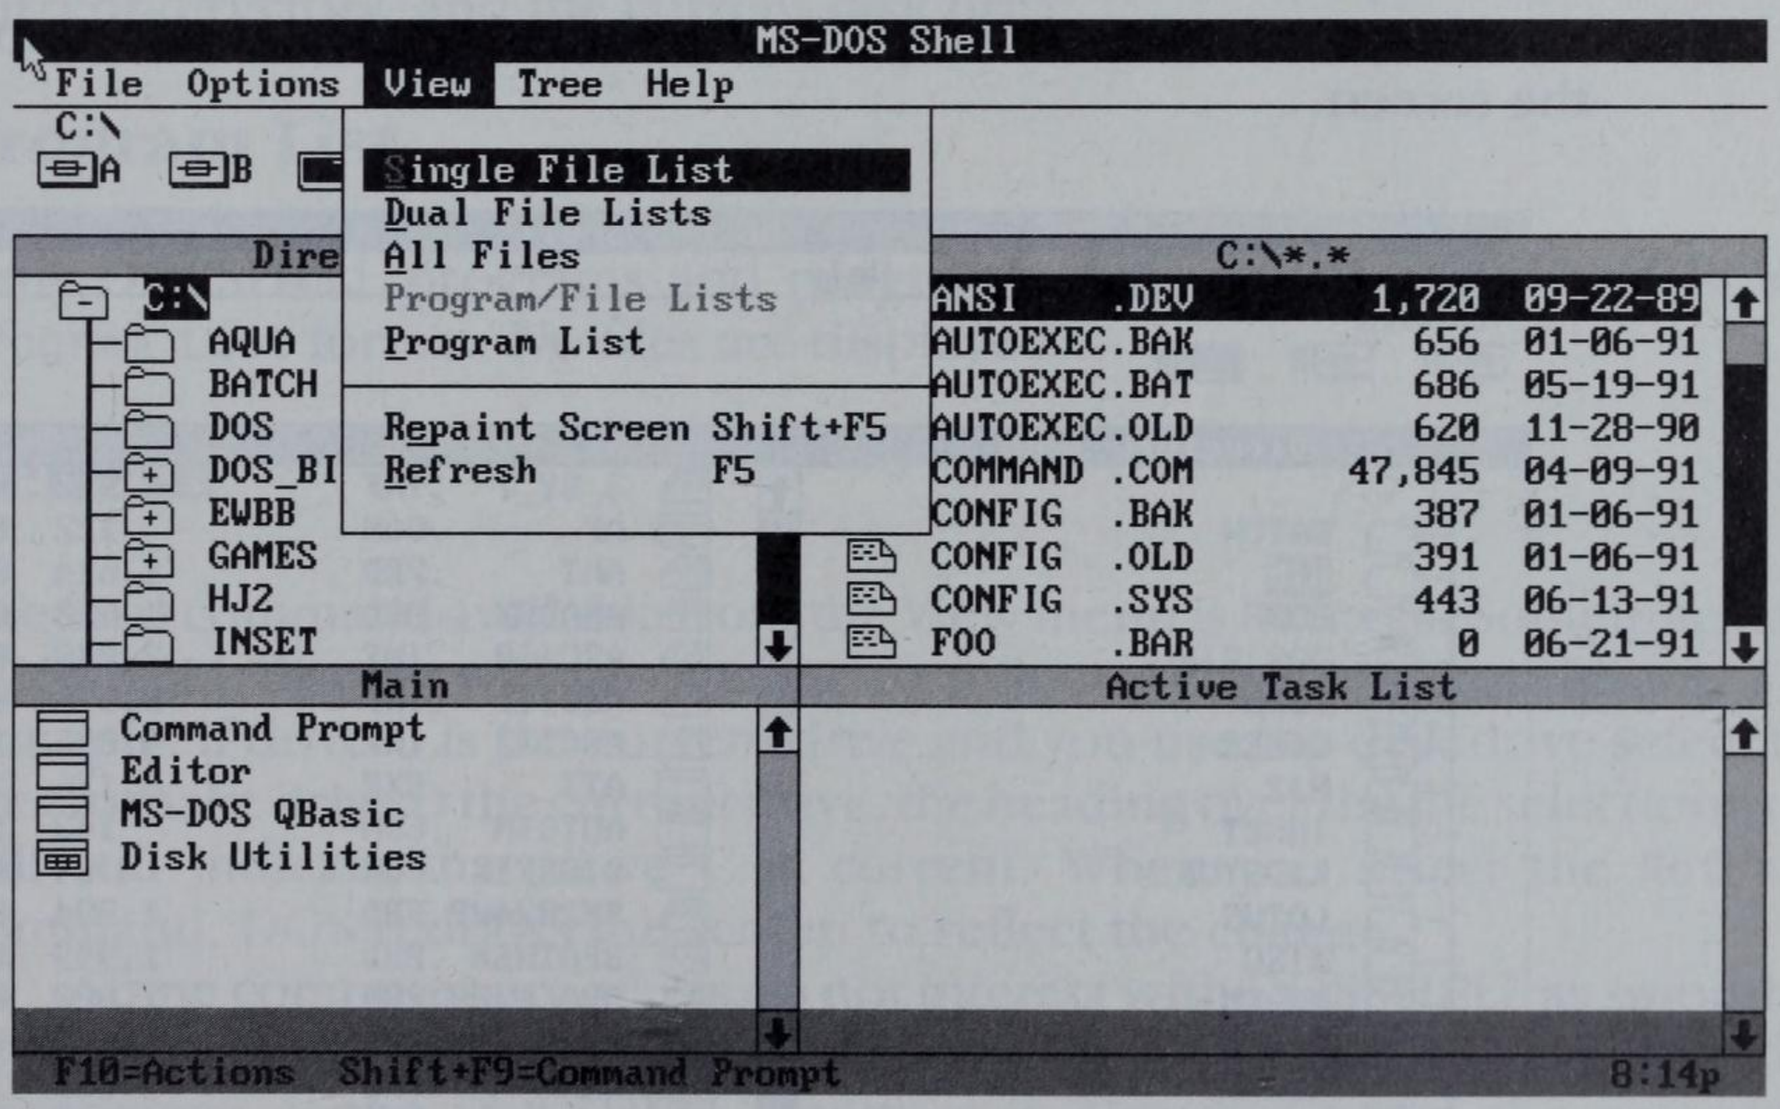

Figure 7-5. Opening the View menu displays its commands.

Program/File Lists

The previous examples in this chapter were displayed using the Program/File Lists format. The directory tree is displayed in the upper left half of the screen, files are listed in the upper right, and DOSSHELL programs and

program subgroups are listed in the lower half of the screen. Notice in figure 7-5 that the command `Program/File Lists` is dimmed. This indicates that the command is not currently available. The reason for this is that `Program/File Lists` is the current display format.

With the View menu open, you can change the display format by choosing one of the four available format commands. Choose a command by typing the first letter in the command, moving the highlight bar to the command and pressing Enter, or clicking on the command with the mouse.

Single File List

The `Single File List` format displays the directory tree on the left side of the screen and the file list on the right side. DOSSHELL programs and program subgroups are not displayed. In figure 7-6, the current directory is C:\BIN, and the files in C:\BIN are displayed on the right half of the screen. This display format is useful when you are working with an extensive directory structure or many files, because there is room for more items on the screen.

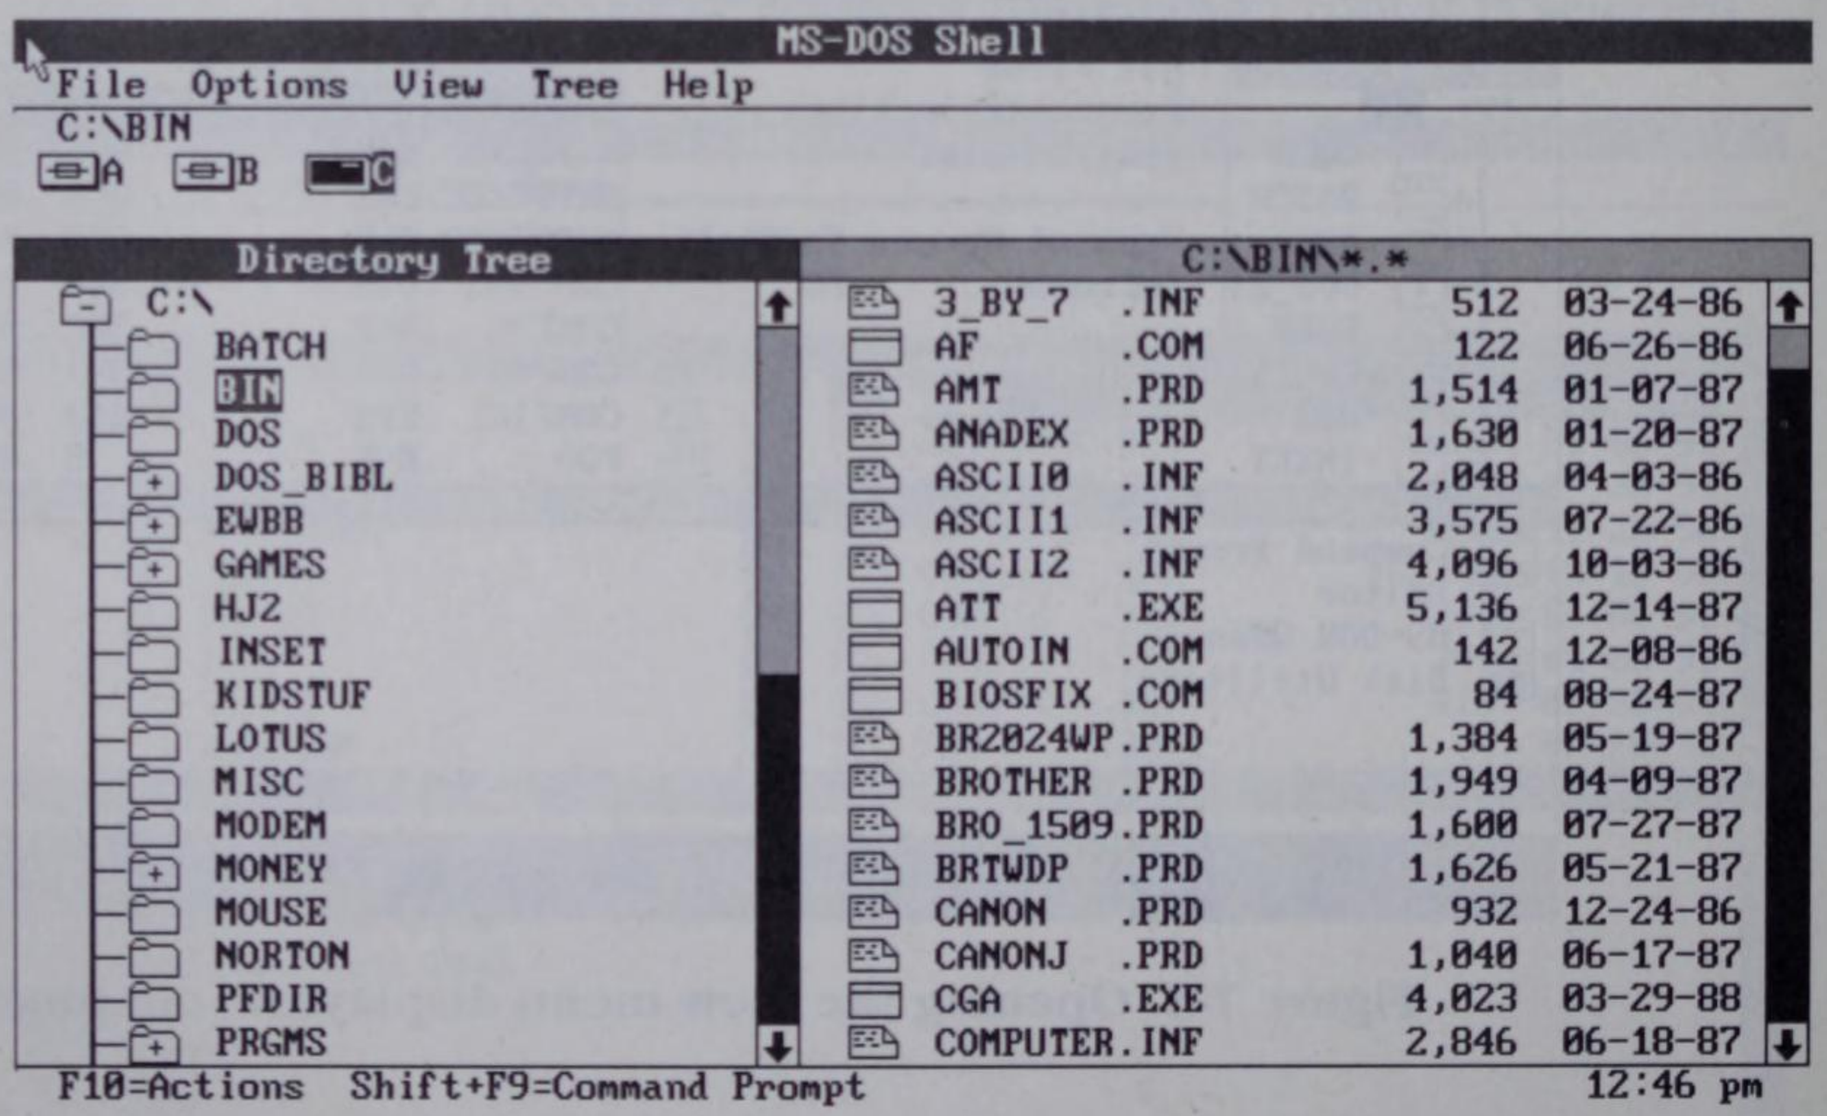

Figure 7-6. The `Single File List` display format.

Dual File Lists

The `Dual File Lists` format displays one directory with its files at the top of the screen and another directory tree with its files at the bottom of the screen. There are also two disk drive selection areas, one for the top and one for the bottom. As we will see, this display format is useful for copying or moving a set of files from one directory to another.

All Files

The `All Files` format displays all of the files on the selected disk in a single list. The files are listed on the right. Later this section shows how the Options menu can be used to control the ordering of the files in this list. The highlighted file's name and its file attributes are displayed on the left. Also on the left is information about the number of files currently selected, the current directory, and the current disk drive.

Program List

Only DOSSHELL programs and program subgroups are displayed in the `Program List` format. No files are displayed.

Refresh

The final command available from the View menu is `Refresh`. Sometimes the DOSSHELL display will not change to reflect a change in conditions. For example, if drive C is the current drive and you use the disk drive selection area to make drive D the current drive, the heading over the file selection area will still indicate that drive C is current. When you select the `Refresh` command, DOS redraws the screen to reflect the change.

Some computer programs do not interact with DOSSHELL as smoothly as they should. These programs execute in a normal fashion, but the appearance of the DOSSHELL interface is distorted when the programs terminate. If any of your computer programs have this effect, use the `Repaint` command from the View menu to correct the situation. Repaint first blanks the screen, then a fresh version of the DOSSHELL interface is displayed.

The File Menu

The File menu is used to carry out most of the functions available in DOSSHELL. From the File menu you can do the following:

- Execute DOS commands, DOS programs, batch files, and DOSSHELL programs
- Move, copy, delete, rename, and search for DOS files
- Link DOS data files to DOS program files
- Create, delete, and rename file directories
- Examine and modify file attributes
- Create DOSSHELL programs
- Modify existing DOSSHELL programs

The File menu contains one set of commands when the disk drive, directory tree, or file selection area is active, and another set of commands when the program selection area is active. (Remember, a selection area is described as *active* when the highlight bar is in it.) For simplicity we will discuss the two groups of commands separately.

Figure 7-7 shows the commands of the File menu when the disk drive, directory tree, or file selection area is active. This means that you are ready to work with directories and files. Within this set of commands, the ones that are available at any time are determined by the number of files that are currently selected. Before discussing the commands we will take another look at file selection. This time we'll concentrate on the selection of a set of files.

Selecting a Set of Files

Earlier in this chapter you saw that a file is "selected" when you move the highlight bar to the file's name in the file selection area. A set of consecutive files can be selected from the keyboard by holding down Shift and moving the highlight bar up or down the file list with the Up or Down Arrow key. You can also use the mouse to select a set of files that are in consecutive order on the list by simultaneously holding down the keyboard's Shift key and the mouse selection key while you "drag" the mouse pointer across the files you wish to select. Figure 7-8 shows the result of such an operation in which four files were selected.

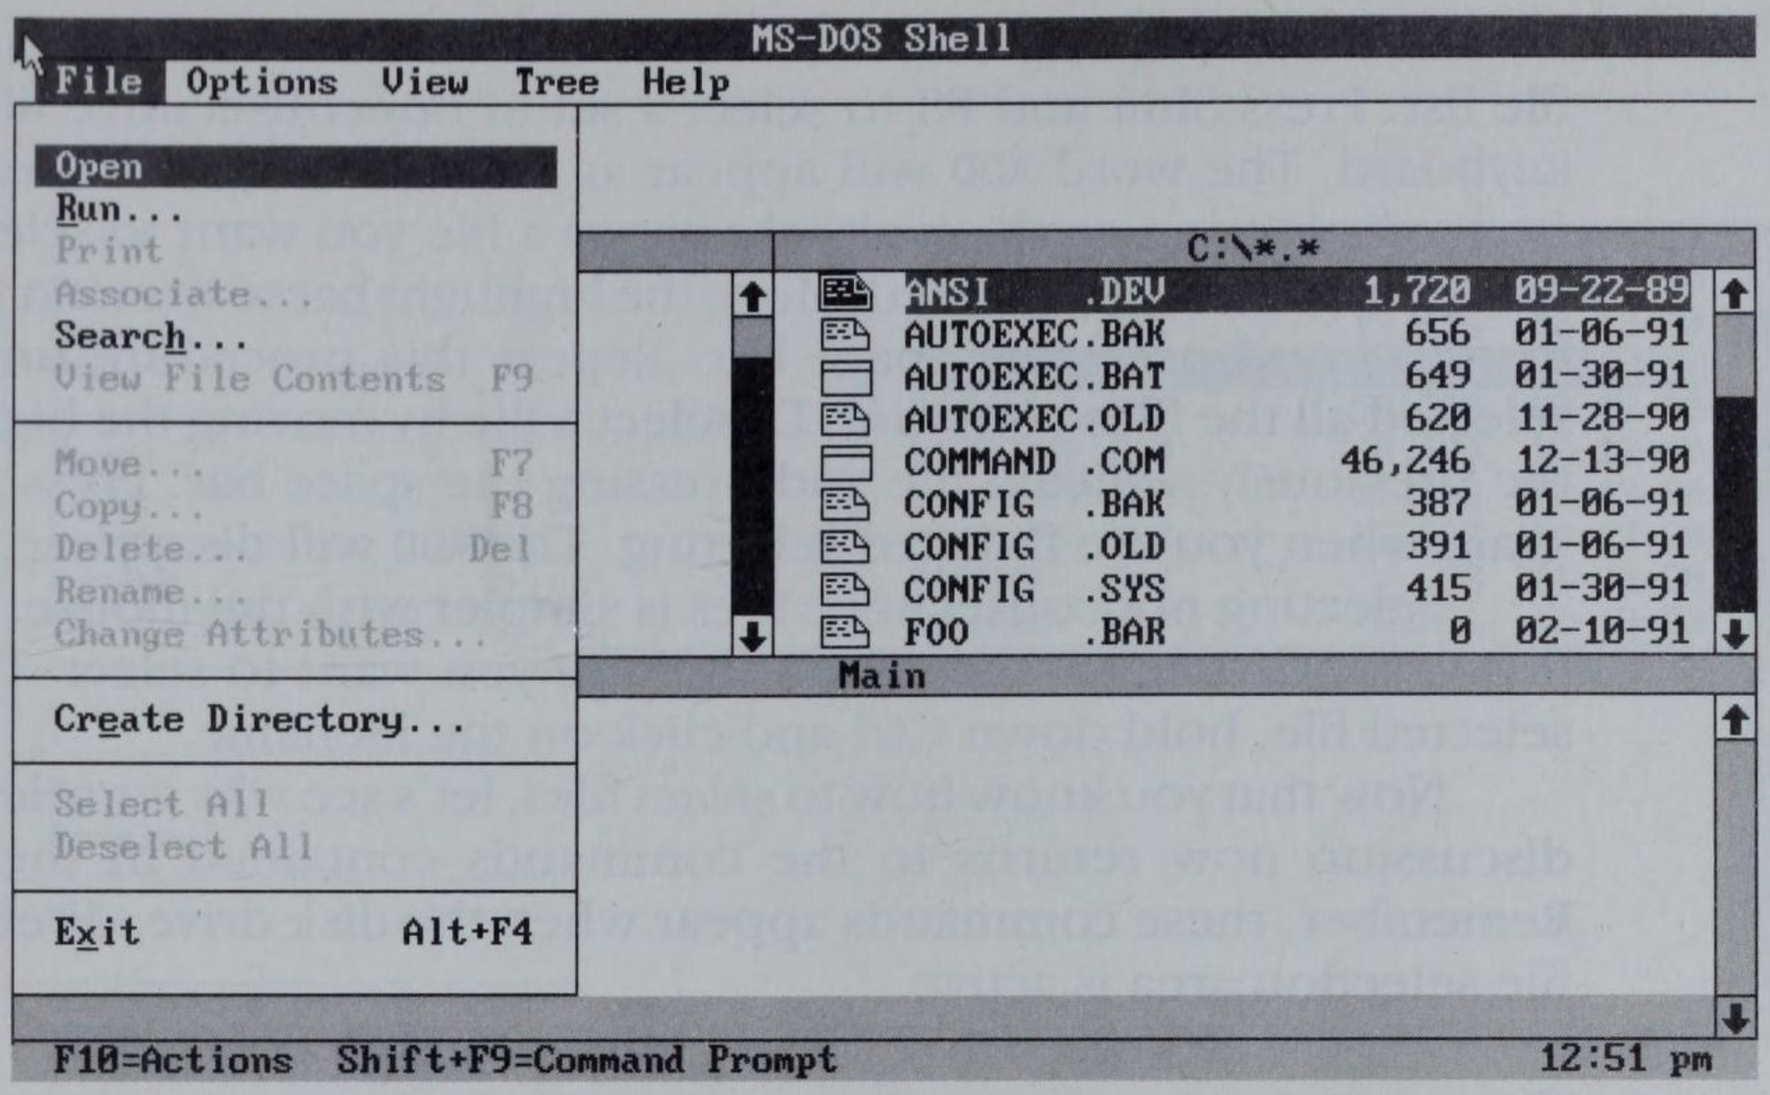

Figure 7-7. File menu commands displayed when the disk drive, directory tree, or file selection area is active.

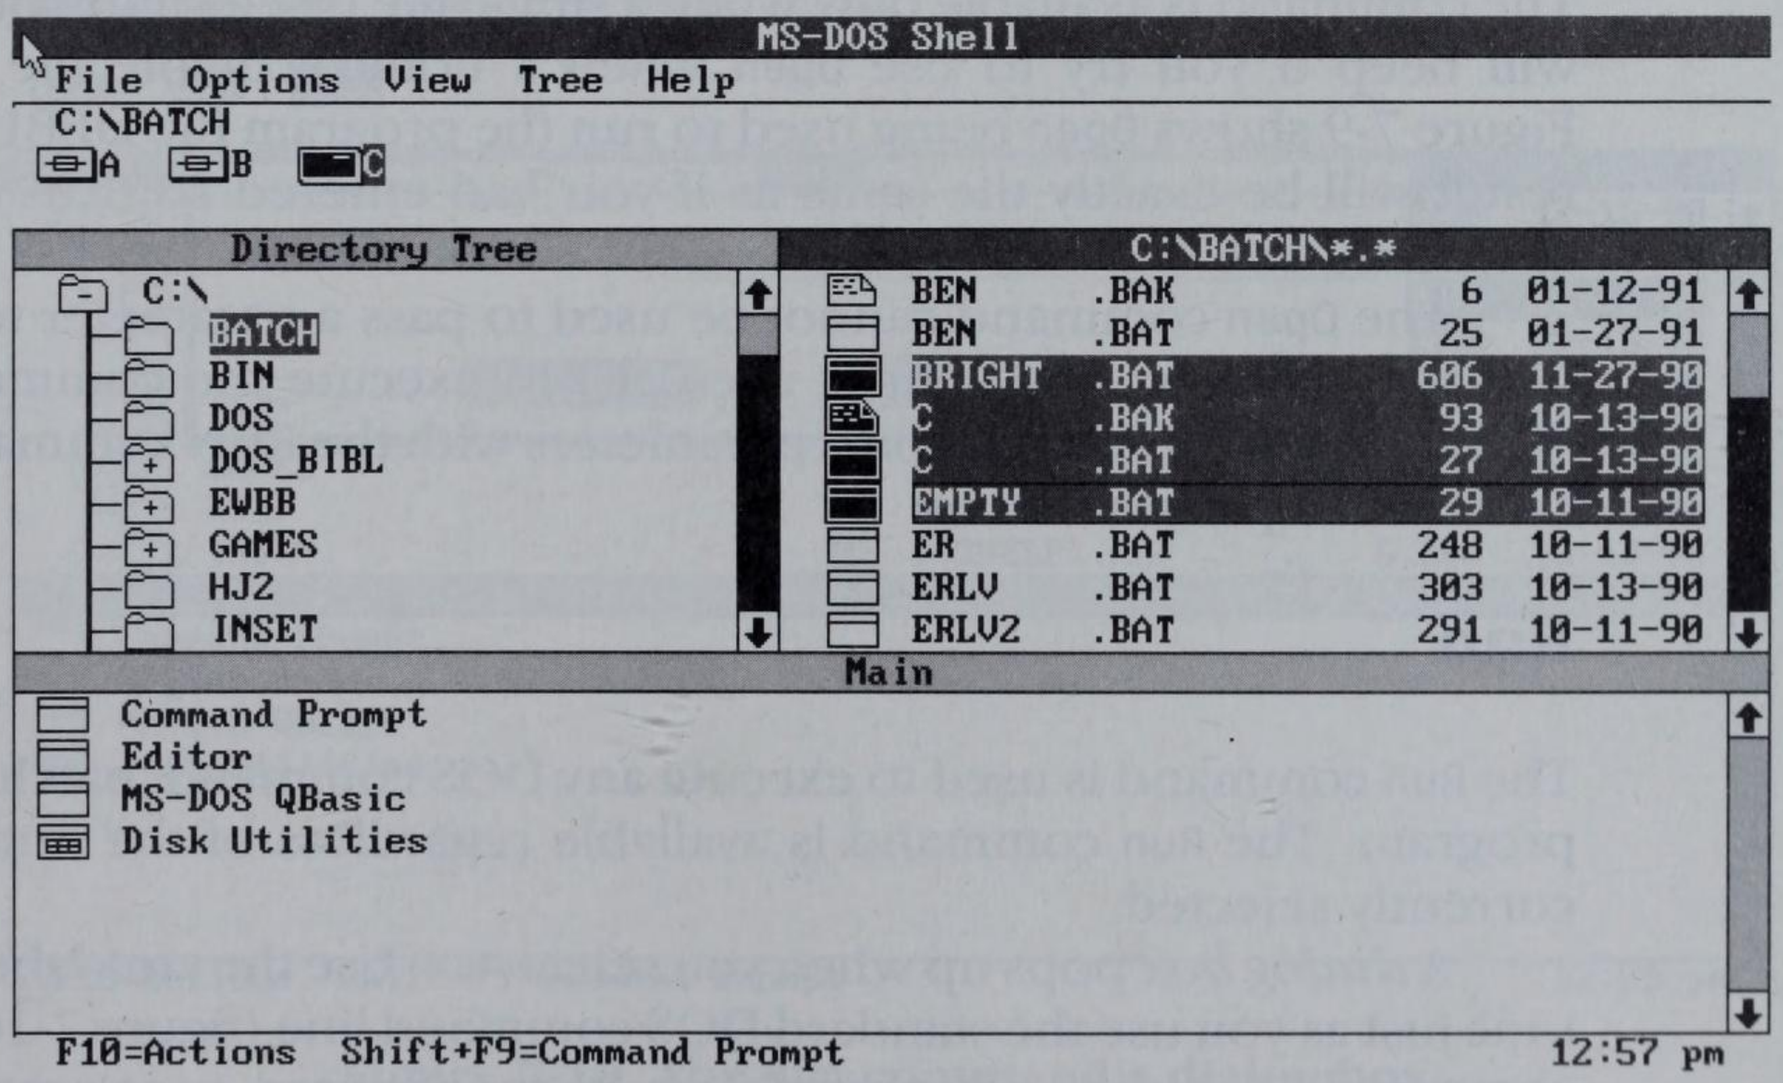

Figure 7-8. Four consecutive files are selected by dragging the mouse pointer.

You can also select a set of files that are not listed consecutively in the file list. Press Shift and F8 to select a set of nonconsecutive files using the keyboard. The word ADD will appear at the bottom of the screen. Use the cursor keys to move the highlight bar to a file you want to select. Press the space bar. The file is selected. Move the highlight bar to the next file you want to select and press the space bar. Repeat this procedure until you have selected all the files you want. Deselect a file by moving the highlight bar to the previously selected file and pressing the space bar. Press Shift and F8 again when you are finished selecting. The ADD will disappear.

Selecting nonconsecutive files is simpler with the mouse. Simply hold down the Ctrl key and click on the files you want to select. To deselect a selected file, hold down Ctrl and click on the filename.

Now that you know how to select files, let's see why we select them. The discussion now returns to the commands contained in the File menu. Remember, these commands appear when the disk drive, directory tree, or file selection area is active.

Open

The Open command is used to execute a selected program file or batch file. The command is available only when a single file is selected. Your computer will beep if you try to use Open when a nonexecutable file is selected. Figure 7-9 shows Open being used to run the program file DEBUG.EXE. The result will be exactly the same as if you had entered DEBUG on the DOS command line.

The Open command cannot be used to pass a parameter to a program file. For example, you cannot use Open to execute the command DEBUG PROGRAM.COM. You can pass parameters with the RUN command and with DOSSHELL programs.

Run

The Run command is used to execute any DOS command, batch file, or DOS program. The Run command is available regardless of the number of files currently selected.

A *dialog box* pops up when you select Run. Use the area labeled Command Line just as you use the standard DOS command line (figure 7-10). Enter the command, including any parameters, in the Command Line area, then press Enter or click on OK to run. Click on Cancel if you decide not to run anything. You can also use the Tab key to move the cursor into the OK or Cancel button and then press Enter.

Run is useful for running commands or programs that you use on an occasional basis. Use of DOSSHELL programs is much more convenient for commands or programs you use frequently.

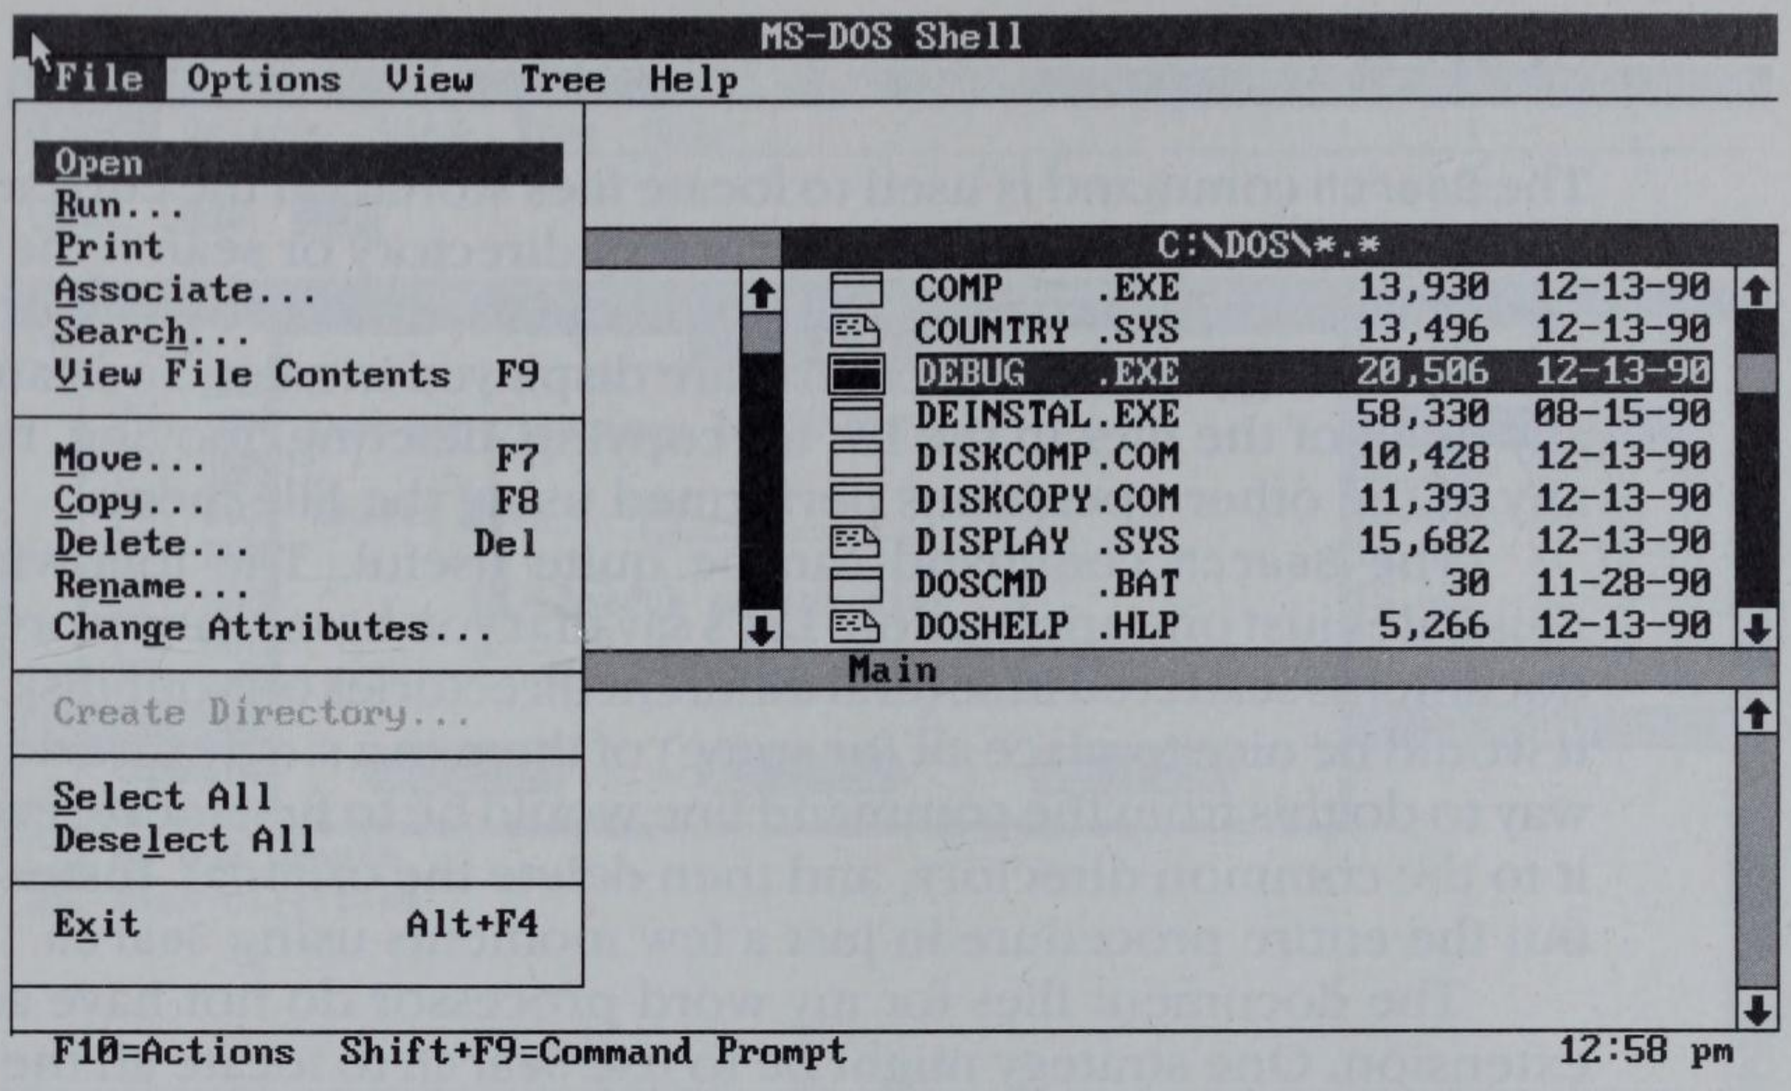

Figure 7-9. Using Open to run DEBUG.EXE

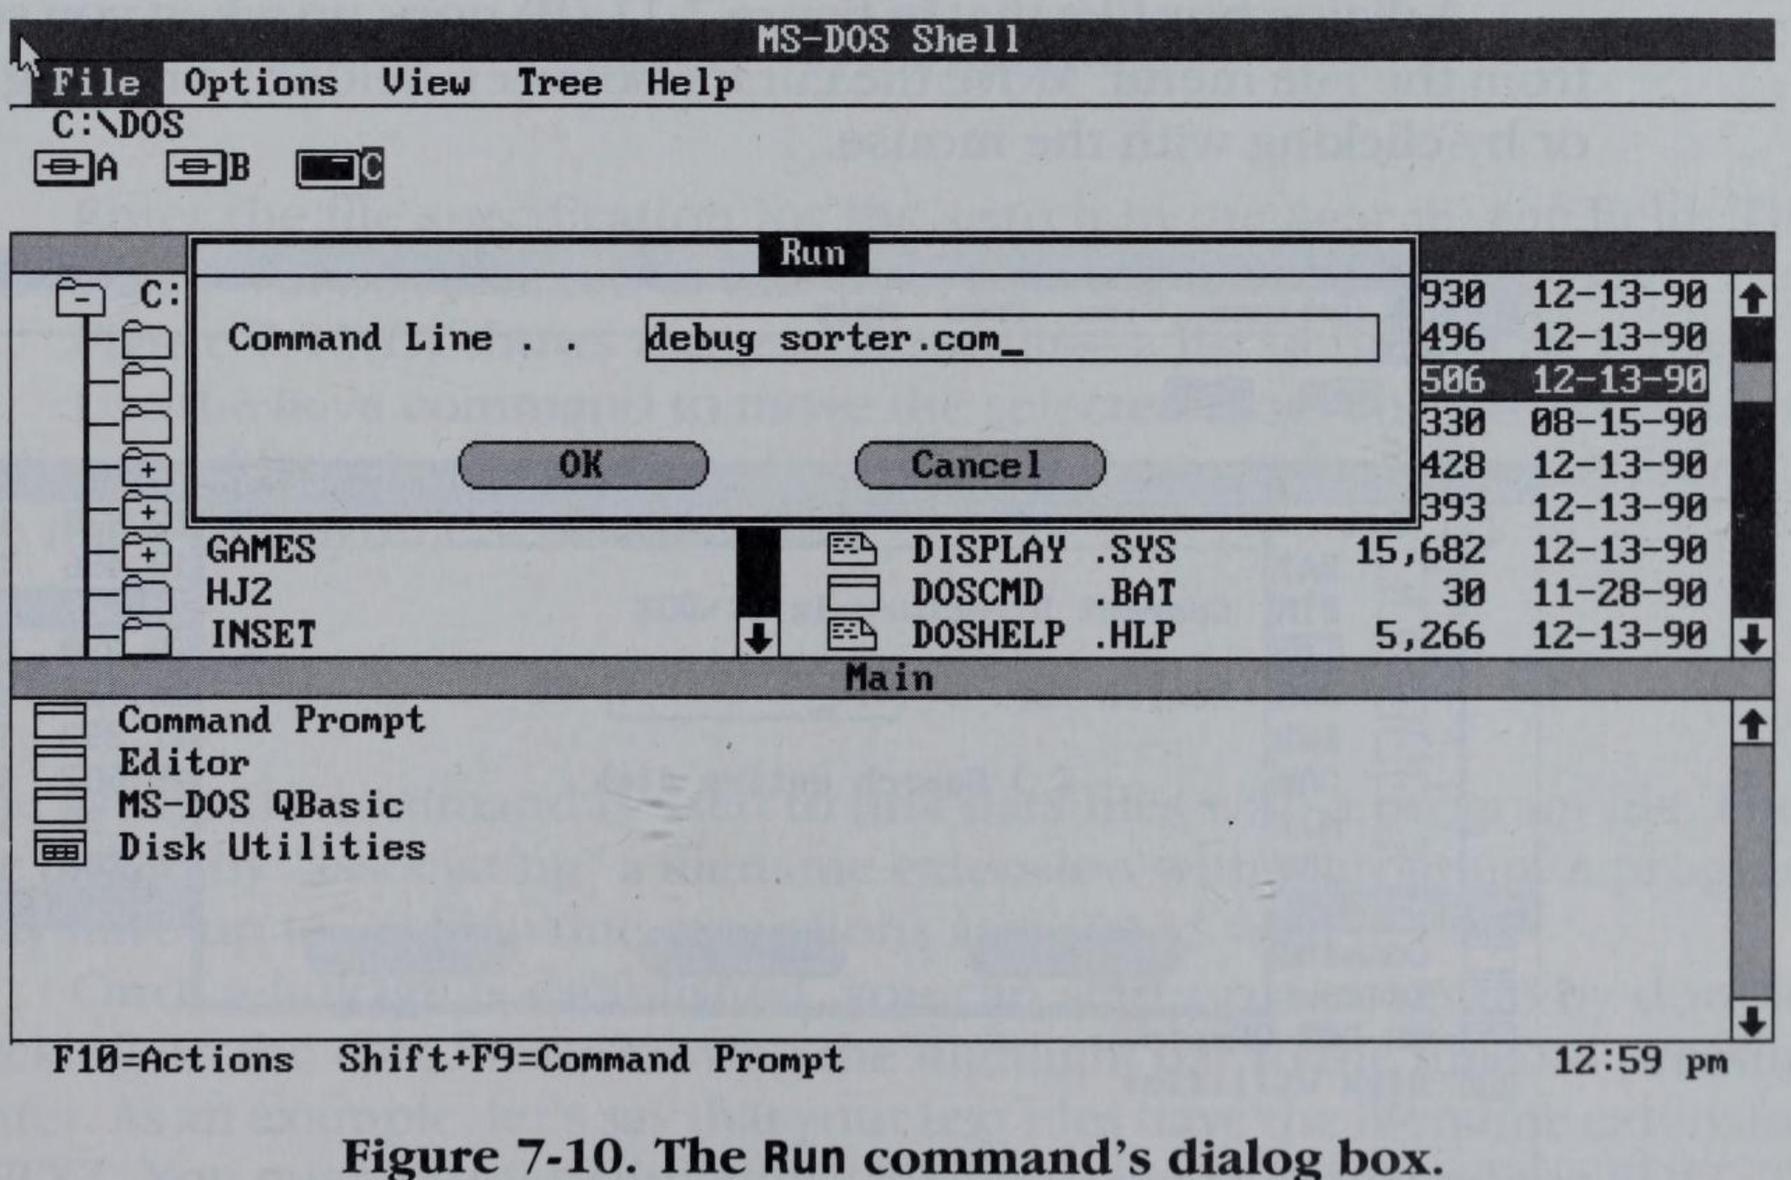

Figure 7-10. The Run command's dialog box.

Search

The Search command is used to locate files stored on the current disk drive. You can limit your search to the current directory or search the entire disk. You can search for a specific file, or you can use wildcards in your search. Any files matching your search criteria are displayed in a list. You can then select any or all of the files in the list for copying, deleting, moving, renaming, or any of the other operations performed using the File menu.

The Search command can be quite useful. The following example illustrates just one application. Let's say that you have many word processing documents scattered in several different directories on your disk. You decide it would be nice to place all (or some) of them in a single directory. The only way to do this from the command line would be to first locate each file, copy it to the common directory, and then delete the original. Instead, you carry out the entire procedure in just a few moments using Search.

The document files for my word processor do not have any filename extension. One strategy might be to use Search to locate all the files on the disk with no extension. I could then select the files resulting from that search that I wanted to move. Figure 7-11 (A) shows how this would work.

A dialog box like that in figure 7-11 (B) pops up when you select Search from the File menu. Move the cursor between fields by pressing the Tab key or by clicking with the mouse.

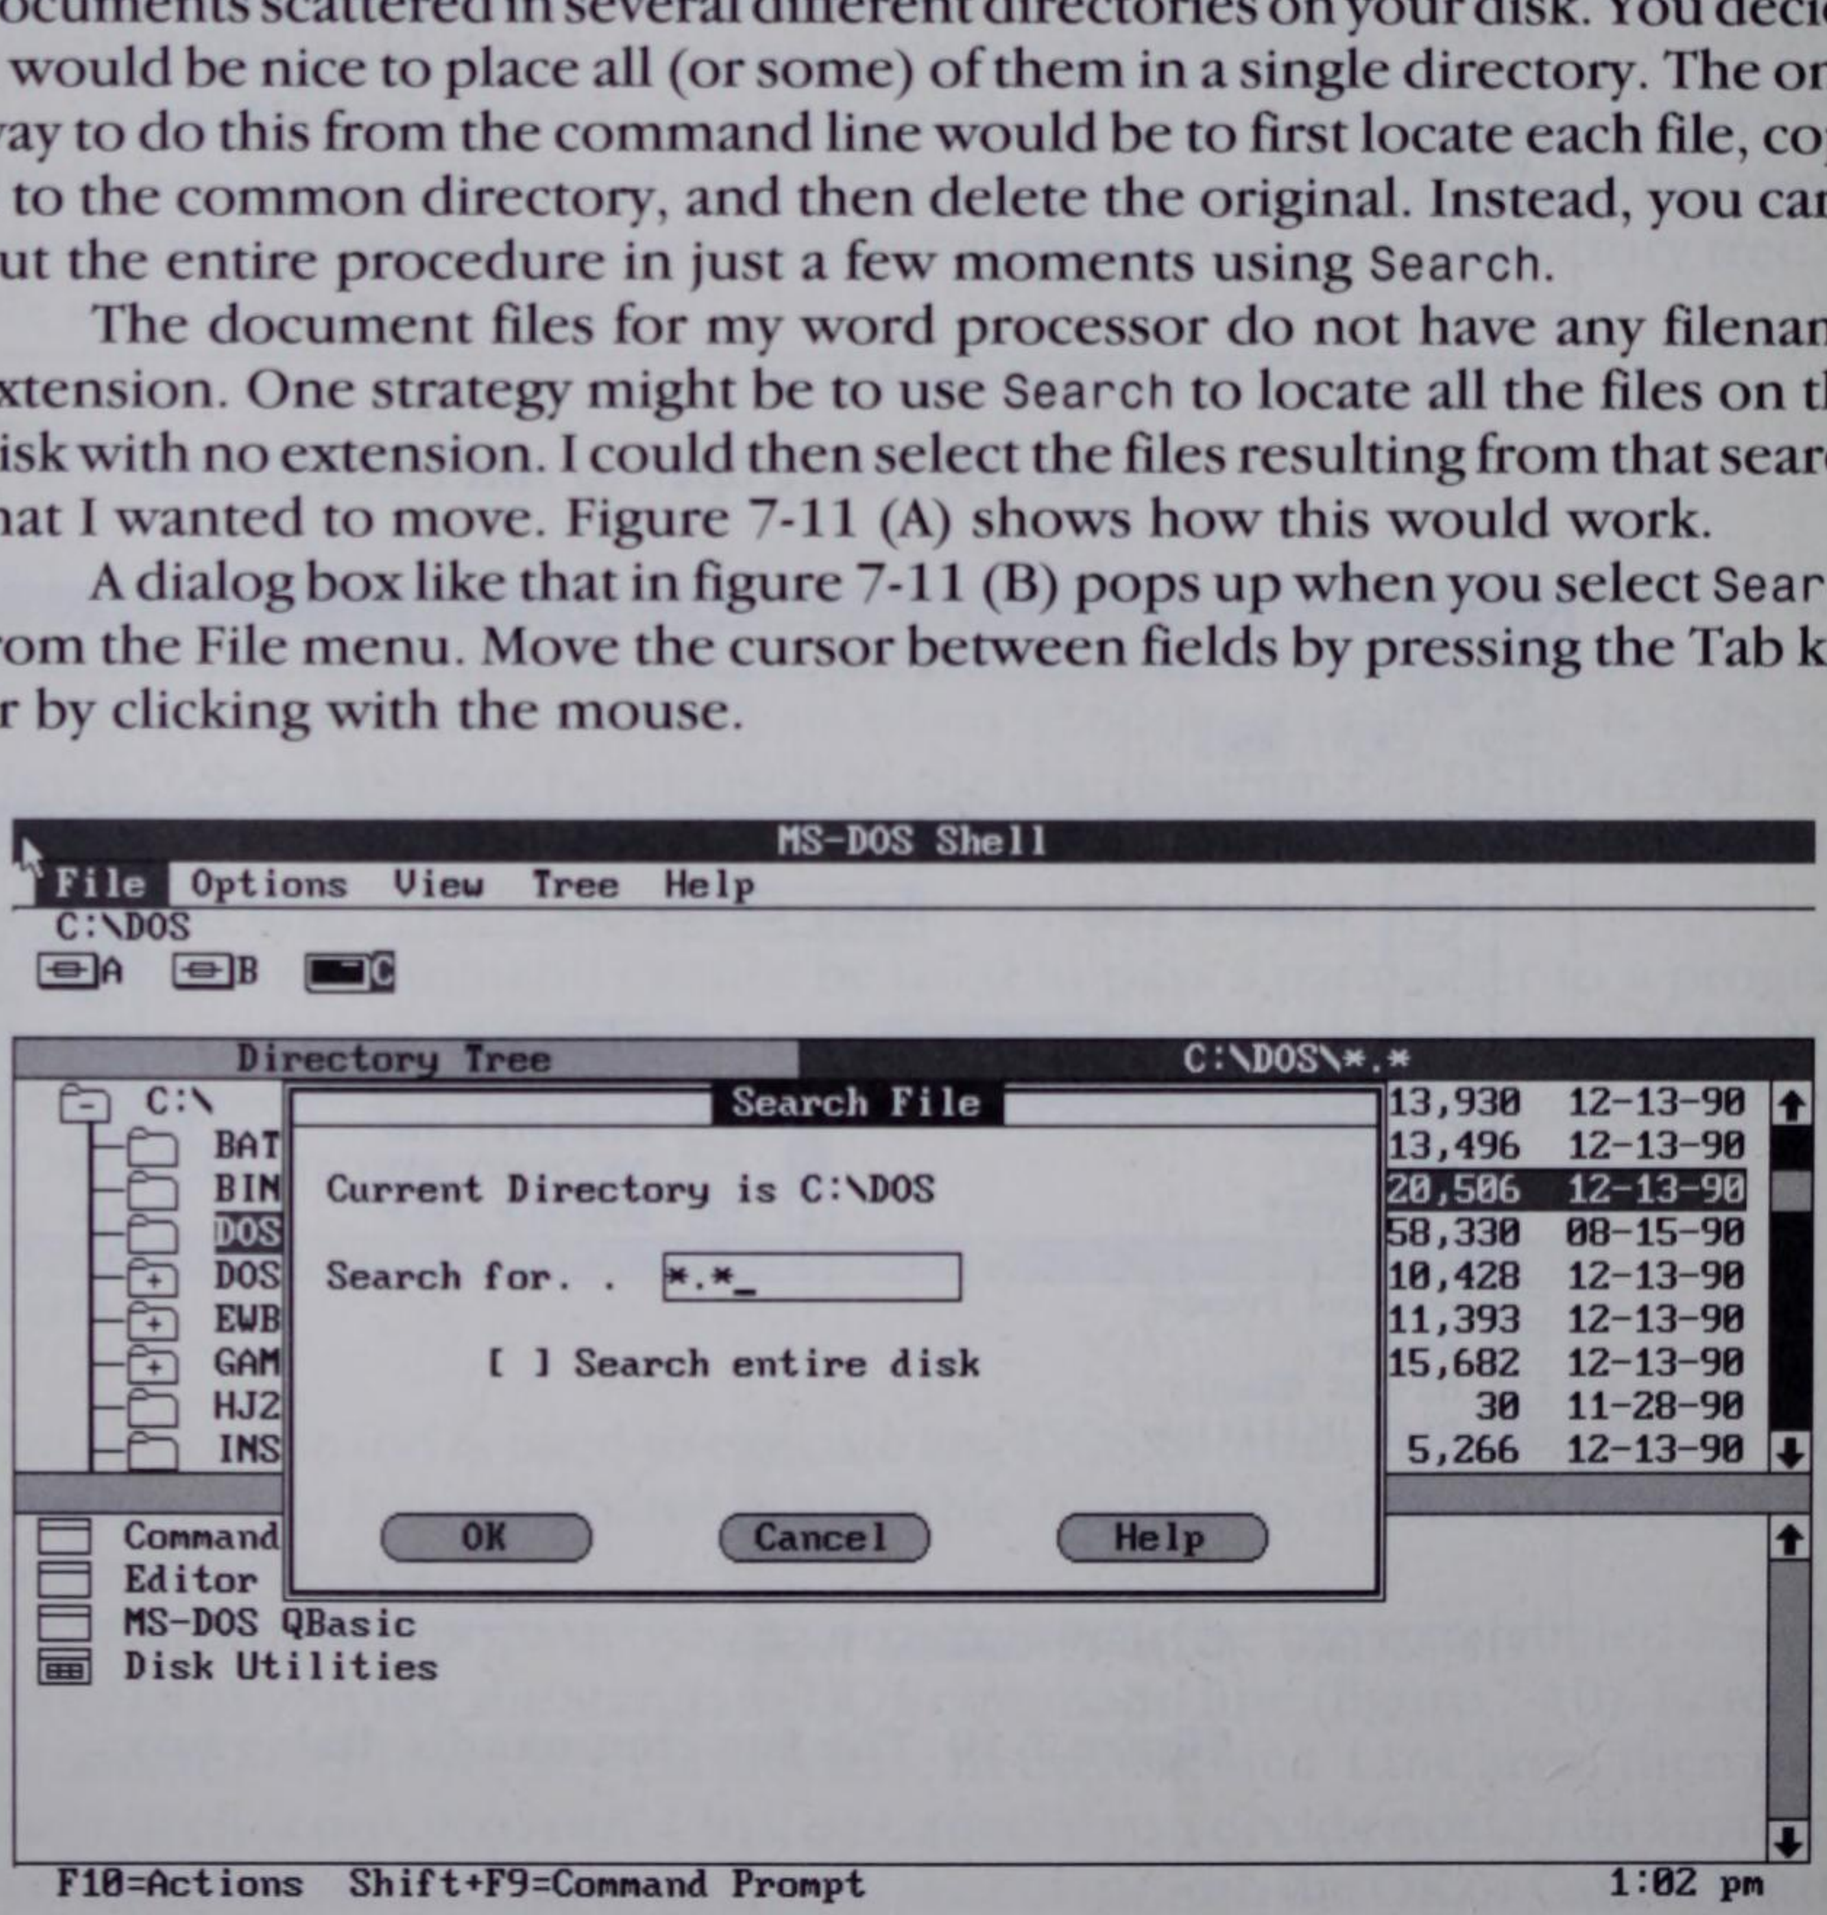

A. The default appearance of the Search File dialog box

Figure 7-11. The process of searching with the Search command.

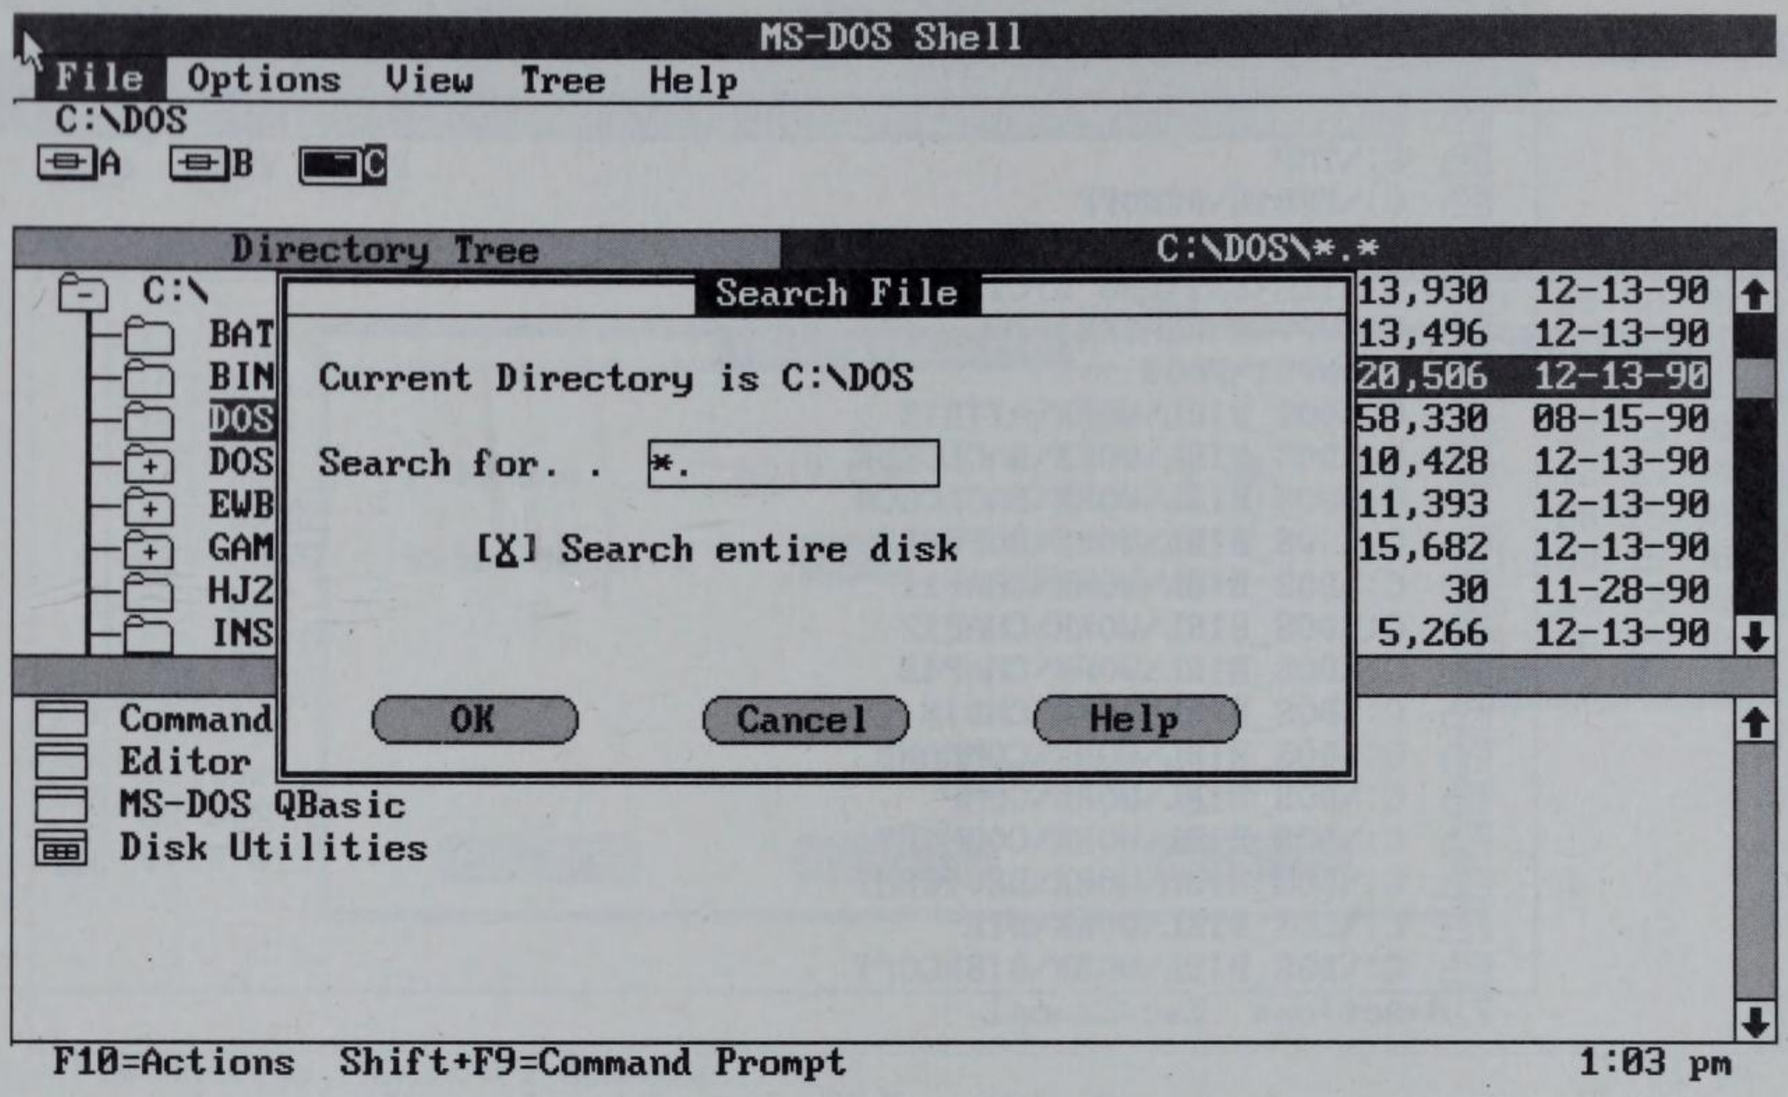

B. Specifying a search of the entire disk

Figure 7-11. Continued

Enter the file specification for the search in the `Search for` field. The entire disk will be searched in this case, because that box is checked.

Figure 7-11(C) shows the search results—a list of files to be moved.

Use the `Move` command to move the selected files. The `Move` command is discussed later in this section. Following the move, press Esc to return to the main DOSSHELL screen.

Associate

The `Associate` command is used to link data files with a program file. Files are linked by "associating" a filename extension with a program. A program may have up to 20 filename extensions associated with it.

Once a linkage is established, you can start up a program by double-clicking on the data file or moving the highlight bar to the file and pressing Enter. As an example, let's say that your text files have the filename extension of TXT. You might want to link those files with the DOS text editor EDIT. To do this, you would select a file with the TXT extension, open the File menu, and select the `Associate` command. A dialog box will pop up (figure 7-12) that you use to type in the name of the program file you wish to associate your TXT files with. You only need to enter the name of the program file if that file is in your DOS search path.

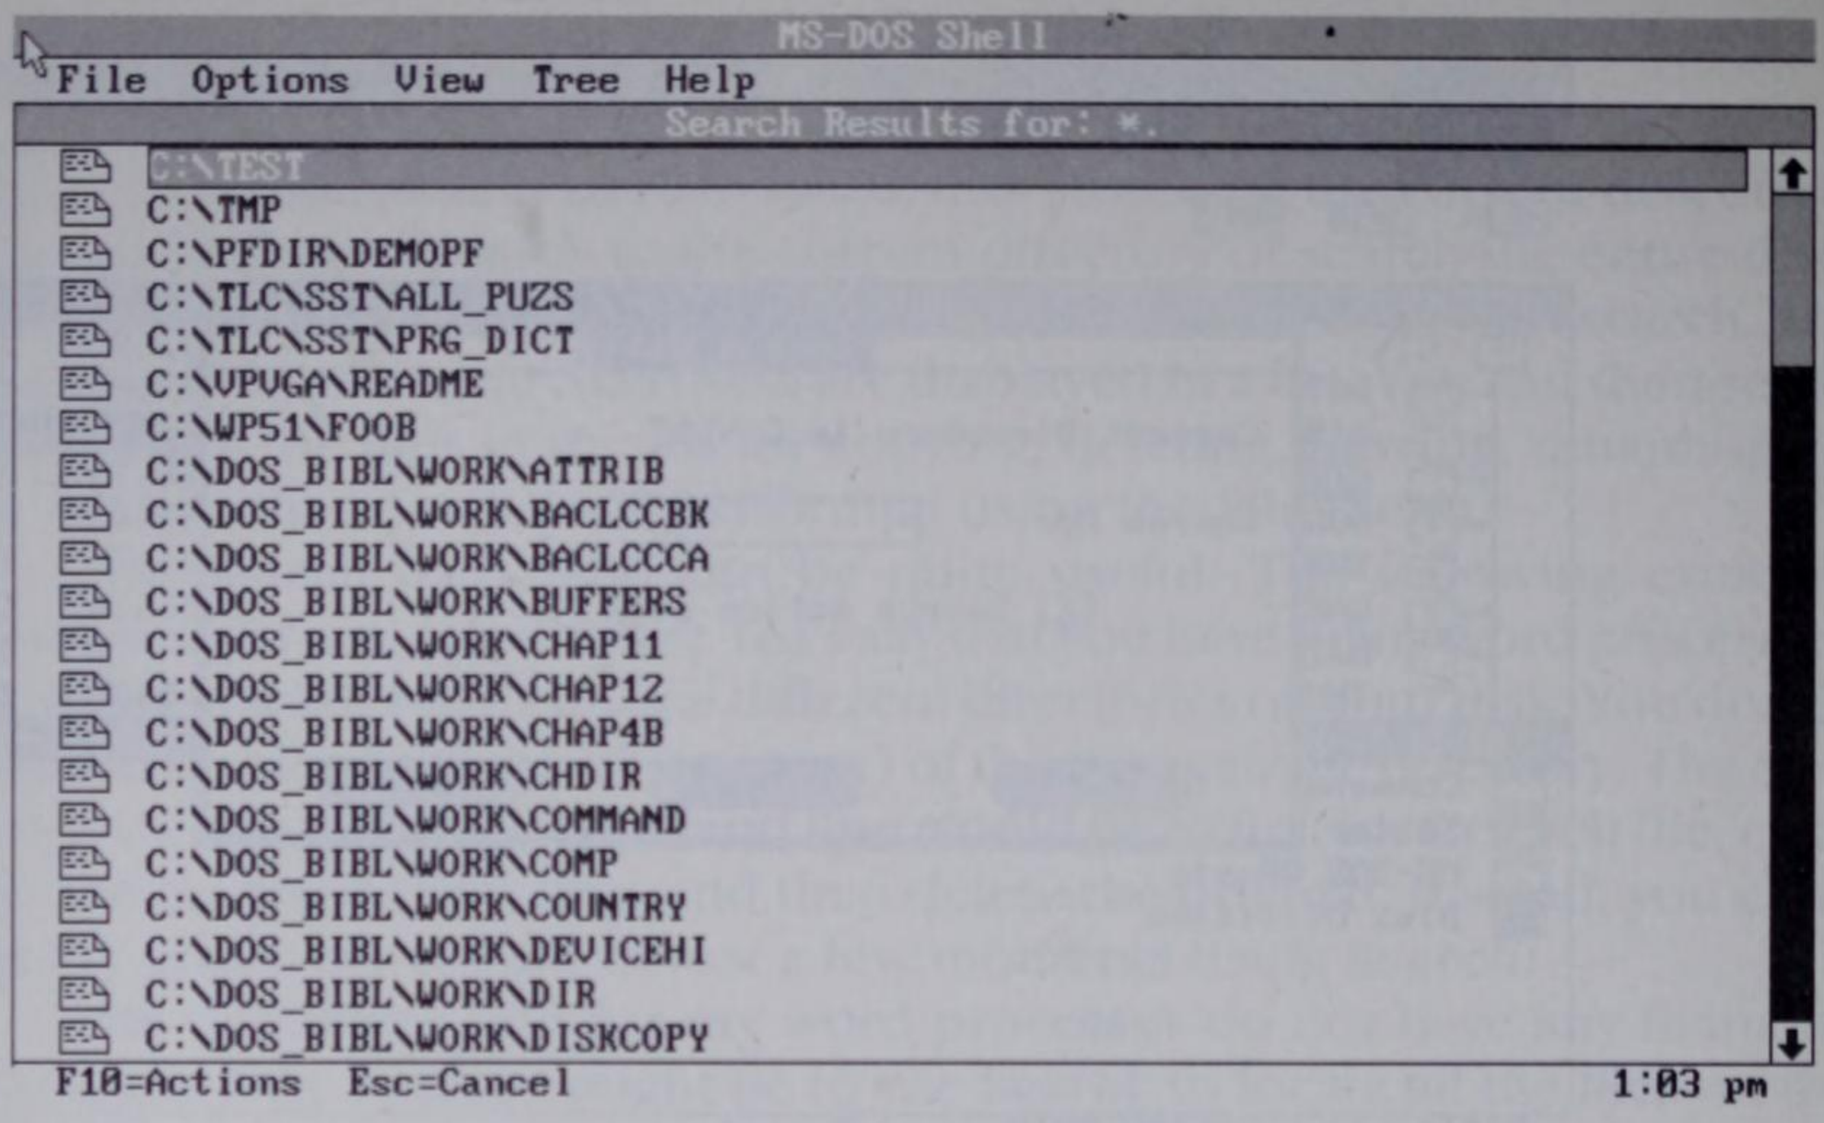

C. A list of files resulting from the search.

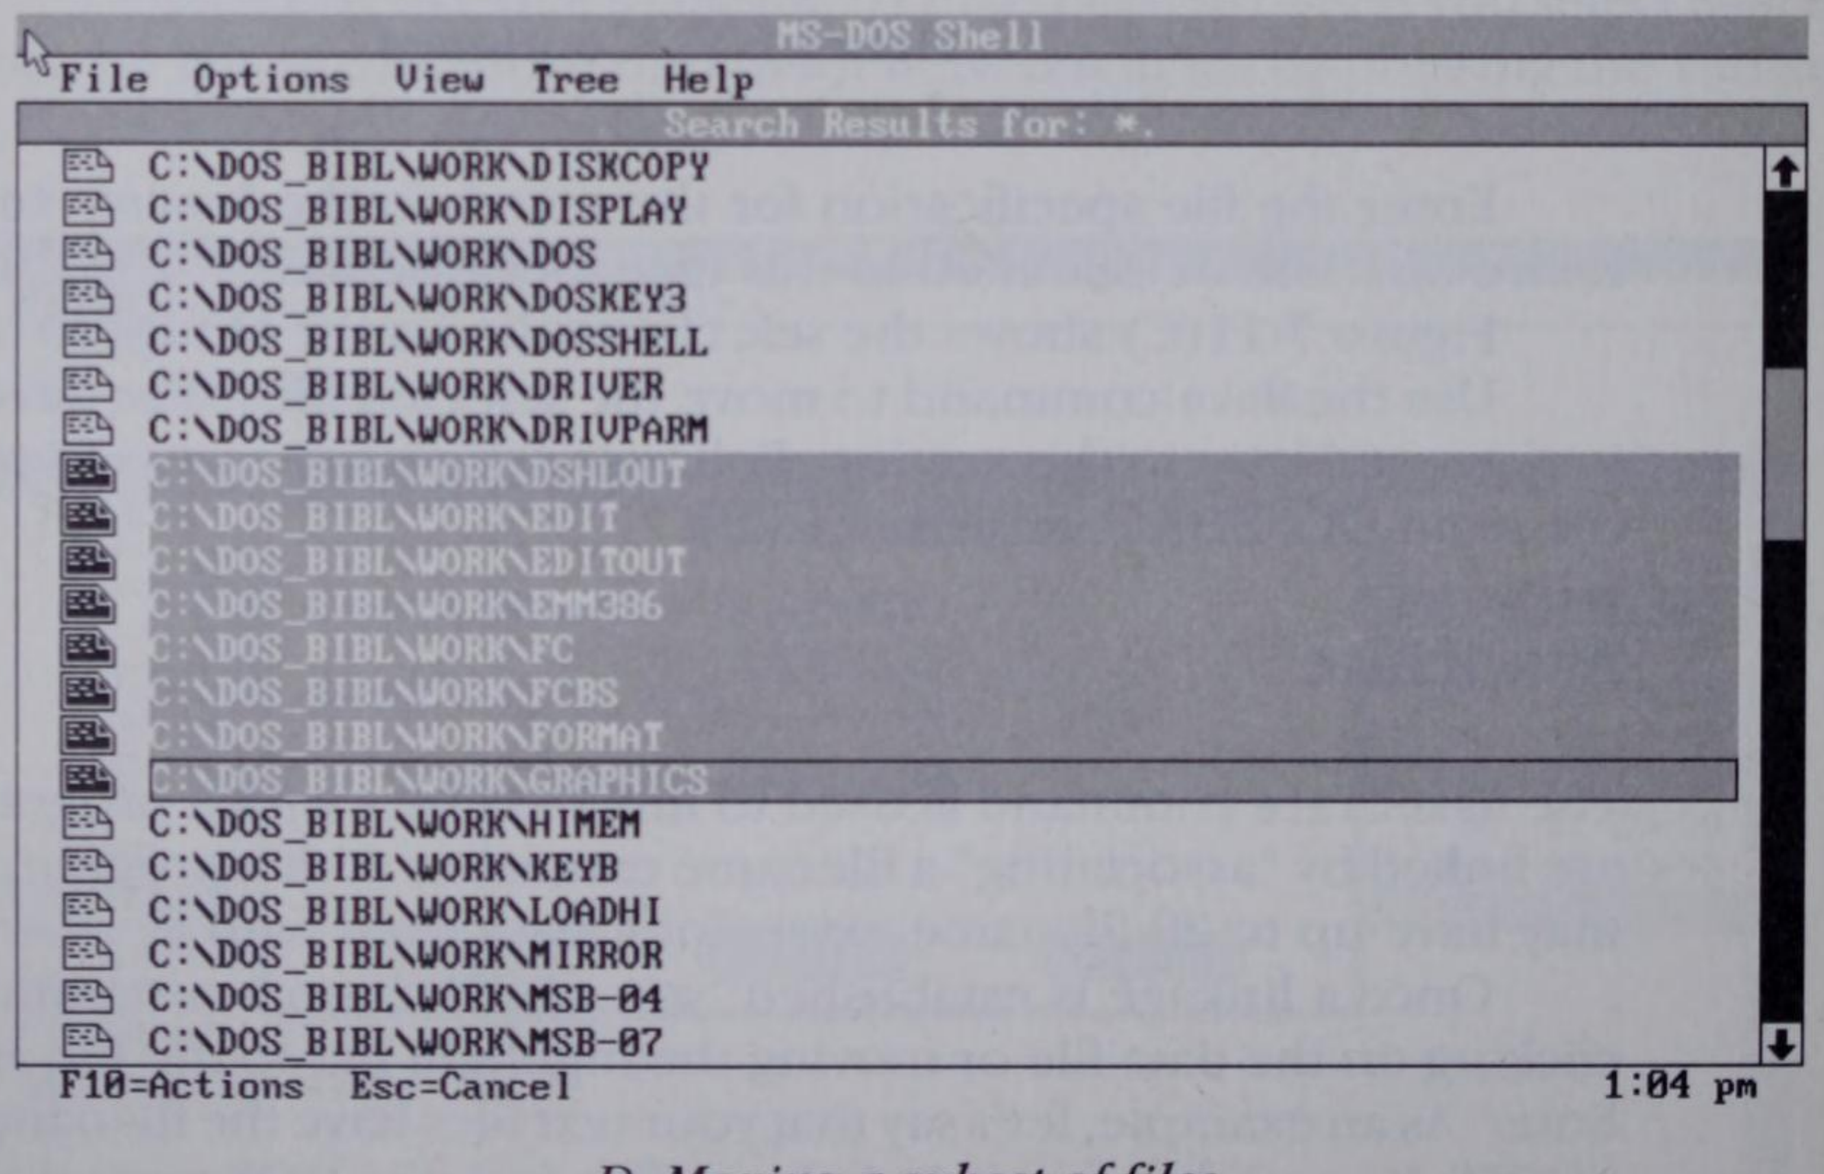

D. Moving a subset of files.

Figure 7-11. Continued

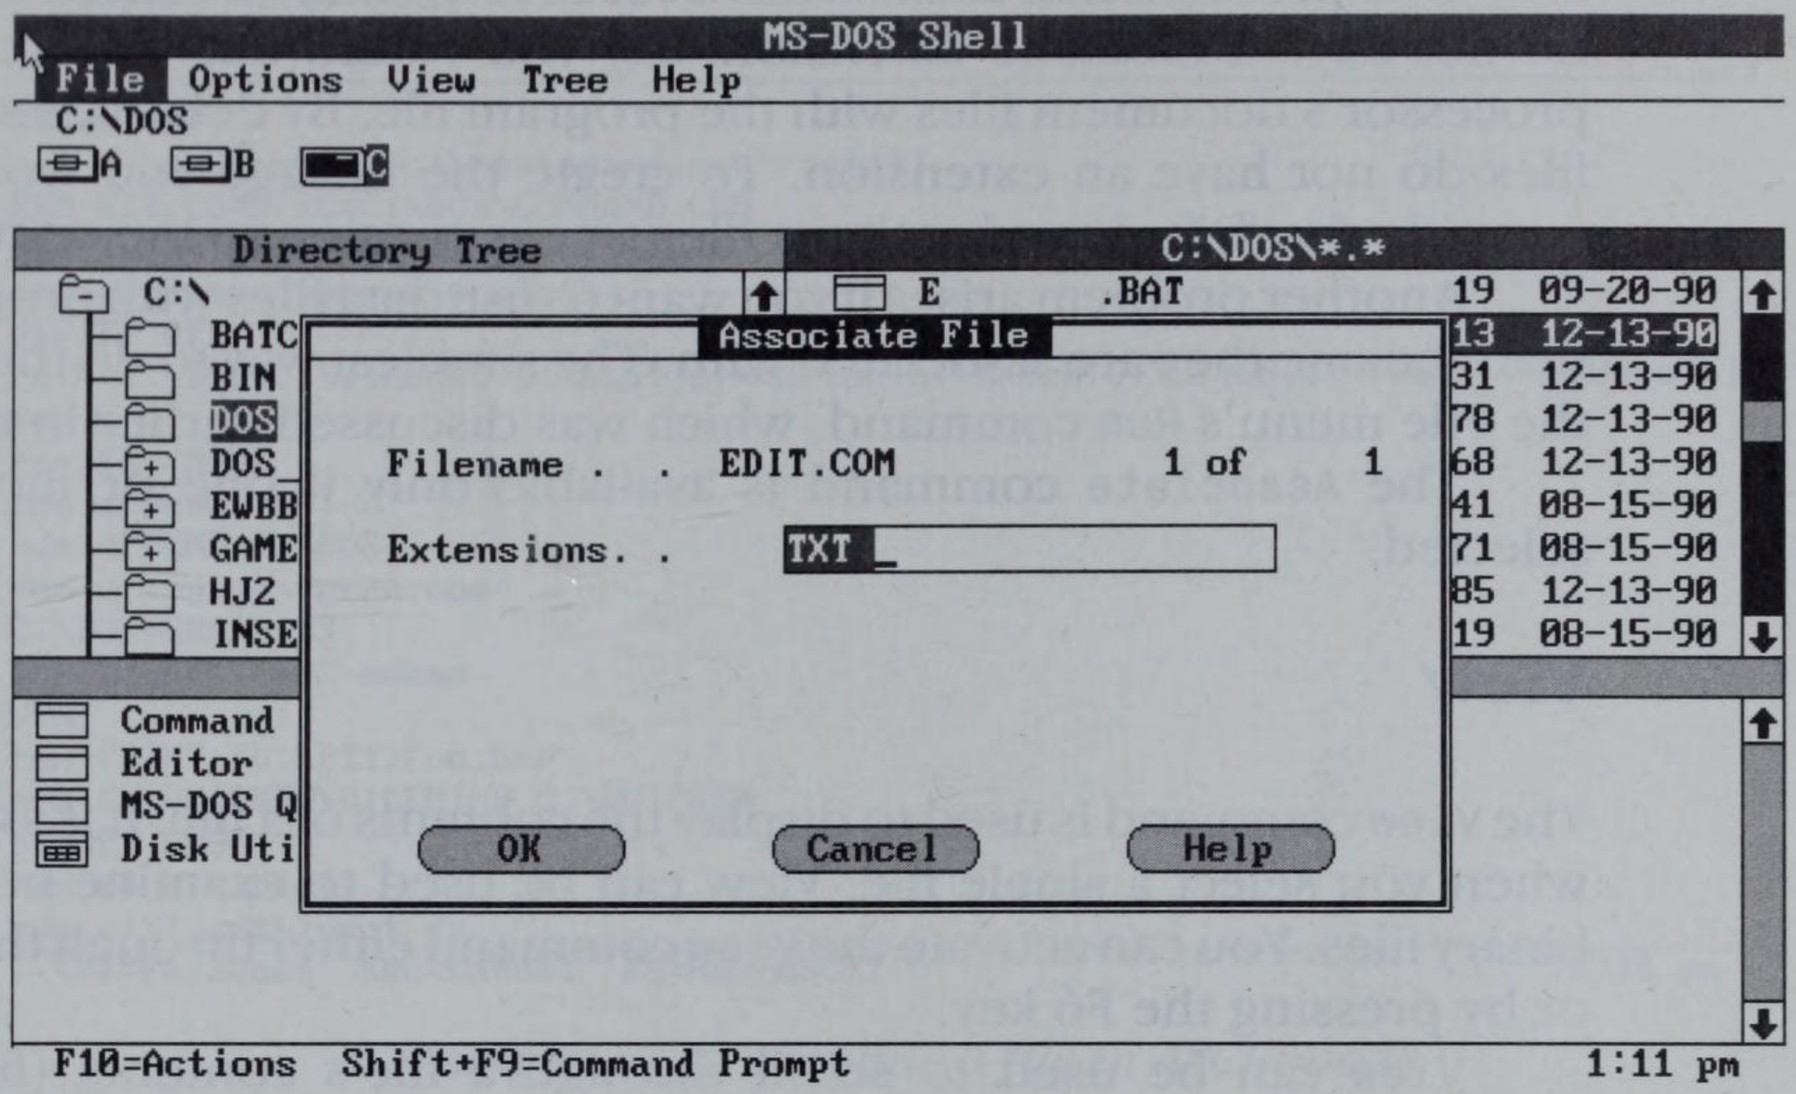

Figure 7-12. The Associate File dialog box.

TXT files are linked to C:\DOS\EDIT.COM.

As with other dialog boxes, you use the Tab key or the mouse to move the cursor from one field to another. Select OK to establish the association typed in. Select Cancel if you want DOSSHELL to ignore any typing that you have entered. As with most of the dialog boxes, a context-specific help display is also available.

A slightly different dialog box appears if you have selected a file with a COM or EXE extension. In this case you have selected a program (or executable) file and DOSSHELL assumes you want to specify data files to associate with the program. In this box you would just enter the extensions of the data files you want to associate with the selected program file. Remember that you can associate up to 20 extensions with a program file. Of course, you can't associate two different programs with the same file extension.

To change or delete an association, select a data file with the associated extension, open the Associate File dialog box, and edit or erase the program listed as being associated with that extension. You could also select the program file and edit the list of extensions that appears when you select `Associate`.

One problem that exists with `Associate` is that you cannot link files that do not have a filename extension. Say you would like to link your word processor's document files with the program file. By default, the document files do not have an extension. To create the linkage you would have to override the default and assign a filename extension to the document files.

Another problem arises if you want to use data files with programs other than the one they are associated with. The simplest way to do this is by using the File menu's `Run` command, which was discussed earlier in this section.

The `Associate` command is available only if one or more files are selected.

View

The `View` command is used to display the contents of a file. It is available only when you select a single file. View can be used to examine both text and binary files. You can activate the `View` command either through the File menu or by pressing the F6 key.

`View` can be used to scroll through a file's contents (figure 7-13). Scrolling can be controlled with the keyboard or the mouse. `View` also has the helpful feature of providing a toggle between ASCII display mode (which you commonly use for text files) and hexadecimal display mode (which is useful for binary files). Press F9 to toggle between ASCII and hexadecimal.

The leftmost column of figure 7-13(B) is the offset address into the file. The middle four columns are the file's contents in hexadecimal byte values. The rightmost column is a text display of the file's contents. Nonalphanumeric bytes are represented by a period.

Move and Copy

Use of the `Move` and `Copy` commands is very similar, so they will be discussed together. These commands are available whether you select one file or multiple files.

To move or copy a single file, simply select the file, choose the `Move` or `Copy` command from the File menu, and type in the full path specifier for the destination directory. When you have selected a set of files, you can also execute the `Move` command by pressing the F7 key or execute the `Copy` command by pressing F8.

```
                    MS-DOS Shell - AUTOEXEC.BAT
 Display  View  Help
   To view file's content use PgUp or PgDn or ↑ or ↓.
@ECHO OFF
rem c:\norton\ncc c:\norton\colors /setall
REM SET COMSPEC=C:\DOS\COMMAND.COM
rem loadhigh c:\utils\pushdir
set pcplus=c:\prgms\pcplus\
VERIFY OFF
PATH C:\DOS;C:\WINDOWS;C:\wp51;c:\norton;c:\batch;C:\UTILS;C:\PRGMS\PCPLUS;c:\lo
tus
rem FR /SAVE
rem append /e
rem APPEND C:\DOS
rem c:\vpvga\vpram.com
C:\DOS\GRAPHICS
loadhigh C:\DOS\mouse
VER
rem PRINT /D:LPT1>foo.bar
rem C:\QUICKEN\BILLMIND C:\QUICKEN
PROMPT $P$G
rem cd c:\inset
rem c:\inset\inset /s
  <┘=PageDown  Esc=Cancel  F9=Hex/ASCII                          1:14 pm
```

A. Using `View` *to examine a file in ASCII mode.*

```
                    MS-DOS Shell - AUTOEXEC.BAT
 Display  View  Help
   To view file's content use PgUp or PgDn or ↑ or ↓.
┌────────┬──────────┬──────────┬──────────┬──────────┬────────────────┐
│ 000000 │ 40454348 │ 4F204F46 │ 460D0A72 │ 656D2063 │ @ECHO OFF..rem c │
│ 000010 │ 3A5C6E6F │ 72746F6E │ 5C6E6363 │ 20633A5C │ :\norton\ncc c:\ │
│ 000020 │ 6E6F7274 │ 6F6E5C63 │ 6F6C6F72 │ 73202F73 │ norton\colors /s │
│ 000030 │ 6574616C │ 6C0D0A52 │ 454D2053 │ 45542043 │ etall..REM SET C │
│ 000040 │ 4F4D5350 │ 45433D43 │ 3A5C444F │ 535C434F │ OMSPEC=C:\DOS\CO │
│ 000050 │ 4D4D414E │ 442E434F │ 4D0D0A72 │ 656D206C │ MMAND.COM..rem l │
│ 000060 │ 6F616468 │ 69676820 │ 633A5C75 │ 74696C73 │ oadhigh c:\utils │
│ 000070 │ 5C707573 │ 68646972 │ 0D0A7365 │ 74207063 │ \pushdir..set pc │
│ 000080 │ 706C7573 │ 3D633A5C │ 7072676D │ 735C7063 │ plus=c:\prgms\pc │
│ 000090 │ 706C7573 │ 5C0D0A56 │ 45524946 │ 59204F46 │ plus\..VERIFY OF │
│ 0000A0 │ 460D0A50 │ 41544820 │ 433A5C44 │ 4F533B43 │ F..PATH C:\DOS;C │
│ 0000B0 │ 3A5C5749 │ 4E444F57 │ 533B433A │ 5C777035 │ :\WINDOWS;C:\wp5 │
│ 0000C0 │ 313B633A │ 5C6E6F72 │ 746F6E3B │ 633A5C62 │ 1;c:\norton;c:\b │
│ 0000D0 │ 61746368 │ 3B433A5C │ 5554494C │ 533B433A │ atch;C:\UTILS;C: │
│ 0000E0 │ 5C505247 │ 4D535C50 │ 43504C55 │ 533B633A │ \PRGMS\PCPLUS;c: │
│ 0000F0 │ 5C6C6F74 │ 75730D0A │ 72656D20 │ 4652202F │ \lotus..rem FR / │
│ 000100 │ 53415645 │ 0D0A7265 │ 6D206170 │ 70656E64 │ SAVE..rem append │
│ 000110 │ 202F650D │ 0A72656D │ 20415050 │ 454E4420 │  /e..rem APPEND  │
│ 000120 │ 433A5C44 │ 4F530D0A │ 72656D20 │ 633A5C76 │ C:\DOS..rem c:\v │
│ 000130 │ 70766761 │ 5C767072 │ 616D2E63 │ 6F6D0D0A │ pvga\vpram.com.. │
  <┘=PageDown  Esc=Cancel  F9=Hex/ASCII                          1:14 pm
```

B. The same file displayed in hexadecimal mode.

Figure 7-13. Different views of a file.

The real power of `Move` and `Copy` is in their capability to copy or move a set of files. The operation illustrated in figure 7-13 is an example of the flexibility that is available when you use `Move` and `Copy`.

DOS wildcards provide some capability for set selection of files from the DOS command line, but this feature is rather limited. The files selected must all be in the same directory, and their filenames must be similar enough so that they can be specified with the * and ? characters.

Later in this section we will discuss how to use the Options menu to configure DOSSHELL so that it either asks you or does not ask you to confirm copy and move operations that replace one version of a file with another.

A major problem sometimes arises when `Copy` or `Move` is used to copy (or move) files to a floppy disk. If the disk fills up before all of the selected files are copied, DOSSHELL displays a message that the disk is full and presents you with two commands. The first command is to skip the next file in the set of selected files as it is too big to fit on the disk. The second option is to cancel the operation. Obviously, neither of these choices is satisfactory. What DOSSHELL should enable you to do is simply put a new disk in and finish the operation. But if you try to do that, you get the somewhat puzzling message `Path not found`. Evidently disk swapping confuses DOS and it doesn't know where to write on the new disk. This limitation is so striking and so unreasonable that Microsoft will almost certainly have to correct it in future implementations of DOSSHELL.

With DOSSHELL you can copy or move a single selected file by dragging with the mouse. Select the file. Then, keeping the mouse pointer on the selected file, hold down the Alt key and the mouse's select button. Keeping both keys down, drag the mouse pointer to the directory or drive letter where you want to move the file. Release the mouse button *first* to complete the operation. The procedure for copying a file is identical, except you use the Ctrl key in place of Alt.

If you use the dragging method for copying or moving files, you may find it easier if you set DOSSHELL display mode with `Dual File Lists`. Use this View menu command to set the display mode, as discussed earlier in this section. The reason the Dual File Lists mode may be easier is that dragging does not work well unless both the source directory and destination directory are in view prior to starting the operation.

You hold down both the Ctrl key and the mouse selection key for a copy operation. Notice the change in the mouse pointer. Also notice the text in the lower left that indicates where the file is being copied. When you use the `Dual File Lists` display, you can have both the source and destination files in view prior to starting the copy.

Later, this section discusses how to use the Options menu to configure DOSSHELL to either ask you or not ask you to confirm mouse operations.

Delete and Rename

Use of the `Delete` and `Rename` commands is very similar, so they are discussed together. These commands are available whether you select one file or multiple files.

The first step in deleting a file or a set of files is to select the files for deletion. Then you execute the `Delete` command either through the File menu or by pressing the Del key. DOSSHELL will ask you to confirm that you want to execute the deletion operation. If you confirm that you want to delete the selected file(s) as a group, DOSSHELL will then ask you to confirm the deletion for each individual file that is selected. Each individual confirmation results in deletion of the corresponding file. You can use the Options menu commands to configure DOSSHELL so that the second confirmation is bypassed, in which case the entire set of selected files will be deleted after the first confirmation. The Options menu is discussed later in this section.

Renaming a file is similar. For each selected file, DOSSHELL displays the file's name and asks you to enter the new name.

The `Delete` and `Rename` commands are also available when no files are selected. In such a case the commands serve to delete or rename the current directory. As is the case with the command line versions of the DELETE command, directories can be deleted only if they are empty, and the root directory is not deletable.

Change Attributes

Each DOS file has a set of characteristics known as *attributes*. These attributes are recorded, along with other information about each file, in the file directory. Among other things, attributes control whether a file can be modified and whether a file is visible in directory listings. Detailed information about file directories is provided in chapter 10.

The DOS command ATTRIB allows you to modify a file's attributes. You can also modify attributes from DOSSHELL's File menu using the enhanced file selection capabilities discussed in this chapter. The `Change Attributes` command is available when one or more files is selected.

When you choose `Change Attributes` with a single file selected, a dialog box pops up displaying the file's current attributes (figure 7-14). To change an attribute, move the highlight bar to the attribute and press the space bar. If the attribute is "on," pressing the space bar will turn it "off," and vice versa.

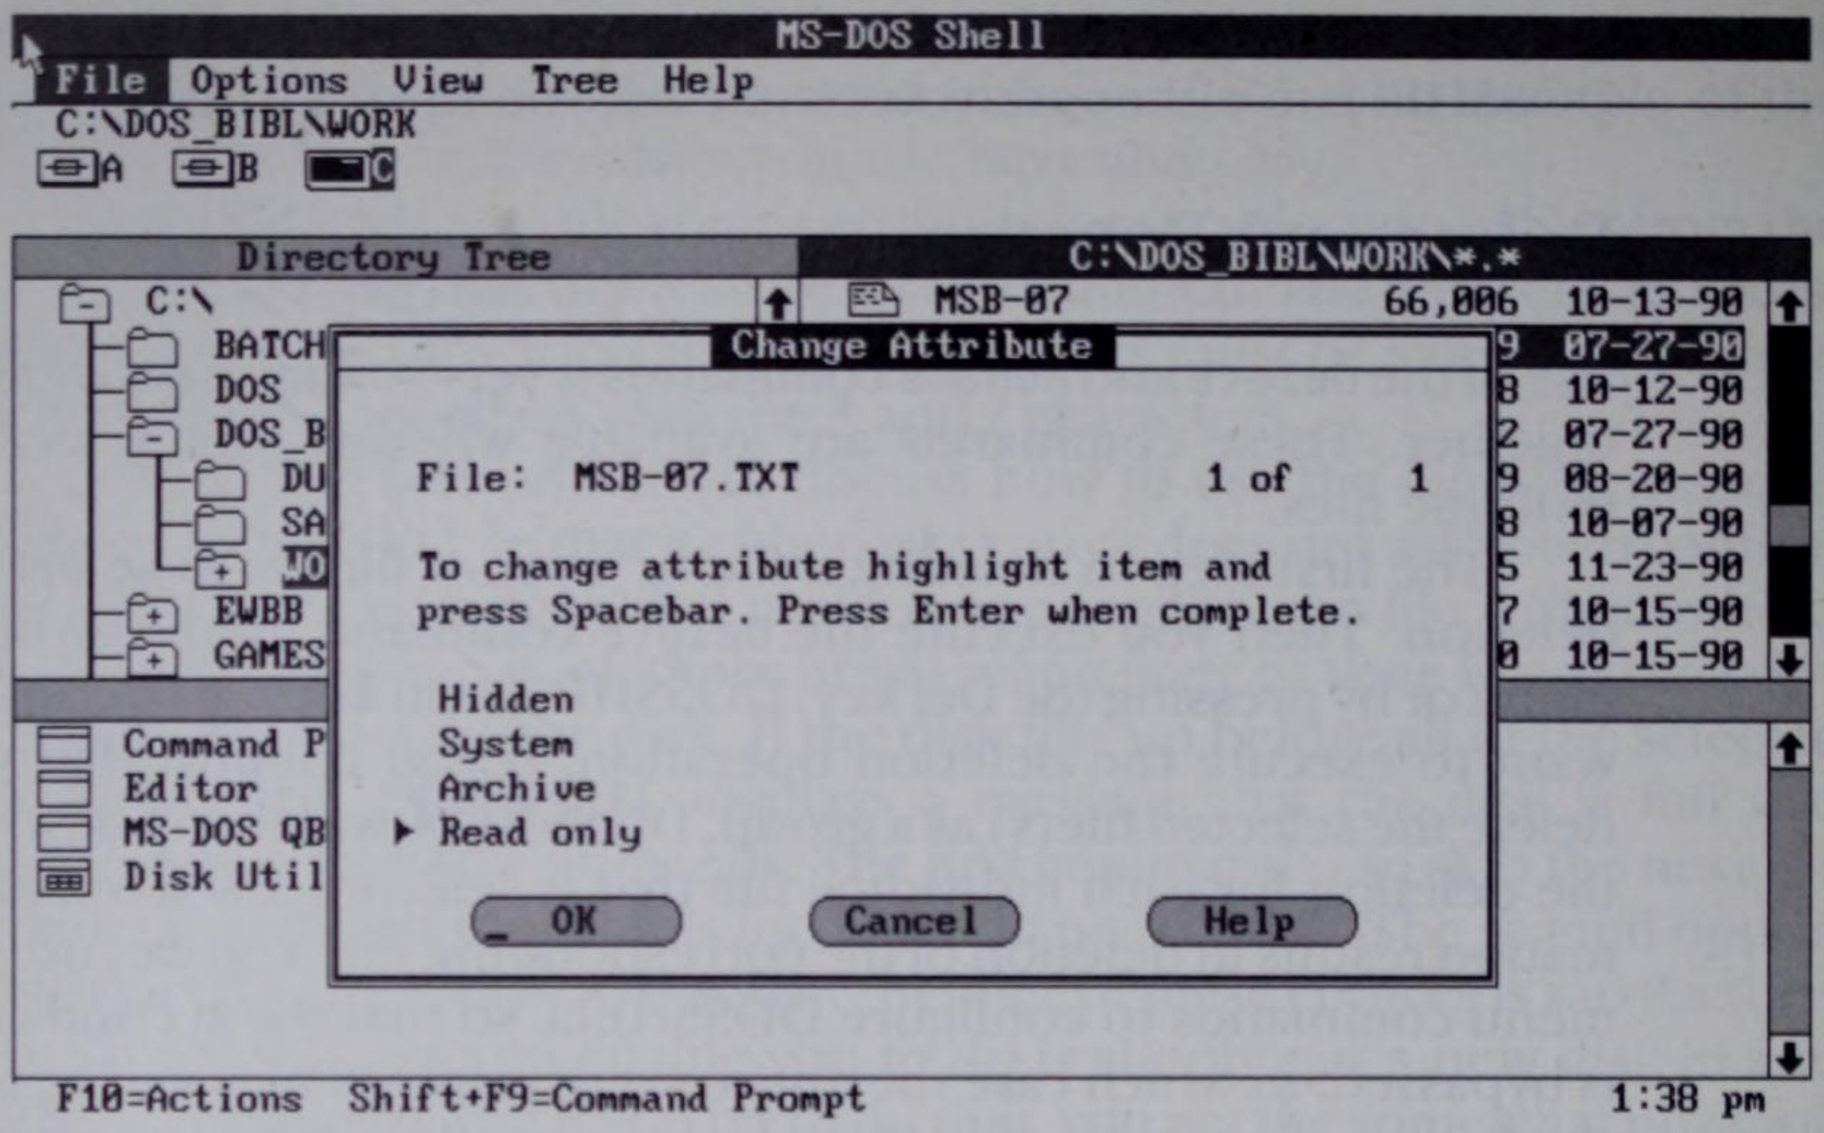

Figure 7-14. Change Attributes.

The MSB-07.TXT file's read only attribute is "on."

If more than one file is selected, DOSSHELL will ask whether you want to change the attributes individually for each file or collectively for the set. If you answer individually, the attributes of each file are displayed, and you can change them one at a time. If you answer collectively, all of the files will be assigned the same set of attributes. This extra control is a nice feature and is the major advantage in changing attributes from DOSSHELL rather than from the command line with ATTRIB.

Select All and Deselect All

The `Select All` command selects all of the files in the current directory. You can also select all of the files by simultaneously pressing Ctrl and the forward slash key (/). `Select All` is useful if you want to perform an operation on all the files in a directory such as copying them all or changing their attributes.

The `Deselect All` command deselects all of the currently selected files. You can also deselect all files by pressing Ctrl-\. `Deselect All` is particularly useful if you have files selected in several directories and you decide to deselect them. Without the `Deselect All` command, you would need to go through each of the directories to deselect the files.

Exit

The `Exit` command is used to terminate DOSSHELL and return to the command line interface. You can also terminate DOSSHELL by pressing Alt and F4 or by pressing F3.

DOSSHELL cannot be terminated when there are programs in the Active Task List. The Active Task List is discussed later in this chapter.

Remember that the File menu commands presented so far are displayed when the disk drive, directory tree, or file selection area is active. The discussion that follows covers the File menu commands that are displayed when the program selection area is active. This means that you are ready to work with DOSSHELL programs. This discussion also clarifies what DOSSHELL programs are and how you can create DOSSHELL programs to suit your own needs. Figure 7-15 shows the File menu commands displayed when the program selection area is active.

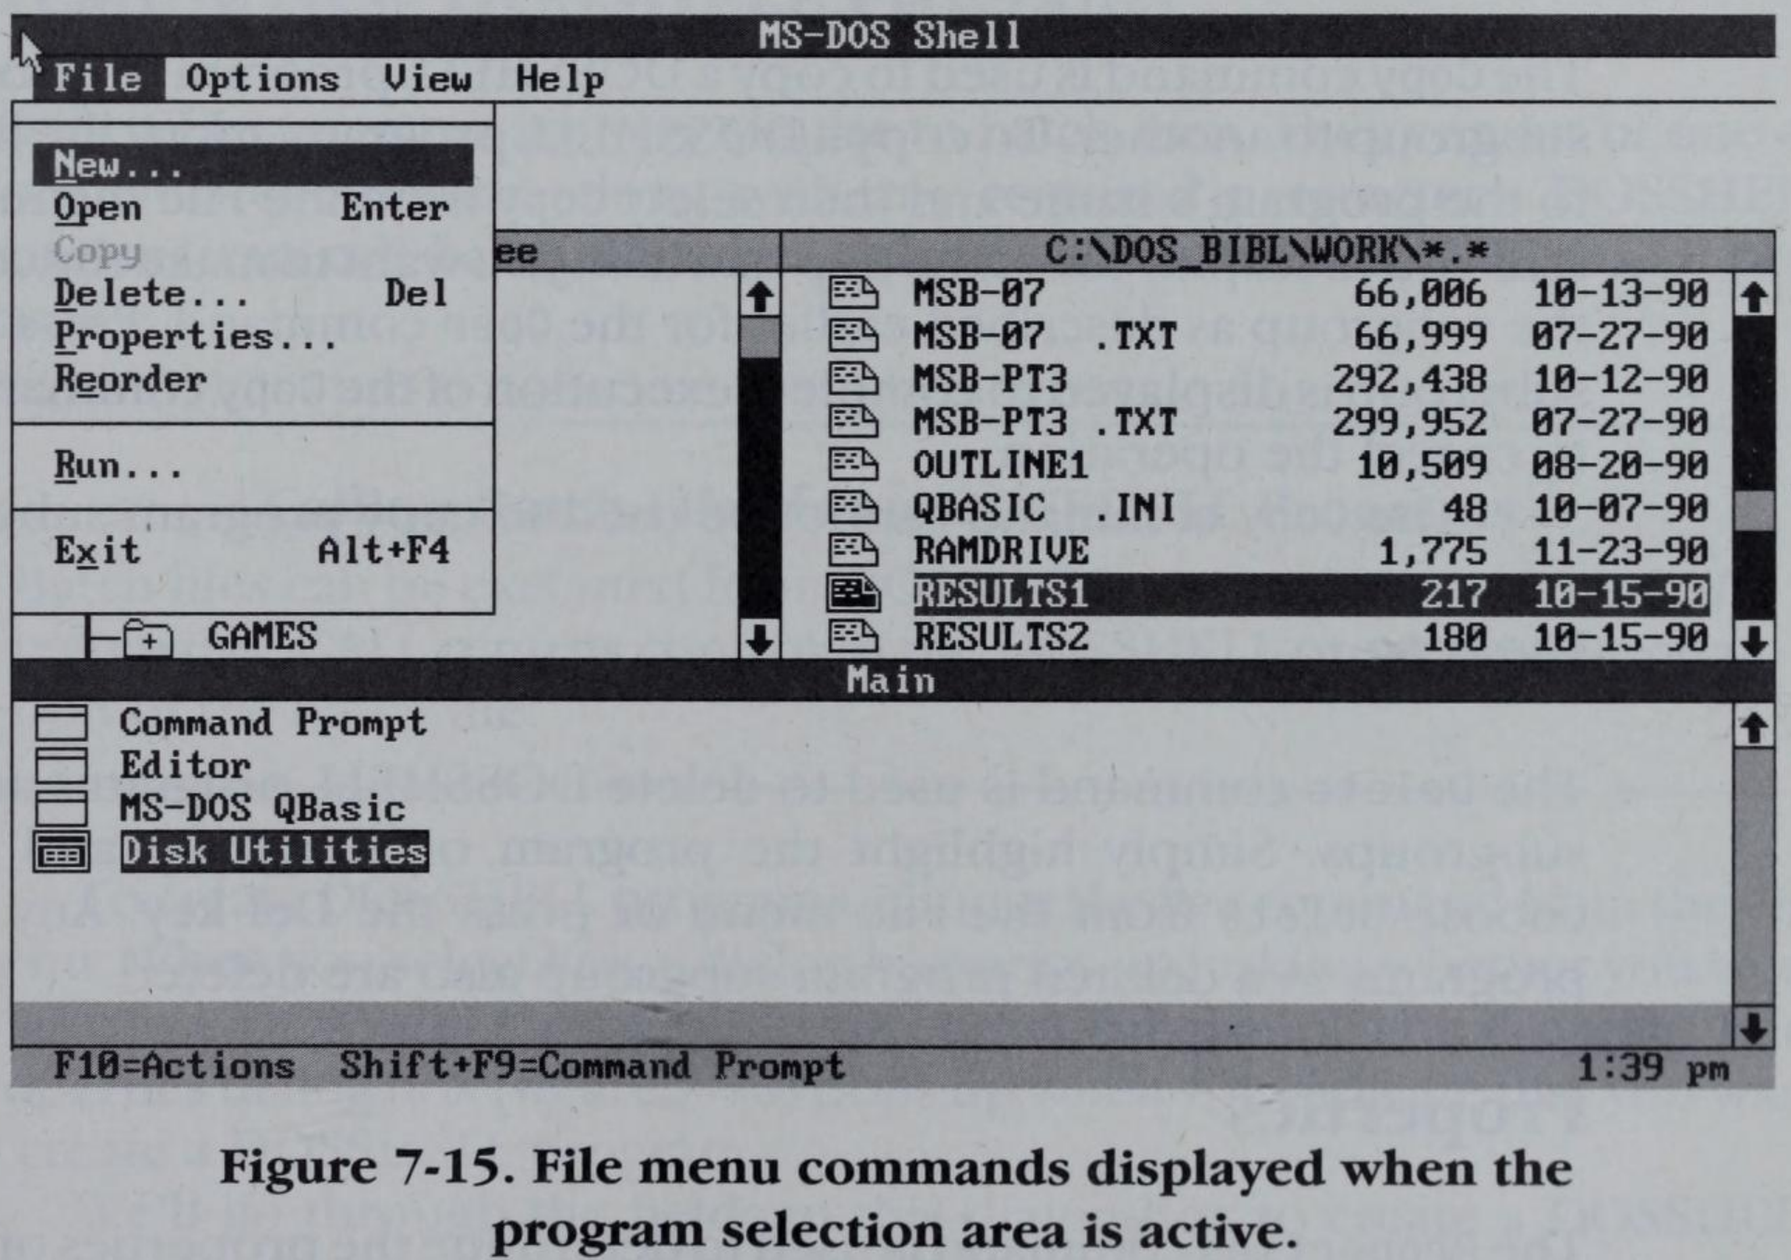

Figure 7-15. File menu commands displayed when the program selection area is active.

New

The New command is used to create DOSSHELL programs and DOSSHELL program subgroups. Use of this command is discussed in Creating DOSSHELL Programs.

Open

The Open command can be used to execute a DOSSHELL program or to display a list of the programs in a program subgroup. Move the highlight bar to the program you wish to execute or the subgroup you wish to display, then select Open from the File menu. Double-clicking with the mouse or pressing the Enter key produces the same results as selecting Open.

Copy

The Copy command is used to copy a DOSSHELL program from one program subgroup to another. To copy a DOSSHELL program, move the highlight bar to the program's name and then select Copy from the File menu. A message tells you to display the subgroup to which you want to make the copy. Display the subgroup as described earlier for the Open command. Press F2 once the subgroup is displayed to complete execution of the Copy command. Press Esc to cancel the operation.

The Copy command cannot be used to copy program subgroups.

Delete

The Delete command is used to delete DOSSHELL programs and program subgroups. Simply highlight the program or subgroup and then either choose Delete from the File menu or press the Del key. Any DOSSHELL programs in a deleted program subgroup also are deleted.

Properties

The Properties command is used to determine the properties of DOSSHELL programs and subgroups. It is also used to modify these properties. Use of the Properties command is discussed in Modifying DOSSHELL Programs.

Reorder

`Reorder` is used to change the position of DOSSHELL programs and program subgroups in the program selection area. Highlight the program or subgroup you want to move in the list. Choose `Reorder` from the File menu and then use the mouse or cursor keys to position the cursor at the new location in the list. Press Enter to move the program or subgroup's name. Press Esc to cancel the operation.

Run and Exit

The use of the `Run` and `Exit` commands remains the same under the file and program selection areas. Refer to the discussion of these commands earlier in this section.

Creating New DOSSHELL Programs

DOSSHELL programs are very similar to batch files. They consist of one or more DOS commands, along with any required parameters. DOSSHELL programs can call batch files, but batch files cannot call DOSSHELL programs.

> **Calling Batch Files from DOSSHELL Programs**
>
> Batch files can be executed from DOSSHELL programs using the CALL command. CALL returns control to the DOSSHELL program on execution of the batch file.

To create DOSSHELL programs, choose the `New` command from the File menu. When you select `New`, a dialog box pops up, asking whether you want to create a DOSSHELL program or program subgroup. The Program Item Properties dialog box (figure 7-16) pops up when you indicate that you want to create a DOSSHELL program.

We'll go through the fields in this dialog box to create a DOSSHELL program that starts up a word processor and prompts you for the name of the document file to edit. As with other DOSSHELL dialog boxes, remember that you use the Tab key or the mouse to move from one field to the next. Pressing Enter closes the dialog box.

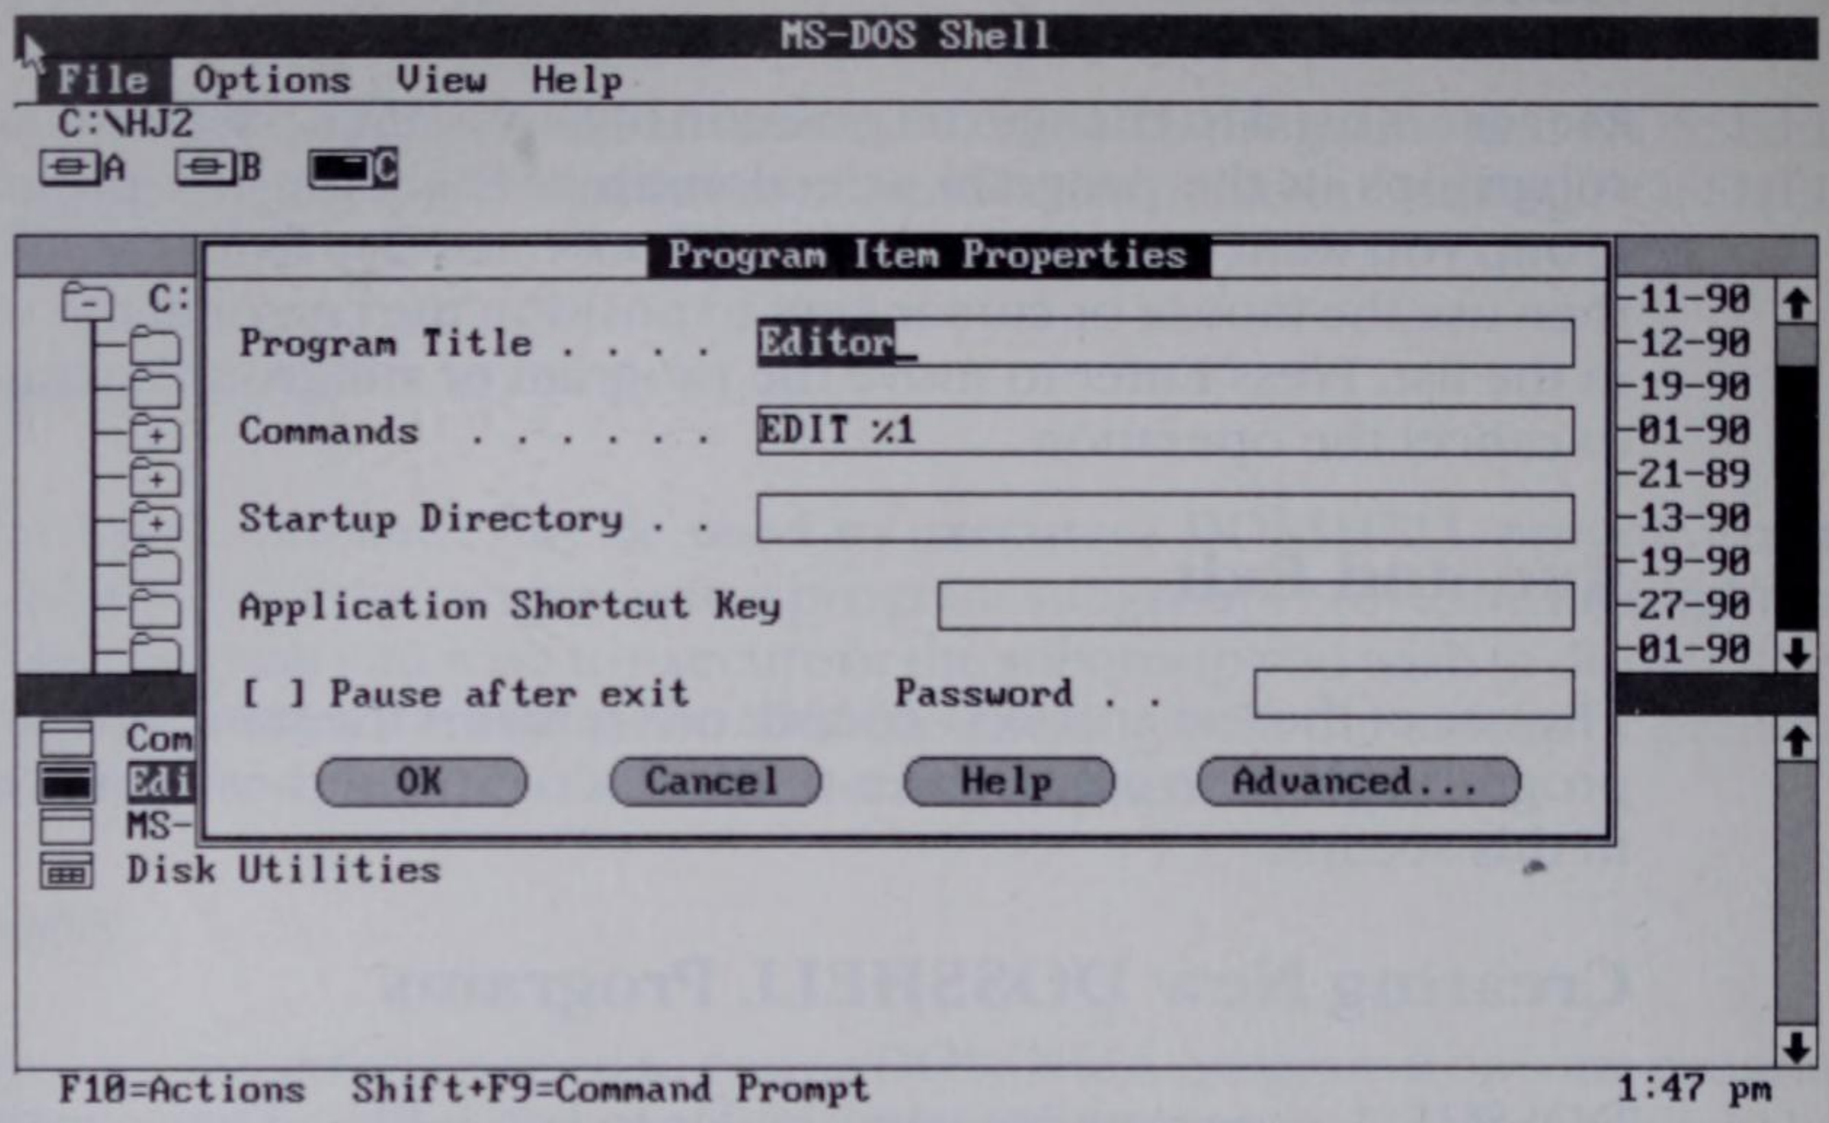

Figure 7-16. The Program Item Properties dialog box.

Program Title

The `Program Title` is the name of the DOSSHELL program. It is the name that will appear in the program selection area. The program title Editor has been entered in figure 7-16.

A program title is required for each DOSSHELL program. The title is limited to 23 characters.

Commands

The `Commands` field is used to enter the actual DOS commands that make up the DOSSHELL program. At least one DOS command must be entered for each DOSSHELL program. Multiple DOS commands are allowed. Commands are separated by a semicolon (;), and a blank space is required before and after each semicolon. Up to 500 total characters may be entered in the `Commands` field.

Replaceable parameters, just like those used with batch files, can be included in DOSSHELL programs. Refer to chapter 4 for a discussion of replaceable parameters.

In the Commands field of figure 7-16, the commands C:\WP51\WP %1 and COPY %1 %2 have been entered. The %1 and %2 are replaceable parameters. When the DOSSHELL program is executed, the first parameter will be replaced by the file specifier of the document to be edited. The second parameter is the file specifier of the backup copy of the document. Notice that the commands entered in the Commands field are separated by a semicolon. The semicolon must be preceded and followed by a blank space.

Startup Directory

The Startup Directory field is used if DOS is required to make another directory current before the DOSSHELL program is executed. Specification of a startup directory is optional. No startup directory is specified in figure 7-16, so the current directory will remain unchanged.

Application Shortcut Key

The Application Shortcut Key field is intended to allow you to specify a key combination (such as Ctrl-W) that you could subsequently use to start the DOSSHELL program. Specification of a shortcut key is optional.

This field has been left blank in figure 7-16, because the feature does not function in the version of DOSSHELL available in the writing of this book.

Pause After Exit

An *X* in the Pause after exit box tells DOS to pause and wait for you to press a key, when the DOSSHELL program has finished running. The DOSSHELL display returns to the screen when you press a key.

The DOSSHELL interface will be displayed immediately after the DOSSHELL program has finished running if you remove the *X* from the Pause after exit box. Remove the *X* by moving the cursor to the box and pressing the space bar.

Password

The last field in the Program Item Properties dialog box is used for entering a password. The password may be any sequence of up to 256 characters. The password may include blanks. DOSSHELL does differentiate between upper- and lowercase letters in the password. Specification of a password is optional.

A password is used to limit access to the DOSSHELL program. If you give a DOSSHELL program a password, any user who attempts to run the program

will first be prompted to enter the password. The program will not execute unless the password is correctly entered. In addition, anyone who tries to modify the DOSSHELL program will first be prompted for the password. Access will be denied unless the password is correctly entered.

Actually, the exact password does not have to be entered—just something very close to it. The reason for this is that DOSSHELL translates the password you specify in setting up the program into a code. The same code value is assigned to more than one character. For example the letter "n" and a blank space are both assigned the same code.

The DOSSHELL program passwords are stored in their encoded form in a file called DOSSHELL.INI. DOSSHELL.INI is a standard DOS text file that contains information used to initialize DOSSHELL each time you start it up. Clearly, the level of security provided by this password system is minimal. Anyone with a fundamental knowledge of DOS can easily bypass it.

DOSSHELL programs also have a set of "Advanced Features" that are accessed by using the Advanced button in the Program Item Properties box (figure 7-16). None of the advanced features are required for a DOSSHELL program to work. We will therefore look at the steps required in completing a DOSSHELL program before discussing these advanced features.

Completing the DOSSHELL Program

Select the OK button or simply press Enter when you have completed your entries in the fields of the Program Items Properties dialog box (figure 7-16) and the optional Advanced dialog box.

If your DOSSHELL program contains any replaceable parameters, additional Program Item Properties boxes will appear. These boxes ask you to enter information that will be displayed to the user, in the form of a dialog box, each time the DOSSHELL program is executed. Each of these dialog boxes will serve as a prompt for the user to specify a value for a replaceable parameter. An example of one of these dialog boxes is shown in figure 7-17. The Program Item Properties box asks you to enter a Window Title (up to 22 characters), Program Information (up to 100 characters), a Prompt Message (up to 17 characters), and a Default Parameter. The value you specify for the default parameter will be assigned to the replaceable variable when the program is run if the user does not specify a value.

A "generic" dialog box will pop up for each replaceable parameter when a DOSSHELL program is executed, if you do not specify a value for Window Title, Program Information, Prompt Message, or Default Parameter.

The newly created DOSSHELL program will appear in the program selection area. It can now be executed, deleted, or moved to a different program group as described earlier in this chapter.

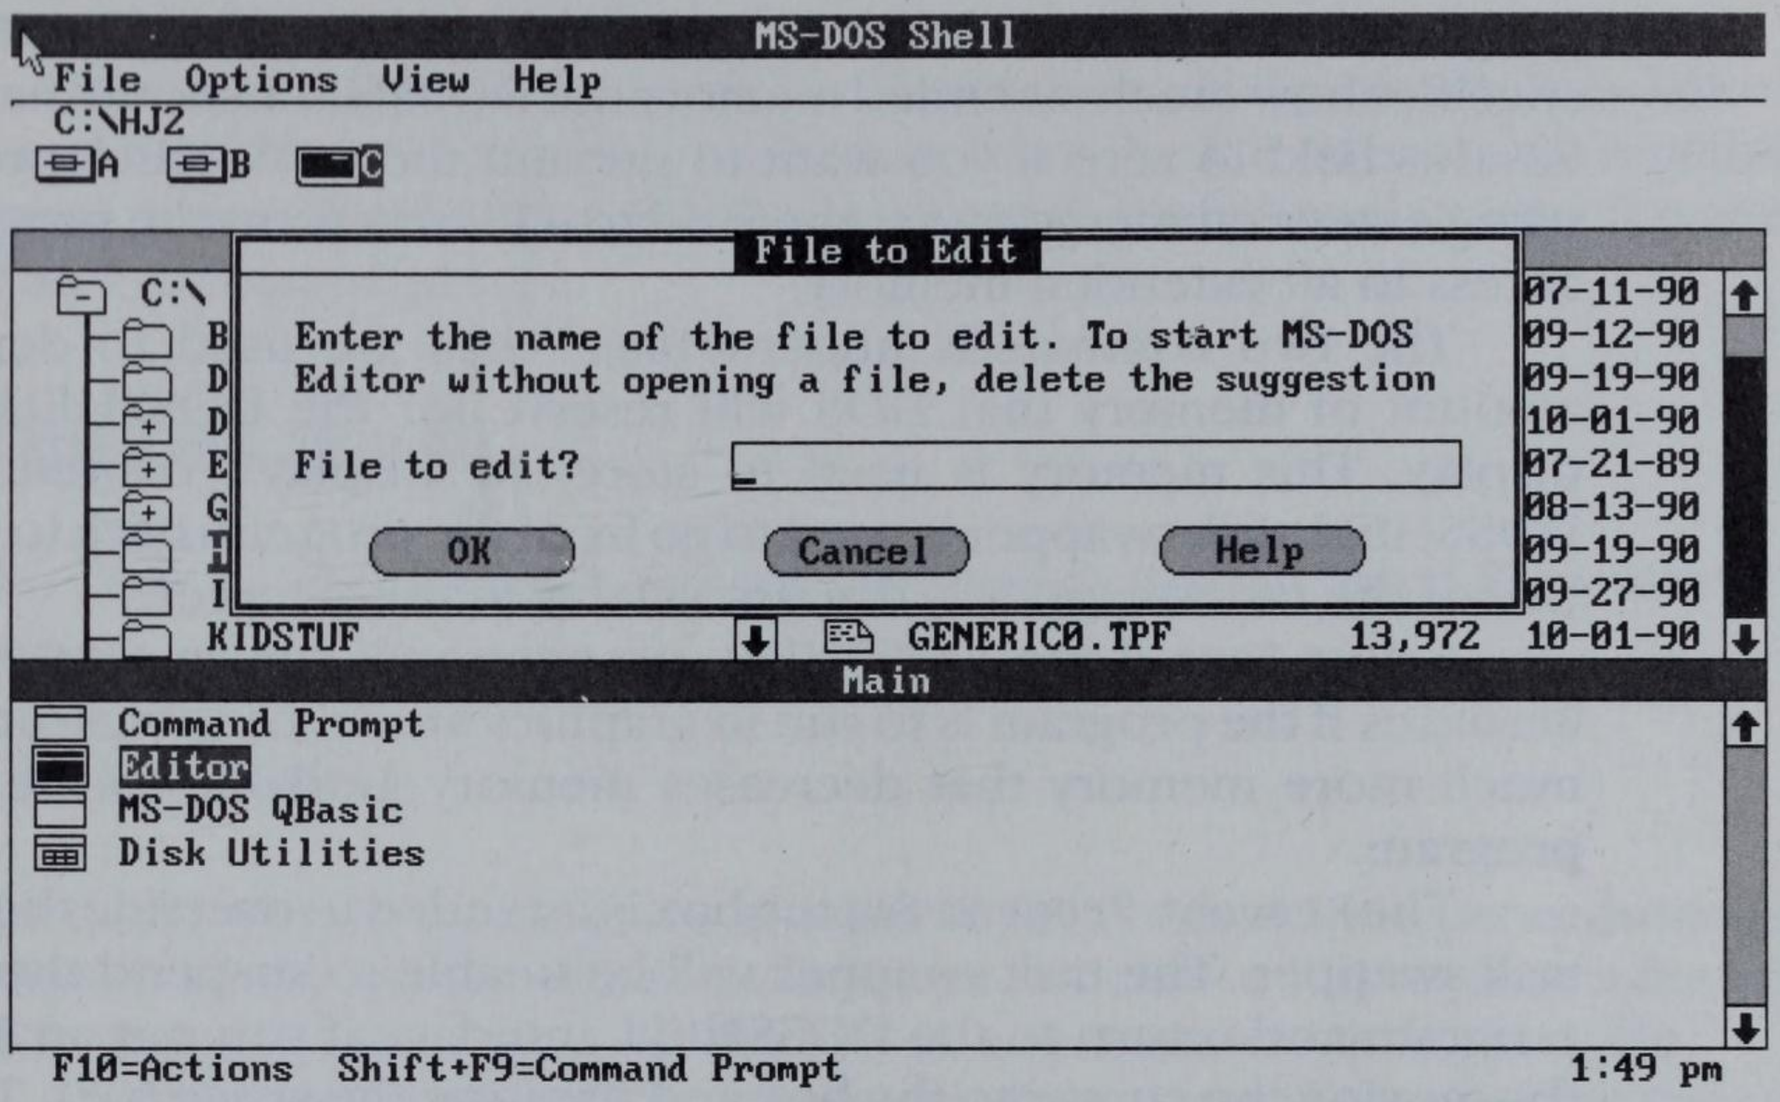

Figure 7-17. File to Edit dialog box that prompts the user to enter a value for a replaceable parameter.

Advanced Features

The advanced features of DOSSHELL programs are configured by using the Advance dialog box. Open this box by selecting the Advanced button in the Program Item Properties box.

`Help Text` is the first field in the Advance box. According to Microsoft's documentation, up to 256 characters of help text may be entered. You should enter an ampersand (&) at the end of each line in the help message. The users can then access the help by selecting `Help` from the menu bar or by pressing F1.

The `Conventional Memory` field specifies the amount of standard DOS memory that must be free in order for the DOSSHELL program to run. This field has a default setting of 384 Kbytes. This field does not control the amount of standard memory DOS gives to a program. DOS always gives *all* available standard memory to a program. DOS simply will not run the DOSSHELL program if there is less standard memory available than is specified by this field.

The next two fields deal with XMS, or extended memory (extended memory is discussed in chapter 11). The `XMS KB Required` field specifies the

amount of extended memory that must be free before the DOSSHELL program can be executed. The default for this field is zero. The `KB Limit` field specifies how much extended memory the DOSSHELL should have access to. Set this field to zero if you want to prevent the DOSSHELL program from using extended memory. Set the field to **–1** if you want the program to have access to all extended memory.

The two commands under `Video Mode` are used to determine the amount of memory that DOS will reserve for the DOSSHELL program's display. This memory is used to store the display's contents when the DOSSHELL task swapper is used to go from the program back to DOSSHELL. Use of the task swapper is discussed later in this chapter.

Select `Text` if the DOSSHELL program will run in text mode. Select `Graphics` if the program is to run in graphics mode. Graphics mode requires much more memory that decreases memory available to the DOSSHELL program.

The `Prevent Program Switch` box is intended to override the DOSSHELL task swapper. The task swapper will be unable to suspend the DOSSHELL program and return to the DOSSHELL interface if you put an *X* in this box (by moving the cursor to the box and pressing the space bar). The swapper will work normally if the box is left blank.

The other fields in the Advance dialog box relate to the role of the Alt-Tab, Alt-Esc, and Ctrl-Esc key combinations. These key combinations are discussed later in this chapter under Task Swapper.

Modifying a DOSSHELL Program

Modification of a DOSSHELL program is just like creating a program, except that you don't start from scratch. Move the highlight bar to the program you want to modify and select `Properties` from the File menu. Then go through the steps discussed for creating a program. The only difference is that this time you will modify existing information that was previously entered. If a password has been assigned, you will need to enter it before modifying the program. You cannot change the name of an existing DOSSHELL program.

Creating Program Subgroups

Creation of a new program subgroup is similar to creation of a DOSSHELL program. Move the highlight bar to the program selection area, open the File menu, and select `New`. A dialog box will pop up, asking whether to create a program group or a program item. Select `Program Group` to display an Add Group dialog box. Use this box to enter a title for the new subgroup. You may also enter some help text and a password for the subgroup if you like. Select OK when you are through, and the new subgroup will be listed in the

program selection area. You can now add programs or other subgroups to it as described earlier in this chapter.

You can modify the properties of an existing subgroup by highlighting the group's name, selecting `Properties` from the File menu, and repeating the steps described in the previous paragraph. You cannot change the name of an existing subgroup.

The Options Menu

The Options menu contains seven commands that are used for a variety of tasks.

Confirmation

The `Confirmation` command is to control the confirmation procedures that DOSSHELL carries out when you attempt to delete a file, replace a file with a file with the same name, or use the mouse to move or delete a file.

A dialog box labeled File Commands pops up when you select `Confirmation` from the Options menu. The dialog box contains three fields that can be toggled on (*X*) and off (no *X*).

`Confirm on Delete` adds an extra layer of protection when you attempt to delete a set of selected files. If `Confirm on Delete` is toggled on, DOSSHELL ask you to confirm the deletion once for the entire set of selected files, and once for each of the individual files selected for deletion. This is a lot of confirming if you have many files to delete. If you toggle `Confirm on Delete` off, DOSSHELL only asks you to confirm once for the entire set. The individual confirmations are bypassed.

If you toggle on `Confirm on Replace`, you will be asked to confirm copy and move operations that replace one file with a file of the same name. The dialog box that pops up lists the two files involved, along with their date stamps and sizes. This information is useful in reducing the chances of replacing the file you want to keep with the file you want to replace. No confirmation occurs on replacements if `Confirm on Replace` is toggled off.

When `Confirm on Mouse Operations` is toggled on, you will be asked to confirm move and copy operations carried out with a mouse. No confirmation occurs when the toggle is off.

A serious limitation with these commands is that they are all toggled on when you start DOSSHELL. You can turn them off without any problem, but when you exit DOSSHELL these temporary settings are lost. The next time you start DOSSHELL, you have to turn them off again. This is very inconvenient and is another problem that will probably be corrected in subsequent revisions of DOSSHELL.

File Display Options

The `File Display Options` command controls which files are listed in DOSSHELL's file selection area and the order in which they are listed. Selection of the command produces a dialog box containing one field and seven items that can be toggled on or off. The `Name` field contains the file specifier for the files to be listed. Generally the file specifier is *.*, which means that all files are listed. You could change this, for example, to *.TXT, so that only files with an extension of TXT are listed. The other items in the box determine whether hidden and system files are displayed; whether files are listed in ascending or descending order; and whether files are sorted by filename, filename extension, date, size, or location on the disk.

The same problem exists here as was mentioned for the `Confirmation` command. `File Display Options` always starts off with *.* in the `Name` field, `Display hidden/system files` toggled off, `Descending order` toggled off, and `Sort by Name`. Any changes made are not saved when you exit DOSSHELL. The temporary nature of the settings is another real inconvenience that will probably be corrected in subsequent revisions of DOSSHELL.

Select Across Directories

`Select Across Directories` is simply a switch that can be toggled on or off. When it is on, you can select a set of files that is located in different directories on your drive. A small diamond appears to the left of the command when it is toggled on. Once again, the toggle is always off when you start DOSSHELL. The information is not saved if you toggle the command on.

Show Information

The `Show Information` command displays information about the number of files currently selected and the total number of bytes in those files; the name and file attributes of the most recently selected file; the number of files and the total number of bytes in the current directory; and the number of directories, number of files, total number of bytes stored, and total storage capacity of the current disk drive.

Task Swapping

The DOSSHELL *task swapper* enables you to suspend the execution of one DOSSHELL program and start another. You can then suspend the second program and return to the first, returning to the exact point at which the program was suspended. You can continue to switch between the program

or use the swapper to start additional DOSSHELL programs. The swapper can be used with any DOSSHELL program, which means that you start the DOS program from within a DOSSHELL program. Some limitations on running DOS programs with the swapper are discussed at the end of this section. Be sure to read these limitations before you use the task swapper.

Use the swapper by first selecting `Enable Task Swapper` from the Options menu. This toggles the swapper on. When the swapper is on, a small diamond appears to the left of the `Enable Task Swapper` command. An additional selection area appears on the screen when the swapper is enabled. This area is called the *Active Task List*. Each DOSSHELL program you start and subsequently suspend with the swapper gets listed in this area. You resume execution of a suspended program by selecting it from the Active Task List.

We'll illustrate use of the task swapper with two DOSSHELL programs called Word Processor and Spreadsheet. These are just standard DOSSHELL programs. No special steps were taken to create them.

The two programs are listed in the program selection area. We'll start Word Processor by selecting it from the list. After we work with Word Processor for a period of time, we suspend it by pressing the Ctrl and Esc keys simultaneously. The suspended program remains in memory, ready to continue its execution when we return to it.

The DOSSHELL interface screen is displayed when Word Processor is suspended. (Word Processor is listed in the Active Task List.) Now we start Spreadsheet by selecting it in the program selection area. We'll do some work with Spreadsheet, and then suspend it by pressing Ctrl-Esc. This returns us to the DOSSHELL interface. Now both Word Processor and Spreadsheet are listed in the Active Task List.

We can return to either of the suspended programs by selecting one of them from the Active Task List. Say we return to Word Processor. After using Word Processor, we can suspend it and return either to the DOSSHELL interface or directly to the Spreadsheet. As before, Ctrl-Esc takes us to DOSSHELL. But now we can also press Alt and Tab to return to Spreadsheet.

We can now continue to switch between the suspended programs and DOSSHELL. Additional DOSSHELL programs can be added to the Active Task List simply by selecting DOSSHELL programs from the program selection area.

There are three different key combinations you can use to switch between DOSSHELL programs and the DOSSHELL interface. Ctrl-Esc suspends the active program and switches to DOSSHELL. Alt-Tab suspends the active task and switches to one of the other suspended programs. Alt-Tab switches to DOSSHELL if there are no other suspended programs. The third key combination, Alt-Esc, switches from program to program until the last program on the task list is reached. From the last program, Alt-Esc returns to DOSSHELL.

You might recall from earlier in this chapter that DOSSHELL programs have what are known as "advanced features." One of these features is the capability of disabling Ctrl-Esc, Alt-Tab, and/or Alt-Esc task switching key combinations. You might want to do this, for example, if you are using a program that requires Ctrl-Esc to perform some special function. In this case, when you set up the DOSSHELL program, you would move to the `Ctrl+Esc` line in the Advance dialog box and press the space bar. This places an *X* on the line and disables Ctrl-Esc for the purpose of task switching. Now when you start the DOSSHELL program and press Ctrl-Esc, your program will not be suspended by DOSSHELL.

A DOSSHELL program is removed from the Active Task List when you terminate the program. For example, say that you have started your word processor by using a DOSSHELL program. You have switched in and out of the word processor with the task swapper. Now you want to remove the DOSSHELL program from the active task list. All you have to do is return to the word processor and quit the program as you normally would. This will return you to the DOSSHELL interface, and the DOSSHELL program will have been removed from the Active Task List.

DOSSHELL will not quit the shell and return to the command line interface while there are any programs in the active task area. If you try to quit by pressing F3 or Alt-F4, your computer will beep to remind you that there are suspended programs on the Active Task List. You must switch to each of the programs and quit it, after which you can quit DOSSHELL. Of course you can "escape" from DOSSHELL to the command line at any time by pressing Shift-F9. But you should realize that you are not quitting DOSSHELL when you do this. You are simply suspending DOSSHELL and can return to it by entering EXIT at the DOS command line.

Task Swapper Limitations

There are some limitations to using the task swapper. Programs don't do anything when they are suspended; they are just sitting there. Thus, if you are using a software communications package and suspend it with the task swapper, the program does not respond appropriately during this suspension. Therefore, you should not use the task swapper with communication packages.

The other limitation you need to be aware of is that some software packages may not be compatible with the task swapper. The reason relates to the discussion at the very beginning of this chapter. DOSSHELL is an after-the-fact add-on to DOS. Problems are bound to arise, because no after-the-fact modification can accommodate the settings for the entire array of existing DOS software.

In writing this chapter, I used the task swapper to jump in and out of WordPerfect. As far as I could tell, the task swapper and WordPerfect worked fine together. But be warned: Microsoft states in its documentation that some application programs may fail "unexpectedly" with the task swapper. Should this occur, the "stability of MS-DOS" may be affected. Microsoft's recommended action is to

1. Select the corresponding DOSSHELL program from the Active Task List.
2. Select `Delete` from the File menu.
3. Remove any other programs from the Active Task List by quitting those programs.
4. Quit DOSSHELL.
5. Reboot your system.

You should probably add one other item: Avoid using the failed application program with the task swapper in the future.

Display and Color

`Display` and `Color` are the remaining commands contained in the Options menu. `Display` is used to set the display mode (text or graphics, number of lines per screen) for DOSSHELL. `Color` is used to specify the colors for the various components in the DOSSHELL interface (background, menu bar, selected items, disabled items, and so on). For both of these commands, the available choices are automatically determined by the type of monitor you are using. The DOSSHELL installation program determines your monitor type during the DOSSHELL installation procedure.

The Tree Menu

The Tree menu is used to expand or collapse the directory tree in the directory tree selection area. Most of these operations can be performed with the plus and minus keys, as discussed earlier.

The `Expand One Level` command expands the currently selected directory one level. The command is available only if the selected directory has collapsed subdirectories.

The `Expand Branch` command fully expands the currently selected directory. This command is also available only if the selected directory has collapsed subdirectories.

The `Expand All` command fully expands the entire directory. The command is available whenever the directory tree is not fully expanded.

The `Collapse Branch full` command collapses the selected directory. It is available when the current directory is not fully collapsed.

The Tree menu is available only when the directory tree or file selection area is active.

The Help Menu

The Help menu provides help on a variety of topics relating to the use of the DOSSHELL interface. The Help menu contains the commands `Index`, `Keyboard`, `Shell Basics`, `Commands`, `Procedures`, and `Using Help`. Each of these commands is used to access a set of topics in the help facility.

CHAPTER

8

EDIT, the MS-DOS Text Editor

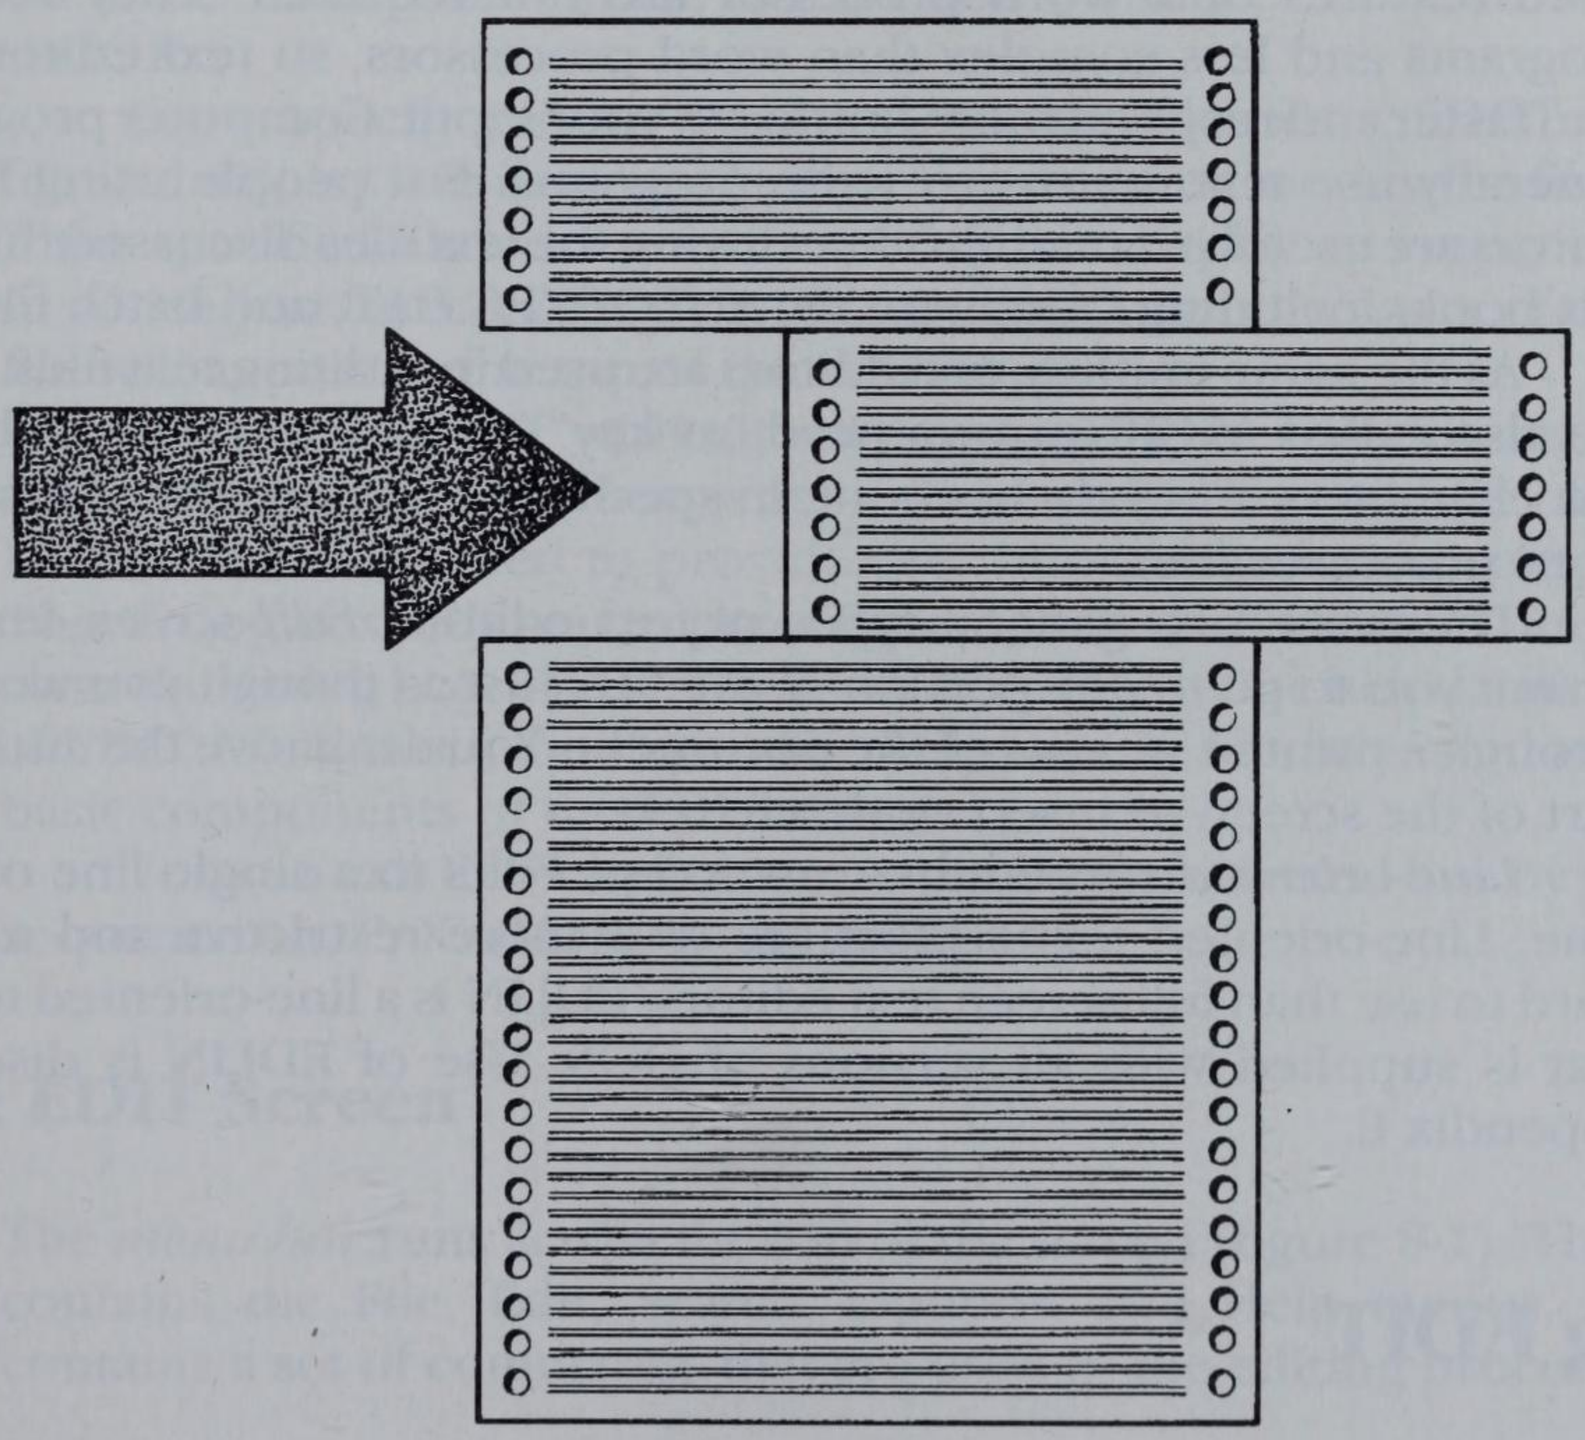

Starting EDIT
Editing
Conclusion

EDIT is a full-screen text editor that comes with MS-DOS 5. Both text editors and word processors are used for creating and modifying written documents. Like word processors, most text editors enable you to insert and delete text, copy and move blocks of text, search for the occurrence of a word or words in a document, print documents, and save documents as disk files.

Text editors have major limitations when compared to word processors, however. Most text editors do not have the formatting features that are standard in word processors. For example, most text editors do not allow you to modify line spacing, width of margins, or font size. Text editors generally do not have the ability to center text, number pages, or place headers and footers in documents. Advanced word processing features, such as file merging and spell checking, are rarely, if ever, available in text editor programs.

Text editors are useful in those editing situations where the sophisticated features of a word processor are not required. They are smaller programs and less complex than word processors, so text editors usually load faster and respond more quickly to your input. Computer programmers generally use text editors to write programs. For people using DOS, text editors are useful in creating or modifying the text files discussed throughout this book, including CONFIG.SYS, AUTOEXEC.BAT, and batch files.

As the name implies, text editors are used for editing text files. Text files are also called ASCII (pronounced "as-key") files. These files only contain text characters. They do not contain special formatting characters found in word processor files.

There are two general types of text editors. *Full-screen* text editors permit you to go to any portion of the file, just as though you were paging through a printed version of the document. You can move the cursor to any part of the screen to insert or delete text.

Line-oriented text editors can accept edits to a single line of text at a time. Line-oriented text editors are thus more restrictive and more awkward to use than full-screen text editors. EDLIN is a line-oriented text editor that is supplied with all versions of DOS. Use of EDLIN is discussed in appendix E.

Starting EDIT

EDIT.COM is the name of the DOS file used to start the EDIT text editor. But EDIT.COM is not the entire EDIT program. In fact, EDIT.COM is a small program that simply starts up the QBasic program and instructs it to operate in text editing mode. QBasic is a BASIC interpreter that comes with

MS-DOS 5. Many good books cover QBasic, and its use will not be discussed here. All you need to know is that the EDIT text editor requires two files: EDIT.COM and QBASIC.EXE. Most DOS installation programs put both of these files in the same directory as the DOS system files. This directory should be included in your DOS search path before you try to use EDIT. Refer to the discussion of the PATH command in Part 2 of this book for information on the DOS search path.

Once you have the DOS search path set up, there are two ways you can start up the EDIT text editor. You can simply enter EDIT on the DOS command line. This starts the editor without specifying the name of the text file to be edited. You can also enter EDIT followed by the name of the text file to be edited. The file's name can include a drive letter and directory path if the file is not located in the current directory. For example, the command EDIT C:\BOOK\EXAMPLE.TXT tells DOS to start EDIT and have EDIT work on a file named EXAMPLE.TXT located on the C: drive in the directory \BOOK.

If you specify a file to be edited, and the file exists, EDIT will load that file and display it in its *edit window*. You can then modify the file as desired. If the specified file does not exist, EDIT will display an empty edit window in which you can create a new file. In either case, the name of the specified file will appear at the top of the edit window.

If you start EDIT without specifying a file to edit, the text editor will come up and a *dialog box* will be displayed in the middle of the screen. Dialog boxes are used to provide user information and prompt for input. This dialog box tells you to press Enter to see the "Survival Guide" or Esc to clear the dialog box. The Survival Guide is the on-line help facility that is part of EDIT. We'll take a look at on-line help shortly. First we need to discuss the basic components of the EDIT screen.

You can exit EDIT and return to the DOS command line by pressing the sequence Alt, F, X. (More about this later.)

The EDIT Screen

The *menu bar* runs across the top of the screen (figure 8-1). The menu bar contains the File, Edit, Search, Options, and Help menus. Each menu contains a set of commands that are used in the editing process.

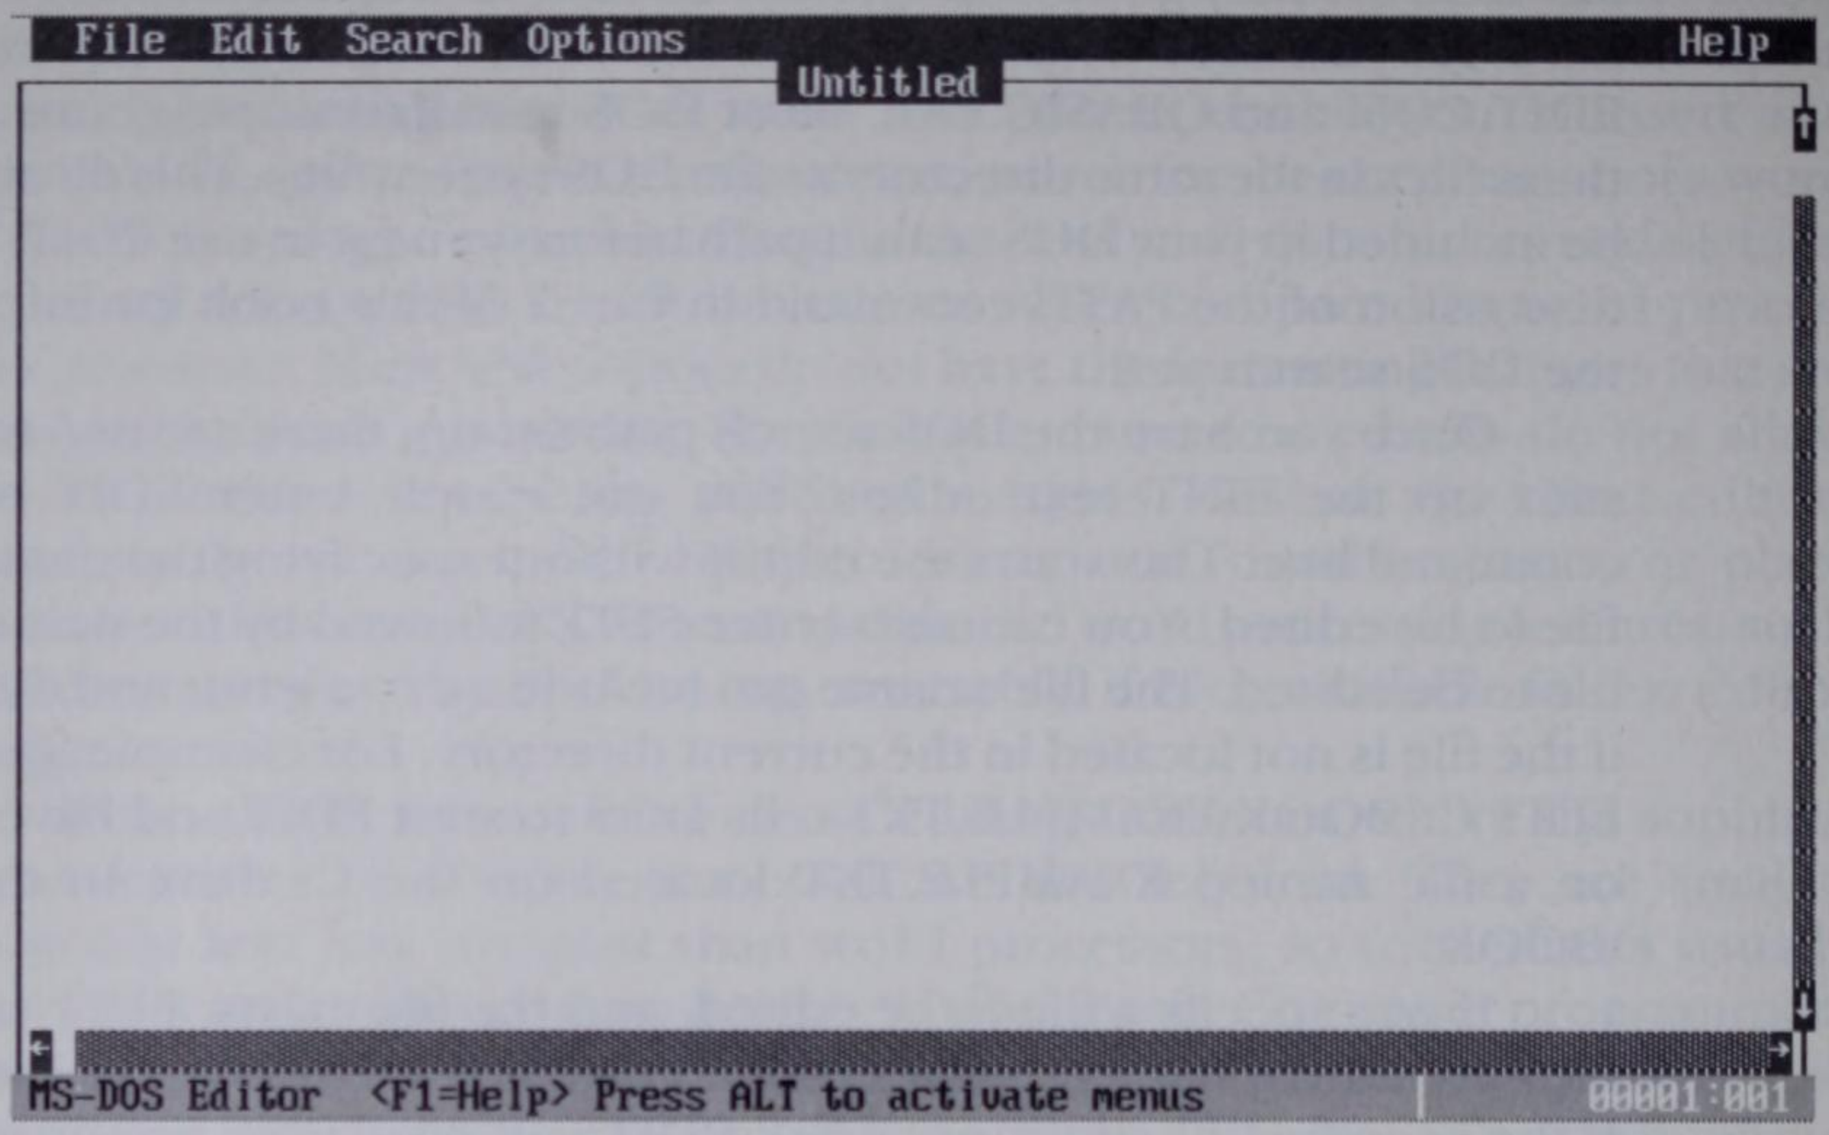

Figure 8-1. The EDIT text editor.

The menu bar runs across the top of the screen. The status bar indicates that F1 will activate the help facility and Alt will activate the menu bar. The cursor's position in the edit window is line 0, column 0.

To access menu commands, you first press Alt to activate the menu bar. With the menu bar active, you can open a menu by typing the first letter in the menu's name. You can also open a menu by using the cursor keys to move the highlight bar to the menu you want to open and pressing Enter. A third way to open a menu is to click on the menu with the mouse's pointer. The File menu has been opened in figure 8-2.

The status bar describes the action of the highlighted menu command.

Once you have opened a menu, you can execute a command by typing one of the highlighted letters appearing in the menu, using the cursor keys to move the highlight bar and pressing Enter, or by clicking on a command with the mouse.

Close a menu by pressing Alt or Esc. Alt leaves the menu bar active. Esc deactivates the menu bar. Clicking the mouse outside the menu also closes it.

The *status line* at the bottom of the screen displays information about actions that are available through certain keys (figure 8-1) and information about the currently selected menu command (figure 8-2). The right side of the status bar has a counter that indicates the current line and column position of the editing cursor.

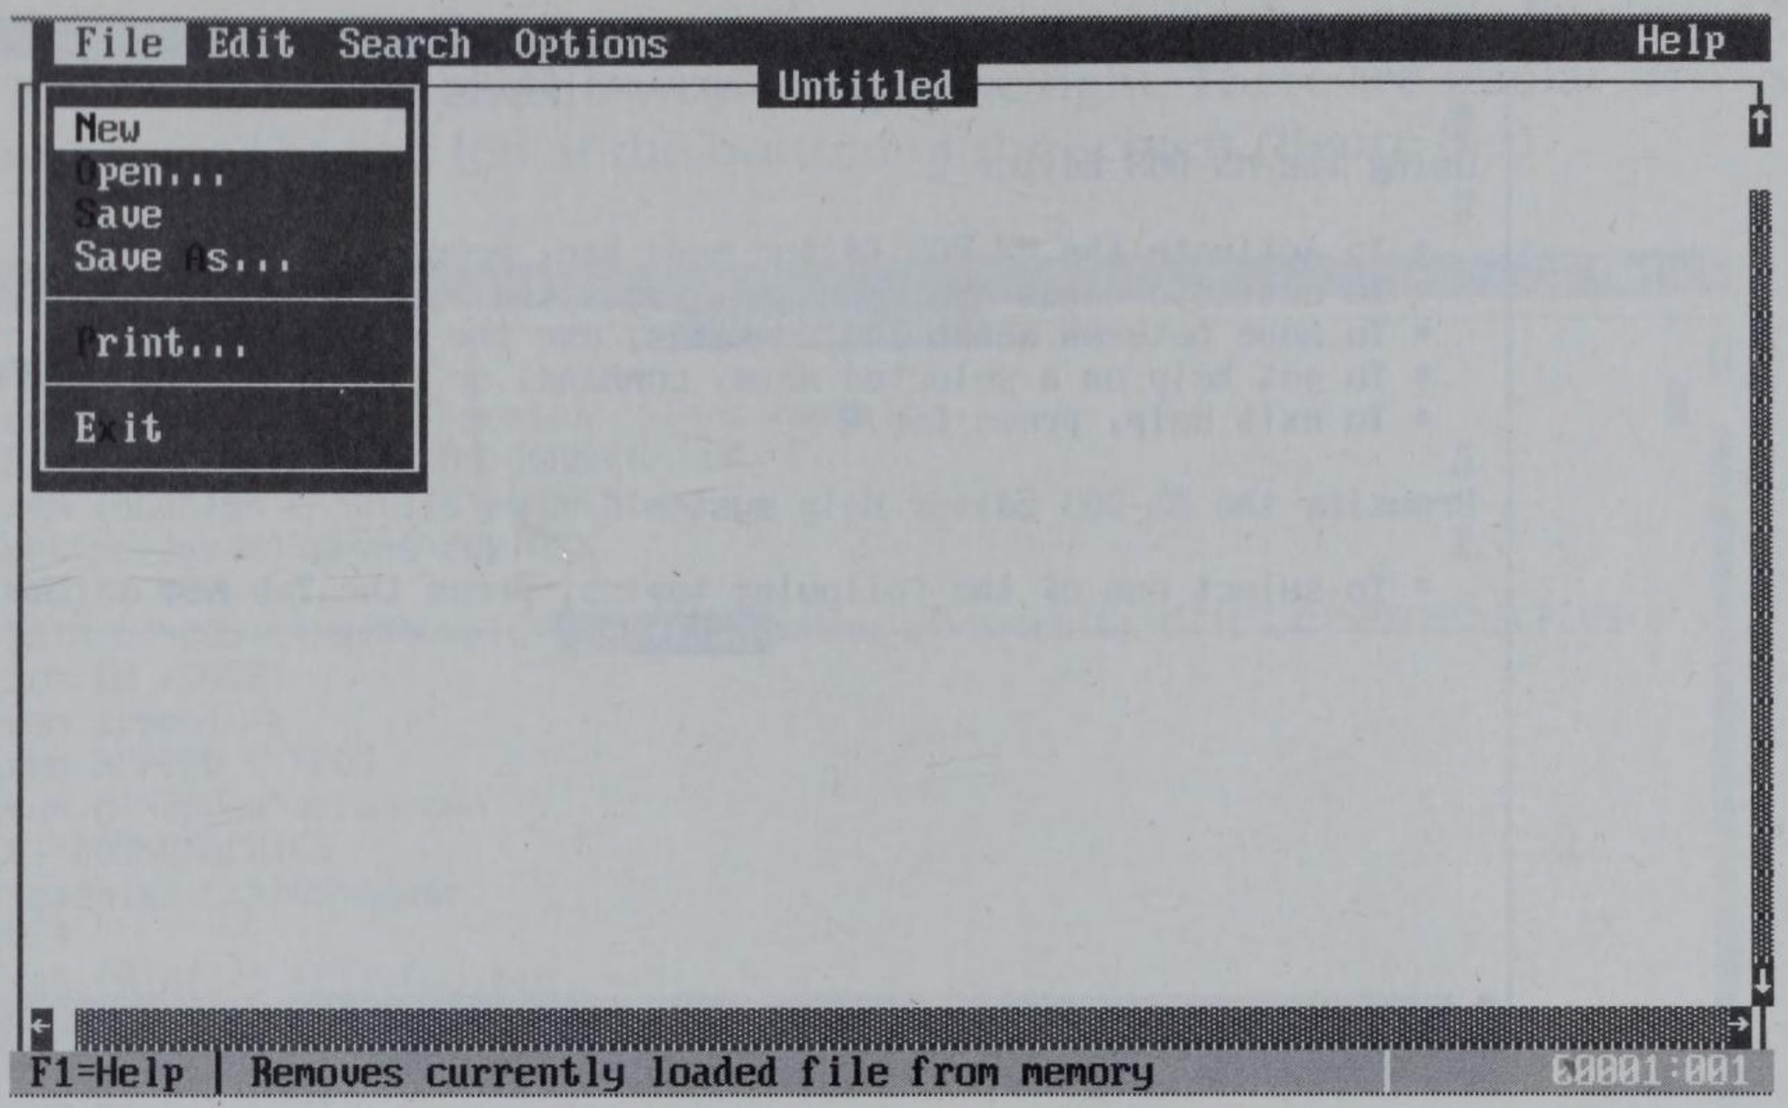

Figure 8-2. The File menu has been opened.

The Edit and Help Windows

Recall that the edit window is used to display the document being edited. The *help window* displays the on-line help. You open the help window by selecting either the `Getting Started` or `Keyboard` command from the Help menu, or by pressing F1. Figure 8-3 shows the edit and help windows.

The help window is at the top of the screen; the edit window, at the bottom.

Select a topic from the help facility by using the Tab key to move the cursor from one topic to another within the help window. Shift and Tab move the cursor in the opposite direction. Press Enter when the cursor is on the topic you want to select. You can also select a help topic by double clicking on it with the mouse.

Pressing Alt and the plus sign (+) will increase the size of the current window when the help window is open. The current window is the window in which the cursor is located. Pressing Alt and the minus sign (–) will decrease the size of the current window. The F6 key changes the current window by moving the cursor from the edit window to the help window and vice versa. You can also change the current window by clicking with the mouse on the noncurrent window.

Press Esc to close the help window.

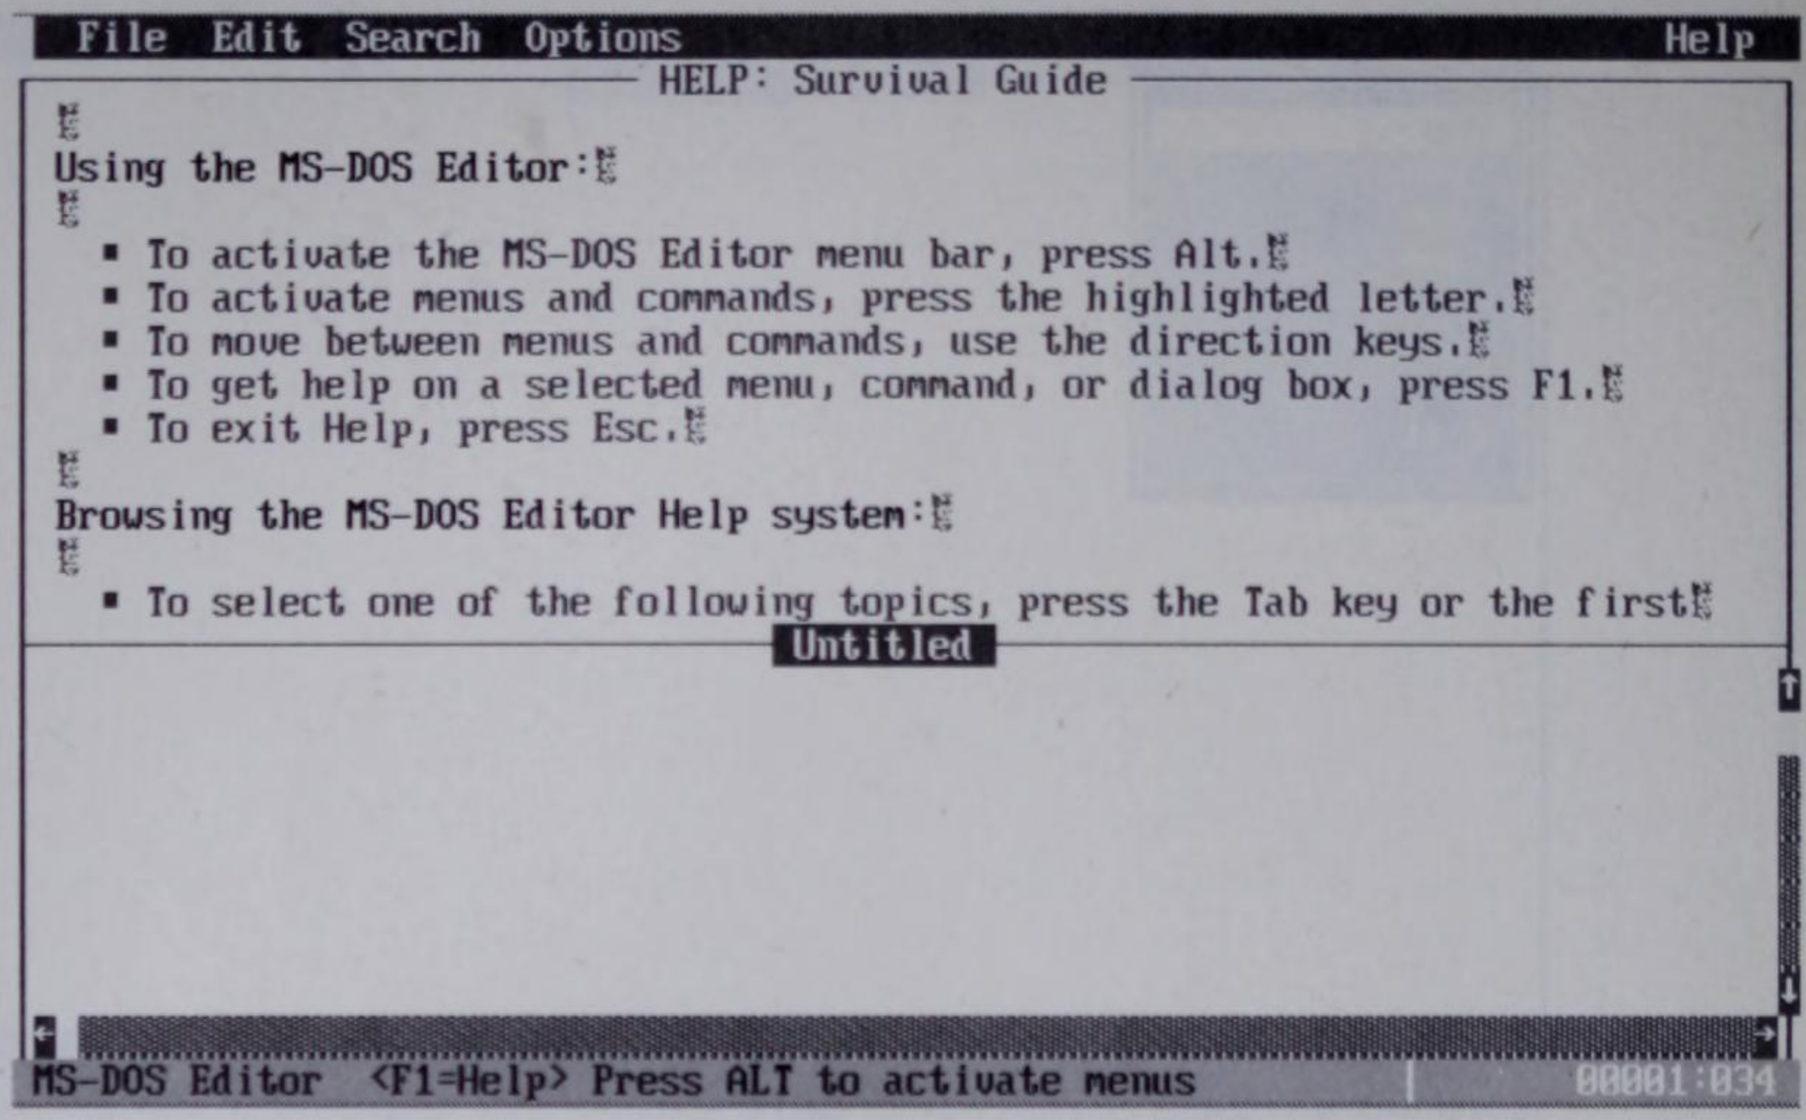

Figure 8-3. The help and edit windows.

Editing

There are two modes in EDIT for entering new text. The default mode is *insert*; as new text is added, existing text is moved forward. Toggle EDIT to *typeover* mode by pressing the Ins key (or Ctrl-V). In typeover mode, new text overwrites existing text as it is entered.

New text is added at the position of the cursor in the edit window. EDIT does not "wrap" the text around the end of a line. You must press Enter to begin a new line. Another limitation is that EDIT will not allow you to add characters to a line that already has 255 or more characters. Additionally, the maximum number of lines in the document is 32,700. Of course, these limits aren't a problem for the kinds of documents you are likely to be working on with a text editor.

Scrolling

Methods for scrolling through a document using the keyboard are listed in table 8-1. To scroll using the mouse, position the pointer in the slider boxes

located at the right and along the bottom of the screen. You can also move the document up or down a single line at a time with the mouse by clicking the mouse on the up and down arrows at the right. There are similar arrows for moving right and left at the bottom of the screen (figure 8-4).

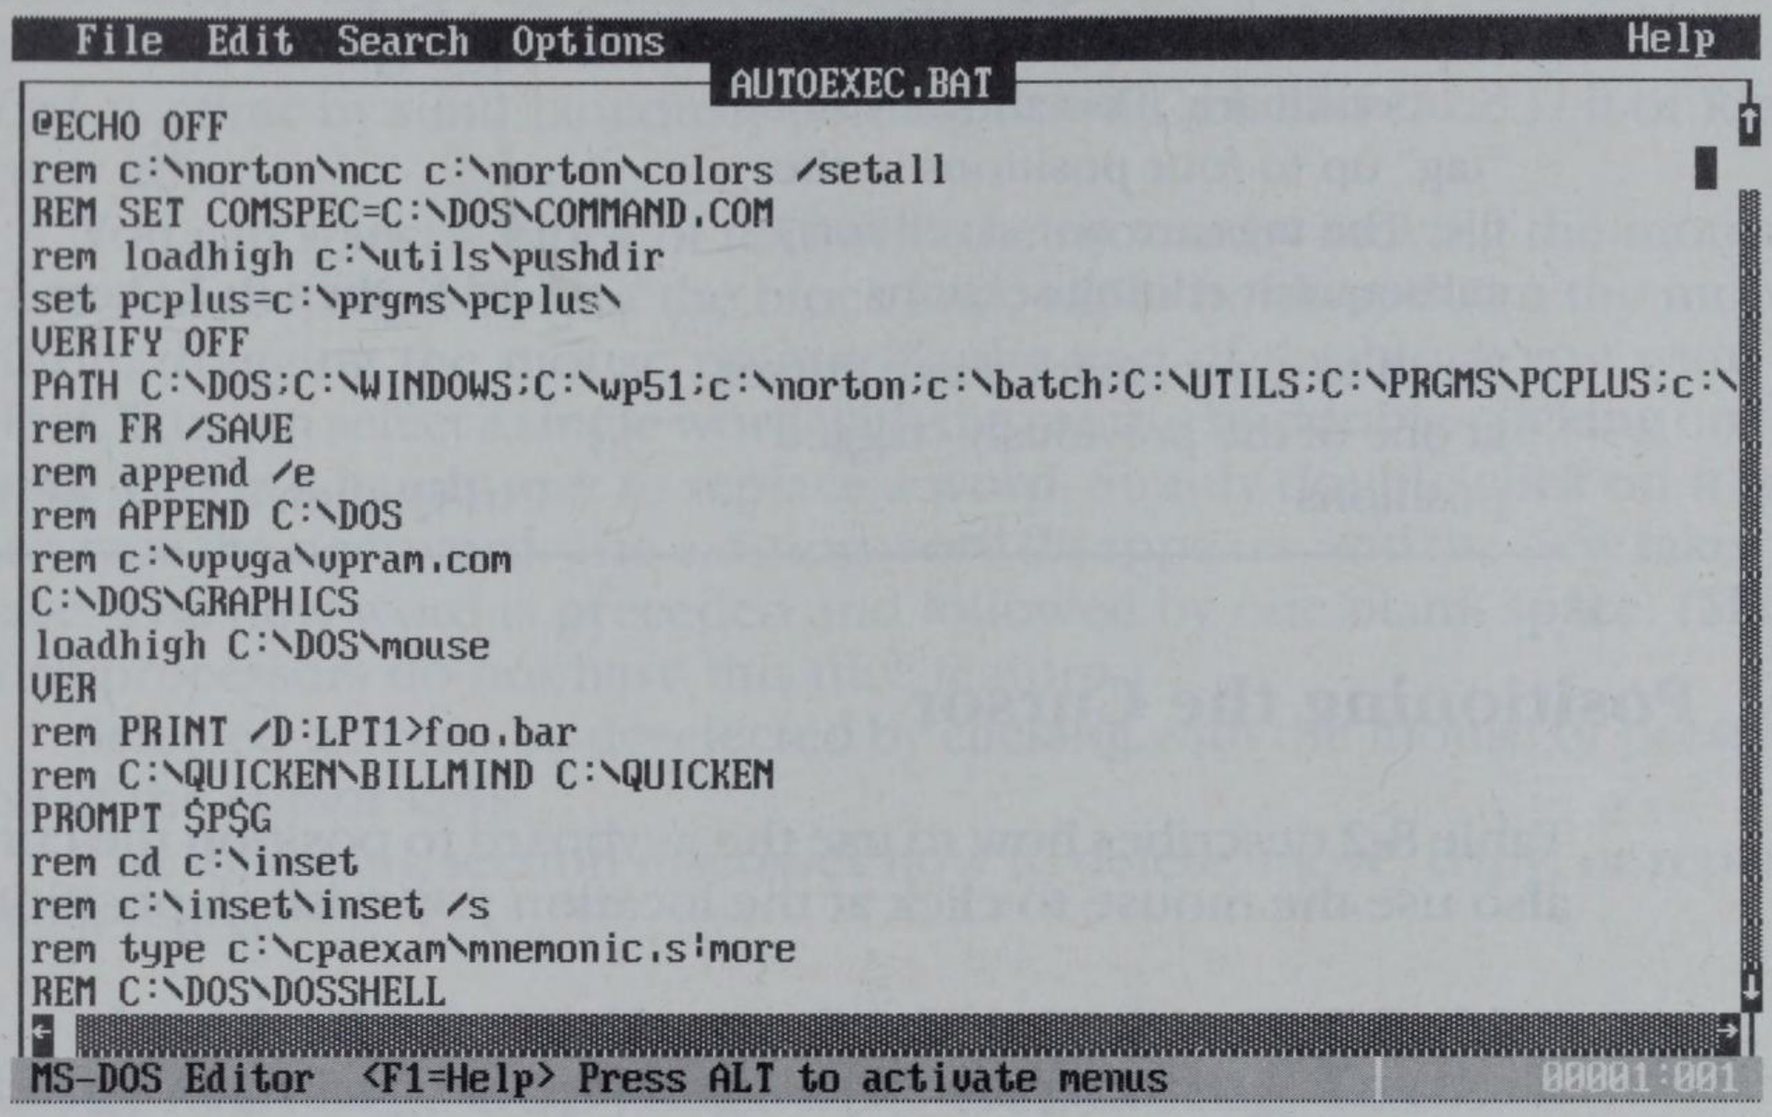

Figure 8-4. Scrolling through the document using the slider.

Move the mouse's pointer over the slider box, hold the mouse's select button down, and move the pointer to scroll.

Table 8-1. Scrolling Using the Keyboard

Action	*Key(s)*
Scroll document up one line	Ctrl-Up Arrow or Ctrl-W
Scroll document down one line	Ctrl-Down Arrow or Ctrl-Z
Scroll up one window. The number of lines scrolled depends on the size of the edit window	Pg Up or Ctrl-R
Scroll down one window. The number of lines scrolled depends on the size of the edit window	Pg Down or Ctrl-C

continues

Table 8-1. continued

Action	*Key(s)*
Scroll right one window (78 columns)	Ctrl-Pg Down
Scroll left one window (78 columns)	Ctrl-Pg Up
Set bookmark. This allows you to "tag" up to four positions in the file. The tags are not saved for subsequent editing sessions	Ctrl-K, then 0, 1, 2, or 3
Scroll to a bookmark. Place cursor at one of the previously "tagged" positions	Ctrl-Q, then 0, 1, 2, or 3

Positioning the Cursor

Table 8-2 describes how to use the keyboard to position the cursor. You can also use the mouse to click at the location you wish to position the cursor.

Table 8-2. Positioning the Cursor Using the Keyboard

Action	*Key(s)*
Move cursor one character to the left	Left Arrow or Ctrl-S
Move cursor one character to the right	Right Arrow or Ctrl-D
Move cursor up one line	Up Arrow or Ctrl-E
Move cursor down one line	Down Arrow or Ctrl-X
Move cursor to the left until cursor encounters a word boundary (an alphanumeric character preceded by a nonalphanumeric character)	Ctrl-Left Arrow or Ctrl-A
Move cursor to the right until a word boundary is encountered	Ctrl-Right Arrow or Ctrl-F
Move cursor to the indentation of current line	Home
Move cursor to beginning of current line	Ctrl-Q, then S
Move cursor to beginning of next line	Ctrl-Enter or Ctrl-J
Move cursor to end of current line	End or Ctrl-Q, then D
Move cursor to top of window	Ctrl-Q, then E
Move cursor to bottom of window	Ctrl-Q, then X

Selecting Text

With EDIT you can select a block of text for deleting, moving, copying or replacing. You can select a block of text with the keyboard by moving the cursor to the start of the block, holding down the Shift key, and using the cursor keys to highlight the block. You can advance the highlight bar one word at a time by simultaneously holding down Ctrl, Shift, and Left or Right Arrow key.

You can select a block of text with the mouse by moving the mouse's pointer to the beginning of the block and, while holding down the mouse button, dragging the mouse pointer to the end of the block you want to select. You can select a single word with the mouse by double-clicking on the word. This is a handy way to replace a word. Simply double-click on it and then type the new word. The existing word disappears, and the new takes its place. The new word is preceded and followed by one blank space. (Many word processors do not have this nice feature.)

Selected text can be deselected by clicking with the mouse or pressing one of the cursor keys.

The following section discusses how to delete, move, copy, or replace selected text.

Deleting, Moving, Copying, and Replacing Text

Selected text may be deleted by simply pressing Del. Selected text may also be deleted and saved in an area of memory called the *clipboard* by pressing Shift and Del. This procedure is referred to as *cutting*.

There is a shortcut for cutting the current line to the clipboard. Simply press Ctrl-Y. You can also cut from the cursor's position to the end of the line by pressing Ctrl-Q, then Y.

Text which has been cut to the clipboard can be inserted at the position of the cursor by pressing Shift-Ins. The procedure is called *pasting*.

Text can also be copied to the clipboard (rather than cut to it) by selecting the text and pressing Ctrl-Ins.

Cutting and copying to the clipboard and pasting can also be carried out by using the Edit menu.

When you cut or copy text to the clipboard, the new text replaces the text previously placed there. However, the clipboard's contents remain unchanged following a paste operation.

To *copy text*, select the text, copy it to the clipboard (Ctrl-Ins), move the cursor to the desired location, and paste the text (Shift-Ins).

To *move text*, select it, cut it to the clipboard (Shift-Del), move the cursor to the desired location, and paste the text (Shift-Ins).

To *replace text*, select the text to be replaced and type in the replacement text. You can also replace selected text with the contents of the clipboard. First copy or cut the text you want to the clipboard. Then select the text to be replaced and press Shift-Ins.

Managing Files

The File menu is used to save text files and load text files into memory.

The New command erases the current text file from memory and clears the edit window. EDIT will ask whether you want to save the file if the file has been modified since it was last saved. If the file in memory has not been given a name, and you indicate that you want to save it, a dialog box will appear. Use the fields in this box to indicate the drive, directory, and name for the file. Move the cursor from field to field by clicking with the mouse or pressing the Tab key. Pressing Shift-Tab moves the cursor in the opposite direction. You can start editing the new file once the edit window is cleared.

The Open command is used to load a file for editing. A dialog box appears when you select this command (figure 8-5). The Dirs/Drives field is used to select the drive and directory containing the file you want to load. Use the File Name field in this box to enter either the name of the file you wish to open or a wildcard specifier. All files matching the wildcard specifier are listed in the field titled Files. You can load any of the listed files by moving the cursor to the Files field, highlighting the file you want to load, and pressing Enter. You can also load a file by double clicking on its name with the mouse.

In this example, C is the current drive and \TMP is the current directory. You can change directories by selecting the ". ." in the Dirs/Drives field. In this example, the file specifier *.TXT has been entered in the File Name field. Files in the current directory matching the specifier are listed in the Files field.

The Save command is used to save a file and keep the file in memory for further editing. The first time you save a file, a dialog box pops up to ask where the file is to be saved and what name it is to have. Subsequent use of Save will overwrite the previous version of the file.

Using the Save As command, you can save a modified version of a file without overwriting the original file. A dialog box comes up asking where the file is to be saved and what name it is to be given. The original file is closed and preserved. The modified file remains in memory for further editing under the new name.

The Print command is used to print either the entire document or a block of selected text. You can also use the Print command to print text from the on-line help facility. Do this by opening the help window, locating the text you wish to print, and selecting the Print command. The cursor must be in the help window in order to print help text. You may print the entire contents of the help window or a selected portion of it.

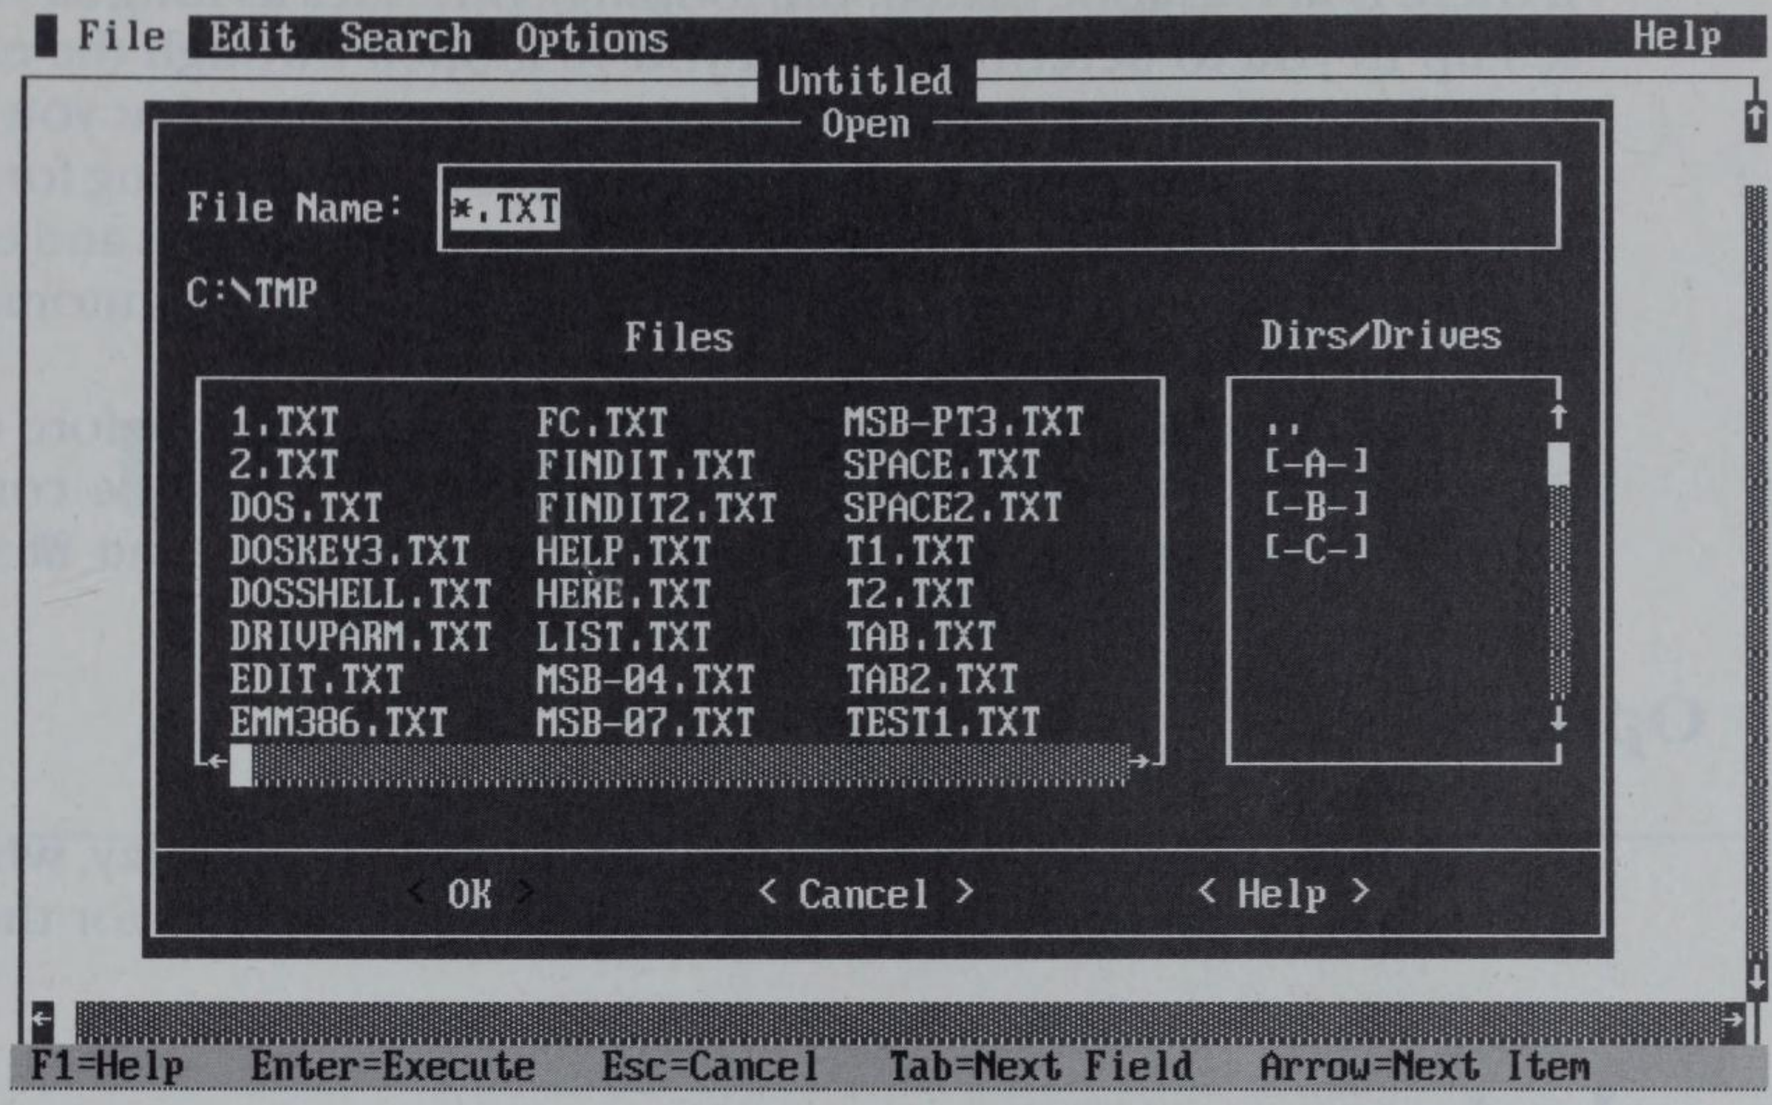

Figure 8-5. Loading a file using the `Open` command.

The `Exit` command is used to terminate EDIT and return you to the DOS command line. EDIT will ask whether you want to save the file if it has been modified since the last save.

Searching

The Search menu is used to search for words or parts of words in the document being edited. The search menu can also be used in the help window to locate words contained in the help text.

To locate text in the file being edited, first make sure the cursor is in the edit window. Then open the Search menu. Select the `Find` command. A dialog box will pop up. Enter the text string you want to find in the `Find What` field. You can enter up to 127 characters.

Move the cursor to the `Match Upper/Lowercase` field and press the space bar if you want an exact match by case. Move the cursor to the `Whole Word` field and press the space bar if you are interested only in whole words. Otherwise, EDIT will also locate occurrences of your text string that are parts of a word.

Select OK to begin the search. EDIT will begin at the current cursor position and stop when it comes to the first match. EDIT also lets you know if there are no matches. You can continue the previous search by pressing F3. EDIT loops from the end of the file to the file's beginning when it is searching.

If there is at least one match, the looping continues as long as you press F3. It's up to you to determine when you've looped through the entire file.

The `Change` command is similar to `Search`, except that you also enter a character string that will replace the string you are searching for. Select `Find and Verify` if you want to monitor the replacement process and either accept or reject each replacement. Select `Change All` if you want automatic replacements for each occurrence.

You can select a block of text from your document before opening the Search menu. Then when you execute the `Find` or `Change` command, the selected block of text will automatically appear in the `Find What` field.

Options

The Options menu is used to control the colors of the display, whether or not the windows have scroll bars, and the number of spaces for the tab stops.

Conclusion

EDIT is a nice addition to DOS. It has many of the basic features of word processors. It also has some nice features not found in many word processors. EDIT's use of dialog boxes, pull down menus, and the mouse gives the program a look and feel similar to DOSSHELL's. This is a significant accomplishment in the ongoing effort to improve the DOS interface.

CHAPTER

9

Extended Keyboard and Display Control

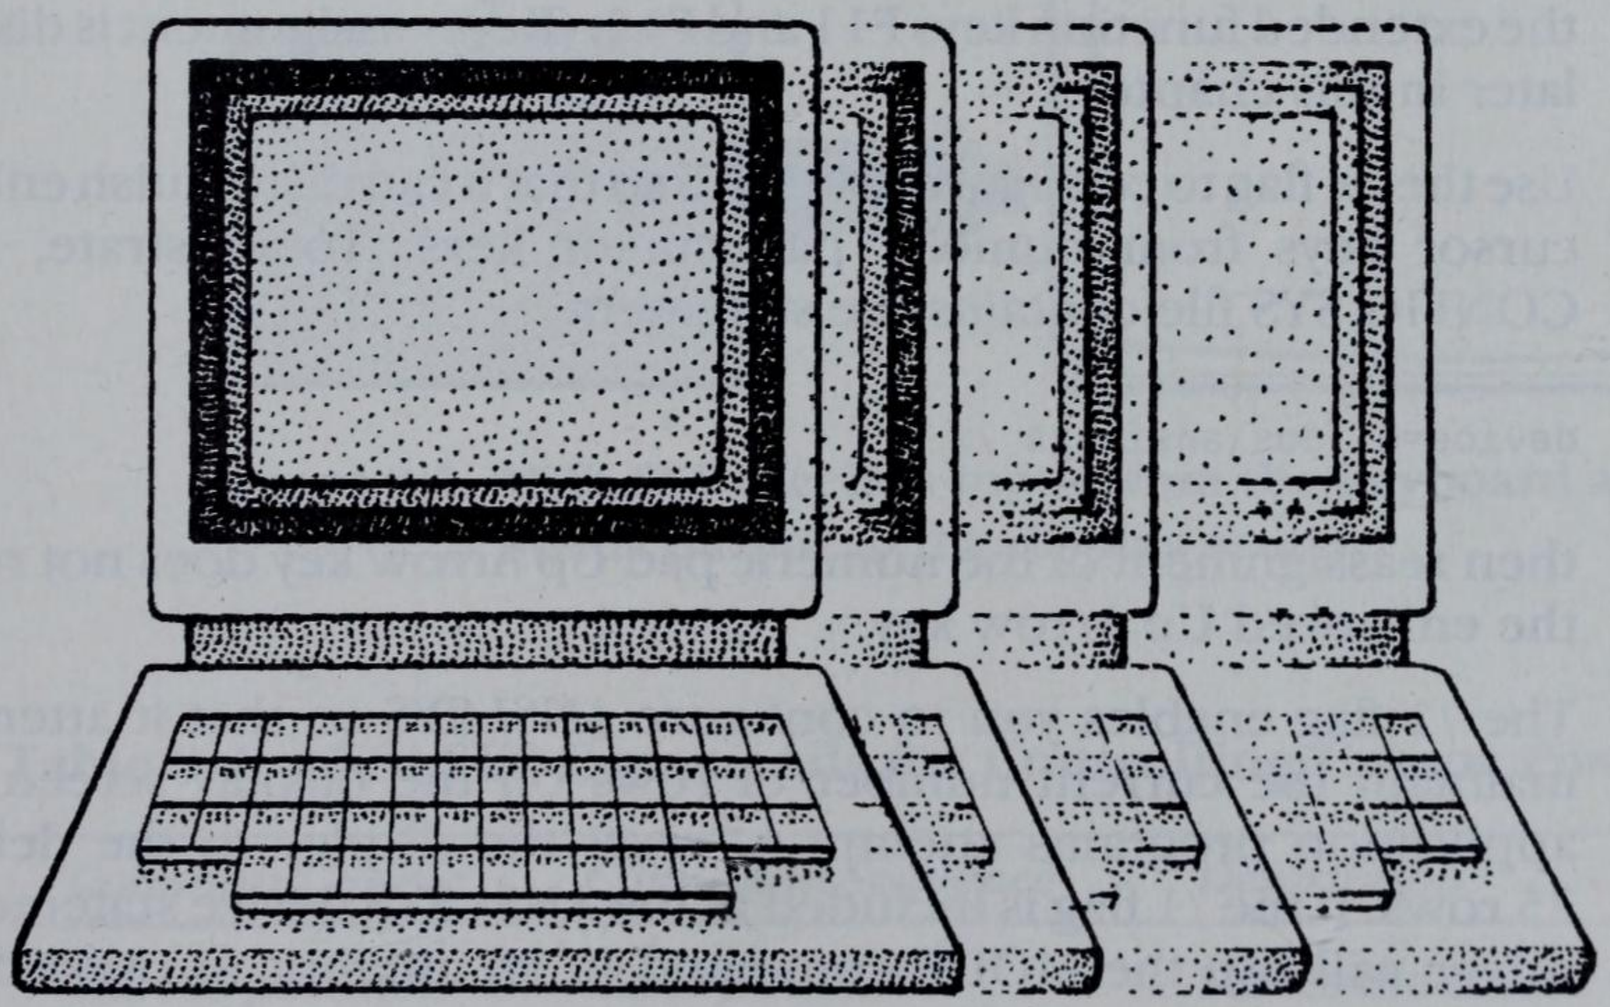

Using ANSI.SYS
Keyboard Reassignment
Screen Control

The ANSI.SYS file is an enhanced keyboard and display device driver supplied with DOS versions 2, 3, 4, and 5. This chapter discusses the ways in which you can employ the enhanced support of the ANSI.SYS console driver.

As with other installable device drivers, you must explicitly configure your system in order to use ANSI.SYS. For example, if the ANSI.SYS file is in your C:\DOS directory, the device driver is installed by including the following statement in your CONFIG.SYS file:

```
device=c:\dos\ansi.sys
```

Remember that in order to use ANSI.SYS, you must reboot after changing CONFIG.SYS.

ANSI.SYS Flags

The DOS 4 version of ANSI.SYS has three optional flags that may be used in the `device` statement used to load the driver.

The `/k` flag enables you to configure ANSI.SYS so that it cannot reassign the extended function keys F11 and F12. (Key reassignment is discussed later in this chapter.)

Use the `/x` flag to configure ANSI.SYS so that it can distinguish enhanced cursor keys from numeric pad cursor keys. To illustrate, if your CONFIG.SYS file contains the statement

```
device=c:\dos\ansi.sys /x
```

then reassignment of the numeric pad Up Arrow key does not reassign the enhanced Up Arrow key.

The `/l` flag enables you to configure ANSI.SYS so that it attempts to maintain the current number of rows on the display screen. Some application programs attempt to reset the display to the default of 25 rows. If the `/l` flag is included in the ANSI.SYS device statement, the driver will use the MODE command in an attempt to override such programs.

Using ANSI.SYS

Data entered from the keyboard is sent to the computer as a sequence of ASCII characters. When ANSI.SYS is installed, it processes all character sequences sent from the keyboard. ANSI.SYS recognizes certain character

sequences as being *command sequences*. Command sequences direct ANSI.SYS to modify keyboard input or to modify display screen output (figure 9-1). All ANSI.SYS command sequences begin with an *escape character* whose ASCII value is 27 (see appendix G for ASCII values). ANSI.SYS command sequences are not displayed on the screen.

ANSI.SYS can perform four types of actions: control the cursor position, erase all or part of the display screen, reassign character strings to individual keys on the keyboard, and set display modes and attributes. Tables 9-1 through 9-5 list the individual commands, the corresponding command sequences, and a brief explanation of each command.

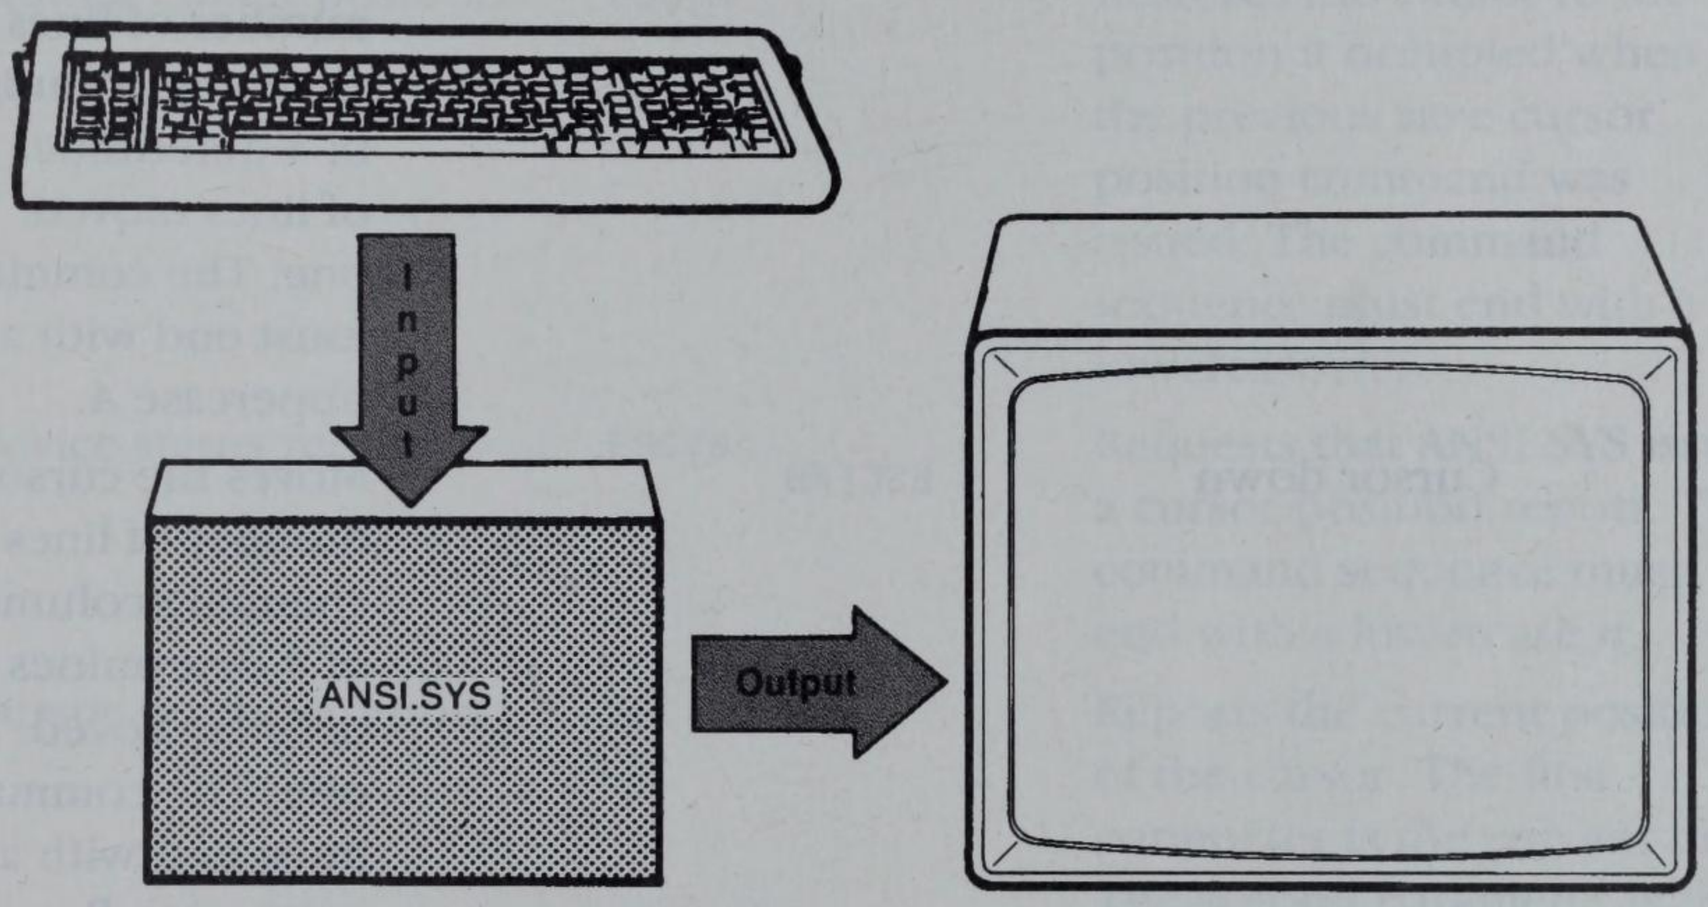

Figure 9-1. ANSI.SYS receives input from the keyboard and sends output to the display screen.

Table 9-1. ANSI.SYS Commands for Controlling Cursor Position

Command Name	*Command Sequence*	*Description*
Cursor position	`ESC[#; #H`	Moves the cursor to a specified position on the display screen. The position is specified by the # parameters. The first parameter specifies the line number, and the second parameter specifies the

continues

Table 9-1. continued

Command Name	*Command Sequence*	*Description*
		column number of the cursor position. The cursor will move to the home position if no position is specified. The command sequence must end with an uppercase *H*.
Cursor up	ESC[#A	Moves the cursor up a number of lines without changing columns. The value of # determines the number of lines moved. The default is one. The command sequence must end with an uppercase *A*.
Cursor down	ESC[#B	Moves the cursor down a number of lines without changing columns. The value of # determines the number of lines moved. The default is one. The command sequence must end with an uppercase *B*.
Cursor forward	ESC[#C	Moves the cursor forward without changing lines. The value of # determines the number of columns moved. The default is one. The command sequence must end with an uppercase *C*.
Cursor backward	ESC[#D	Moves the cursor backward without changing lines. The value of # determines the number of columns moved. The default is one. The command sequence must end with an uppercase *D*.
Horizontal/ vertical position	ESC[#; #f	Has function identical to cursor position command. Command sequence must end with a lowercase *f*.

Command Name	*Command Sequence*	*Description*
Save cursor position	`ESC[s`	Saves, in memory, the current position of the cursor. The position of the cursor can be restored with the restore cursor position command. The command sequence must end with a lowercase *s*.
Restore cursor position	`ESC[u`	Restores the cursor to the position it occupied when the previous save cursor position command was issued. The command sequence must end with a lowercase *u*.
Device status report	`ESC[6n`	Requests that ANSI.SYS issue a cursor position report. The command sequence must end with a lowercase *n*.
Cursor position report	`ESC[#; #R`	Reports the current position of the cursor. The first parameter is the current line. The second parameter is the current column. ANSI.SYS issues a cursor position report in response to a device status report.

Table 9-2. ANSI.SYS Commands for Erasing the Display Screen

Command Name	*Command Sequence*	*Description*
Erase display	`ESC[2J`	Erases entire display and positions the cursor at the home position. The command sequence must end with an uppercase *J*.
Erase line	`ESC[K`	Erases from the cursor to the end of the line. The command sequence must end with an uppercase *K*.

Table 9-3. ANSI.SYS Commands for Controlling Display Screen Attributes

Command Name	*Command Sequence*	*Description*
Set graphics rendition	`ESC[#;...;#m`	Sets the screen display attributes. The command sequence may contain one or more of the parameters that are listed below. The command sequence must end with a lowercase *m*.

Attribute Parameters	*Meaning*
0	All attributes off. Normal display
1	High intensity display on
4	Underscore on. Underscore will not work with a color display
5	Blink on
7	Reverse video on
8	Concealed on. No display
30	Black foreground
31	Red foreground
32	Green foreground
33	Yellow foreground
34	Blue foreground
35	Magenta foreground
36	Cyan foreground
37	White foreground
40	Black background
41	Red background
42	Green background

Attribute Parameters	*Meaning*
43	Yellow background
44	Blue background
45	Magenta background
46	Cyan background
47	White background

Table 9-4. ANSI.SYS Commands for Setting Display Mode

Command Name	*Command Sequence*	*Description*
Set mode	`ESC[=#h`	Sets display mode according to the parameter (#) specified. Command sequence must end with a lowercase *h*. (See Screen Control later in this chapter for more information on the display mode.)
Reset mode	`ESC[=#l`	Resets display mode according to the parameter (#) specified. Equivalent to set mode except for parameter 7, which turns end-of-line wrap off. Command sequence must end with a lowercase *l*.

Mode Parameters	*Meaning*
0	40 × 25 black and white
1	40 × 25 color
2	80 × 25 black and white
3	80 × 25 color
4	320 × 200 color
5	320 × 200 black and white
6	640 × 200 black and white
7	End-of-line wrap turned on

continues

Table 9-4. continued

Mode parameters 14 through 19 are supported in DOS 4.0 and subsequent versions only.

Mode Parameters	*Meaning*
14	640 × 200 color
15	640 × 350 mono (EGA)
16	640 × 350 color (EGA)
17	640 × 480 color (VGA)
18	640 × 480 color (VGA)
19	320 × 200 color

Table 9-5. ANSI.SYS Commands for Controlling Keyboard Reassignment

Command Name	*Command Sequence*	*Description*
Keyboard	`ESC[#; #…;# p` or `ESC[#;"string";p`	Reassigns a character reassignment string to the key specified by the first ASCII code (#) in the sequence. The character string is deter mined by the remaining ASCII codes in the sequence. If the first ASCII code is a zero, the second ASCII code in the sequence determines which function key is as signed the character string. (See the section Keyboard Reassignment later in this chapter.)

An Example

The erase display command (table 9-2) is coded by the ASCII character sequence `ESC[2J`. Note that `ESC` refers to the escape character—a single ASCII character—and not the three characters *E*, *S*, and *C*. The display screen is erased when the sequence `ESC[2J` is sent to ANSI.SYS. This sounds simple,

and it is—except for one problem. All ANSI.SYS commands begin with an escape character, and sending an escape character to the display screen may require some special tactics.

Unless your system is one of those made by certain suppliers, you cannot use the Esc key to enter an escape character. In most machines, pressing Esc causes MS-DOS to cancel the current line being entered and skip to the next line. You can verify this by entering **copy con:** to try to create a text file containing the erase display command:

```
C:\>copy con: erase.txt
\       ←pressing Esc displays a "\" and causes MS-DOS to skip to the next line
[2J
^Z
        1 File(s) copied

C:\>type erase.txt
[2J
```

The `type` command displays the file that was created. As you can see, the file did not begin with an ESC character. The **type** command would have erased the display screen if the file had contained the complete sequence for the erase display command.

Consider yourself fortunate if your system allows you to enter the escape character from the keyboard; entering ANSI.SYS commands will be much easier for you. For example, a file that erases the display screen could be created as follows:

```
C:\>copy con: erase.txt
^[[2J       ←pressing Esc displays the ^[, which represents the ESC character
^Z
        1 File(s) copied
```

Getting ESC into a File

One way to insert an escape character into a file is to create the file with a dummy character in place of the escape character. Once the file is created, you could use the MS-DOS utility program DEBUG to replace the dummy character with an escape character (see chapter 15). However, there is an easier way.

You can use the MS-DOS command PROMPT to enter an escape character in a text file. PROMPT is used to change the MS-DOS system prompt. Simply enter **prompt**, followed by the new system prompt. For

example, if you wanted to change the system prompt to ROCK AND ROLL, you could do it by entering the following command:

```
C:\>prompt ROCK AND ROLL
ROCK AND ROLL _
```

ROCK AND ROLL is now the system prompt, and MS-DOS will display it whenever it is ready to accept a command.

The PROMPT command is discussed in Part 2. Of interest to us now is the fact that we can place an escape character in the system prompt by including **$e** in the PROMPT command. Suppose that the current system prompt is the default prompt (C:\>) and that the following command is entered:

```
C:\>prompt $e[2J
```

What happens? Remember that MS-DOS sends all screen output to the ANSI.SYS black box (figure 9-1). When MS-DOS is ready to display the prompt, it sends the system prompt, as output, to ANSI.SYS. Because this system prompt begins with ESC[, ANSI.SYS recognizes the output as a command sequence, and the specified command is executed. In this case, the screen is cleared. The system prompt (ESC[2J) is not displayed, because ANSI.SYS does not display command sequences. The screen simply goes blank each time that MS-DOS calls for a system prompt. Although a screen that constantly blanks out is of limited value, this example does show how the prompt command can be used to send an escape character to ANSI.SYS.

The examples in this chapter will use the PROMPT command to enter the escape character, because most suppliers of MS-DOS do not include direct keyboard entry of ESC. However, if you are one of the lucky ones, you do not have to resort to this rather awkward technique when using ANSI.SYS.

The remaining sections of this chapter will present some examples of how ANSI.SYS can be used for more practical modifications to MS-DOS.

Keyboard Reassignment

The ANSI.SYS device driver can be used to reassign values to individual keys on the computer keyboard (table 9-5). Like all ANSI.SYS command sequences, reassignment sequences begin with the ESC character followed by a left bracket ([). The left bracket is followed by the ASCII code (see appendix G) of the key that is to have a new value assigned to it. For example, if you wanted to assign a new value to the *A* key, the command sequence would begin with **ESC[97**.

The first ASCII code is followed by one or more additional ASCII codes. The key indicated by the first code takes on the values of the remaining ASCII codes in the command sequence. All ASCII codes are separated by semi colons. The command sequences for keyboard reassignment are terminated by a lowercase *p*.

Let's say that you want to reassign *apple* to the *A* key so when you pressed *A*, *apple* would display on the screen. The command sequence used is **ESC[97** followed by the ASCII values for *a*, *p* (twice), *l*, and *e*. The command sequence is terminated by a lowercase *p*. The entire command sequence would be:

```
esc[97;97;112;112;108;101p
```

Now we will add the command `prompt $e` to generate the ESC character. Let's put everything together. Enter the following command to turn your *a* into an *apple*:

```
C:\>prompt $e[97;97;112;112;108;101p
```

Does it work? Press the *a* key; you should get `apple`. If you don't, you may not have installed ANSI.SYS. Refer to the beginning of this chapter if you need help in installing ANSI.SYS. The other point to remember is that a new value has been assigned to lowercase *a* only. Pressing the key for the uppercase letter will still give `A`. If you try this example on your computer, you will notice that no system prompt is displayed. This is because the prompt is now an ANSI.SYS command sequence and command sequences are not displayed. To get the familiar `C:\>` back, enter

```
prompt
C:\>
```

You can get your *a* back by sending the sequence **ESC[97;97p** to ANSI.SYS:

```
C:\>prompt $e[97;97p        ←reassigns the letter a
to the "a" key
prompt          ←resets the prompt to C:\>
C:\>
```

In the previous example, we entered a series of ASCII values to be assigned to the *a* key. However, a keyboard reassignment command sequence can also contain the actual character string that you want to assign to a key. Instead of entering the ASCII value for each letter in *apple*, you can

enter the string **"apple"**. Begin the control sequence as before, but replace the series of ASCII values with the actual characters, enclosed in quotation marks. The following sequence turns *a* to "apple":

```
esc[97;"apple"p
```

You can also combine the two methods just discussed. The following sequence will also turn *a* to "apple":

```
esc[97;"appl";101p
```

Function Keys

ANSI.SYS will reassign a string to one of the function keys (F1–F10) when the first ASCII code in a reassignment sequence is zero. The second ASCII code in the command sequence determines which key is reassigned. The following sequence reassigns the string "dir" to the F1 function key:

```
esc[0;59;"dir"p
```

This sequence can be sent to ANSI.SYS with the following command:

```
C:\>prompt $e[0;59;"dir"p
prompt

C:\>
```

Appendix G has a complete list of the extended ASCII codes for the 40 function keys (unshifted, shifted, Ctrl-shifted, and Alt-shifted). The next discussion includes more examples of how strings can be reassigned to function keys.

Some Useful Applications of Keyboard Reassignment

Keyboard reassignment can be used to assign frequently entered commands to individual keys. Commands so assigned could then be entered with a single keystroke. You can assign up to 128 characters to a single key.

Say that you use your computer for word processing and BASIC programming. To load your word processor, you have to type **wp**. To load your BASIC interpreter, you have to type **gwbasic**. You could save yourself some typing by reassigning each of these commands to a function key.

We will illustrate by first reassigning "gwbasic" to the F2 function key. The F2 key has an extended ASCII code of 0,60 (see appendix G). Therefore, the reassignment code sequence will begin with **ESC[0,60**. The character string reassigned to the function key can be specified in the command sequence:

```
esc[0;60;"gwbasic"
```

This command sequence tells ANSI.SYS to display `gwbasic` when the F2 key is pressed. A carriage return must be requested before MS-DOS will load GW-BASIC. This can be accomplished by including the ASCII code for carriage return (13) in the command sequence. The complete command sequence for key reassignment is terminated with a lowercase *p*:

```
esc[0;60;"gwbasic";13p
```

Again, we use the command `prompt $e` to send an ESC character to the ANSI.SYS device driver:

```
C:\>prompt $e[0;60;"gwbasic";13p      ←this sends the command sequence
prompt      ←this resets the prompt to default

C:\>
```

The BASIC interpreter will now be loaded when you press the F2 key.

We can assign `wp` to the F3 function key (ASCII code **0,61**) by entering the following command:

```
C:\>prompt $e[0;61;"wp";13p
prompt

C:\>
```

Let's also assign the MS-DOS command DIR and the s switch to the F1 function key (ASCII code **0,59**):

```
C:\>prompt $e[0;59;"dir/w";13p
prompt

C:\>
```

Let's put all of these reassignment commands into a single batch file. If the file is given the name AUTOEXEC.BAT, it will automatically execute when

MS-DOS is booted. We will also include the TIME and DATE commands in the batch file so that the time and date will be set when MS-DOS boots.

```
C:\>copy con: autoexec.bat
date
time
rem
rem reassign f1
prompt $e[0;59;"dir/w";13p
rem
rem reassign f2
prompt $e[0;60;"gwbasic";13p
rem
rem reassign f3
prompt $e[0;61;"wp";13p
rem
rem return prompt to default (C:\>)
prompt
^Z
        1 File(s) copied

C:\>
```

This batch file will automatically execute if it is in the root directory of the boot disk. The reassignments we entered will take effect once the file has been executed.

Screen Control

You can use the ANSI.SYS device driver to control cursor position and set display mode and attributes. The command sequences for screen control are listed in tables 9-2 through 9-5.

This section will show you how to use ANSI.SYS to control the display screen by modifying the batch file developed in the discussion of key reassignment. We will add a PROMPT command to the end of the file that will send a series of display command sequences to ANSI.SYS. These commands will modify the display screen. When the batch file terminates, the system prompt will consist of these display commands. The commands will be sent to ANSI.SYS each time that the prompt is displayed. The screen modifications will be displayed each time MS-DOS requests the system prompt to be displayed.

The commands placed in the batch file will instruct ANSI.SYS to perform the following tasks: move the cursor to the home position (first line, first column), clear any text in the first line, switch to the high-intensity display

mode, display three messages on the first line, move the cursor to the first column of the 25th line, display a prompt, return to the normal display mode, and, finally, clear line 25 of any text to the right of the prompt. This sounds complicated, but it can all be accomplished with one PROMPT command.

The first task that we want to accomplish is to move the cursor to the home position. Table 9-1 shows the ANSI.SYS command sequences that control the cursor. The cursor position command is ESC[#;#H. Remember that the # symbols represent parameters. The first parameter is the line number, and the second parameter is the column number of the screen location where the cursor is to be located. The cursor will be moved to the home position if no parameters are included in the command sequence. The cursor position command must be terminated by an uppercase *H*. Therefore, the first screen control command sequence that we will send to ANSI.SYS is **ESC[H** (move cursor to home position).

Next, we want ANSI.SYS to erase the first line on the display screen. This is accomplished with the sequence **ESC[K** (table 9-2). The command sequence must end with an uppercase *K*.

The next command sequence will switch the display mode to high intensity. This is accomplished with the command sequence **ESC[1m** (table 9-4). A lowercase *m* is required.

So far our command series consists of three command sequences:

```
esc[H          esc[K          esc[1m
  ↓              ↓              ↓
Home           Erase       High-Intensity
```

The ESC character will be sent to ANSI.SYS by using the `prompt $e` command; therefore, the three ANSI.SYS commands can be sent with the following command:

```
prompt $e[H $e[K $e[1m
```

After the cursor has been positioned, the line cleared, and the high-intensity mode set, we want ANSI.SYS to display a message. Because we will be using a PROMPT command to send the commands, we can simply include the message as part of the prompt:

```
prompt $e[H $e[K $e[1m directory-f1
```

Next, we want ANSI.SYS to advance the cursor eight spaces and then display another message. The cursor forward command advances the cursor. The command sequence is **ESC[#C**, where the **#** symbol represents the number of spaces forward that the cursor will be moved. The default value for # is

one. The command sequence to move the cursor forward eight spaces is **ESC[8C**. The command must end with an uppercase "C:"

```
prompt $e[H $e[K $e[1m directory-f1 $e[8C basic interpreter-f2
```

After displaying the second message, we want ANSI.SYS to advance the cursor eight more spaces and display a third message:

```
prompt $e[H $e[K $e[1m directory-f1 $e[8C basic interpreter-f2
$e[8C word processor-f3
```

After displaying the third message on the first line, we want ANSI.SYS to move the cursor to the first column in line 25. Again, we will use the cursor position command sequence (**ESC[#;#H**); this time we will specify some parameters:

```
prompt $e[H $e[K $e[1m directory-f1 $e[8C basic
interpreter-f2 $e[8C word processor-f3 $e[25;1H
```

With the cursor at line 25, column 1, we will have ANSI.SYS display a prompt, return to the regular display mode, and clear line 25 of all text beyond the prompt:

```
prompt $e[H $e[K $e[1m directory-f1 $e[8C basic interpreter-f2
$e[8C word processor-f3 $e[25;1H ENTER COMMAND: $e[0m $e[K
```

If we make this PROMPT command the last command in a batch file, the system prompt at the end of the batch file execution will be the sequence of messages and ANSI.SYS commands and prompts that we have just discussed. Each time MS-DOS calls for a system prompt, ANSI.SYS will execute the commands and display the messages and prompts.

To get a better idea of what we are talking about, let's use EDLIN to modify this same batch file. (See the preceding section on keyboard reassignment for the original batch file and see appendix E for a discussion of EDLIN commands.)

```
C:\>edlin autoexec.bat      ←edit file created in previous section
End of input file           ←EDLIN responds that the file has been loaded
*L          ←enter L; EDLIN will display file

     1:*DATE
     2: TIME
     3: REM
```

```
 4: REM REASSIGN F1
 5: PROMPT $e[0;59;"DIR/W";13p
 6: REM
 7: REM REASSIGN F2

 8: PROMPT $e[0;60;"GWBASIC";13p
 9: REM
10: REM REASSIGN F3
11: PROMPT $e[0;61;"WP";13p
12: REM
13: REM RETURN PROMPT TO DEFAULT (C:\>)
14: PROMPT
*       ←EDLIN waits for the next command
```

The first step in modifying the batch file is to remove the lines that reset the system prompt to the default. This is accomplished by deleting the last three lines of the file:

```
*12,14d       ←delete lines 12–14
*1L       ←to list file starting with line 1

    1:*DATE
    2: TIME
    3: REM
    4: REM REASSIGN F1
    5: PROMPT $e[0;59;"DIR/W";13p
    6: REM
    7: REM REASSIGN F2
    8: PROMPT $e[0;60;"GWBASIC";13p
    9: REM
   10: REM REASSIGN F3
   11: PROMPT $e[0;61;"WP";13p
*
```

Now we want to put into the file the PROMPT command that does all the wonderful things we have just described. We will also put some rem (remark) statements in the batch file to explain what is going on.

```
*12i       ←to insert text beginning at line 12
    12:*rem       ←type a line of text and press Enter
    13:*rem the following prompt command instructs ansi.sys to
    14:*rem perform several functions:
    15:*rem move cursor to home, clear first line, set display mode to
    16:*rem hi intensity, print 3 messages at top of screen, move cursor
    17:*rem to line 25 column 1, print a prompt, reset display mode to
    18:*rem normal intensity, and clear right side of line 25.
```

```
    19:*rem
    20:*prompt $e[H $e[K $e[1m directory-f1 $e[8C basic interpreter-f2
$e[8C word processor-f3 $e[25;1H ENTER COMMAND: $e[0m $e[K
    21:*^Z      ←enter Ctrl-Z to terminate the INSERT command
*
```

The final line added to the batch file will be the MS-DOS command CLS. This command will clear the display screen:

```
*21i        ←to insert text beginning at line 21
    21:*rem
    22:*rem The next command clears the screen. The batch file will
    23:*rem then terminate and return control to ms-dos.
    24:*cls
    25:*^Z      ←enter Ctrl-Z to terminate INSERT command
*1L         ←to display file
     1: DATE
     2: TIME
     3: REM
     4: REM REASSIGN F1
     5: PROMPT $e[0;59;"DIR/W";13p
     6: REM
     7: REM REASSIGN F2
     8: PROMPT $e[0;60;"GWBASIC";13p
     9: REM
    10: REM REASSIGN F3
    11: PROMPT $e[0;61;"WP";13p
    12: rem
    13: rem THE FOLLOWING PROMPT COMMAND INSTRUCTS ANSI.SYS TO
    14: rem PERFORM SEVERAL FUNCTIONS:
    15: rem MOVE CURSOR TO HOME, CLEAR FIRST LINE, SET DISPLAY MODE
TO
    16: rem HI INTENSITY, PRINT 3 MESSAGES AT TOP OF SCREEN, MOVE
CURSOR
    17: rem TO LINE 25 COLUMN 1, PRINT A PROMPT, RESET DISPLAY MODE
TO
    18: rem NORMAL INTENSITY, AND CLEAR RIGHT SIDE OF LINE 25.
    19: rem
    20: PROMPT $e[H $e[K $e[1m DIRECTORY-F1 $e[8C BASIC INTERPRETER-
F2
$e[8C WORD PROCESSOR-F3 $e[25;1H ENTER COMMAND: $e[0m $e[K
    21: rem
    22: rem THE NEXT COMMAND CLEARS THE SCREEN. THE BATCH FILE WILL
    23: rem THEN TERMINATE AND RETURN CONTROL TO MS-DOS.
    24: CLS
*e          ←to save the file and exit EDLIN
C:\>
```

The AUTOEXEC.BAT file is now stored in the root directory of the boot disk, and it will automatically execute when MS-DOS is booted. Let's try it. Press the Ctrl-Alt-Del key combination to reboot the system. AUTOEXEC.BAT should begin execution, prompting you to enter the date and time. The first three PROMPT commands reassign character strings to the F1, F2, and F3 function keys. The fourth PROMPT command sets the screen control sequence. The CLS command clears the screen, and the batch file terminates, returning control to MS-DOS.

MS-DOS signals that it is ready to accept another command by displaying the system prompt. In this case, the system prompt is the screen control sequence that was the final PROMPT command in the batch file.

Figure 9-2 shows the appearance of the display screen after the batch file executes. This display is the current system prompt. MS-DOS commands can be entered in the normal fashion. The commands `dir/w`, `gwbasic`, and `wp` may be entered simply by pressing function keys F1, F2, and F3. The screen control sequence will be executed each time that MS-DOS is ready to accept another command. The system prompt can be changed at any time by using the PROMPT command.

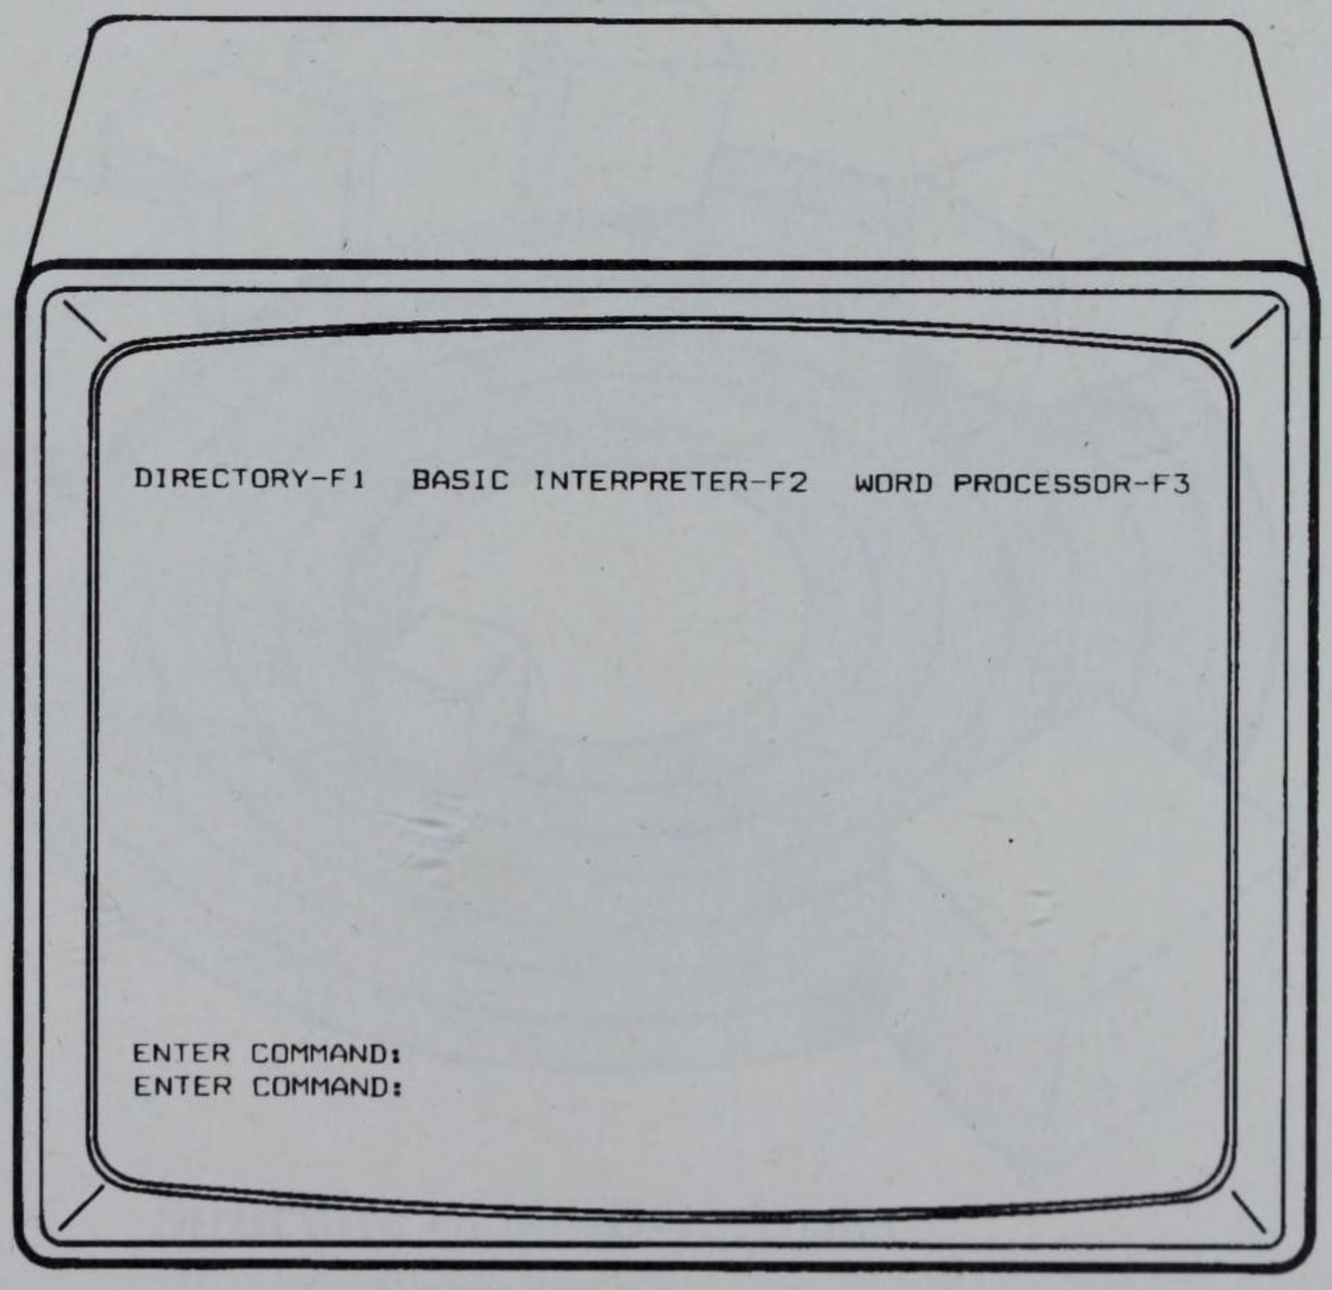

Figure 9-2. The appearance of the display screen after AUTOEXEC.BAT has been executed.

Note: MS-DOS displays the system prompt twice at the end of a batch file. Because of this, the bottom line in figure 9-2 (`ENTER COMMAND:`) will be displayed twice when the system first boots. Each subsequent display of the system prompt will display `ENTER COMMAND:` one time. You can avoid this minor annoyance by modifying the last PROMPT command in AUTOEXEC.BAT. The boldface indicates the modified portion.

```
prompt $e[H $e[K $e[1m directory-f1 $e[8C basic
interpreter-f2 $e[8C word
processor-f3 $e[24;1H $e[K $e[25;1H ENTER COMMAND: $e[0m  $e[K
```

CHAPTER

10

Disk Structure and Management

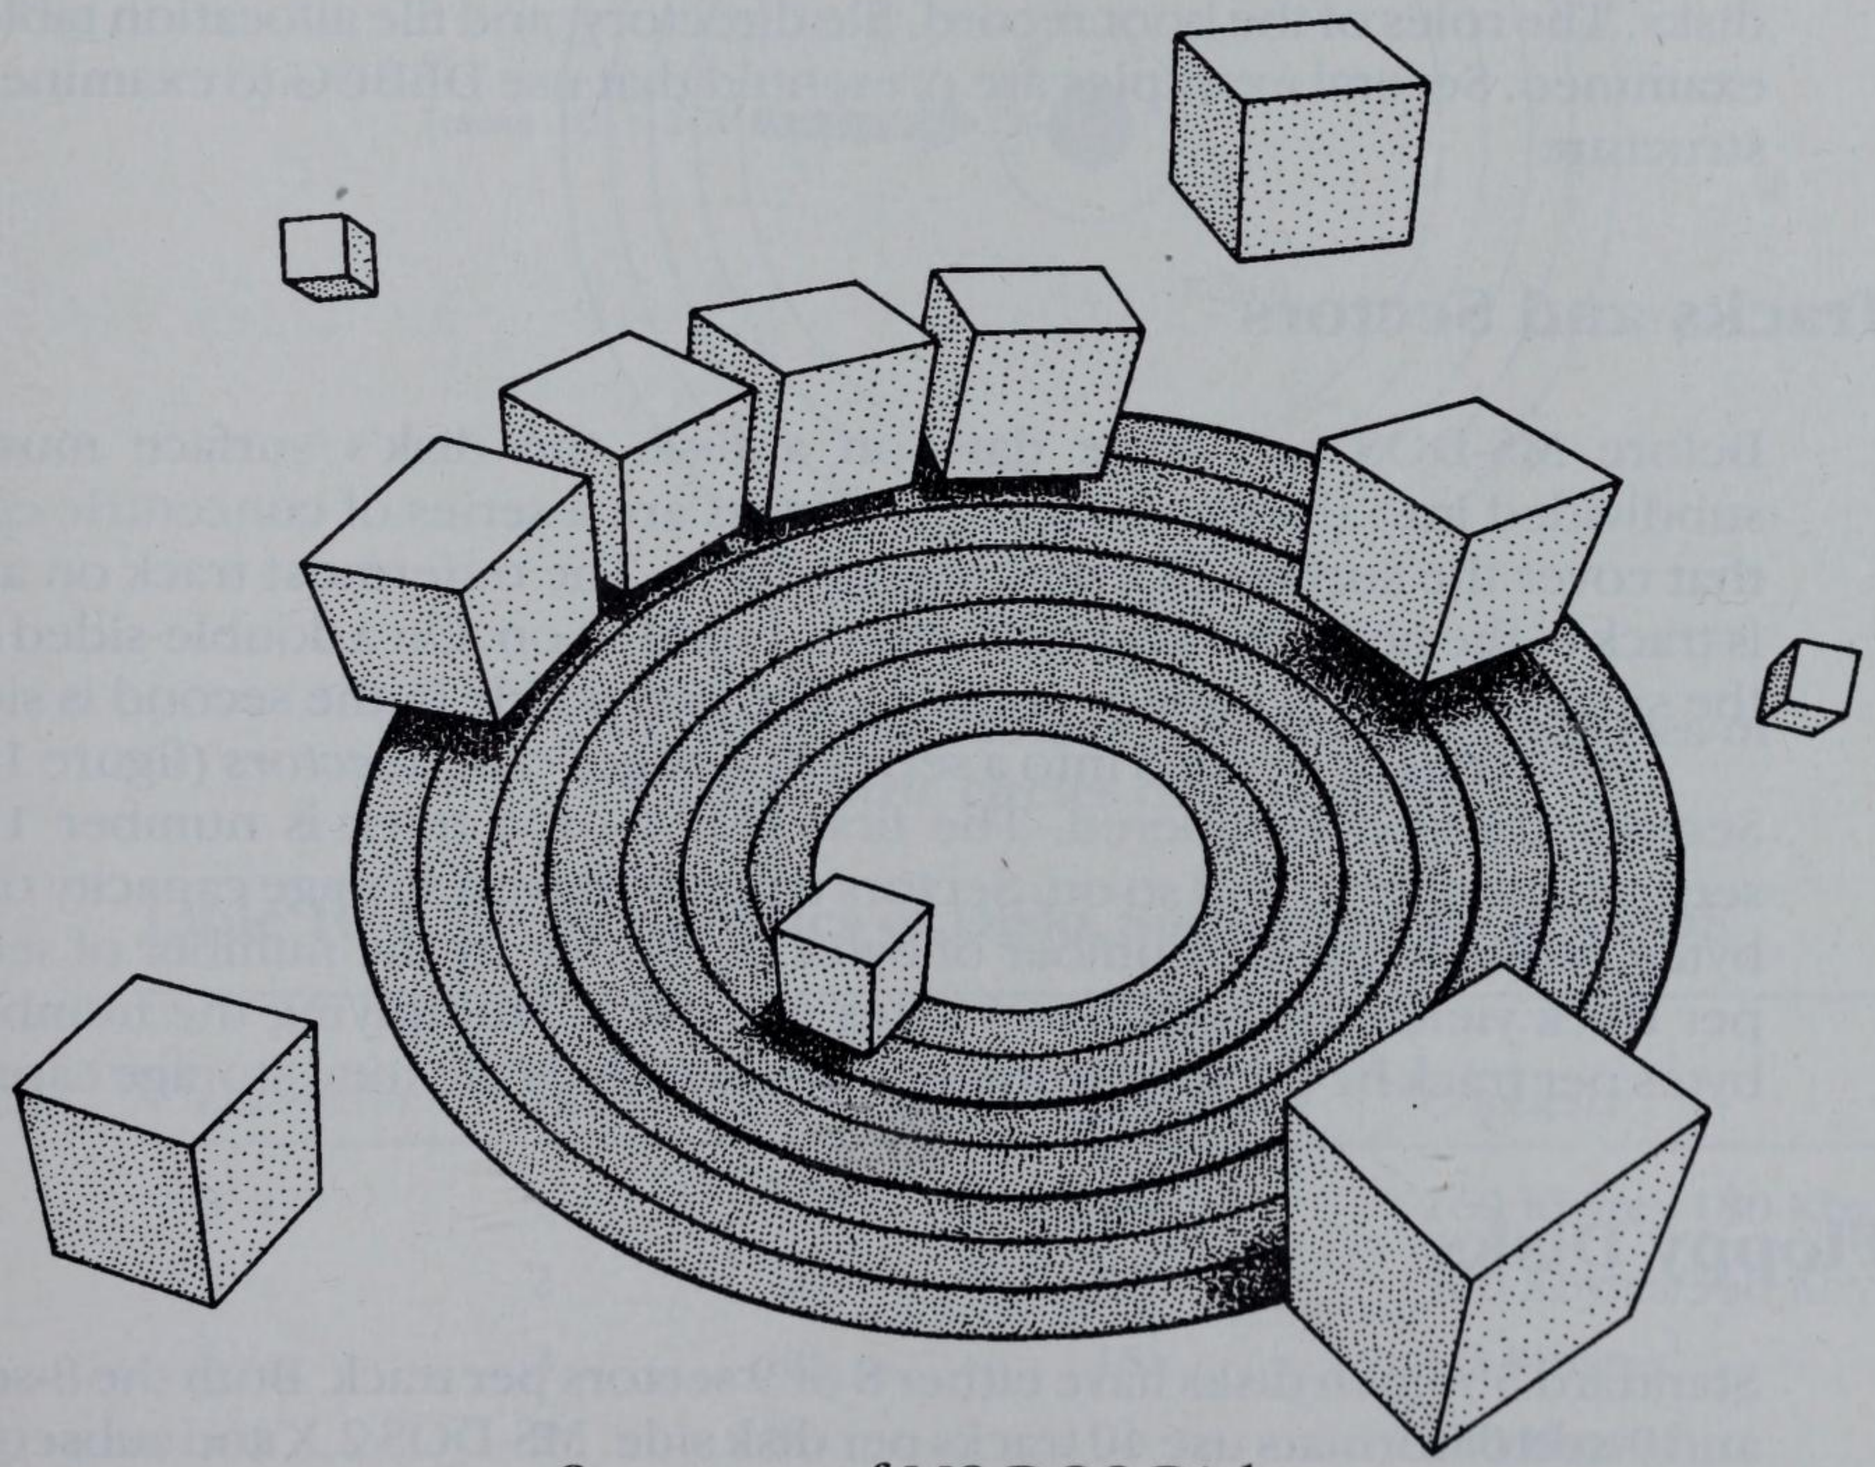

Structure of MS-DOS Disks
Formatting
Examining the File Directory and the FAT
Exploring with DEBUG
MS-DOS File Management

This chapter looks at the internal structure of disks used by MS-DOS. It also discusses how the operating system keeps track of files on a disk as well as how the contents of a file are accessed. Throughout this chapter, the word *disk* refers to both fixed disks and floppies unless specified otherwise.

This chapter does not contain any material needed for the routine use of MS-DOS. The material presented is intended for those readers who want a more thorough understanding of the operating system. Some familiarity with hexadecimal arithmetic and assembly language programming will be helpful but is not essential.

Structure of MS-DOS Disks

This section discusses the way that MS-DOS stores and retrieves data from disks. The roles of the boot record, file directory, and file allocation table are examined. Several examples are presented that use DEBUG to examine disk structure.

Tracks and Sectors

Before MS-DOS can store data on a disk, the disk's surface must be subdivided into tracks and sectors. *Tracks* are a series of concentric circles that cover the surface of a disk (figure 10-1). The outermost track on a disk is track 0, the neighboring track is track 1, and so on. On a double-sided disk, the sides are also assigned numbers. The first is side 0; the second is side 1.

Each track is divided into a series of wedges called *sectors* (figure 10-2). Sectors are also numbered. The first sector on a track is number 1; the second, number 2; and so on. Sectors typically have a storage capacity of 512 bytes. Multiplying the number of bytes per sector by the number of sectors per track yields the number of bytes per track. Multiplying the number of bytes per track by the total number of tracks yields the total storage capacity.

Floppy Disks

Standard $5^1/_4$-inch disks have either 8 or 9 sectors per track. Both the 8-sector and 9-sector formats use 40 tracks per disk side. MS-DOS 2.X and subsequent versions can use both types of disks. MS-DOS 1.X cannot use disks with the 9-sector format.

High-density 5¼-inch disks have 15 sectors per track and 80 tracks per side. High-density disks require high-density drives and are supported by MS-DOS 3.X, 4.X, and 5.X.

In addition to the standard and high-density 5¼-inch disks, MS-DOS 3.X, 4.X, and 5.X also support 3½-inch disks with 80 tracks per side and either 9 or 18 sectors per track. Table 10-1 summarizes the characteristics of the floppy disks supported by MS-DOS.

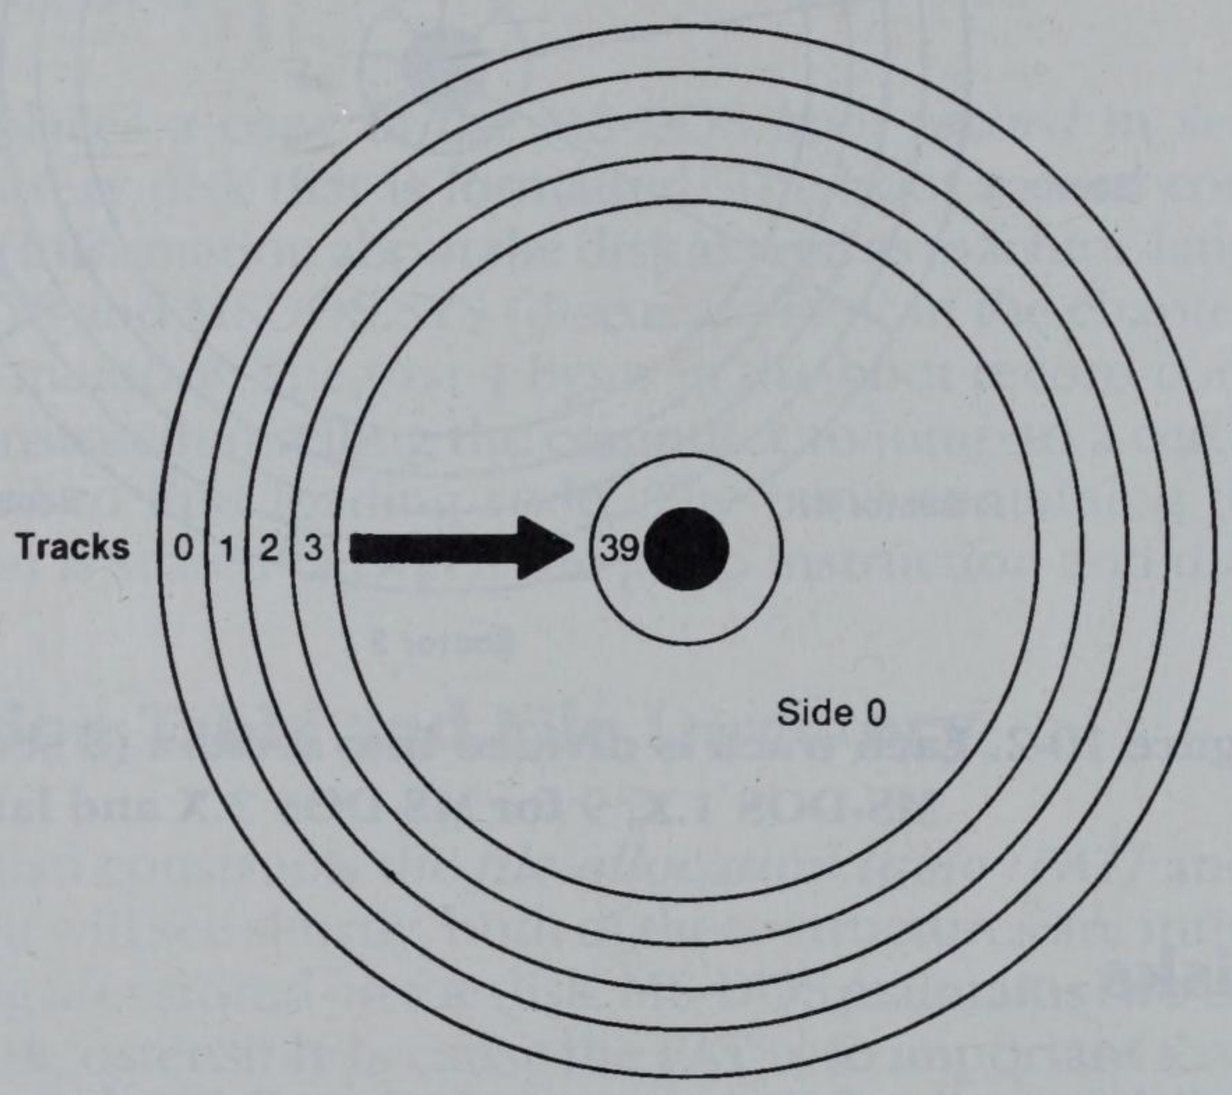

Figure 10-1. Each disk surface is divided into a series of concentric circles called *tracks*.

Table 10-1. Characteristics of Disks Supported by MS-DOS

Diameter	*Sides*	*Tracks per Side*	*Sectors per Track*	*Capacity*
5¼	1	40	8/9	160 Kbytes/180 Kbytes
5¼	2	40	8/9	320 Kbytes/360 Kbytes
5¼	2	80	15	1.2 Mbytes[1]
3½	2	80	9	720 Kbytes[2]
3½	2	80	18	1.44 Mbytes[3]

[1]Starting with DOS 3.0.
[2]Starting with DOS 3.2.
[3]Starting with DOS 3.30.

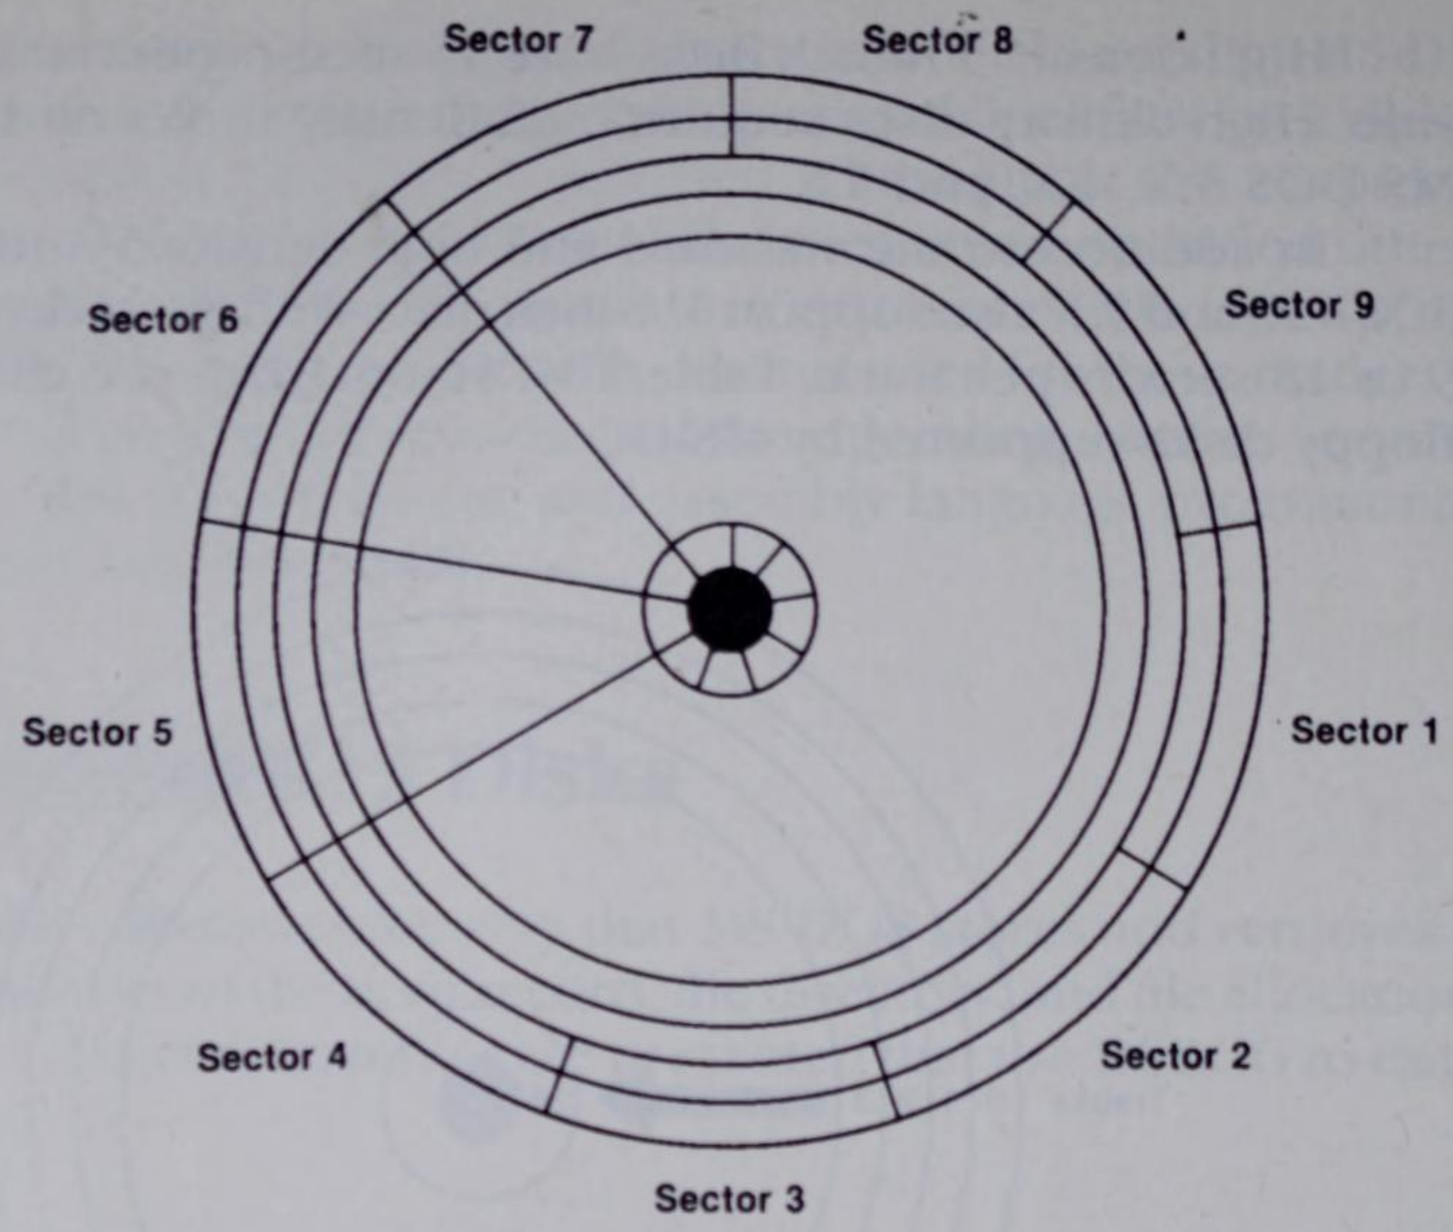

Figure 10-2. Each track is divided into *sectors* (8 sectors per track for MS-DOS 1.X, 9 for MS-DOS 2.X and later).

Hard Disks

Hard disks consist of one or more *platters*. Each platter has two surfaces on which data is stored. MS-DOS divides the surface of each platter into tracks, and the tracks are subdivided into sectors. All tracks that have the same radius form a *cylinder*. Thus, all tracks numbered 0 form a cylinder, all tracks numbered 1 form another cylinder, and so on.

The layout of hard disk drives varies considerably, according to disk capacity and disk manufacturer. As an example, the hard drive on my system is listed as having a capacity of 42.5 Mbytes. The drive has 5 platters and 977 cylinders. This makes for a total of 4,885 tracks (5 tracks per cylinder × 977 cylinders). Each track has 17 sectors, so there are 83,045 sectors on the entire disk (4,885 × 17). Each sector has 512 bytes, giving a total disk capacity of 42,519,040 bytes (83,045 × 512). Of this total, 42,366,976 bytes are available for use by MS-DOS.

Formatting

Tracks and sectors are constructed using the FORMAT command. FORMAT also writes certain data onto the disk. This section discusses what happens when you use the FORMAT command.

The Boot Record

FORMAT places a copy of the MS-DOS *boot record* in sector 1, track 0, side 0 on every disk that is formatted. The boot record consists of a table containing information about the disk as well as machine language code that loads IO.SYS and MSDOS.SYS (discussed later in the chapter under System Files) into memory. The first 4 bytes in the boot record contain a machine language instruction telling the computer to jump to a certain offset in the boot record to find loading code. The table containing the disk-specific information is stored between the jump instruction and the loading code.

File Allocation Table and File Directory

FORMAT also constructs the *file allocation table (FAT)* and the *file directory*. As you will see shortly, both of these structures are intimately involved in accessing files stored on the disk. MS-DOS maintains two copies of the FAT on each disk, ostensibly because the FAT is so important that a second copy is available should the first be damaged. However, MS-DOS never uses the second copy of the FAT.

Standard 5¼-inch, 8-sector-per-track disks have a 1-sector FAT. Standard 5¼-inch, 9-sector-per-track disks have a 2-sector FAT. High-density (1.2-Mbyte), 5¼-inch disks have a 7-sector FAT. 720-Kbyte, 3½-inch disks have a 3-sector FAT. 1.44-Mbyte, 3½-inch disks have a 12-sector FAT. The 42.5-Mbyte hard drive on my computer has an 81-sector FAT.

The number of sectors occupied by each copy of the FAT is summarized as follows:

Disk Type	*Size of FAT*
Standard 5¼-inch, 8 sectors/track	1 sector
Standard 5¼-inch, 9 sectors/track	2 sectors
High-density 5¼-inch	7 sectors
Standard 3½-inch	3 sectors
High-density 3½-inch	12 sectors
42.5-Mbyte hard disk	81 sectors

Standard 5¼-inch, single-sided disks have a 4-sector file directory. Standard 5¼-inch, double-sided disks have a 7-sector file directory. High-density (1.2-Mbyte), 5¼-inch disks have a 14-sector file directory. 720-Kbyte, 3½-inch disks have a 7-sector file directory. 1.44-Mbyte, 3¼-inch disks have an 8-sector file directory. Most hard drives have a 32-sector file directory.

To summarize, the number of sectors occupied by the file directory is as follows:

Disk Type	*Size of File Directory*
Standard 5¼-inch, single-sided	4 sectors
Standard 5¼-inch, double-sided	7 sectors
High-density 5¼-inch	14 sectors
Standard 3½-inch	7 sectors
High-density 3½-inch	8 sectors
Typical hard disk	32 sectors

Table 10-2 lists the physical location of the boot record, FAT, and file directory on 5¼-inch and 3½-inch disks. Figure 10-3 illustrates the arrangement of these structures on a standard 5½-inch disk.

System Files

The /s switch directs FORMAT to place a copy of the system files on the disk being formatted. The three MS-DOS system files are IO.SYS, MSDOS.SYS, and COMMAND.COM. In PC-DOS, IO.SYS is called IBMBIO.COM, and MSDOS.SYS is called IBMDOS.COM. The system files must be stored on any hard disk or floppy that will be used to boot the system. FORMAT places these files in a particular physical location on the disk in a particular order.

IO.SYS is stored immediately after the last sector of the file directory. IO.SYS consists of the operating system's default device drivers. A *device driver* is a computer program that serves as the interface between the operating system and a peripheral device (device drivers are discussed in chapter 14). Because IO.SYS interacts directly with the hardware, it is highly system-specific and is generally implemented by the computer's manufacturer.

MSDOS.SYS is stored on the disk immediately after the last sector of IO.SYS. MSDOS.SYS forms the kernel of MS-DOS. MSDOS.SYS receives all requests for service functions (such as opening and reading a file) and channels the requests to IO.SYS. The protocol for communication between MSDOS.SYS and IO.SYS is identical from system to system. Therefore, MSDOS.SYS is said to be *hardware independent*.

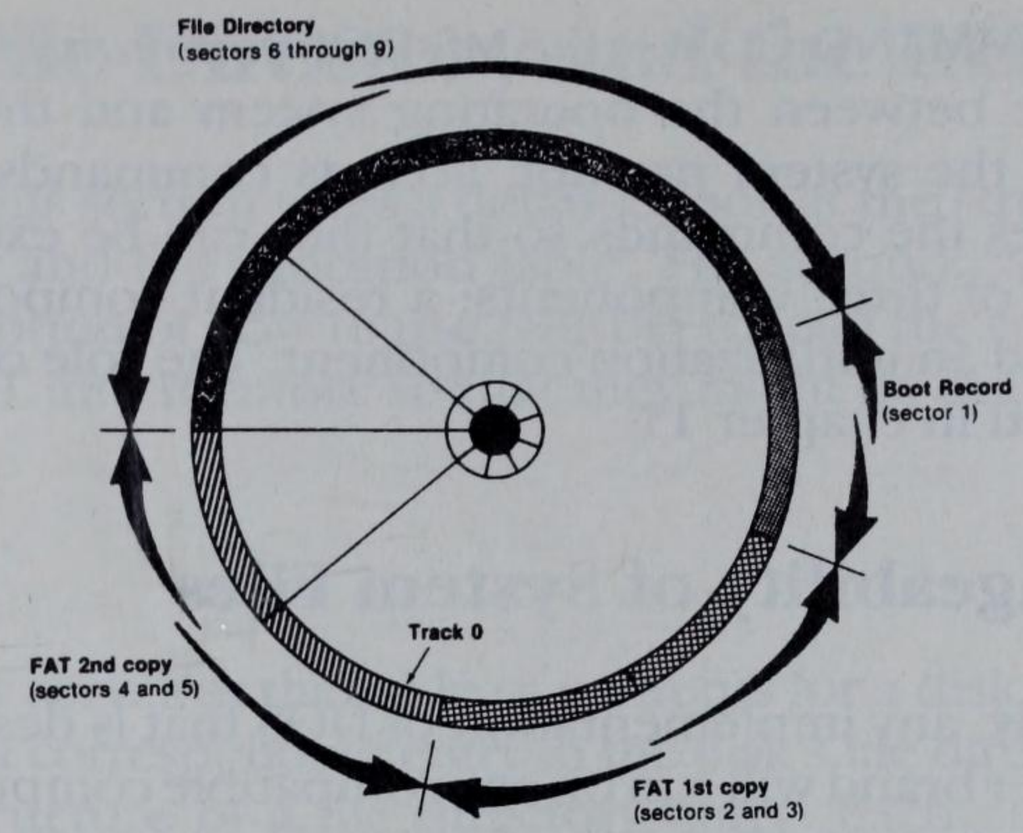

Figure 10-3. Layout for track 0 of boot record, FAT, and file directory on standard 5¼-inch, single-sided, 9-sector/track disk.

Table 10-2. Location of Boot Record, FAT, and File Directory on 5¼" and 3½" Disks

	5¼", 8 Sectors/ Track Disks		5¼", 9 Sector/ Track Disks		5½", Sectors/ Track Disks		3½" Disks
	Single-Sided Disk	*Double-Sided Disk*	*Single-Sided Disk*	*Double-Sided Disk*		*720-Kbyte*	*1.44-Mbyte*
Boot Record	Sector 1 Track 0	Sector 1 Track 0 Side 0	Sector 1 Track 0	Sector 1 Track 0 Side 0	Sector 1 Track 0 Side 0	Sector 1 Track 0 Side 0	Sector 1 Track 0 Side 0
FAT, 1st Copy	Sector 2 Track 0	Sector 2 Track 0 Side 0	Sectors 2–3 Track 0 Side 0	Sectors 2–3 Track 0 Side 0	Sectors 2–8 Track 0 Side 0	Sectors 2–4 Track 0 Side 0	Sectors 2–7 16–18[1] Track 0 Side 0
FAT, 2nd Copy	Sector 3 Track 0	Sector 3 Track 0 Side 0	Sectors 4–5 Track 0	Sectors 4–5 Track 0 Side 0	Sectors 9–15 Track 0 Side 0	Sectors 5–7 Track 0 Side 0	Sectors 4–15 Track 0 Side 1
File Directory	Sectors 4–7 Track 0	Sectors 4–7 Track 0 Side 0	Sectors 6–9 Track 0	Sectors 6–9 Track 0 Side 0	Sectors 1–14 Track 0 Side 1	Sectors 8–9 Track 0 Side 0	Sectors 8–15 Track 0 Side 0
		Sectors 1–3 Track 0 Side 1		Sectors 1–3 Track 0 Side 1		Sectors 1–5 Track 0 Side 1	

[1]Sectors 1–3, Track 0, Side 1 also included in first copy of FAT.

COMMAND.COM is the MS-DOS *command interpreter*; it serves as the interface between the operating system and the user. COMMAND.COM displays the system prompt, accepts commands from the keyboard, and processes the commands so that they can be executed. COMMAND.COM consists of three components: a resident component, a transient component, and an initialization component. The role of the three components is discussed in chapter 11.

Interchangeability of System Files

Generally, any implementation of DOS that is designed to run on a specific computer brand will run on any compatible computer. For example, PC DOS will run on any truly compatible machine, as will COMPAQ's version of MS-DOS, as will Toshiba's version. The only area where the various implementations are significantly different is the IO.SYS file. Recall that IO.SYS is a hardware-specific file, implemented independently by each of the computer manufacturers. However, the hardware used by the different manufacturers is similar enough that IO.SYS is usually compatible across brand lines.

DOS 4 and 5 System Files

With DOS 4.X and 5.X, IO.SYS and DOS.SYS no longer have to be in certain sector positions. Their directory entries can go in any available slots in the root directory. This means that the SYS command can be used to put the system files on any disk that has room, even if it wasn't originally formatted as a system disk.

Because of this compatibility, users can generally switch from one implementation of DOS to another without tremendous difficulty. However, if you plan a switch, bear in mind that the size of the system file (particularly IO.SYS) varies from one implementation to another. Problems may arise if the physical location used to store one implementation of the system files is not large enough to store another implementation of the system files. In addition, some programs with automatic installation procedures assume a specific size for the system files. The installation procedures may fail if these assumptions are not correct.

Examining the File Directory and the FAT

The first part of this section takes a detailed look at the structure and use of the file directory and file allocation table. The second part of this section contains a description of how to use DEBUG to load the contents of the file directory and FAT into memory so that they might be examined.

File Directory

The *file directory* serves as the table of contents for a disk. For every file on the disk, there is a corresponding entry in the disk's file directory. Figure 10-4 illustrates the structure of a file directory entry. Each entry is composed of 32 bytes. The 32 bytes are partitioned into eight fields, each field containing information used by MS-DOS in file management. Table 10-3 lists the fields in a file directory entry and describes the information stored in each field.

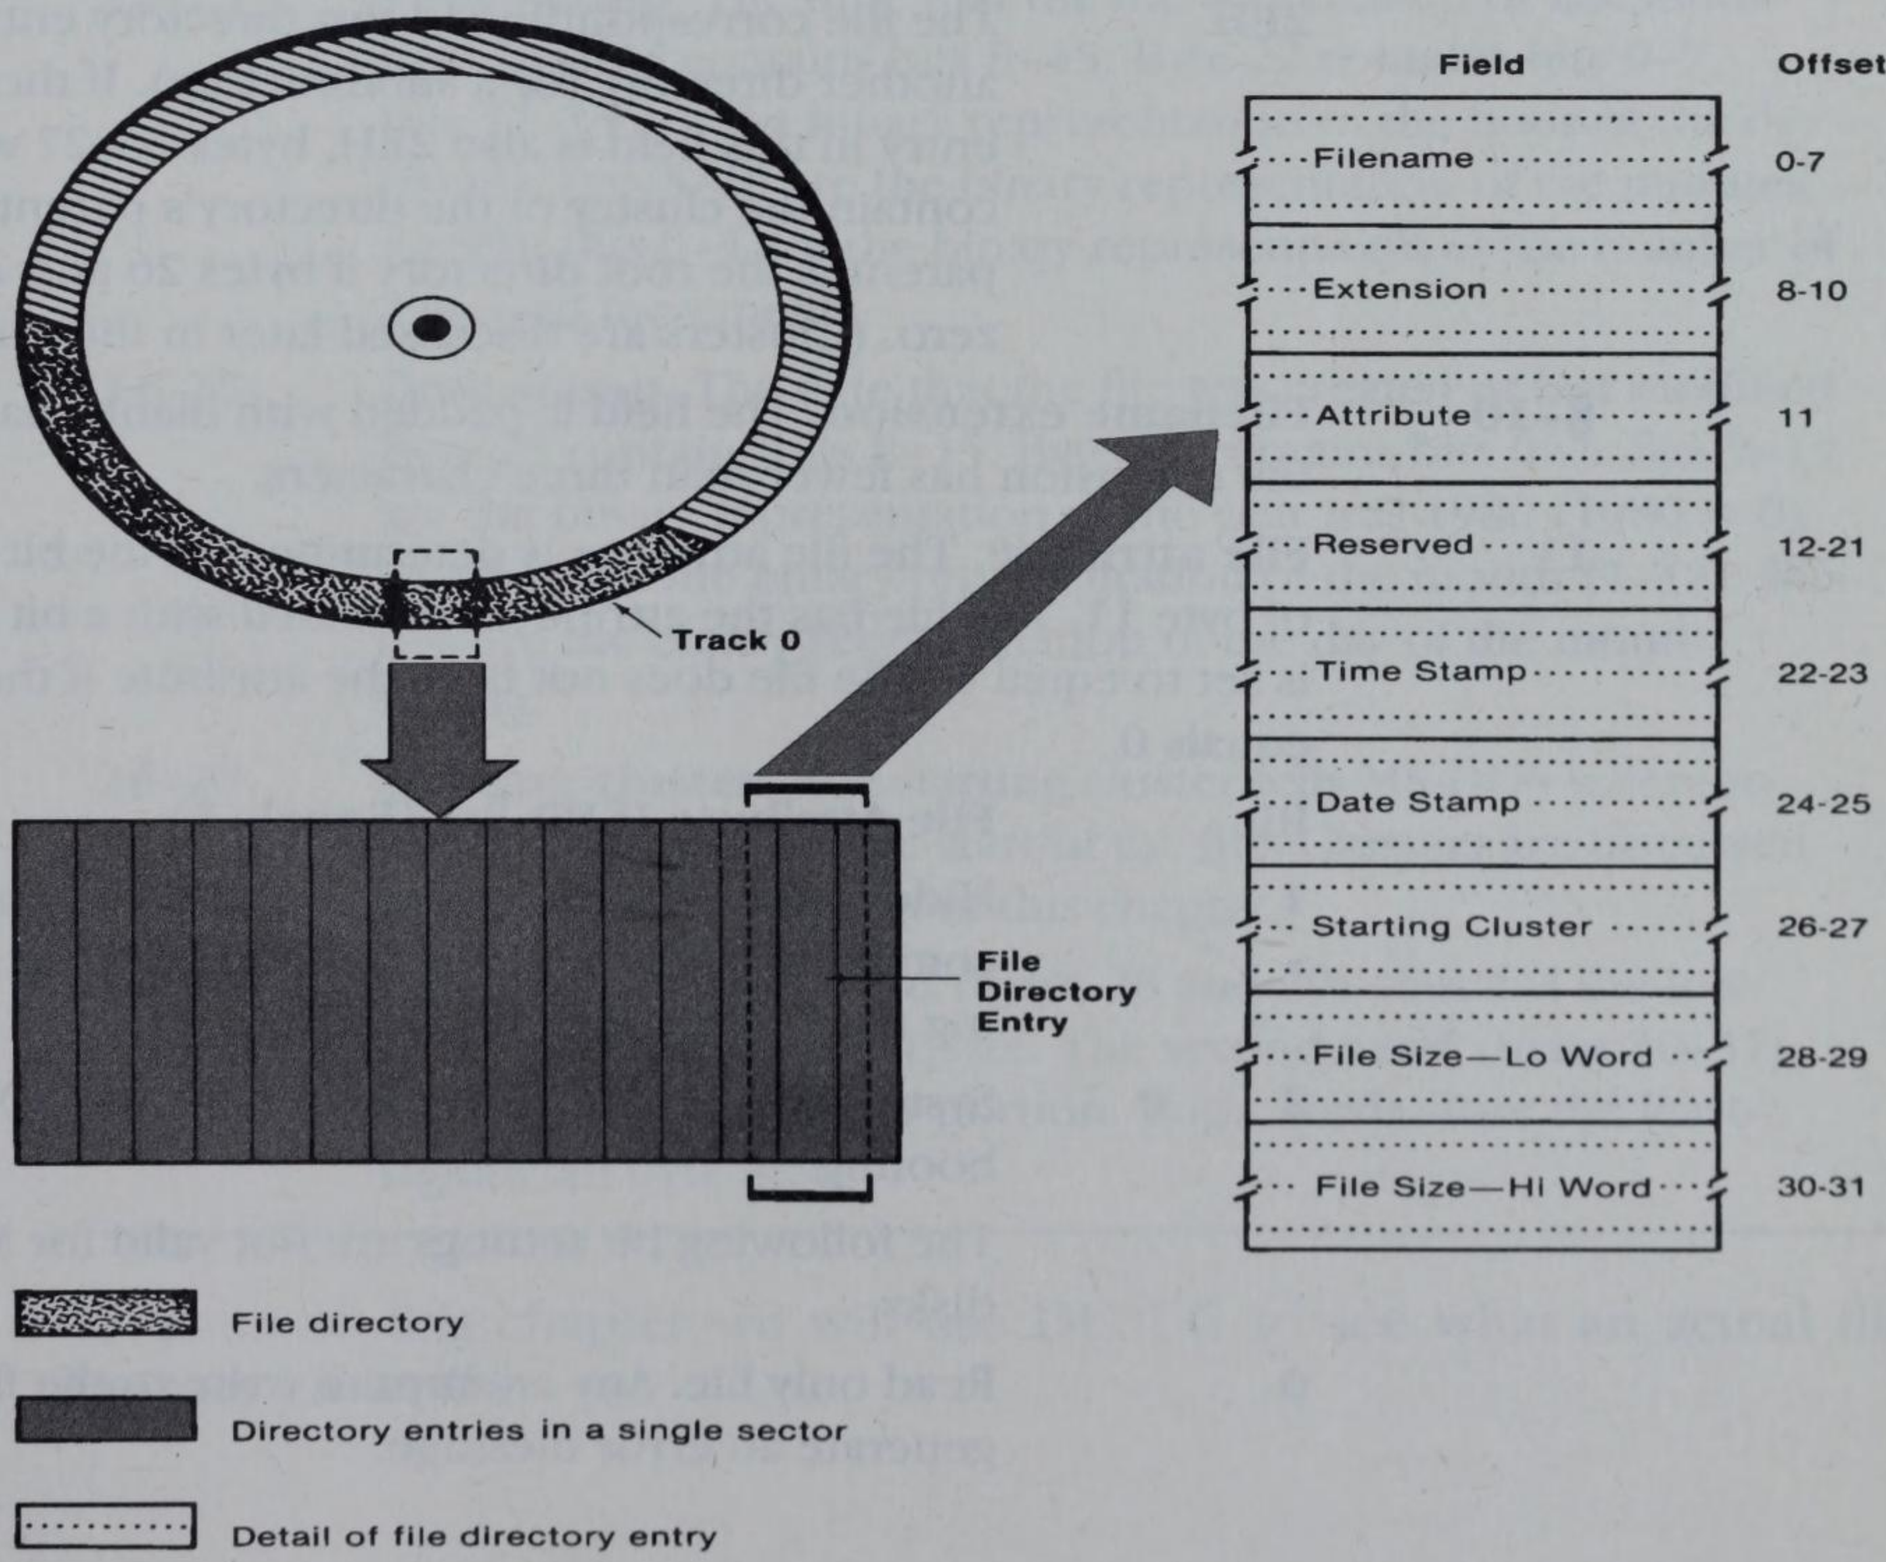

Figure 10-4. Structure of entry in file directory.

Table 10-3. Breakdown of Bytes in a File Directory Entry

Byte(s)	*Purpose*
0–7	**Filename.** The filename is padded with blank characters if it has fewer than eight characters. The following values have special significance if they are the first byte in the filename field:
	00H The file directory entry has never been used. When MS-DOS sees 00H in this field, it skips over the entire entry. This can speed up performance.
	E5H The file that corresponds to this entry has been "erased." The file is not actually erased, however. The only change in this first byte is the filename field of the directory. Programs that recover "erased" files take advantage of this fact. On MS-DOS 1 disks, E5H may also indicate that the directory entry has not been used.
	2EH The file corresponding to this directory entry is another directory (or a subdirectory). If the second entry in this field is also 2EH, bytes 26–27 will contain the cluster of the directory's parent. The parent is the root directory if bytes 26 and 27 equal zero. (Clusters are discussed later in this chapter.)
8–10	**Filename extension.** The field is padded with blank characters if the extension has fewer than three characters.
11	**File attribute.** The file attribute is determined by the bit pattern of byte 11. The file has the attribute associated with a bit if that bit is set to equal 1. The file does not have the attribute if the bit equals 0.
	Bit **File Attribute If Bit Set (Equals 1)**
	1 Hidden file. The file will not be listed when a DIR command is issued. (See the following box, Modifying the Hidden File Attribute.)
	2 System file. System files are used by MS-DOS during booting.
	The following bit settings are not valid for MS-DOS 1 disks:
	0 Read only file. Any attempt to write to the file will generate an error message.

Byte(s)	Purpose	
	3	Volume label. Setting this bit tells MS-DOS that the characters in the filename and filename extension fields of this directory entry form the volume label for the disk. All other fields in this directory entry are irrelevant. This entry must be located in the root directory, and there can be only one such entry per disk.
	4	Subdirectory. The directory entry corresponds to a subdirectory if this bit is set.
	5	Archive. This bit is set if the file has been revised but not copied by the BACKUP command. Backing up a file clears the archive bit.
12–21		**Reserved.** These bytes are reserved by MS-DOS. Look for them to be used in later versions of MS-DOS.
22–23		**Time stamp.** The time that the file was created or last modified. Byte 23 contains bits 8–15. Byte 22 contains bits 0–7. Bits 11–15 are the binary representation of the hour of the day (0–23). Bits 5–10 are the binary representation of the minutes (0–59). Bits 0–4 are the binary representation of the number of 2-second increments.
24–25		**Date stamp.** The date that the file was created or last modified. Byte 25 contains bits 8–15. Byte 24 contains bits 0–7. Bits 9–15 are the binary representation of the year less 1980 (1980 = 0). Bits 5–8 are the binary representation of the month (1–12). Bits 0–4 are the binary representation of the day of the month (0–31).
26–27		**Starting cluster.** The starting cluster tells MS-DOS where to look on the disk for the start of the file. Clusters are discussed in the following section of this chapter.
28–31		**File size.** The first word (bytes 28 and 29) contains the low-order portion of the file size. The second word (bytes 30–31) contains the high-order portion. Both words store the least-significant byte first.

Later in this chapter we will use DEBUG to see what an actual file directory looks like.

Modifying the Hidden File Attribute

In listing 10-1, which follows, DEBUG is used to write two assembly language programs. You can use HIDE.COM to set the hidden file attribute. UNHIDE.COM will enable you to clear the hidden file attribute. Enter **hide [*filename.ext*]** to set the hidden file attribute. Enter **unhide [*filename.ext*]** to clear the attribute. Note that files with the system attribute set will remain hidden after clearing the hidden attribute. You will need to clear both the hidden and system attributes to unhide these files. To create the programs in listing 10-1, enter the commands printed in bold type. Do not enter the explanatory comments, which are preceded by a semicolon.

Listing 10-1. HIDE.COM and UNHIDE.COM, two assembly language programs for setting and clearing the hidden file attribute (see table 10-3).

```
C:\>debug
-a
68D8:100 mov cx,[0080]                  ;length of command tail
68D8:104 xor ch,ch                      ;clear high byte
68D8:106 dec cx                         ;ignore space in command tail
68D8:107 mov si,0082                    ;point to 1st letter in filename
68D8:10A mov di,0159                    ;point to buffer
68D8:10D repnz movsb                    ;move command tail to buffer
68D8:10F mov byte ptr [di],00           ;append 00 to filename in buffer
68D8:112 mov dx,0159                    ;point to first letter in buffer
68D8:115 mov ax,4300                    ;get file attribute function
68D8:118 int 21                         ;call MS-DOS
68D8:11A jc 012c                        ;jump if error
68D8:11C or cx,0002                     ;set hidden file bit
68D8:120 mov ax,4301                    ;set file attribute function
68D8:123 int 21                         ;call MS-DOS
68D8:125 jc 012c                        ;jump if error
68D8:127 mov dx,0135                    ;point to success message
68D8:12A jmp 012f
68D8:12C mov dx,0143                    ;point to error message
68D8:12F mov ah,09                      ;display string function
68D8:131 int 21                         ;call MS-DOS
68D8:133 int 20                         ;program terminate
68D8:135      ←press Enter
-e 135 'File hidden' 0d 0a '$' 'Unable to hide
file' 0d 0a '$'
-f 159 L40 00                           ;start of buffer
```

```
-n hide.com
-rcx
CX 0000
:60
-w 100
Writing 0060 bytes
-a 10a
68D8:10A mov di,0174
68D8:10D      ←press Enter
-a 112
68D8:112 mov dx,0174
68D8:115      ←press Enter
-a 11c
68D8:11C and cx,fffd              ;change fffd to fff9 for system files
68D8:120      ←press Enter
-a 12c
68D8:12C mov dx,0150
4f68D8:12F      ←press Enter
-e 135 'Hidden attribute removed' 0d 0a '$'
-e 150 'Unable to remove hidden attribute' 0d 0a
'$'
-f 174 L40 00
-n unhide.com
-rcx
CX 0060
:1b4
-w 100
Writing 01B4 bytes
-q

C:\>
```

File Allocation Table

Just as the file directory serves as a disk's table of contents, the file allocation table (FAT) serves as a roadmap around the disk. For each file on the disk, the FAT contains a series of entries that tells MS-DOS where the file's contents are physically located.

MS-DOS divides a file's contents into *clusters*. Table 10-4 lists the number of adjoining sectors that form a cluster on the most commonly used types of floppy disks. The cluster size on a fixed disk depends on how the disk was partitioned.

Table 10-4. Sectors per Cluster for Various Disk Types

Disk Type	*Sectors per Cluster*
Standard Single-sided	1
Standard Double-sided	2
Quad-density	1
10-Mbyte hard disk (single partition)	8
42.5-Mbyte hard disk (single partition)	4

Clusters are numbered according to their physical location on the disk. The first cluster starts with the sector immediately following the last sector of the file directory. The second cluster follows the first, and so on.

On single-sided disks, cluster numbers increase going from one sector to the next along a track. When the final sector on a track is reached, the next cluster is the first sector on the following track (see figure 10-5).

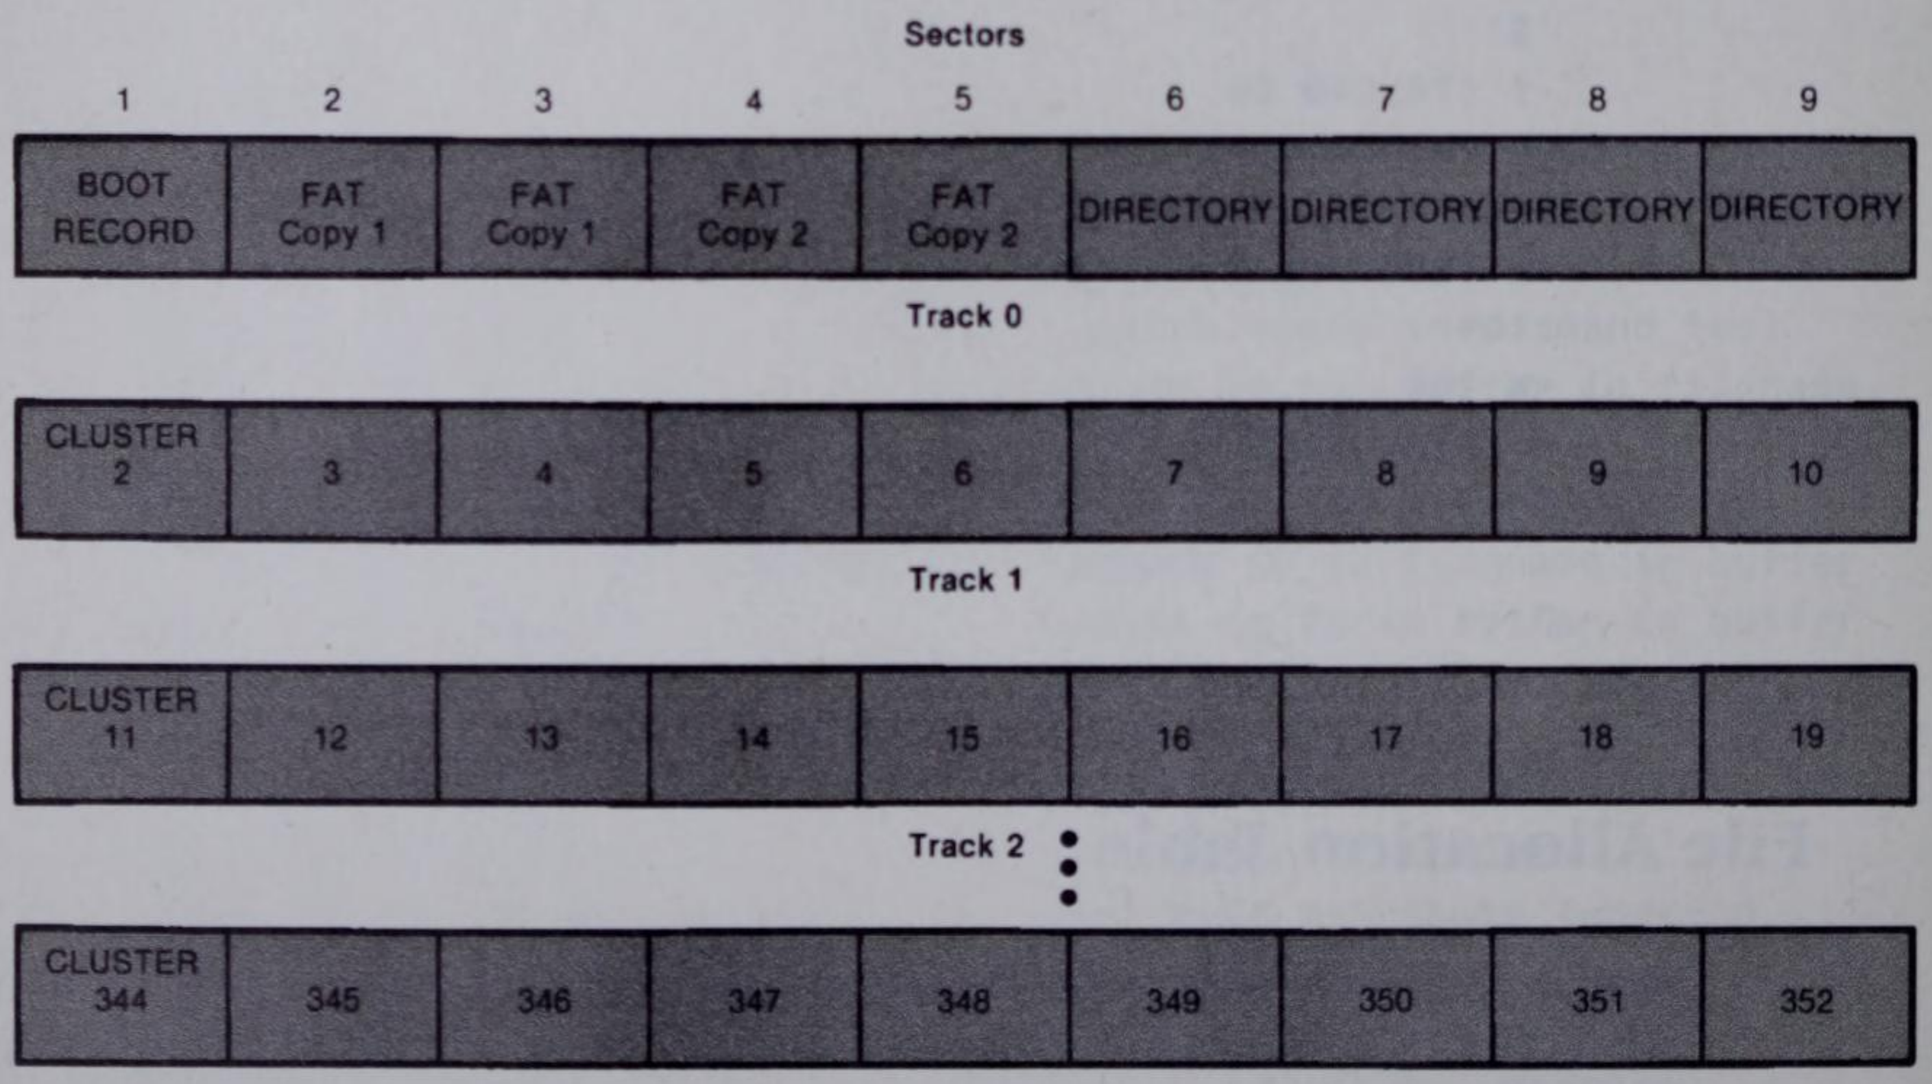

Figure 10-5. Layout of boot record, FAT, file directory, and clusters on a 9-sector, *single-sided* disk.

On double-sided disks, clusters increase along a track on side 0, continue on the same track on side 1, and then continue on the following track on side 0 (see figure 10-6).

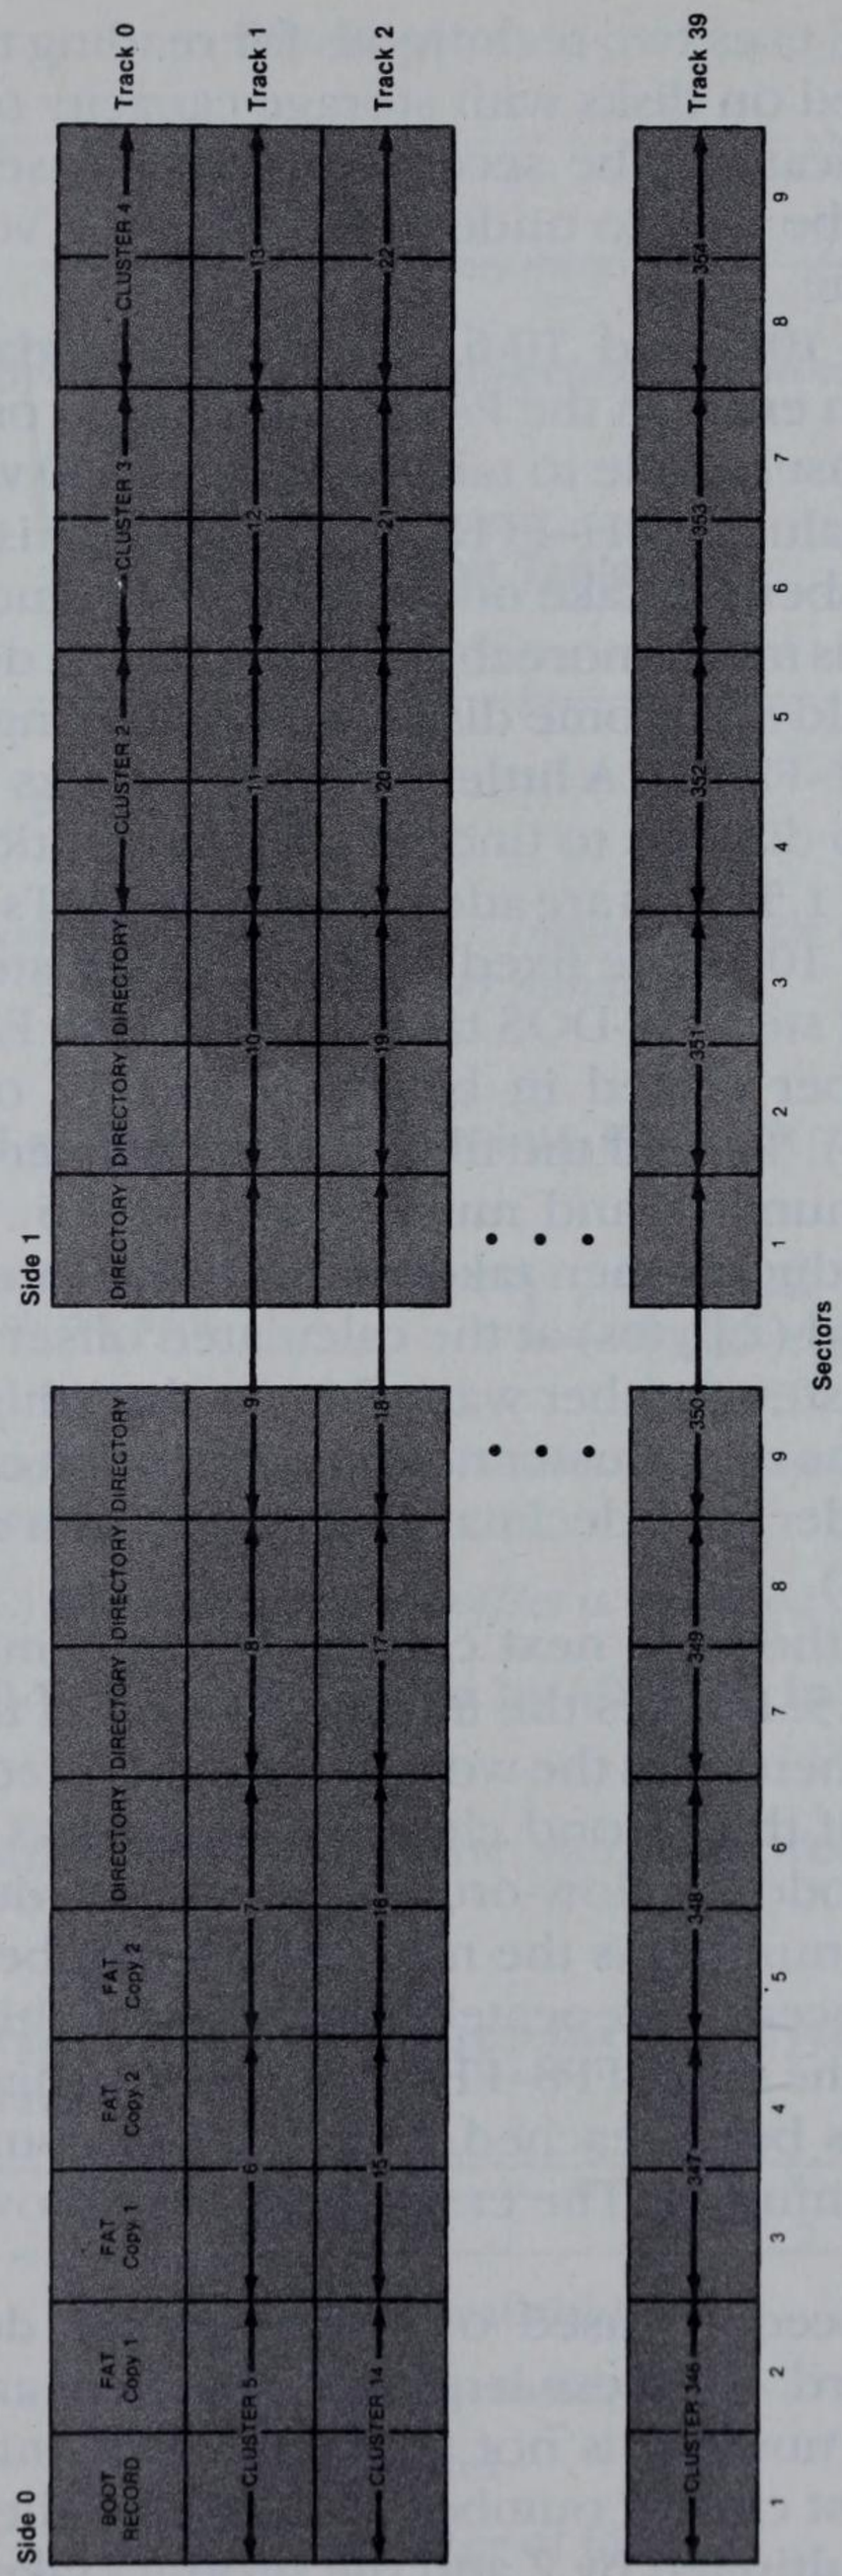

Figure 10-6. Layout of boot record, FAT, file directory, and clusters on a 9-sector, *double-sided disk*.

MS-DOS uses two techniques for reading the FAT's contents. The first, generally used on disks with storage capacity of less than 20 Mbytes, is the more complicated. The second, generally used on large-capacity storage devices, will be easy to understand after you've read an explanation of the first technique.

Figures 10-5 and 10-6 show that standard disks contain over 300 clusters. Each entry in the FAT must point to one of these clusters, so each FAT entry must be able to take on at least 300 values. A single byte can take on only 256 values (00H–FFH), so a single byte is not adequate as a FAT entry. A 2-byte number can take on up to 65,536 values (0000H–FFFFH). Because this quantity is much more than is needed, the designers of MS-DOS decided that they could save some disk space by making each FAT entry 1.5 bytes in length (000H–FFFH). A little odd, but it works well in the computer and is really not too difficult to understand. In addition, the 4,096 values that are possible with 1.5 bytes are adequate for the FATs of quad-density disks (2,371 clusters) and 10-Mbyte fixed disks (2,587 clusters).

The first step MS-DOS takes in using the FAT is to obtain the file's first cluster number stored in bytes 26 and 27 of the file's directory entry (figure 10-7A). To find the file's second cluster number, MS-DOS takes the first cluster number and multiplies it by 1.5. The integer portion of the resulting product is then taken as an offset into the FAT (figure 10-7B).

The word (2 bytes) at the calculated offset is then modified as follows: If the first cluster number was odd, the three high-order hexadecimal digits are taken as the next cluster number. If the first cluster number was even, the three low-order hexadecimal digits are taken as the next cluster number (figure 10-7C).

To find the file's next cluster, MS-DOS multiplies the second cluster number by 1.5. It takes the integer portion of the product as an offset into the FAT and then takes the word at the calculated offset. The high-order digit is discarded if the second cluster number was even. If the second cluster number was odd, the low-order digit is discarded. The resulting three-digit hexadecimal number is the next cluster number.

This process is repeated until the resulting three-digit hexadecimal number is in the range FF8–FFF. A number in this range indicates that the end of the file has been reached. Don't get discouraged if this process seems somewhat confusing. The example in the following section should help to clarify it.

The procedure used on large storage devices is similar but more straightforward. On these large devices, there are more than 4,096 clusters, so a 1.5-byte number is not adequate. FAT entries on these devices are 2 bytes. The first cluster number is read from the directory. Now the cluster number is multiplied by 2 and the product taken as an offset into the FAT. The 2-byte word stored at this location is the next cluster number. The low-order byte is stored first, the high-order byte second.

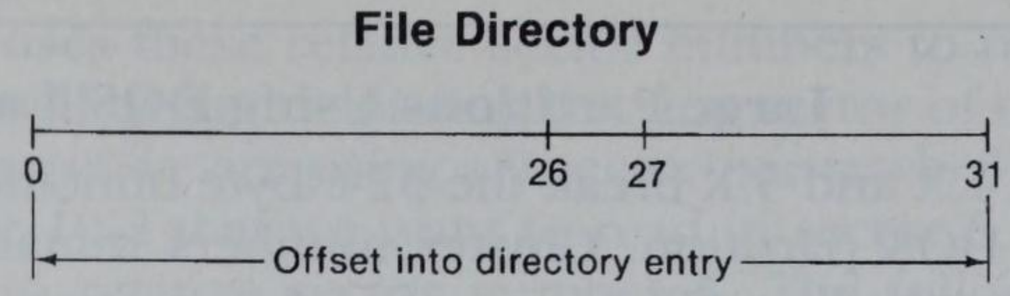

(A) *Bytes 26 and 27→starting cluster number.*

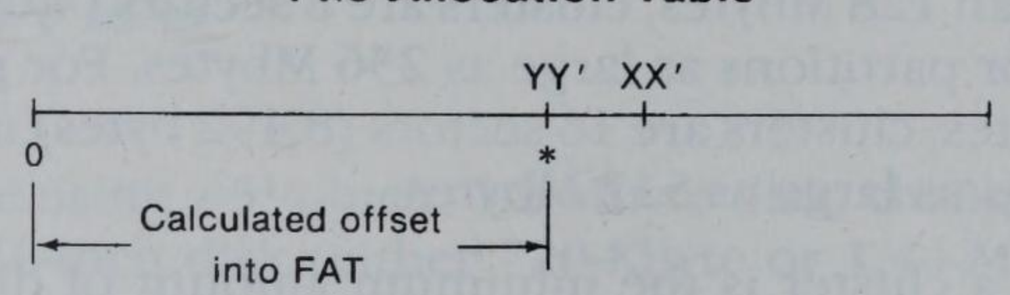

(B) *Starting cluster number × 1.5 = product. Integer portion of product = offset into FAT of 2nd cluster number (*).*

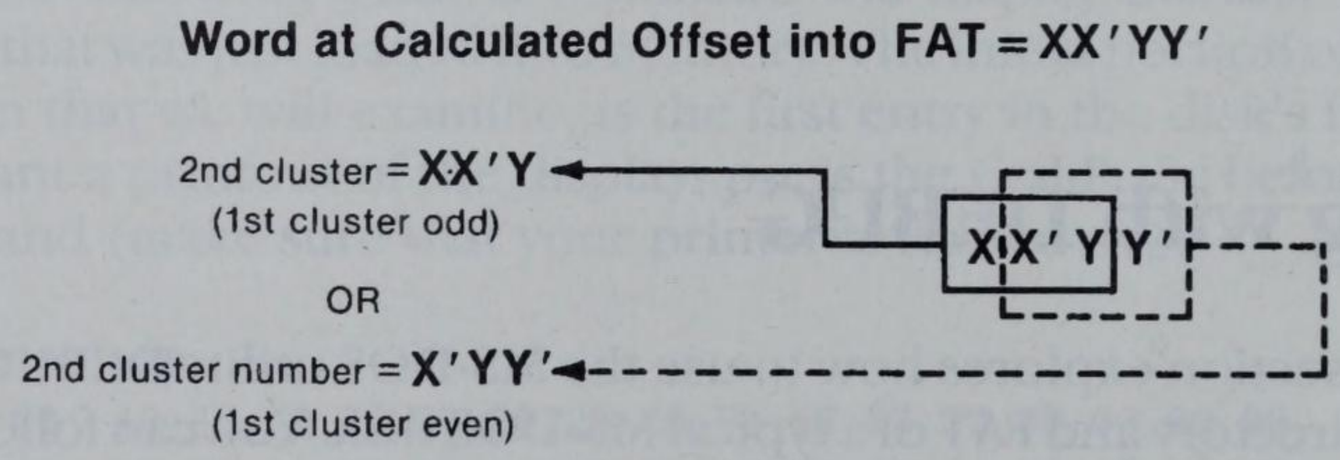

(C) *Word at calculated offset is modified.*

Figure 10-7. The steps taken by MS-DOS in using the FAT.

Table 10-5 summarizes how the values stored in the FAT are interpreted.

Table 10-5. Interpretation of Values for 1.5-Byte (XXX) and 2-Byte (XXXX) FAT Entries

Value	*Meaning*
(0)000	Cluster available
(F)FF0–(F)FF6	Reserved cluster
(F)FF7	Bad cluster
(F)FF8–(F)FFF	Last cluster of file
(X)XXX	Cluster belongs to a chain

Large Partitions Using DOS 4 and 5

MS-DOS 4.X and 5.X break the 32-Mbyte limitation on the size of the primary DOS partition. Cluster numbers remain 2 bytes in length. Therefore, there is still a limit of 65,536 clusters. Large partitions are supported by simply increasing the size of each cluster.

For partitions larger than 32 Mbytes, clusters are 4 sectors (2,048 bytes) in size. This allows for partitions as large as 128 Mbytes. For partitions larger than 128 Mbytes, clusters are 8 sectors (4,096 bytes) in size. This allows for partitions as large as 256 Mbytes. For partitions larger than 256 Mbytes, clusters are 16 sectors (8,192 bytes) in size. This allows for partitions as large as 512 Mbytes.

Because a cluster is the minimum amount of disk space that can be allocated to a file, an increase in the cluster size results in a larger amount of wasted disk space.

Exploring with DEBUG

This section explores how to use the MS-DOS utility DEBUG to examine the file directory and FAT of a typical MS-DOS disk. You can follow along on your own computer if you wish. Before you do that, you may want to refer to chapter 15 for a detailed discussion of DEBUG and the DEBUG commands.

The demonstration uses a copy of the MS-DOS 3.3 system disk (360-Kbyte, 5¼-inch, double-sided, 9-sector-per-track). Instructions are provided to perform the demonstration with a 5¼-inch, 1.2-Mbyte disk and with a 3½-inch disk.

Looking at the File Directory

Boot your system if you have not already done so. When the system prompt appears, type **debug** and press Enter. MS-DOS will load DEBUG, and DEBUG will take control. The DEBUG prompt (a hyphen on most systems) tells you that DEBUG is loaded and ready to go:

```
-C:\>debug
```

MS-DOS uses the term *relative sector* to describe a sector's position relative to sector 1, track 0, side 0. Sector 2, track 0, side 0 is relative sector 1, and so on, up to sector 9, track 0, side 0, which is relative sector 8.

DEBUG uses these relative sector numbers to read disk sectors into memory. We will begin by loading the first sector of the file directory into memory. Because we are using a 9-sector-per-track, 5¼-inch disk, you can see from table 10-2 that we want to read in sector 6, track 0, side 0. This corresponds to relative sector number 5. The following command tells DEBUG to load into memory location CS:100 the contents from drive A (drive number 0), absolute sector 05. The `01` specifies that DEBUG is to read in one sector only.

```
-L CS:100 0 05 01
-
```

If you are using a 5¼-inch, 1.2-Mbyte disk, change the `05` to `0F`. If you are using a 3½-inch disk (either 720-Kbyte or 1.44-Mbyte), change the `05` to `07`. Change the `0` to `1` if you are using drive B instead of drive A. The remaining DEBUG commands used in this section will be the same regardless of the disk type you are using.

The following DEBUG command will display the first 48 bytes of the sector that was just loaded into memory. The initial portion of the dump, the portion that we will examine, is the first entry in the disk's file directory. If you want a printout of the display, press the Ctrl-PrtSc before entering the command (make sure that your printer is turned on).

```
-d CS:100 L30
0976:0100  49 4F 20 20 20 20 20 20-53 59 53 27 00 00 00 00  IO      SYS'....
0976:0110  00 00 00 00 00 00 43 4E-65 08 02 00 E4 13 00 00......CNs...d...
0976:0120  4D 53 44 4F 53 20 20 20-53 59 53 27 00 00 00 00  MSDOS SYS'....
```

The numbers to the far left are memory addresses that may differ from system to system. The middle portion of the display is called a *memory dump*. The contents of memory are displayed in hexadecimal numbers.

Let's examine the dump closely:

Filename and extension (offset 0–7 and 8–10). The underlined portion of the display on the left side comprises the first 8 bytes of the dump. These 8 bytes make up the *filename* field of the first entry in the file directory. Notice that the eight-character filename field has been padded with blanks. The ASCII representation of the dump is the underlined portion on the right side of the screen. We can see that the filename is IO.

The 3 bytes following the filename field (53 59 53) make up the *filename extension* field. In the right-hand column, we can see that the extension is SYS.

Attribute (offset 11). Following the filename extension field is the *attribute* field. The attribute field is interpreted according to its bit pattern.

```
-d CS:100 L30
0976:0100  49 4F 20 20 20 20 20 20-53 59 53 27 00 00 00 00  IO      SYS'....
0976:0110  00 00 00 00 00 00 43 4E-65 08 02 00 E4 13 00 00......CNs...d...
0976:0120  4D 53 44 4F 53 20 20 20-53 59 53 27 00 00 00 00  MSDOS SYS'....
```

In the preceding example, the field contains a value of 27H, which translates to the following bit pattern:

```
Bit:    7 6 5 4   3 2 1 0
Value:  0 0 1 0   0 1 1 1
```

Bits 0, 1, 2, and 5 have been set to equal 1. This tells us that the file IO.SYS has the attributes read only, hidden, system, and archive (see table 10-3).

Reserved (offset 12–21). The 10 bytes (all 00H) that follow the attribute field form the *reserved* field of the file directory entry. This field has been reserved by the makers of MS-DOS.

Time (offset 22–23). The next 2 bytes (43 4E) form the *time stamp* field. The time that the file was created or last modified is stored as the bit pattern of these two bytes.

```
-d CS:100 L30
0976:0100  49 4F 20 20 20 20 20 20-53 59 53 27 00 00 00 00  IO      SYS'....
0976:0110  00 00 00 00 00 00 43 4E-65 08 02 00 E4 13 00 00......CNs...d...
0976:0120  4D 53 44 4F 53 20 20 20-53 59 53 27 00 00 00 00  MSDOS SYS'....
```

MS-DOS stores the 2 bytes of the preceding example in reverse order; thus, the bit pattern of the hexadecimal word (2 bytes) is 4E 43. The bit pattern is as follows:

```
        1  1  0  0     1  1 1 0     0 1 0 0     0 0 1 1
Bit  15 14 13 12    11 10 9 8     7 6 5 4     3 2 1 0
     |<-- Hour -->|  |<-Minute->|  |<- Seconds->|
```

Bits 11–15 store the binary representation of the hour of the day. These 5 bits store a value of 1 + 8, or 9. Bits 5–10 store the minutes in binary. In this example, the minutes value is 2 + 16 + 32 = 50. Bits 0–4 hold the seconds in 2-second intervals. In this case, the number of 2-second intervals is 1 + 2 = 3.

Putting all of this information together, we can tell that the file was created or last modified at 9:50:06 in the morning (to the closest 2 seconds).

Date (offset 24–25). The bit pattern of the *date stamp* field stores the date that the file was created or last modified.

```
-d CS:100 L30
0976:0100  49 4F 20 20 20 20 20 20-53 59 53 27 00 00 00 00  IO      SYS'....
0976:0110  00 00 00 00 00 00 43 4E-65 08 02 00 E4 13 00 00......CNe.....d...
0976:0120  4D 53 44 4F 53 20 20 20-53 59 53 27 00 00 00 00  MSDOS SYS'....
```

Again, the bytes are stored in reverse order, so in this example we want the bit pattern of the hexadecimal word 08 65.

```
          0  0  0  0     1  0 0 0     0 1 1 0     0 1 0 1
Bit  15 14 13  12     11 10 9 8     7 6 5 4     3 2 1 0
     |<------ Year ------>| |<-Month->||<-- Day -->|
```

Bits 9–15 store the year (less 1980). In this case, the year stored is 4, which means that IO.SYS was created or last modified in 4 + 1980 = 1984. Bits 5–8 store the month in binary. Here, the month is 1 + 2 = 3. The day is stored in bits 0–4. The day is 1 + 4 = 5. Thus, the date stamp is March 5, 1984. Putting this information together with the time information, we know that IO.SYS was created or modified on March 5, 1984 at approximately 9:50:06 in the morning.

Starting cluster (offset 26–27). The hexadecimal word at offset 26–27 holds the starting cluster number of IO.SYS. Again, the word is stored in reverse order, so the starting cluster number is 00 02. We will see how MS-DOS uses this number shortly.

```
0976:0100  49 4F 20 20 20 20 20 20-53 59 53 27 00 00 00 00  IO      SYS'....
0976:0110  00 00 00 00 00 00 43 4E-65 08 02 00 E4 13 00 00......CNe.....d...
0976:0120  4D 53 44 4F 53 20 20 20-53 59 53 27 00 00 00 00  MSDOS SYS'....
```

File size (offset 28–31). This field contains the file size stored as a 4-byte hexadecimal number. MS-DOS stores the bytes in reverse order, with the low-order byte stored first and the high-order byte stored last. The size of IO.SYS is 00 00 13 E4 (hex), or decimal 5,092 bytes.

```
-d CS:100 L30
0976:0100  49 4F 20 20 20 20 20 20-53 59 53 27 00 00 00 00  IO      SYS'....
0976:0110  00 00 00 00 00 00 43 4E-65 08 02 00 E4 13 00 00......CNe.....d...
0976:0120  4D 53 44 4F 53 20 20 20-53 59 53 27 00 00 00 00  MSDOS SYS'....
```

This concludes our examination of an MS-DOS file directory. Next, you will see how to use DEBUG to examine the FAT and see how MS-DOS uses the FAT, along with the starting cluster number, to keep track of a file.

Loading the FAT

Returning to figure 10-6, note that on a double-sided, 9-sector disk, the first sector of the first FAT copy is stored at side 0, track 0, sector 1. This is relative sector 1 and can be loaded into memory location CS:300 with the DEBUG command `L CS:300 0 01 01`. (The commands in this section work with all types of disks.) To follow along with this tutorial, you should have DEBUG running and your backup system disk in drive A. Refer to the discussion of the file directory if you need some help getting started. Enter the following command after the - prompt:

```
-L CS:300 0 01 01
```

When the disk drive turns off, after the - enter:

```
-d CS:300 L20
```

DEBUG will display:

```
0976:0300  FD FF FF 03 40 00 05 60-00 FF 8F 00 09 A0 00 0B  }...@..'......
0976:0310  C0 00 0D E0 00 0F 00 01-11 20 01 13 40 01 15 60 @..'.......@..'
```

This is a dump of the first 32 bytes of the FAT. The first byte in the FAT is set according to the type of disk media on which the FAT is stored (table 10-6). In this case, the medium is a double-sided, 9-sector disk. Thus, the first byte in the FAT is the hexadecimal number FD; the second and third bytes in the FAT are always FFH.

Table 10-6. Value of First Byte in FAT According to Type of Storage Media

First Byte in FAT	*Type of Media*
FF	Double-sided, 8 sectors/track disk
FE	Single-sided, 8 sectors/track disk
FD	Double-sided, 9 sectors/track disk
FC	Single-sided, 9 sectors/track disk
F9	Double-sided, 15 sectors/track disk
F8	Hard disk

Looking at the FAT

In the previous section, we saw that the starting cluster number for the file IO.SYS was hexadecimal 02 (02H). Here is how MS-DOS uses the FAT to determine the second cluster number of IO.SYS. MS-DOS starts by taking the first cluster number (02) and multiplying it by 1.5. It uses the product (3) as a pointer into the FAT. Then, MS-DOS examines the 2-byte word located at the calculated offset:

```
-d CS:300 L20
0976:0300  FD FF FF 03 40 00 05 60-00 FF 8F 00 09 A0 00 0B  }...@..'......
0976:0310  C0 00 0D E0 00 0F 00 01-11 20 01 13 40 01 15 60  @..'.....@..'
```

In this example, the bytes 03 40 are at offset 3 in the FAT. Because MS-DOS stores bytes in reverse order, the 2 bytes are interpreted as 4003H. MS-DOS uses 1.5 bytes for each FAT entry, so 1.5 bytes must be extracted from this 2-byte number. The extraction is performed as follows: If the previous cluster number (2 in this case) was even, MS-DOS discards the high-order digit of the 2-byte number. If the previous cluster number was odd, MS-DOS discards the low-order digit of the 2-byte number.

In our example, the previous (first) cluster number was 2, which is even. Thus, we discard the high-order digit of 4003 to yield 003. This is the second cluster number. MS-DOS computes the third cluster number of IO.SYS by multiplying 3—the previous (second) cluster number—times 1.5. The product is 4.5. MS-DOS throws away the .5 and uses 4 as an offset into the FAT:

```
-d CS:300 L20
0976:0300  FD FF FF 03 40 00 05 60-00 FF 8F 00 09 A0 00 0B  }...@..'......
0976:0310  C0 00 0D E0 00 0F 00 01-11 20 01 13 40 01 15 60  @..'.....@..'
```

The 2 bytes at offset 4 in the FAT are 40 00. MS-DOS reads them as the 2-byte number 0040H. Because the previous (second) cluster number—3—was odd, MS-DOS discards the low-order digit of 0040 to yield 004, which is the third cluster number of IO.SYS.

In a similar fashion, MS-D0S will compute the fourth cluster number of IO.SYS as 5 and the fifth cluster number as 6. Let's see what happens when MS-DOS computes the sixth cluster number. The previous (fifth) cluster number was 6. Multiplying 6 times 1.5 equals 9. The 2 bytes at offset 9 in the FAT are FF and 8F:

```
-d CS:300 L20
0976:0300  FD FF FF 03 40 00 05 60-00 FF 8F 00 09 A0 00 0B  }...@..'......
0976:0310  C0 00 0D E0 00 0F 00 01-11 20 01 13 40 01 15 60  @..'......@..'
```

MS-DOS forms the 4-byte number 8FFFH from these 2 bytes. The previous cluster number (6) was even, so MS-DOS throws out the high-order digit (8) to give the 1.5-byte number FFFH. MS-DOS reads any value in the range FF8–FFF as an end-of-file marker; therefore, FFFH tells MS-DOS that the last cluster of IO.SYS has been reached.

Without the FAT, MS-DOS would find itself adrift in a sea of clusters, unable to access any files. In fact, the FAT is so important to the operation of MS-DOS that each disk contains two copies of the FAT.

Ostensibly, this second copy serves as a backup if the first is damaged. However, for reasons known only to the designers of MS-DOS, the second copy of the FAT is never used.

MS-DOS File Management

MS-DOS employs two techniques in managing files. The first technique, using data structures called *file control blocks (FCBs)*, was implemented in MS-DOS 1. When MS-DOS was first developed, CP/M was the predominant operating system being used on microcomputers. FCBs were implemented specifically to provide some compatibility with CP/M files. When a hierarchical file structure was introduced in MS-DOS 2, a new technique for managing files was implemented. This technique uses a *file handle* and does not require the use of FCBs. File handles are patterned after the file management technique used by the UNIX operating system. This section discusses FCBs and file handles.

Structure of the File Control Block

The *file control* block is a 36-byte block of computer memory. The FCB, which is required for file management in MS-DOS 1, contains 10 individual fields. Table 10-7 shows the 10 fields and the purpose of each.

The *extended FCB* is used by MS-DOS to create files with a particular attribute or to search the file directory for such files. As table 10-8 shows, the extended FCB consists of a standard FCB with a 7-byte *header*. The bytes of the header are referenced by negative offsets relative to byte 00 of the standard FCB.

Table 10-7. Breakdown of File Control Block

Offset (Hex)	*Purpose*
00	**Disk drive number.** Set by the programmer. **0** default drive **1** drive A **2** drive B **3** drive C and so on.
01–08	**Filename of file to be created, written, or read.** Set by the programmer. The field must be padded with blanks if the filename has fewer than eight characters. The field may contain a valid device name (excluding the optional colon).
09–0B	**Filename extension.** Set by the programmer. The field must be padded with blanks if the extension has fewer than 3 characters.
0C–0D	**Current block number.** A block consists of 128 records. The size of a record is determined by bytes 0EH and 0FH of the FCB. A block is numbered according to its position relative to the start of the file. The current block number is set to zero by MS-DOS when a file is opened. Sequential read and write operations use the current block number and the current record number (FCB byte 20H) to locate a particular record.
0E–0F	**Logical record size.** An "open file" operation assigns a value of 80H to this field.
10–13	**File size in bytes.** When MS-DOS opens a file, it extracts the file's size from the file directory and stores the value in this field. The low-order word is stored in bytes 10H and 11H; the high-order word in 12H and 13H. This value should **not** be modified by the programmer.
14–15	**Date file was created or last modified.** Also extracted from directory during an "open." This value should **not** be modified by the programmer.
16–1F	**Reserved for use by MS-DOS.** This value should **not** be modified by the programmer.

continues

Table 10-7. continued

Offset (Hex)	*Purpose*
20	**Current relative record number.** This field contains the relative record number (0–127) within the current block (FCB bytes 0CH–0DH). This field is not initialized by an "open" operation.
21–24	**Random record number.** This field is used for "random" reading and writing of files. Records are numbered according to their position relative to the first record in the file. The first record is random number 0.

Table 10-8. Breakdown of Extended FCB Header

Offset (Hex)	*Purpose*
_07	**A flag byte set to FFH,** indicating the beginning of an extended FCB header.
_06 to _02	**Reserved by MS-DOS.**
_01	**Attribute of file to be created or searched for:** **02H** Hidden file **04H** System file **00H** Other file

Using an FCB

MS-DOS 1 requires you to set up an FCB for a file before any operations can be performed on that file. Once the FCB is set up in memory, you must place the FCB's segment address in the DS register and the FCB's offset address in the DX register. The DS and DX registers then act as a pointer directing MS-DOS to the FCB.

With DS:DX pointing to the FCB, you must place the value of the desired service function (see appendix A) in the AH register, initialize any other registers required by that particular service function, and then direct MS-DOS to execute an interrupt type 21 (hex). Interrupt 21 is the MS-DOS *function dispatcher* that tells MS-DOS to execute the service specified by the value in the AH register. The MS-DOS service functions are used to perform the nuts-and-bolts operations in a computer program.

When a computer program issues a call for interrupt 21, control will pass from the computer program to MS-DOS. The service function will operate on the file specified by the FCB and then return control to the calling program. Execution of the program will then continue in the normal fashion.

As we have seen, a big drawback in using the MS-DOS 1 file management functions is the requirement for a valid FCB to be established for each file read or written. MS-DOS 2 effectively removed this annoyance with the implementation of file handles.

File Handles

MS-DOS versions 2.X and subsequent versions provide a group of file management service functions that do not require the use of FCBs. Before a file is opened or created, a character string is placed in memory that specifies the drive, path, filename, and extension of the file. The DS and DX registers are then used to point to this string and the *create* (DOS function 3CH) or the *open* (DOS function 3DH) function is called. The function returns a 16-bit file handle in the AX register. The file handle is then used for any subsequent access to the file; no FCB is used. MS-DOS takes care of the messy details. The programmer simply keeps track of which file handle belongs to which file.

MS-DOS versions 2.X, 3.X, 4.X, and 5.X provide support for FCBs; therefore, programs written to execute under MS-DOS 1.X will run under 2.X and subsequent versions. Programs that use file handles will not run under MS-DOS 1.X.

CHAPTER

11

Memory Structure and Management

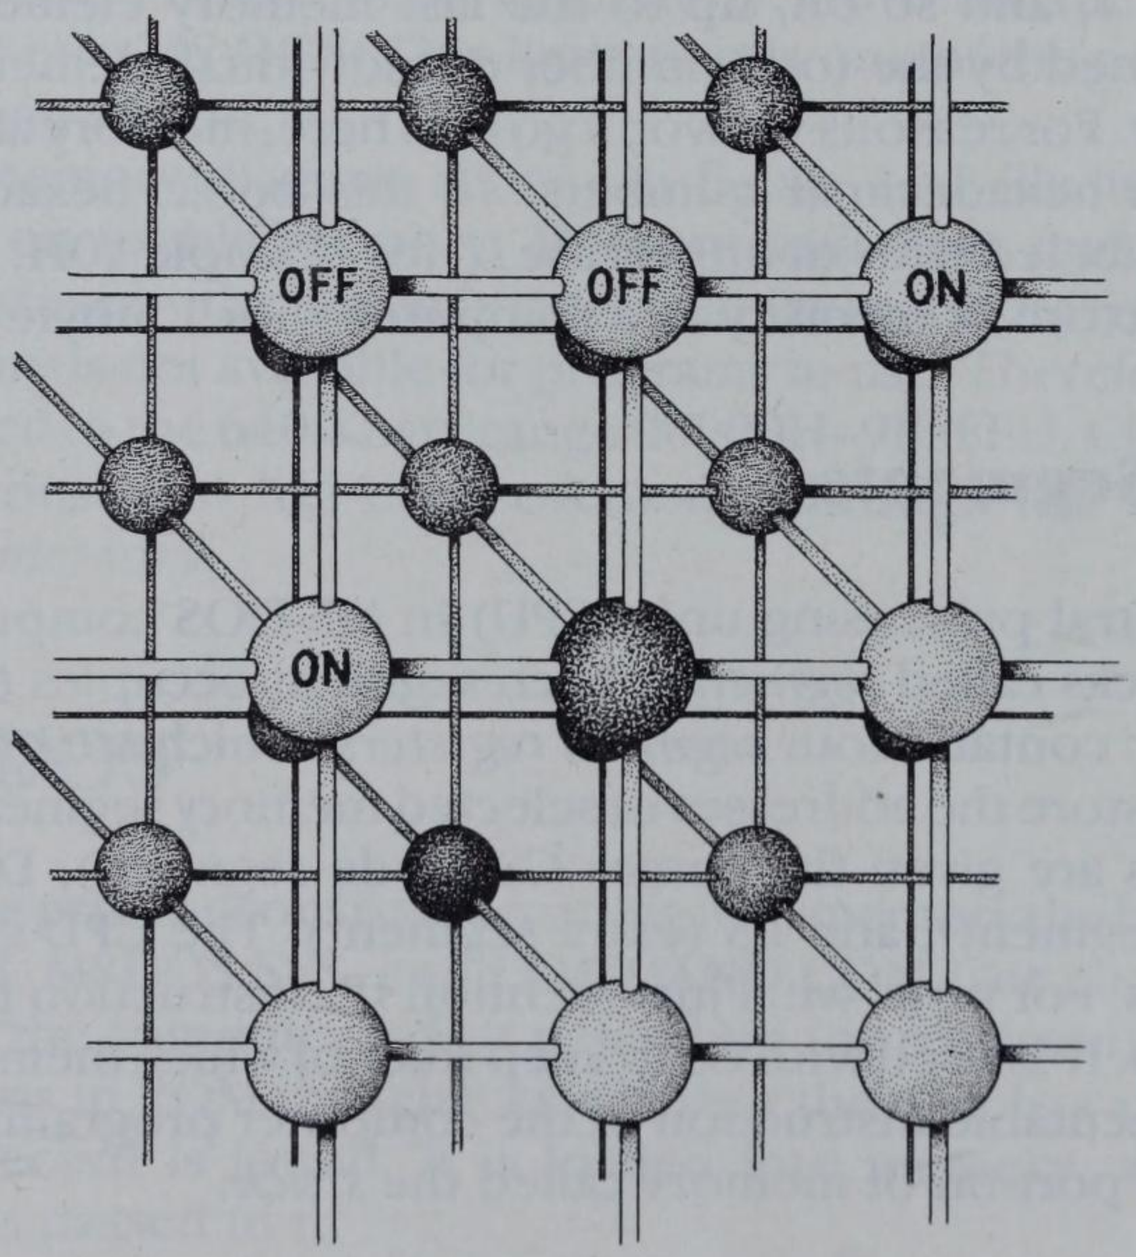

Computer Memory
Booting MS-DOS
Program Segment Prefix
Executable Files
The Environment
Environment Size
Memory Allocation

The purpose of the next three chapters is to give you a thorough understanding of how memory is organized and controlled in MS-DOS computers. This chapter is an overview, discussing structure and process in general terms. Chapter 12 extends the discussion to expanded memory, and chapter 13 then applies this information to terminate and stay resident computer programs.

Computer Memory

Computer memory consists of a large number of individual memory elements, each of which stores 1 byte of data. Each element is assigned a unique numerical address, and the elements are ordered according to these addresses. The first memory element is assigned address 0, the next is assigned address 1, and so on, up to the last memory element, whose address is determined by the total number of individual elements in the computer's memory. For reasons we won't go into here, memory addresses are generally given in hexadecimal numbers. In this book, hexadecimal numbers are always labeled with an uppercase *H*, for example 10H. Figure 11-1 illustrates the structure of memory in a computer with 1 Mbyte of memory.

Memory Segments

The central processing unit (CPU) in MS-DOS computers divides memory into blocks called *segments*. Each segment occupies 64 Kbytes of memory. The CPU contains four *segment registers*, which are internal storage devices used to store the addresses of selected memory segments. The four segment registers are given the names CS (code segment), DS (data segment), SS (stack segment), and ES (extra segment). The CPU contains several other registers. For now, we'll just mention IP (instruction pointer) and SP (stack pointer). IP is used with CS to keep track of which memory address stores the next executable instruction of the computer program. SP is used with SS to access a portion of memory called the *stack*.

Accessing Memory

In MS-DOS computers, memory locations are accessed by combining the contents of a segment register with the contents of one of the other registers. For example, the program instruction to be executed is accessed by combin-

ing the contents of the CS and IP registers (the combination of CS and IP is written "CS:IP"). After the instruction is retrieved from memory and executed, the IP register is incremented so that CS:IP points to the next instruction to be executed.

The manner in which register contents are combined places an upper limit on the amount of memory that is addressable by the computer hardware. MS-DOS was originally designed to run on computers with an Intel 8088 CPU. Each 8088 register stores a 16-bit number. The 8088 combines the 16-bit number from a segment register (such as CS) with the 16-bit number from another register (such as IP) to produce a 20-bit memory address. This limits the amount of memory addressable by the 8088 to 2^{20} bytes, or 1 Mbyte.

Since the birth of MS-DOS, 8088 computers have been succeeded by 80286, 80386, and 80486 computers. These computers are capable of addressing more than 1 Mbyte of memory. However, the 1-Mbyte limitation is still built into MS-DOS. This limitation is one of the major restrictions of the operating system.

The memory diagram shown in figure 11-1 illustrates an additional restriction on usable memory. Memory addresses starting at A0000H are reserved for use by the system's video display and ROM (read-only memory). This memory is not available for programs to use. Therefore, user programs are restricted to the 640-Kbyte range 00000H–9FFFFH. Chapter 12 discusses how this constraint has been overcome through the implementation of *expanded memory*.

Booting MS-DOS

The booting process consists of reading into memory the boot record and the files IO.SYS, MSDOS.SYS, and COMMAND.COM (see chapter 10).

When the computer is first turned on (or restarted), control is passed to an address in ROM that checks whether the disk has a valid boot record. If a valid record is found, it is loaded into memory, and control of the computer is passed to it.

When the boot record receives control, it checks whether IO.SYS and MSDOS.SYS are the first two files stored on the disk. If they are, the two files are loaded into the low end of memory, and control is passed to an initialization module contained in IO.SYS. If the two files are not on the disk in the appropriate physical location, the following message is displayed:

```
Non-System disk or disk error
Replace and strike any key when ready
```

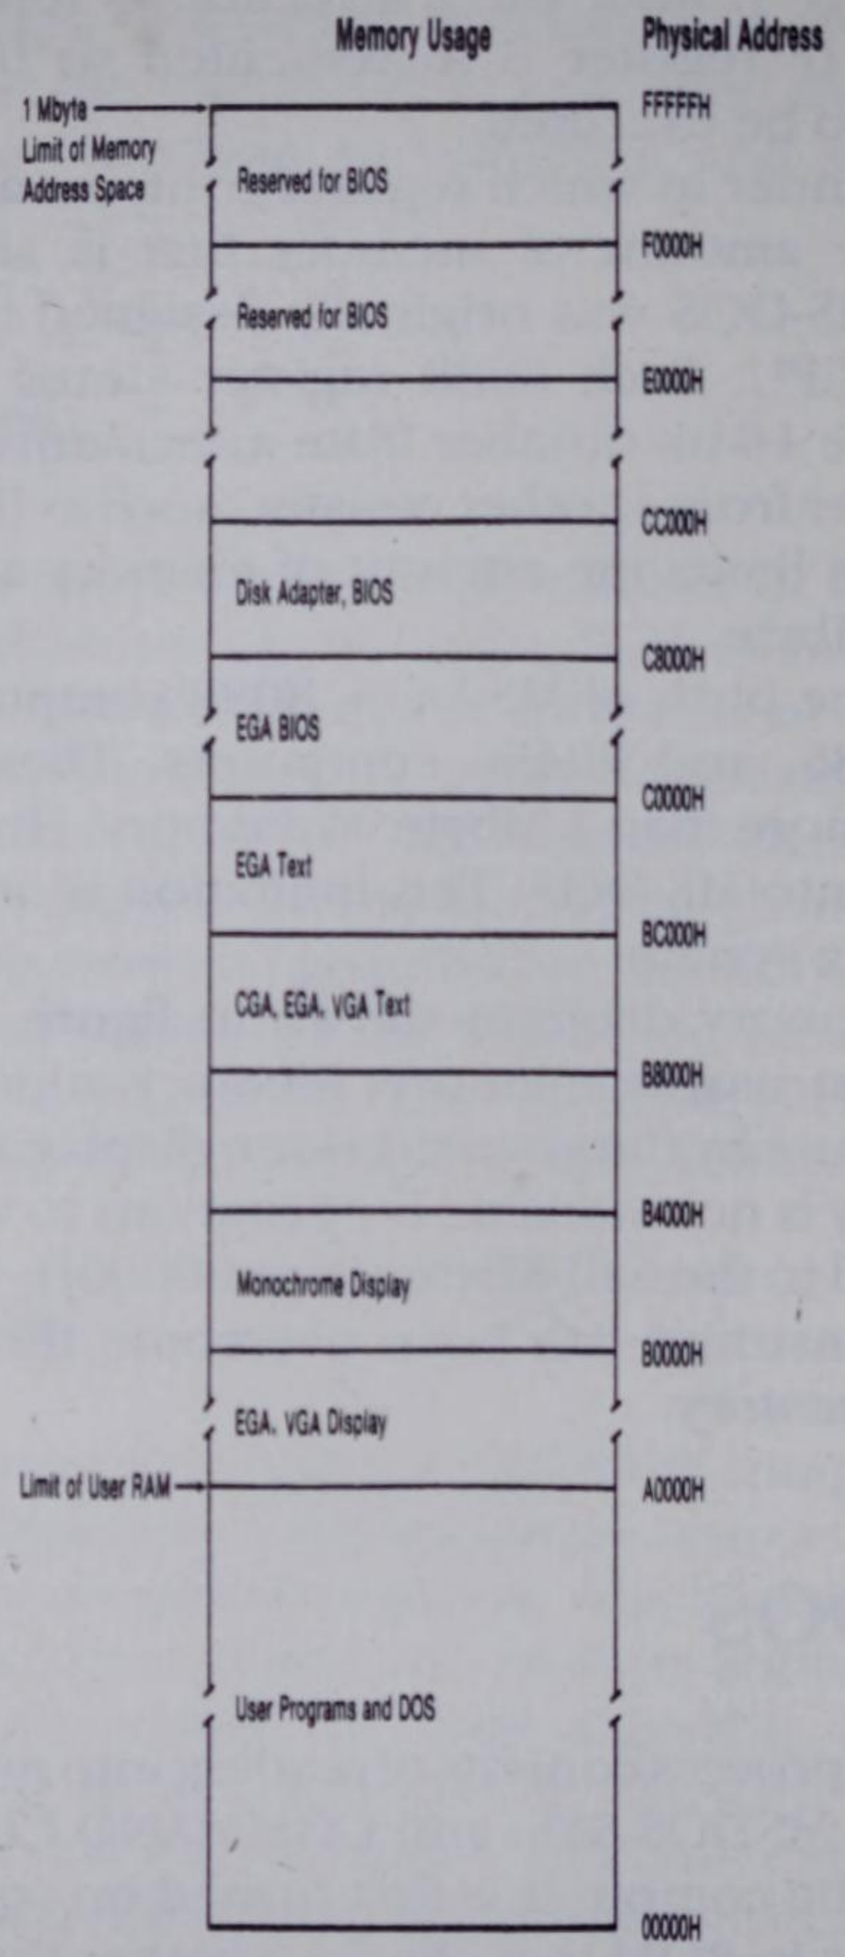

Figure 11-1. Memory map for a computer with 1 megabyte of memory.

If you are using DOS 5 and your computer has available extended memory, you can configure the operating system so that a portion of DOS resides in extended memory. Such a setup frees some conventional memory for use by your application programs. Refer to the discussion of HIMEM in Part 2 of this book for details.

> In versions of DOS prior to 3.3, IO.SYS and MSDOS.SYS must be stored in contiguous sectors. This restriction does not hold in DOS 3.3 and subsequent versions of the operating system.

The initialization module passes control to MSDOS.SYS, which initializes a disk buffer and a file control block area that are used in executing service routines. MSDOS.SYS also determines the computer's equipment status and performs any necessary hardware initialization. MSDOS.SYS then passes control back to the IO.SYS initialization module.

The initialization module checks whether there is a CONFIG.SYS file (discussed in chapter 9) in the root directory of the boot disk. If there is and it contains any instructions about installable device drivers, the specified drivers are installed in memory.

Next, the initialization module issues a call to DOS function 4BH, which invokes the DOS program loader. The loader, also called EXEC, is responsible for loading a program into memory and passing control to the program. In this case, the initialization module directs EXEC to load COMMAND.COM. EXEC can be directed to load a different command interpreter through the use of the SHELL command (see Part 2).

Recall from chapter 10 that COMMAND.COM consists of three parts:

- An initialization portion
- A resident portion
- A transient portion

The resident portion is loaded by EXEC and is responsible for loading the transient portion. The resident portion also contains the routines that handle input and output errors, as well as routines that handle int 22H (terminate address), int 23H (Ctrl-Break), and int 24H (critical error).

The initialization portion of COMMAND.COM is loaded into memory immediately above the resident portion. This portion of the command interpreter processes AUTOEXEC.BAT files (see chapter 4). The initialization portion also prompts you for the time and date. It is then discarded.

The transient portion of COMMAND.COM is loaded into the high end of memory. This portion of the command interpreter displays the system prompt, contains the internal system commands, and loads and executes external commands and executable files. As its name implies, the transient portion may be overwritten during the execution of a program. When a program terminates, the resident portion of COMMAND.COM determines whether the transient portion has been overwritten and reloads it if necessary.

Once the transient portion of COMMAND.COM has been installed, the system prompt is displayed, indicating that the booting process has been completed and that MS-DOS is ready to accept a command. Figure 11-2 illustrates the structure of computer memory at the completion of the booting process.

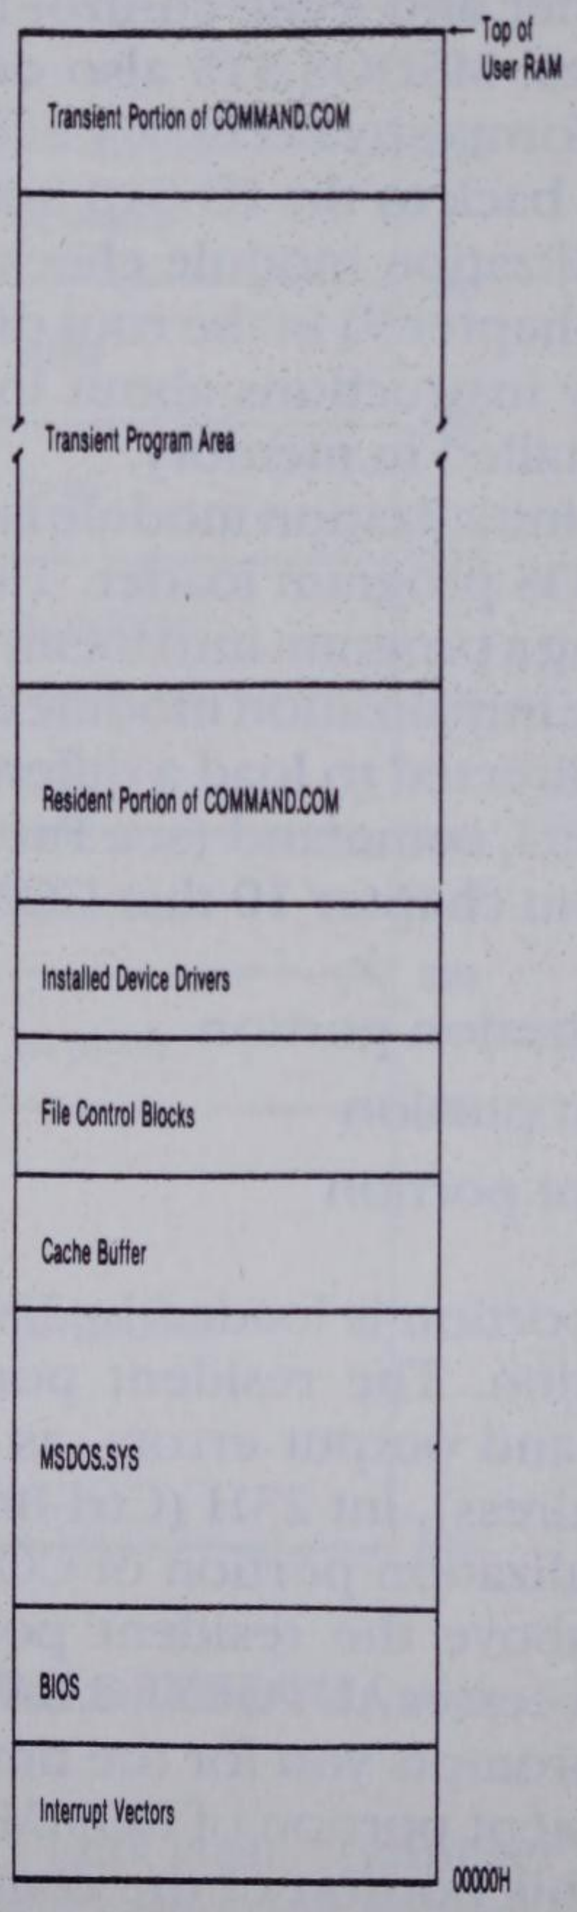

Figure 11-2. Configuration of computer memory immediately after MS-DOS is booted (exact memory addresses vary according to system configuration).

Program Segment Prefix

Before loading any program (including COMMAND.COM), EXEC locates the lowest available segment in memory. This segment is designated the *program segment*. Beginning at offset 00 in the program segment, EXEC constructs a *program segment prefix (PSP)*. This program segment prefix is a 256-byte (100H) block of memory that serves as an area of communication between MS-DOS and the executing program. Once the PSP is constructed, EXEC loads the program beginning at offset 100H in the program segment.

Table 11-1 describes the fields of the PSP. Note that several of the fields described are not officially documented by either IBM or Microsoft. However, these fields seem to have served the same function from MS-DOS 2.0 through MS-DOS 3.3, and the descriptions presented in table 11-1 are widely accepted by DOS program developers.

The segment address of the PSP is sometimes referred to as the *process identifier*, or *PID*. Each program running on a computer is called a process and is identified by a unique PID. On MS-DOS computers, the PID and the PSP segment address are identical. When MS-DOS was first implemented, it was used on relatively small personal computers that were never running more than one program (process) at a time. The current MS-DOS computers are quite different in this respect: It is not unusual for them to have one or more terminate and stay resident programs (such as SideKick) active as the user runs another application program. In the environment, the concept of processes is very important, as is an understanding of the location, structure, and function of the PSP. Processes and PIDs are discussed later in this chapter under Memory Allocation.

Table 11-1. Breakdown of Program Segment Prefix

Offset (Hex)	*Purpose*
00–01	**Program terminate.** The first 2 bytes of the PSP are always CD and 20. These two hexadecimal numbers code for the MS-DOS interrupt "program terminate" (int 20H). See appendix B for a discussion of MS-DOS interrupts.
02–03	**Top of memory.** These 2 bytes store, in reverse order, the starting segment address of any memory that MS-DOS has not allocated to the executable file. Because MS-DOS generally allocates all available memory to an executable file, these 2 bytes normally contain the address of the "top of memory."

continues

Table 11-1. continued

Offset (Hex)	*Purpose*
04	**Byte of 00.** Although officially documented as "reserved," this field is not currently in use.
05–09	**Function dispatcher.** A long call to the MS-DOS function dispatcher. This field is implemented to provide compatibility with CP/M programs. New programs should not use this field to call the function dispatcher. The first byte in this field is the op-code for a long call. The second and third bytes store, in reverse order, the offset of the function dispatcher. This number also represents the number of bytes that are available in the program's code segment. The fourth and fifth bytes of the field store, in reverse order, the segment address of the function dispatcher. The function dispatcher is discussed in appendix A.
0A–0D	**Terminate address.** These 4 bytes store, in reverse order, the default address that receives control when a program terminates execution. The value stored here preserves the default so that it can be restored, if necessary, when the program terminates.
0E–11	**Ctrl-Break exit.** These 4 bytes store, in reverse order, the default address that receives control when Ctrl-Break is pressed. The value stored here preserves the default so that it can be restored, if necessary, when the program terminates.
12–15	**Critical error exit.** These 4 bytes store, in reverse order, the default address that receives control when a critical error is encountered. The value stored here preserves the default so that it can be restored, if necessary, when the program terminates. See appendix A for a discussion of critical errors.
16–17	**PSP of parent.** This field stores in reverse order, the segment address of the parent's PSP. For example, if COMMAND.COM uses EXEC to load an application program, this field of the application's PSP will contain the segment address of COMMAND.COM's PSP. THE COMMAND.COM shell that was loaded during booting has no viable parent. Therefore, this field in COMMAND.COM's PSP stores its own segment address. The use of this field is undocumented by Microsoft and IBM. Officially the field is "reserved."

Offset (Hex)	*Purpose*
18–2B	**File handle alias table**. These 20 bytes are used to store the file handles that belong to this process. The byte at a given entry contains FFH if the corresponding handle is not in use by the process. A value other than FFH represents an offset into DOS's master file table, which contains the file-specific information. The size of this master table is set with the `FILES=nnn` command. The first 5 bytes in this field are reserved for the standard input, standard output, standard error, standard auxiliary, and standard printer devices. If any of these devices are redirected, the corresponding entry in this table will be changed by MS-DOS. The size of this table limits a process to 20 file handles. However, it is possible to create a table with more than 20 bytes and use it as a handle alias table. This can be accomplished by (1) storing the size of the new table at offset 32H in the PSP, (2) storing the offset and segment addresses of the new table at offset 34H of the PSP, and (3) copying the contents of the old alias table into the new alias table. The use of this field is not documented by Microsoft or IBM. Officially the field is "reserved."
2C–2D	**Environment address.** These bytes store the segment address, in reverse order, of the program's environment. Refer to this chapter's discussion of the environment.
2E–31	**Reserved by MS-DOS**.
32–33	**Size of file handle alias table**. This 2-byte word stores the size of the process's file alias table. Current implementations of MS-DOS set the value of this field to 20. See the description of PSP offset field 18H–2BH. The use of this field is undocumented by Microsoft and IBM. Officially this field is "reserved."
34–37	**Address of file handle alias table.** The first 2 bytes of this field store, in reverse order, the offset address of the file handle alias table. The second 2 bytes of this field store, in reverse order, the alias table's segment address. Current implementations of MS-DOS store the alias table at PSP:0018H. See the description of PSP offset field 18H–2BH. The use of this field is undocumented by Microsoft and IBM. Officially the field is "reserved."

continues

Table 11-1. continued

Offset (Hex)	*Purpose*
37–4F	**Reserved by MS-DOS.**
50–52	**Function dispatcher, return.** This field contains the bytes CD 21 CB—the machine code for a call to the function dispatcher followed by a FAR return.
53–5B	**Reserved by MS-DOS.**
5C–6B	**File control block.** This default file control block is used if the first command line parameter following the program name is a filename.
6C–7B	**File control block.** This default file control block is used if the second command line parameter following the program name is a filename.
7C–7F	**Reserved by MS-DOS.**
80–FF	**Command tail, DTA.** The first byte stores the length of the command line's parameter string. The parameter string (command tail) is stored beginning at byte 2 of this field. The entire field also serves as a default disk transfer area. This field is used if the program requires but does not establish a DTA. When the field is used in this fashion, the command tail is overwritten.

MS-DOS 3.0 (and subsequent versions) implement DOS function 62H. This function can be called by a program to obtain the segment address of its PSP. Appendix A contains a Turbo Pascal program that demonstrates the use of function 62H.

For the 2.X versions of DOS, there is an undocumented DOS function that can be used to obtain the PSP's segment address. Function 51H (which is also implemented in 3.X, 4.X, and 5.X) returns the address in the BX register. Listing 11-1 is a Turbo Pascal program that demonstrates the use of function 51H. See appendix A for a general discussion on the use of the DOS functions.

DOS function 50H is available to set the current PSP. This function is implemented in MS-DOS 2.X and subsequent versions, but its use is not officially documented. Despite this lack of sanction by IBM and Microsoft, function 50H is widely used in resident programs. When a resident program receives control (as when a "hot key" is pressed), DOS keeps the PSP of the application program as the current PSP. Function 50H may be used to tell DOS that the resident's PSP is the current PSP. Similarly, when the resident passes control back to the application program, function 50H may be used to reset the application's PSP as current.

Listing 11-1. PsPeep, a Turbo Pascal program demonstrating the use of function 51.H

```
program PsPeep;

{This program displays information about its PSP using
MS-DOS function 51H. 51H is an undocumented function that is
identical to the MS-DOS 3.X function 62H. The difference is
that 51H is also implemented in -DOS 2.X.}

type
    registers = record
                ax,bx,cx,dx,bp,si,di,ds,es,flags: integer;
                end;
    HexString = string[4];
var
    dosreg  : registers;
    psp_seg : integer;

function hex (i : integer) : HexString;
{Converts decimal to hex string}
const
     h : array[0..15] of char = '0123456789ABCDEF';
var
     low,high : byte;
begin
     low  := Lo(i);
     high := Hi(i);
     hex  := h[high shr 4]+h[high and $F]+h[low shr 4]+h[low and $F];
end;

function VerNum : integer;
{This function returns the version of DOS being used.}
begin
      dosreg.ax:= $3000;              {Set AH to 30H.}
      MsDos(dosreg);                  {Call DOS.}
      VerNum:= Lo(dosreg.ax);         {Major number in AL.}
end;

procedure GetPsp;
{Uses DOS service function 51H to obtain the segment address
of the program's PSP.}
begin
     dosreg.ax := $5100;

     MsDos(dosreg);
     psp_ := dosreg.bx;
     writeln('PSP: ',hex(psp_seg));
end;
```

continues

Listing 11-1. continued

```
procedure TermAddr;
{Displays segment:offset address of termination handler.}
begin
     write('Termination address: ');
     write(hex(MemW[psp_seg:$0c]));
     writeln(':',hex(MemW[psp_seg:$0a]));
end;

procedure ParentPsp;
{Displays PSP of this program's parent. The purpose of offset
is not officially documented.}
begin
     writeln('Parent PSP: ',hex(MemW[psp_seg:$16]));
end;

procedure EnvSeg;
begin
     write('Environment begins at: ');
     writeln(hex(MemW[psp_seg:$2c]),':0000');
end;

procedure FileHandles;
{Displays information about the file handle alias table. The format
for alias table is not officially documented.}
var
     AliasSeg,AliasOff,FileCnt,
     i,j                          : integer;

begin
     AliasSeg := MemW[psp_seg:$36];
     AliasOff := MemW[psp_seg:$34];
     write('Handle alias address: ');
     writeln(hex(AliasSeg),':',hex(AliasOff));
     write('Size of alias table: ');
     writeln(MemW[psp_seg:$32],' bytes');

     FileCnt := 0;
     for i := 0 to (MemW[psp_seg:$32] - 1) do
     begin
          j := Mem[psp_seg:$18 + i];
          if not (j in [$FF, 0..2]) then
             FileCnt := FileCnt + 1;
     end;
     writeln('Number of open file handles: ',FileCnt);

end;
```

```
procedure GoPeep;
begin
      TermAddr;
      ParentPsp;
      EnvSeg;
      FileHandles;
end;

{Program starts here.}
begin
      if VerNum < 2 then
          writeln('DOS 2.0 or later required.')
      else begin
          GetPsp;
          GoPeep;
      end;
end.
```

Executable Files

All programs written to run under MS-DOS go through a process called *linking* (see chapter 16). The linker evaluates the program and determines where in memory the different parts of the program are to be located relative to one another. The linker then stores this information in a header located at the front of the program file. All files produced by the linker have a filename extension of EXE.

EXE files that meet three requirements may be converted to COM files. The requirements for a COM file are

- The program and all of its data must occupy less than 64 Kbytes.
- The program's code, data, and stack must all reside in the same memory segment.
- The first executable instruction of the program must be at offset 100H within the file.

If an EXE file meets all of these requirements, it can be converted to a COM file by using the MS-DOS utility EXE2BIN. COM files do not contain a header.

MS-DOS always loads COM files beginning at offset 100H in the program segment, immediately following the PSP. The starting address of the program segment is placed in all four segment registers, and a value of 100H is placed in the IP register. The SP register is set to point to the top of the program segment. MS-DOS then places 2 bytes of 00H at the top of the stack and passes control to the instruction at CS:100.

When an EXE file is loaded, the file's header is placed in memory beginning at offset 100H in the program segment. The remainder of the file is then relocated in memory according to the information contained in the header. The CS, IP, SS, and SP registers are initialized according to information in the header. The DS and ES registers are set to point to the start of the PSP, control is passed to the instruction pointed to by CS:IP, and program execution commences.

The Environment

Any program running under MS-DOS may use EXEC to load and run another program. When this occurs, the program calling EXEC is referred to as the *parent* and the program loaded by EXEC is referred to as the *child*. The child inherits many items from its parent, including a block of memory called the *environment*.

The environment consists of a series of statements having the form environment variable = some string of characters

An environment statement serves to communicate information to both MS-DOS and application programs. For example, the `PATH=search path` statement tells MS-DOS which directories to search for files; the statement `COMSPEC=d:[path]` tells MS-DOS where to locate the transient portion of COMMAND.COM; and the statement `LIB=[path]` tells the compiler where to look to locate library files used in compiling programs.

The statements within the environment are separated from each other by a byte of value 00H. The final statement in the environment is followed by 2 bytes that store 00H. In MS-DOS 3, 4, and 5, the 2 bytes of 00H are followed by a word count and by the drive, path, filename, and filename extension of the program that owns the environment. As mentioned earlier in this chapter, offset 2CH in the program's PSP stores the segment address of the program's environment.

Environment Size

The environment may be up to 32 Kbytes long. As part of the standard booting process, COMMAND.COM receives an environment that is 160 bytes long. An environment of this size can fill up quickly, in which case MS-DOS will display the message `Out of environment space`.

Users of MS-DOS 3.1 and subsequent versions can increase the size of the environment passed to COMMAND.COM by including a command with the following format in the CONFIG.SYS file:

```
shell=[d:][path]command.com /p /e:xxxx
```

Refer to the discussion of SHELL in Part 2 for details on the use of this command.

Users of MS-DOS 2.X and 3.0 can also change the size of the environment, but it is necessary to use DEBUG to modify the contents of COMMAND.COM (DEBUG is thoroughly discussed in chapter 15). Place your working system disk in drive A and enter the following command:

```
A> debug a:command.com
```

This command instructs MS-DOS to load DEBUG and tells DEBUG to load COMMAND.COM. You will want to use DEBUG to search for the portion of code within COMMAND.COM that sets the default size of the environment. When you see the DEBUG prompt (-), enter the following command:

```
-s 100 L 4500 BB 0A 00 B4 48 CD 21
```

DEBUG will search COMMAND.COM until it finds the appropriate sequence of machine code. When the code is found, DEBUG will display the address at which it is located. You should see something like this:

```
39D3:0ECE
```

The precise address on your machine will probably differ from the one in this example. The next step is to unassemble the machine code. Enter the following command (again, the address you use will probably differ from the one used in the example):

```
-u 39d3:0ece
39D3:0ECE BB0A00      MOV     BX,000A
39D3:0ED1 B448        MOV     AH,48
39D3:0ED3 CD21        INT     21
39D3:0ED5 E890F7      CALL    0668
39D3:0ED8 E8DCF7      CALL    06B7
39D3:0EDB 89166909    MOV     [0969],DX
39D3:0EDF A16709      MOV     AX,[0967]
39D3:0EE2 2D5900      SUB     AX,0059
39D3:0EE5 90          NOP
39D3:0EE6 A3B10B      MOV     [0BB1],AX
39D3:0EE9 E861F3      CALL    024D
39D3:0EEC 8916B70B    MOV     [0BB7],DX
```

The instruction `MOV BX,000A` sets the number of paragraphs (16-byte blocks) given to the environment. As you can see, the default is 10 (000AH) paragraphs. The following command changes the code so that 64 (0040H) paragraphs are set aside for the environment. Feel free to choose a smaller or larger number for your environment size. Remember that you are limited to 32 Kbytes and that DEBUG operates with hexadecimal numbers. By the way, 32 Kbytes is actually 32,768 bytes, or 2,048 paragraphs.

```
-a 39d3:0ece
39D3:0ECE mov bx,0040
39d3:0ED1       ←press Enter
-
```

Because we are changing the contents of COMMAND.COM, it is a good idea to unassemble the changed code just to check our work.

```
-u 39d3:0ece
39D3:0ECE BB4000        MOV     BX,0040
39D3:0ED1 B448          MOV     AH,48
39D3:0ED3 CD21          INT     21
39D3:0ED5 E890F7        CALL    0668
39D3:0ED8 E8DCF7        CALL    06B7
39D3:0EDB 89166909      MOV     [0969],DX
39D3:0EDF A16709        MOV     AX,[0967]
39D3:0EE2 2D5900        SUB     AX,0059
39D3:0EE5 90            NOP
39D3:0EE6 A3B10B        MOV     [0BB1],AX

39D3:0EE9 E861F3        CALL    024D
39D3:0EEC 8916B70B      MOV     [0BB7],DX
-
```

Now enter **w** to write the modified file back to the disk. Then enter **q** to leave DEBUG. Test whether COMMAND.COM has been successfully patched by using the disk in drive A to reboot your system. If your system boots, copy COMMAND.COM into the root directory of the boot drive.

Passing an Environment to a Child

Before calling EXEC, the parent must set up a pointer to the environment block that the child will inherit. A *pointer* is a variable that stores an address in memory. In this case, the pointer stores the address of the first byte in the environment. The parent can create an environment of any size (up to 32 Kbytes) using the memory allocation function (see the following discussion).

However, when control passes from the child back to the parent, the parent's environment will remain unchanged from the original. Therefore, the parent cannot use this mechanism to change the size of its own environment.

The parent can pass to the child an exact duplicate of its own environment by setting the pointer to equal zero. Any modifications that the child performs on its environment are strictly local: they have no effect on the parent's environment.

It is possible for a child to modify its parent's environment. One way is to have the child locate its parent's PSP from offset 16H in its own PSP. Once the parent's PSP is located, the parent's environment address can be read from offset 2CH.

The parent's environment can also be accessed by using the memory control blocks discussed in the next section.

Memory Allocation

One of the most critical jobs of any operating system is managing computer memory. The operating system must constantly be aware of which portions of memory are being used and which portions are available. There are three fundamental requests that an operating system must be able to service in performing memory management:

- Requests for allocations of blocks of memory
- Requests to modify the size of previously allocated blocks of memory
- Requests to release (deallocate) previously allocated blocks of memory

MS-DOS carries out these tasks using functions 48H (allocate memory), 49H (release memory), and 4AH (modify memory allocation). If you refer to the previous section where COMMAND.COM was patched to modify the environment size, you will see that function 48H was used to allocate a block of memory for the environment.

The first paragraph in each allocated memory block is set aside for the *memory control block (MCB)*. The first byte of a memory control block is either 4DH or 5AH. If the first byte is 4DH, the MCB is an internal member of the chain that links all of the MCBs. If the first byte of the MCB is 5AH, the MCB is the final MCB in the chain.

The second and third bytes of the memory control block store, in reverse order, the process identifier (PID) of the program that owns the memory block. Recall from the PSP discussion that the PID is identical to the segment address of the program's PSP.

The fourth and fifth bytes in the MCB store, in reverse order, the number of paragraphs in the allocated block of memory. Adding this number to the address of the current MCB gives the address of the next MCB in the chain.

As mentioned earlier, MS-DOS supplies three functions to use in accessing MCBs. Direct manipulation of the MCBs is strongly discouraged by Microsoft and IBM. There is no way that programs can coexist unless programmers leave the MCBs alone and let DOS worry about them. Having said that, there is no reason why a programmer should not be able to look at the MCBs and use the information they contain.

Unfortunately, there is no documented way of accessing the MCBs. Even the MCB structure just described is not officially documented. However, there is a way (undocumented) to get at the MCBs: DOS function 52H. This function returns a pointer to the first MCB in the allocated chain. Once the first link is found, it is possible to traverse the entire chain.

Let's use DEBUG to see how the previous information can be used. Start DEBUG (**debug**) and wait for the prompt (-). When the prompt appears, invoke DEBUG's assembler by entering **a 100**. You should see something like this:

```
-a 100

1259:0100        ←press Enter
```

Now enter the following assembly language commands:

```
1259:0100 mov ah,52

1259:0102 int 21

1259:0104        ←press Enter

-
```

Next, enter **g 104**. This tells DEBUG to execute the assembly language commands entered and to stop at offset 104H.

```
-g 104

AX=5200 BX=0026 CX=0000 DX=0000 SP=FFEE BP=0000 SI=0000 DI=0000
DS=1259 ES=022B SS=1259 CS=1259 IP=0104  NV UP EI PL NZ NA PO NC
1259:0104 6F      DB     6F
```

DEBUG just called DOS function 52H. Function 52H returned the memory address in ES and BX. The 2-byte word at ES:BX 2 is the segment address of the first MCB in the allocation chain. The next DEBUG command displays the word at ES:BX 2:

```
-d es:0024 L2

022B:0020       73 09                          s.
```

This dump tells us that the first MCB is stored at address 0973:0000. Remember that MCBs always start at offset 0000 in a segment. We can now look at the first MCB:

```
-d 973:0 110
0973:0000 4D 08 00 EF 02 07 03 00-36 C6 06 08 03 00 36 C7
M.......6.....6.
```

The first byte in the preceding dump is reassuring, because the first byte in each MCB must be either 4DH or 5AH. The second and third bytes store, in reverse order, the PID (PSP segment address) of the process that owns this block of memory. MS-DOS always assigns PID 0008 to the block containing the CONFIG.SYS device drivers.

To find the next MCB, add the 2-byte word formed by the fourth and fifth bytes to the segment address of this MCB. DEBUG's hexadecimal calculator is useful for this:

```
-h 973 2ef

0C62 0684
```

The first number is the sum; the second number is the difference.

The next MCB is at the paragraph following 0C62:0000:

```
-d c63:0 L10
0C63:0000 4D 64 0C D3 00 EA 75 07-3B FD 73 19 AA EB F3 4E
Md....u.;.s....N
```

The preceding display is the MCB for the second block of memory in the chain. This is the memory block used by COMMAND.COM. The second and third bytes tell us that COMMAND.COM's PSP starts at address 064:0000. Let's take a look at the PSP's contents:

```
-d c64:0
0C64:0000 CD 20 00 80 00 9A F0 FE-1D F0 B2 02 64 0C 3C 01
.............d.<.
0C64:0010 64 0C 56 05 64 0C 64 0C-01 03 01 00 02 FF FF FF
d.V.d.d.........
0C64:0020 FF FF FF FF FF FF FF FF-FF FF FF FF 3C 0D 1D 08
............<...
0C64:0030 64 0C 14 00 18 00 64 0C-FF FF FF FF 00 00 00 00
d.....d.........
0C64:0040 00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00
................
0C64:0050 CD 21 CB 00 00 00 00 00-00 00 00 00 00 20 20 20
.!............
0C64:0060 20 20 20 20 20 20 20 20-00 00 00 00 00 20 20 20  .....
0C64:0070 20 20 20 20 20 20 20 20-00 00 00 00 00 00 00 00  ........
```

This is the beginning of COMMAND.COM's PSP. We can use it to obtain the segment address of COMMAND.COM's environment block (offset 2CH). Thus, knowing how to get at the MCBs and traverse them gives us access to COMMAND.COM's environment. Any changes in this environment block will be passed on to all programs loaded by COMMAND.COM.

CHAPTER

12

Expanded Memory

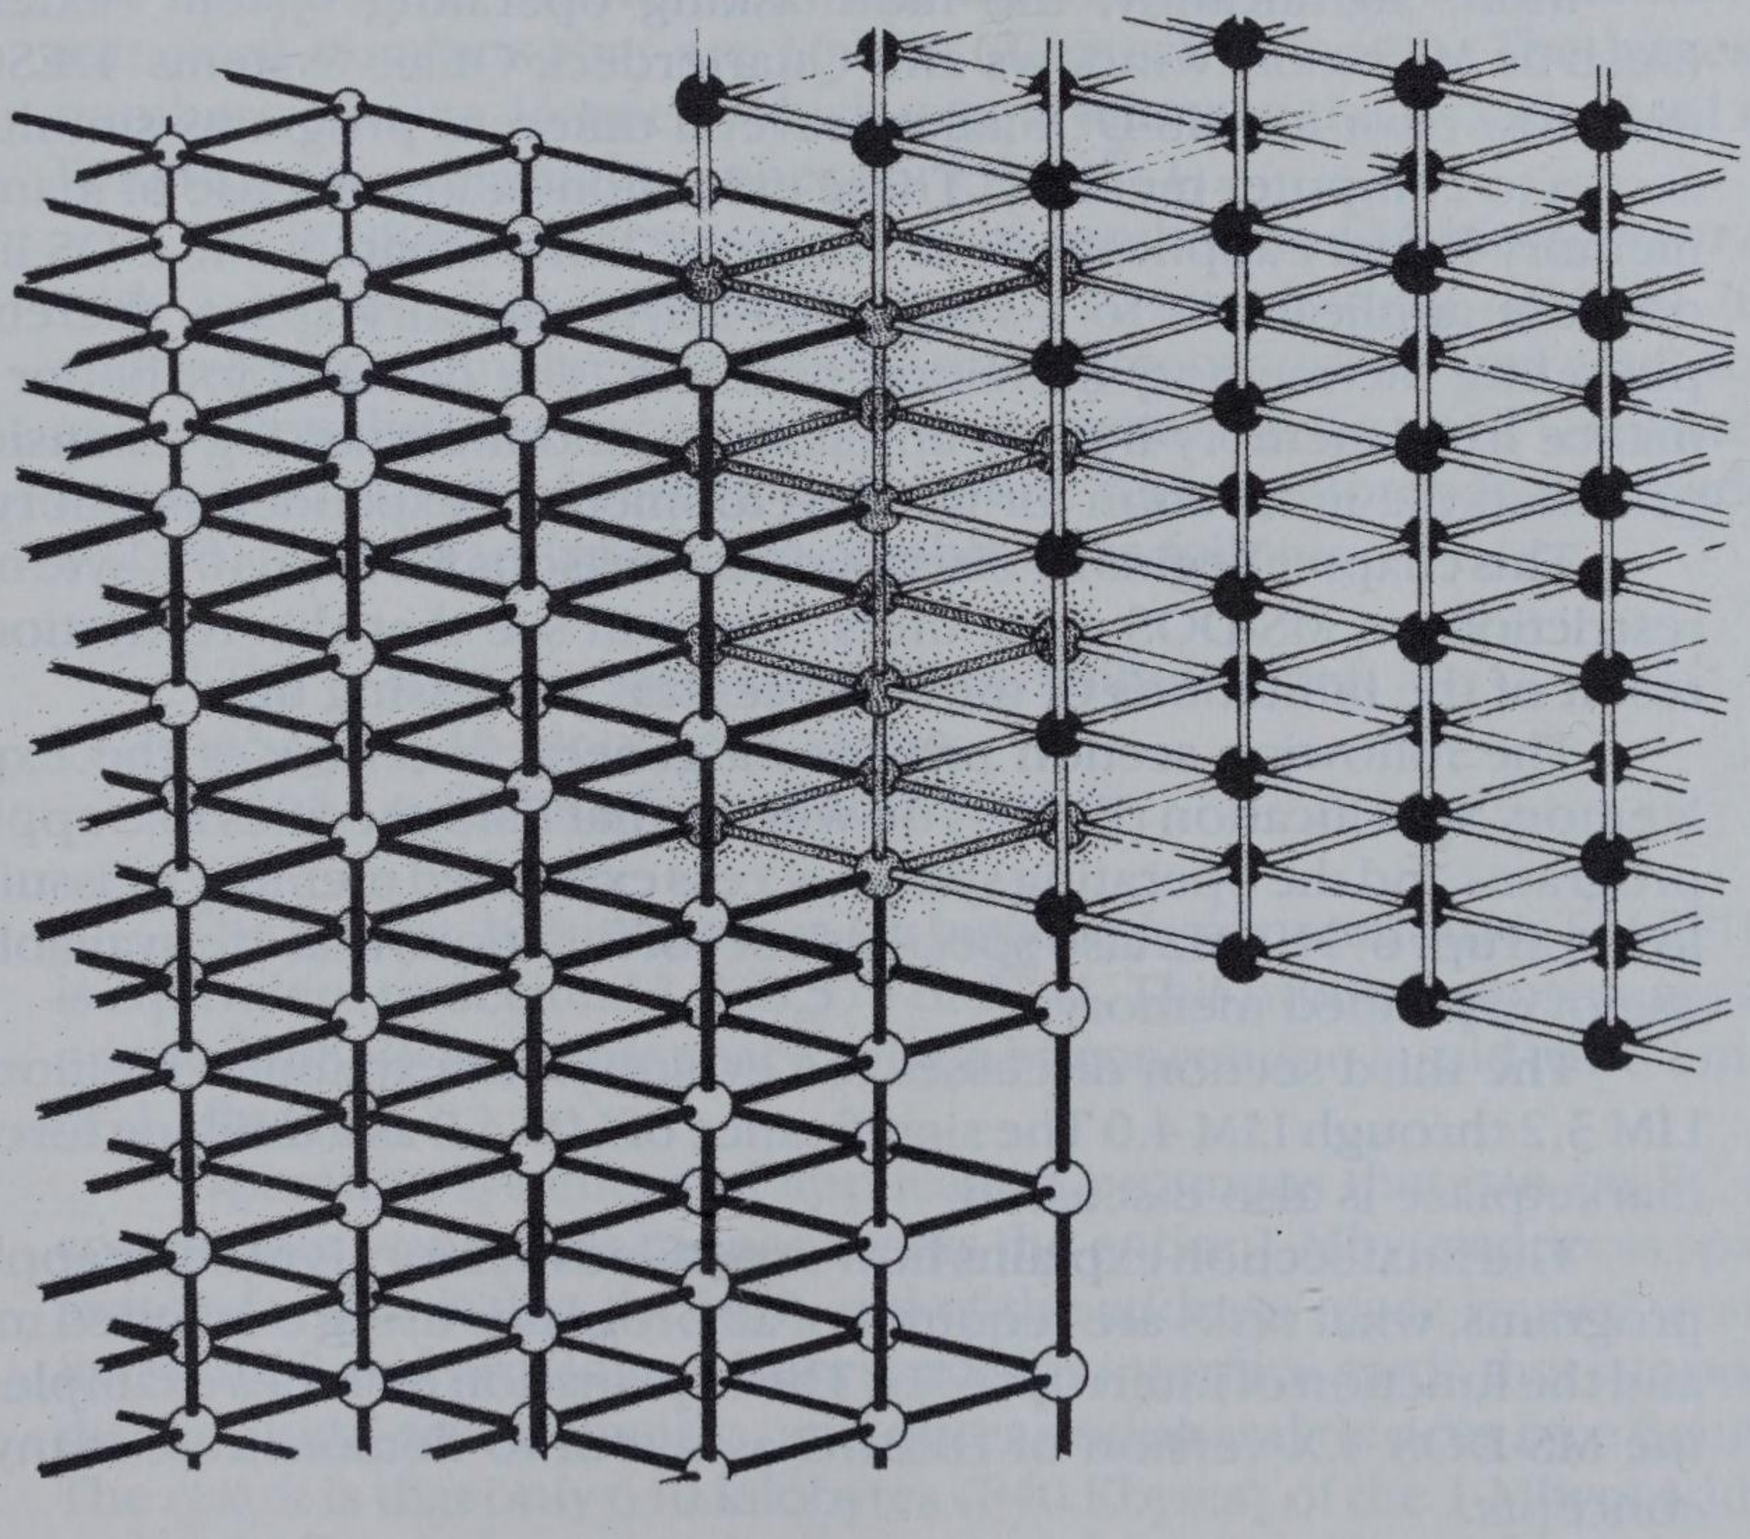

The 640-Kbyte Limit
Fundamentals of Expanded Memory
The Evolution of Expanded Memory
Using Expanded Memory
Exploring Expanded Memory with DEBUG

Expanded memory is the name of a method developed to overcome the memory limitation of MS-DOS computers. The structure and use of expanded memory is the subject of this chapter.

MS-DOS computers are limited to 640 Kbytes of usable main memory. When MS-DOS was first introduced, most observers felt that 640 Kbytes was more than enough memory for a personal computer. After all, earlier personal computers were limited to 64 Kbytes of memory, so 640 Kbytes seemed like more memory than any reasonable person would require.

What has happened, though, is that as computer applications have become more sophisticated, the memory limitation has become a significant problem. Large application programs, device drivers, and TSR utilities all require large amounts of memory.

More significantly, the multitasking operating system "extensions" (such as Microsoft Windows and Quarterdeck Office Systems' DESQView) that now exist for MS-DOS allow several different programs simultaneous access to computer memory. These extensions allow the use of many large, memory-hungry applications at one time. Unfortunately, MS-DOS limits all of these applications to a single 640-Kbyte memory space, thereby compounding the memory limitation problem. The demand for better performance from memory-hungry applications and multitasking extensions has provided the motivation for the development of expanded memory.

This chapter begins by discussing the reasons for the 640-Kbyte memory restriction on MS-DOS computers. You will see that this restriction is the result of the limitations of the 8088 central processing unit.

The following section provides a general overview of the Expanded Memory Specification (EMS). You will see that EMS specifies that application programs and the operating system access expanded memory by issuing calls to interrupt 67H. EMS also specifies a set of functions that are available in the use of expanded memory.

The third section discusses the evolution of expanded memory, from LIM 3.2 through LIM 4.0 The significance of LIM 4.0 as a unifying force in the marketplace is also discussed.

The final section explains how expanded memory is used by application programs, what tasks are required of all programs using expanded memory, and the function of interrupt 67H. The explanation includes examples, using the MS-DOS 4.X version of DEBUG as a tool to demonstrate many of the concepts.

The 640-Kbyte Limit

All computers access memory through their central processing unit (CPU). All CPUs contain *internal registers* that are used to store data. All CPUs also

have an *address space* that determines how much memory the CPU can address or access.

One type of data used by the CPU is the *memory address*. Memory addresses specify physical locations in computer memory. The larger the internal registers, the larger the memory addresses they can store. Therefore, the size of the CPU's internal registers determines the size of the CPU's address space.

8088/86 Computers

The original IBM PC and PC-compatible computers contain an 8088/86 CPU. The 8088/86 is a "16-bit" CPU. This means that the CPU's internal registers can store numbers that are 16 bits (2 bytes) in length. The largest 16-bit number contains 16 ones, which is equivalent to the hexadecimal number FFFFH, or the decimal number 65,535 (2^{16}–1).

The 8088/86 addresses memory by combining a 16-bit *segment address* with a 16-bit *offset address* to form a 20-bit *physical address*. The two addresses are combined by shifting the segment address one place to the left and adding the offset address to it. As an example, if one CPU register stores a segment address of 1234H, and another register stores an offset address of 4321H, the two addresses are combined as follows:

```
1234   ←16-bit segment address shifted to left
 4321  ←16-bit offset address
-----
16661  ←20-bit physical address
```

The largest 20-bit number (in hexadecimal notation) is FFFFFH, which is equivalent to decimal 1,048,575 or 2^{20}–1. This number represents the limit on the 8088/86's address space, which by convention is said to be 1 megabyte or 1 Mbyte.

Operating systems and application programs that run on PC and PC-compatible computers cannot access the entire 1-Mbyte address space. The reason for this is that the high end of the address space is used to store the ROM BIOS and provide address space for interface cards that support video display, local area networks, and other peripheral devices (see figure 11-1). The result is that only 640 kilobytes (640 Kbytes) of the 1-Mbyte address are available for use by operating system and application programs.

From this discussion you can see that the 640-Kbyte limitation is due to design features of MS-DOS that were implemented to accommodate the 8088/8086 hardware. If the hardware had been accommodated differently, MS-DOS could have been designed to access more than 640 Kbytes.

80286, 80386, and 80486 Computers

Because MS-DOS was written to run on 8088/86 machines, the operating system was unable to use the larger address space of the newer generations of IBM and IBM-compatible computers. These computers contain 80286, 80386, and 80486 CPUs, which have 32-bit internal registers that can address much larger memory spaces. But in order to maintain compatibility with the 8088 machines, the newer versions of MS-DOS continue to use 16-bit segment and offset addresses. MS-DOS application programs that run on the newer and potentially more powerful machines are thus burdened by the memory limitation of the original PC and PC compatibles.

IBM and Microsoft have developed OS/2, an operating system that can use the larger address space of 80286, 80386, and 80486 computers. OS/2 does have the capability to run programs written for MS-DOS, but only one MS-DOS program can run at a time and it is limited to 640 Kbytes of memory. OS/2 programs that use the larger address must be written specifically for OS/2.

Expanded memory, on the other hand, allows a program such as Windows or DESQView to run several standard MS-DOS applications at one time without being restricted to 640 Kbytes of memory.

Fundamentals of Expanded Memory

Expanded memory allows the CPU to access more memory than is contained in the CPU's address space through a technique called *memory bank switching*. The principle is simple. A large amount of external memory (or other storage media) exists that cannot be directly accessed by the CPU. A block of the CPU's conventional memory is designated as a *window*. Some mechanism is implemented whereby a portion (or bank) of the external memory is *mapped* to the window. When the CPU reads from the window, it is actually reading a portion of the contents of the external memory. The application program can change the mapping to suit its needs so that different blocks of the external memory are mapped to the window. The result is that the CPU can access a large amount of external memory, although only a portion of the external memory is accessible at any one time. Figure 12-1 illustrates the concept of memory bank switching.

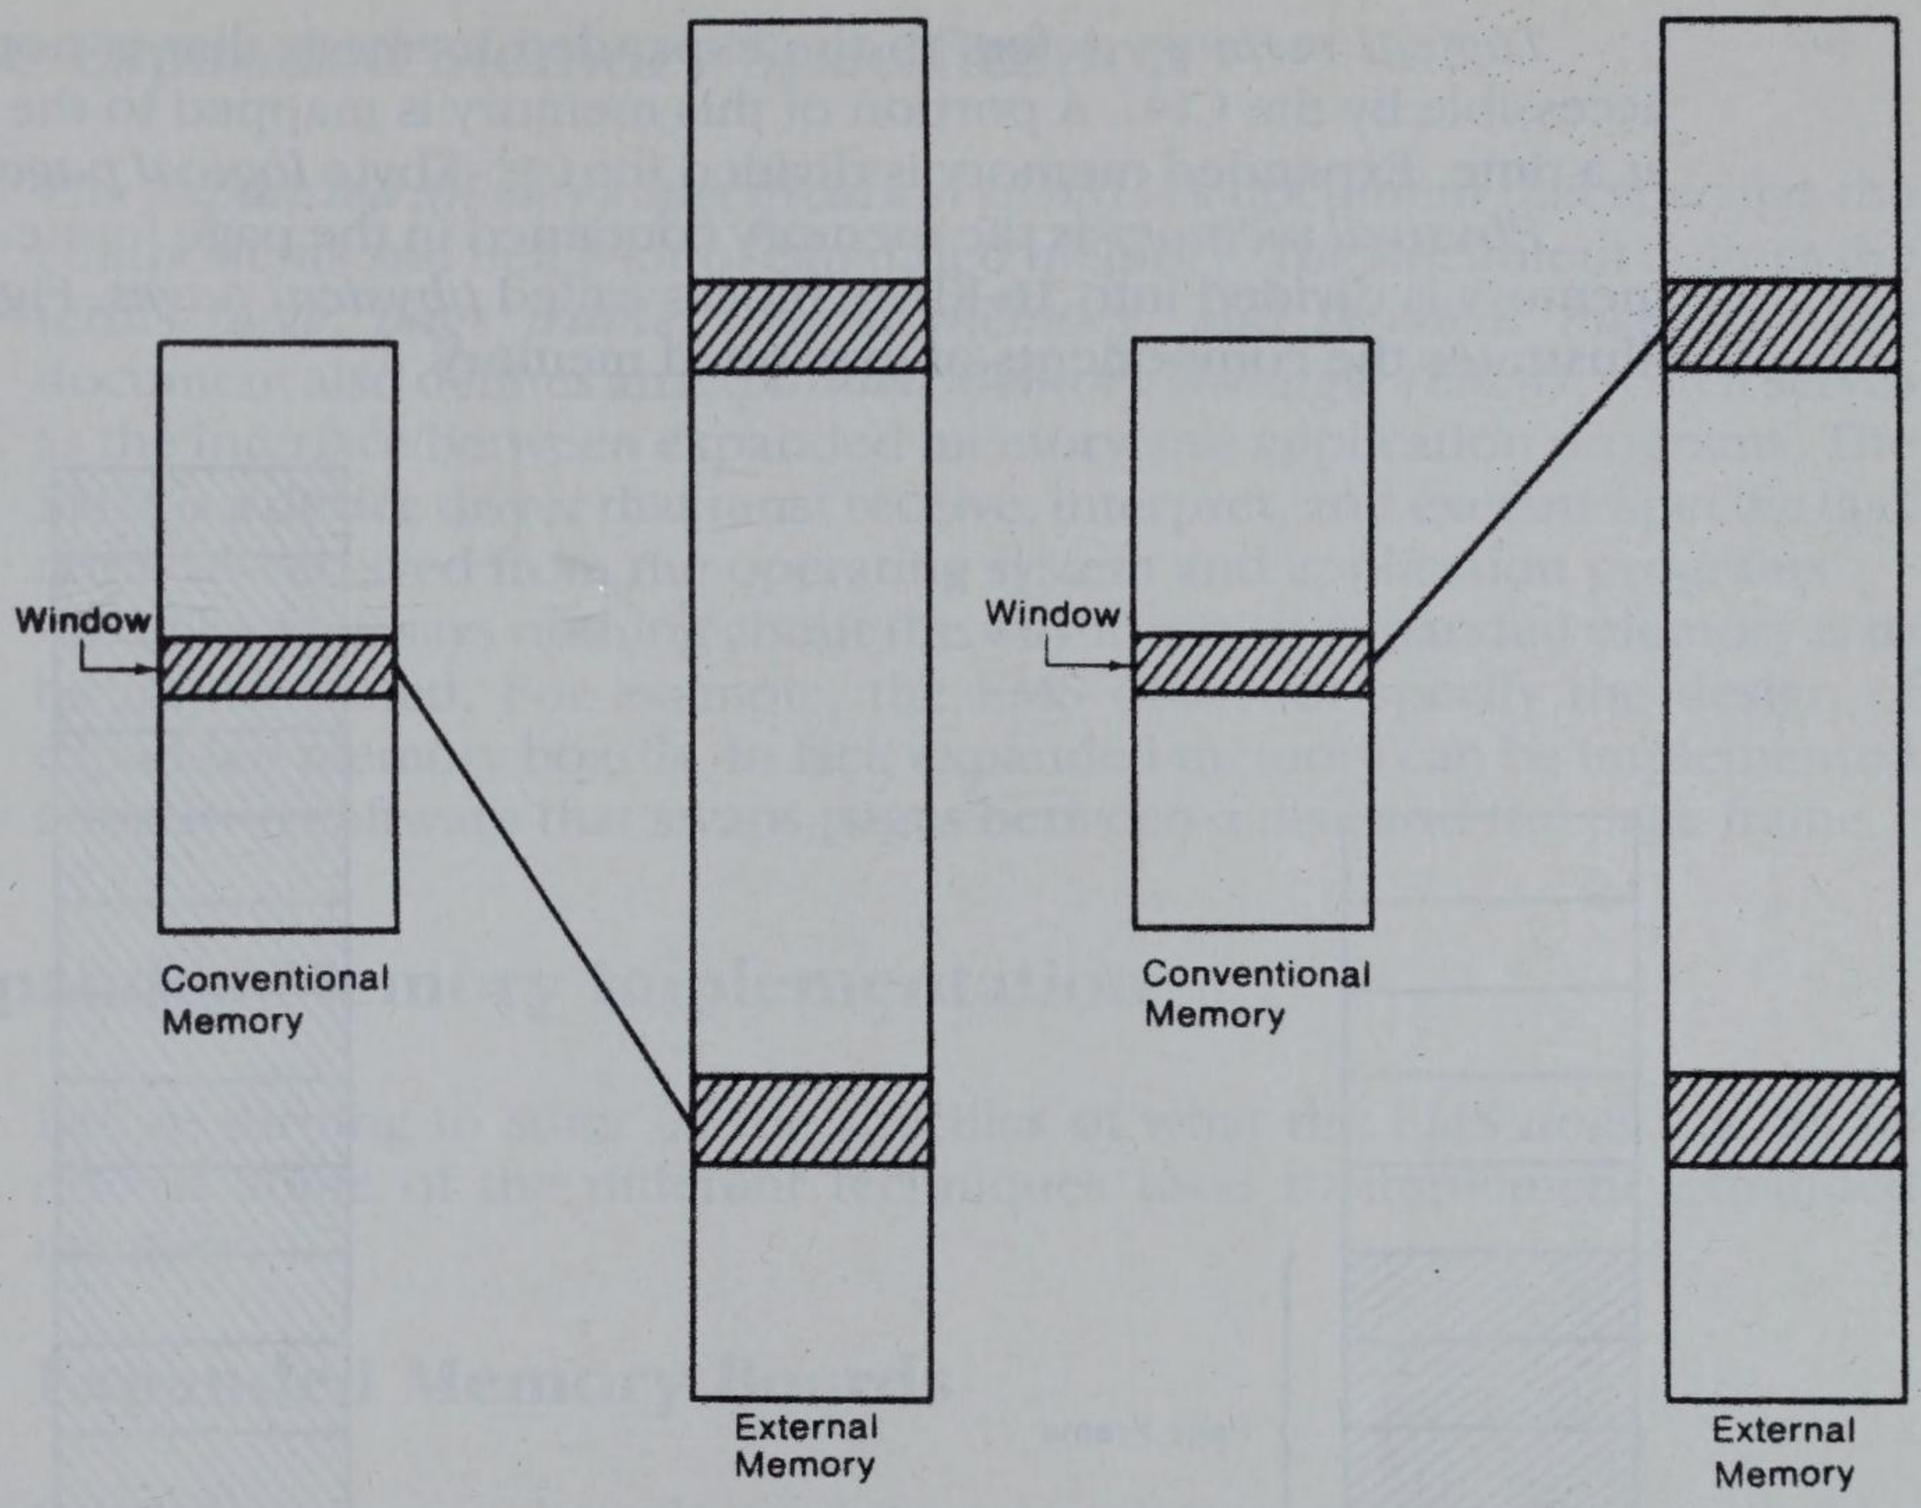

Figure 12-1. Memory bank switching. A block of conventional memory is designated as the "window." A portion of external memory is "mapped" into the window. The mapping varies over time.

Expanded Memory Terminology

Once you understand the principle of memory bank switching, you understand most of what is going on with expanded memory. Expanded memory uses its own conventions and terminology, which will now be presented and then used in the remainder of this chapter.

Both the window and the external memory are divided into 16-Kbyte blocks called *pages*. As you will see later in this chapter, a page is the basic EMS unit of allocation.

The window of main memory is called the *page frame*. The page frame resides in conventional memory and is directly accessible by the CPU.

Logical memory refers to the expanded memory that is not directly accessible by the CPU. A portion of this memory is mapped to the window at a time. Expanded memory is divided into 16-Kbyte *logical pages*.

Physical memory is the memory contained in the page frame. Physical memory is divided into 16-Kbyte blocks called *physical pages*. Figure 12-2 illustrates the components of expanded memory.

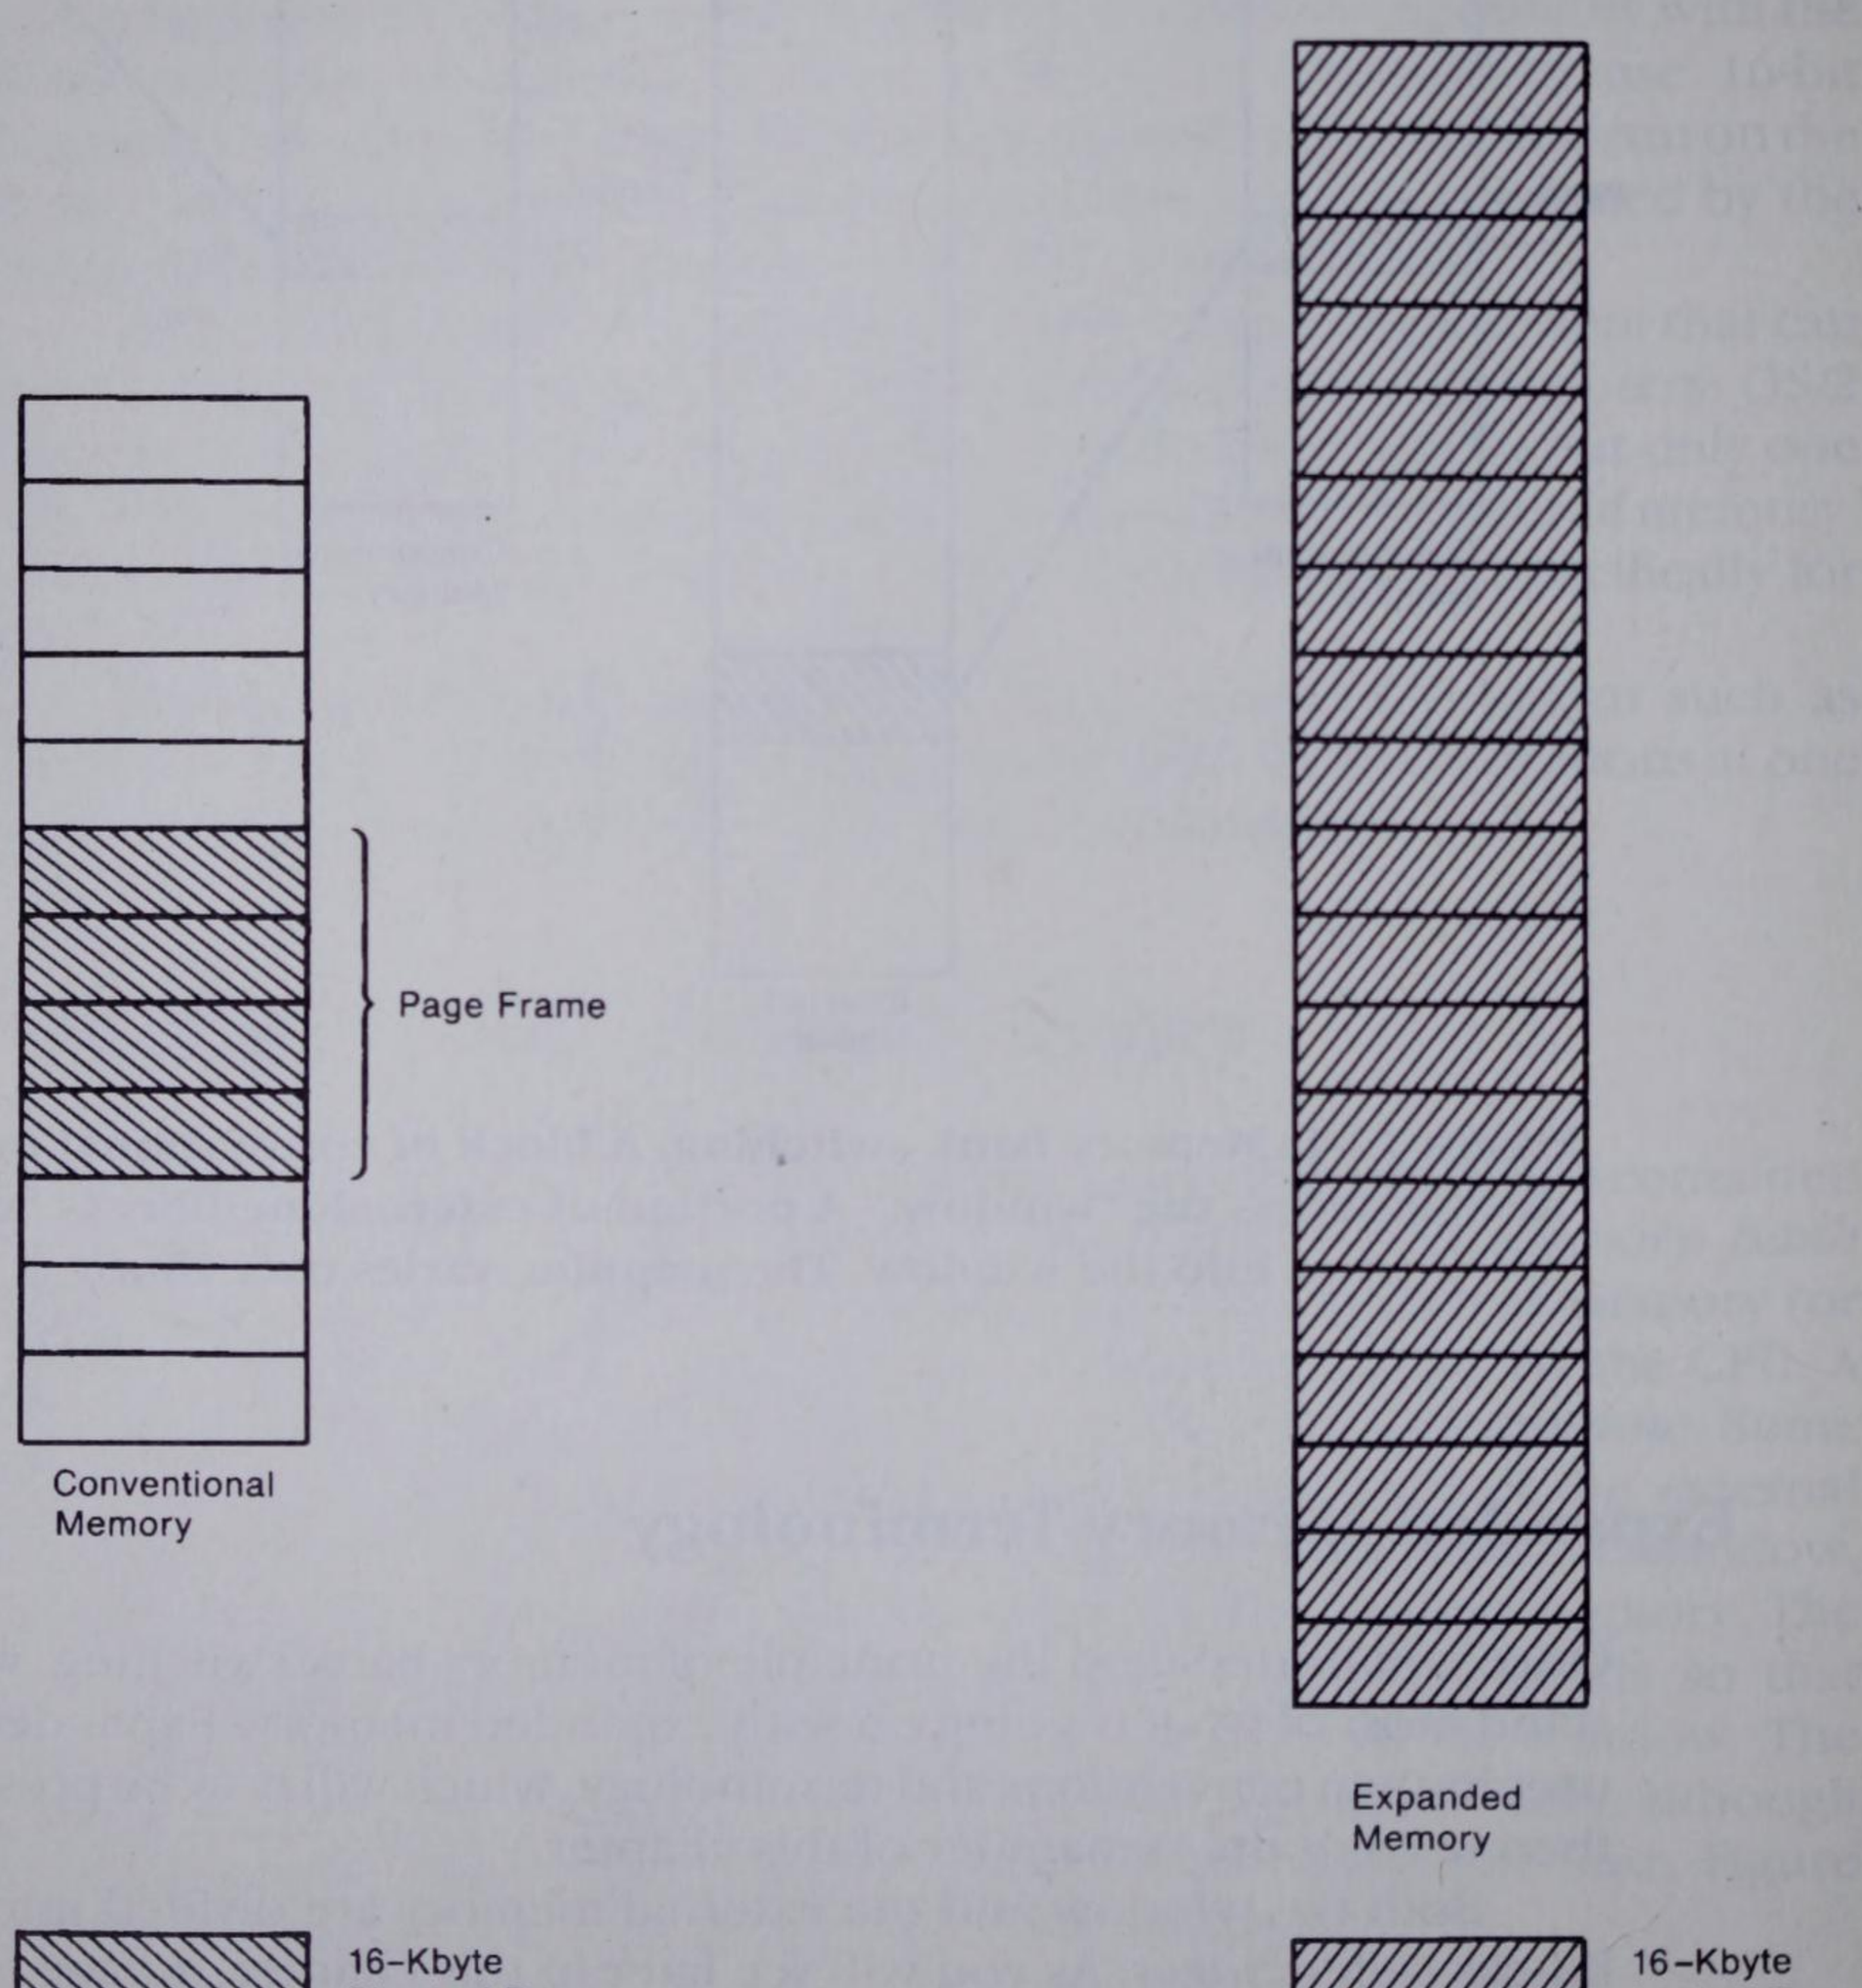

Figure 12-2. The page frame resides in conventional memory and consists of four 16-byte physical pages. Expanded memory consists of 16-Kbyte logical pages.

The Expanded Memory Specification

The *Expanded Memory Specification (EMS)* is a document that specifies the components and behavior of expanded memory. The document defines the terms *page*, *page frame*, *logical memory*, and *physical memory*. The document also defines an *Expanded Memory Manager (EMM)*, which serves as the interface between expanded memory and application programs. The EMM is a device driver that must receive, interpret, and execute specific task requests received from the operating system and application programs.

The EMS says nothing about the way in which expanded memory is to be implemented. For example, the EMS does not specify the design of expanded memory boards. In fact, expanded memory can be implemented entirely in software that swaps pages between a disk and the page frame.

Expanded Memory Implementation

Before turning to some of the specifics of what the EMS *does* say, let us discuss some of the different techniques used to implement expanded memory.

Expanded Memory Boards

Expanded memory boards use internal registers, which are controlled by software, to map a set of logical pages to the page frame. Mapping changes can be executed very quickly because all that is required is a changing of the value stored in one or more of the internal registers.

Alternatives to Expanded Memory Boards

Extended memory is standard computer memory that lies outside the 1-Mbyte address space. Extended memory can exist either on the motherboard or on standard memory expansion cards.

Extended memory can be used by some utilities, such as VDISK.SYS. A portion of the operating system can reside in extended memory under DOS 5 (see the discussion of HIMEM in Part 2).

You can also use extended memory to emulate an expanded memory board, provided you have an *expanded memory emulator*. The emulator is a computer program that works by swapping data between the page frame and extended memory. Expanded memory emulation is much slower than expanded memory boards because data must be physically moved between the page frame and extended memory.

There are some software packages that move data between the page frame and a disk drive. This type of expanded memory (often called *virtual* memory) emulation is slow, but it can provide an adequate environment to develop expanded memory applications. Usually the cost of a software emulator is much less than the cost of an expanded memory board and the memory chips needed to populate it. If the emulator adheres to the EMS, applications developed with it will work with any implementation of expanded memory.

80386 and 80486 Computers

The 80386 and 80486 CPUs contain sophisticated memory management hardware that enables them to use conventional memory to emulate an expanded memory board. Expanded memory implemented in this fashion is as fast as or faster than expanded memory boards.

An example of 80386 emulation is the device driver XMAEM.SYS, which comes with PC DOS 4.X. The driver uses a portion of the PS/2 Model 80's standard memory to emulate an IBM PS/2 80286 Expanded Memory Adapter/A.

The Evolution of Expanded Memory

There have been three significant versions of the Expanded Memory Specification. The Lotus/Intel/Microsoft Expanded Memory Specification version 3.2 (LIM EMS 3.2) was the first specification of expanded memory and was widely used and supported. The AST Research/Quadram/Ashton-Tate Enhanced Expanded Memory Specification (AQA EEMS) was an enhanced specification that was upwardly compatible with LIM EMS 3.2. The most recent specification is LIM EMS 4.0, which incorporates the enhancements of AQA EEMS along with its own additional enhancements. These three versions of the expanded memory specification are discussed in this section.

LIM EMS 3.2

The LIM EMS 3.2 was published in September 1985. It defined a protocol for using up to 8 Mbytes of expanded memory. In addition to the concepts of page, page frame, logical page, and physical page, which are discussed in the previous section, LIM EMS 3.2 specifies that the page frame is 64 Kbytes in size and resides in conventional memory somewhere above the 640-Kbyte line and below the 1-Mbyte line. The four 16-Kbyte physical pages in the page frame are identified by the numbers 0–3.

An application program may *allocate* a block of one or more 16-Kbyte expanded memory pages at a time. Allocation simply means that the pages are "claimed" by the application and "marked" as being in use. Each allocated block is assigned a unique number, called the *handle*. The application program uses a handle when it needs to reference a specific allocated block of expanded memory.

AQA EEMS

A limitation of the LIM EMS 3.2 is that the 64-Kbyte page frame allows only 4 logical pages of expanded memory to be mapped to the page frame at a time. AQA EEMS removes this restriction by allowing up to 64 logical pages to be mapped into conventional memory at a time.

Notice that 64 times 16 Kbytes (the size of one logical page) is 1 Mbyte. Thus, AQA EEMS allows the entire MS-DOS address space to be used in the page frame. Memory below the 640-Kbyte line is called *mappable conventional memory*. This memory is generally only used for mapping by programs such as DESQView and Windows 2.0, which use mappable conventional memory to swap *executable code* in and out of the page frame. Most application programs using expanded memory use memory above 640 Kbytes for mapping.

LIM EMS 4.0

LIM EMS 4.0, which was published in August 1987, incorporates the enhancements of AQA EEMS and provides some additional enhancements of its own. LIM EMS 4.0 allows up to 32 Mbytes of expanded memory to be addressed by application programs. EMS 4.0 supports page frames larger than 64 Kbytes. However, memory boards originally designed for EMS 3.2 can only provide 64-Kbyte page frames, even if the boards are controlled by a 4.0 driver.

The significance of LIM EMS 4.0 is that it has been widely recognized as *the* standard specification for expanded memory. Most major software and hardware manufacturers have stated that they will use LIM EMS 4.0 in their future expanded memory products. Even AST, Quadram, and Ashton-Tate (the force behind AQA EEMS) have endorsed LIM EMS 4.0. In what is perhaps the ultimate indication that LIM EMS 4.0 is accepted as standard, IBM includes XMA2EMS.SYS, a LIM 4.0 expanded memory manager, as a standard component of PC DOS 4.X.

Using Expanded Memory

Application programs use expanded memory by issuing calls to the *expanded memory functions*. Programs access these functions via interrupt 67H. The use of interrupt 67H is similar to the use of interrupt 21H (the MS-DOS function dispatcher). An application program selects expanded memory functions by placing the appropriate function number in the AH register. Other registers are initialized as required by the particular function being called. The application program then calls interrupt 67H, which invokes the Expanded Memory Manager (EMM). The EMM carries out the requested function and then returns control to the application program.

The expanded memory functions report an error condition by returning a nonzero value in the AH register. A return value of zero in AH indicates that the function executed successfully.

This section discusses steps carried out by application programs in using expanded memory. You will see how interrupt 67H is used. You will also see how to use the MS-DOS 4.X or 5.X version of DEBUG to gain a better understanding of expanded memory.

Appendix A contains information on interrupts and function calls that is directly applicable to the material in this section. Appendix F contains a primer on assembly language programming that you may find useful in following the examples presented below. Use of DEBUG is covered in chapter 15.

The Required Steps

To use expanded memory, the first thing an application program must do is to check for the *presence* of expanded memory. Obviously, no program can use expanded memory if it is not installed and functioning.

A program must determine which *version* of expanded memory is installed on the machine. If EMS 3.2 is installed, programs cannot request functions only implemented in EMS 4.0.

A program must determine *how much* expanded memory is available for its use. The program may need to modify its behavior according to the amount of available memory.

A program must determine the *starting address* of the expanded memory page frame and then *allocate* a portion of expanded memory for its use. Allocation means that the memory is marked as being in use by the program.

Before a program can gain access to expanded memory, it must *map* a portion of the allocated expanded memory into the page frame. A *mapping* defines the portion of expanded memory that is currently being viewed through the page frame "window."

Once a mapping is established, the program may *read from* or *write to* expanded memory. A mapping also allows a program to *execute code* stored in expanded memory.

When a program is finished using expanded memory, it should return or *deallocate* the memory it was using, so that the memory becomes available to other programs.

Now you will see how each of these steps is carried out.

Checking for Expanded Memory

All programs must check to see that the EMM is installed and functioning before issuing a call to interrupt 67H. The system will most likely crash if the call is made and the EMM is not present. This can happen because interrupt 67H has no meaning to the operating system; it must be defined by the EMM or some other program (see box).

Other Programs Using Interrupt 67H

Some other commercial device drivers, such as the driver for AST's PC-NET II adapter card, also use interrupt 67H. Most EMMs provide a mechanism called *chaining*, which allows the EMM to peacefully coexist with such drivers. Refer to the documentation provided with your expanded memory board for information on implementing chaining.

There are two widely accepted methods available to check for the presence of the EMM. The first method is called the *Open Handle Method* and is performed as follows:

1. The application issues a call to MS-DOS function 3DH, asking the operating system to open a file named EMMXXXX0. The program specifies that the "file" is to be opened in read-only mode. (Use of MS-DOS function 3DH, as well as other MS-DOS functions discussed in this chapter, is discussed in appendix A.)
2. The function call is successful if the carry flag is clear on return, in which case the AX register holds the file handle. The call is unsuccessful if the carry flag is set on return, in which case the operating system was either unable to find EMMXXXX0 or was unable to assign it a file handle.

3. If the call to function 3DH was successful, use MS-DOS function 44H, subfunction 0, to determine whether the file handle returned for EMMXXXX0 refers to a file or a device driver. If, on return, bit 7 of the DX register is set, the handle refers to a device driver indicating that the EMM is installed.
4. If the EMM is installed, use MS-DOS function 44H, subfunction 7, to determine whether the EMM is ready to operate. The EMM is ready if, on return, AL contains the value FFH.
5. Use MS-DOS 3EH to close the file opened in step 1. The application program will not need the file handle in order to use the EMM.

The second way to check for the presence of the EMM is called the *Get Interrupt Vector Method*. The method is as follows:

1. Use MS-DOS function 35H to obtain the memory address of the handler for interrupt 67H. The function returns the handler's segment address in the ES register.
2. If the EMM is installed, the string `EMMXXXX0` will be stored in the interrupt handler's segment, beginning at offset address 0AH.

The following assembly language code illustrates this technique. In this example and the examples that follow, comments following the arrows are for explanation only. They are not meant to be entered.

```
string1 db    "EMMXXXX0"
;
mov     ah,35h      ←request DOS function 35h
mov     al,67h      ←handler address for int 67h
int     21h     ←call DOS
;
mov     di,0ah      ←ES:DI points to test string
push cs
pop     ds      ←make DS=CS
lea     si,string1      ←DS:SI points to "EMMXXXX0"
mov     cx,8        ←compare 8 bytes
repz cmpsb      ←compare the strings
jnz     bad_emm     ←compare failed
jmp     good_emm      ←compare succeeded
```

The first line in the listing defines the test string for which the code will look.

The next group of three instructions calls DOS function 35H requesting the address of the handler for interrupt 67H. On return, the ES register contains the handler's segment register.

The final group of instructions compares the string at es:000a with EMMXXXX0. The instruction repz cmpsb compares 8 pairs of bytes. The instruction terminates with the zero flag set to nz if a nonmatching pair is found. The two strings are equal if the flag is set to zr on completion of the compare operation.

The program may go on to use interrupt 67H once it has determined that the EMM is installed.

Getting the EMM Version Number

To obtain the version number of the installed EMM, use expanded memory function 46H. In assembly language, the call looks like this:

```
mov ah,46h
int 67h
```

On return, the upper 4 bits in the AL register store the major version number. For EMS 3.2, the major version number is 3; for EMS 4.0, the major version number is 4.

Determining How Much Expanded Memory Is Available

Expanded memory function 42H is used to obtain both the total number of expanded memory pages and the number of unallocated pages. In assembly language, the call looks like this:

```
mov ah,42h
int 67h
```

On return, the DX register contains the total number of expanded memory pages, and the BX register contains the number of unallocated pages. The unallocated pages are the pages available for use by the program.

Determining the Page Frame's Segment Address

Expanded memory function 41H is used to obtain the page frame's segment address. In assembly language, the call looks like this:

```
mov ah,41h
int 67h
```

On return, the BX register contains the page frame's segment address.

As you saw earlier in this chapter, the page frame serves as a "window" into extended memory. All access to expanded memory is through the page frame. Therefore, the application program must know where in conventional memory the page frame is located.

EMS 4.0 supports page frames larger than 64 Kbytes. The page frame may consist of 16-Kbyte pages that are not contiguous with one another. An application can use the EMS 4.0 function 58H, subfunction 1, to determine the total number of pages in the page frame (the total is returned in CX). Using that number, the program can use function 58H, subfunction 0, to populate an array with the segment address of each page in the page frame.

Allocating Expanded Memory Pages

The next step for a program is to request that the EMM allocate a set of unallocated expanded memory pages to the program.

Expanded memory function 43H is used to allocate a set of expanded memory pages. Prior to the call, the program places the number of 16-Kbyte pages that it wishes to allocate in the BX register. If a program wanted to allocate two expanded memory pages, the call would look like this:

```
mov bx,02h
mov ah,43h
int 67h
```

On return from function 43H, the DX register contains the *handle*. The handle is a number that is used to reference the set of pages that were just allocated. It is comparable to the *file handle* that is returned by MS-DOS function 3DH.

Mapping Logical Pages to the Page Frame

Once expanded memory pages have been allocated, they must be *mapped* to the page frame in order for an application program to access them. Pages that have been mapped in can be mapped out, but remain allocated. You will see more about this concept when we discuss context switching.

Handles are assigned a set of one or more logical pages. Each page in a set has a logical page number. The first page in a set has a logical page number of 0, the second a logical number of 1, and so on. Thus, each

expanded memory page that has been allocated is uniquely identified by a handle number and logical page number.

Each physical page in the page frame is uniquely identified by a physical page number. The first page in the page frame has a physical page number of 0, the second a number of 1, and so on.

Expanded memory function 44H is used to map expanded memory pages into the page frame. Before calling function 44H, place the handle associated with the expanded memory page in the DX register, and the page's logical page number in the BX register. You specify a page in the page frame by placing a physical page number in the AL register.

In the following example, the expanded memory page with handle number 1, logical page 0 is mapped into physical page 0 of the page frame:

```
mov dx,01h      ←handle number
mov bx,00h      ←logical page
mov al,00h      ←physical number
mov ah,44h
int 67h
```

Exploring Expanded Memory with DEBUG

The MS-DOS 4.X and 5.X version of the DEBUG utility have four commands that are used to examine and manipulate expanded memory. The discussions in the remainder of this chapter use these new DEBUG commands, along with some other capabilities of the utility, to illustrate how expanded memory functions. Unfortunately, some vendors (particularly IBM) decided not to include DEBUG as a standard component of DOS 4.X. These vendors require you to purchase the DOS Technical Reference in order to obtain DEBUG.

The objective in what follows is not to demonstrate that DEBUG can be used to write programs that use expanded memory. Rather, the objective is to use DEBUG to gain a better understanding of expanded memory so that you can go on to write such programs.

The DEBUG commands that manipulate expanded memory only work if the EMM is installed. In addition, calling interrupt 67H without the EMM installed may cause your machine to crash. Consider this to be your warning before you try to execute the examples that follow.

Starting DEBUG

To begin your DEBUG expedition, start DEBUG and then use the 4.X command **xa** to allocate two sets of expanded memory pages. Refer to chapter 15 if you need help starting DEBUG.

```
C:\BOOKS\DOS>debug        ←start DEBUG
-xa 1       ←allocate a page
Handle created = 0001       ←it gets handle number 1
-xa 1       ←allocate a second page
Handle created = 0002       ←it gets handle number 2
-
```

After DEBUG is started, the command `xa 1` directs the EMM to allocate one page of expanded memory (the format for the command is `xa` *n*, where *n* is the number of expanded memory pages to be allocated).

The message `Handle created = 0001` is DEBUG's way of telling you that the page has been allocated and assigned to handle number 1. Similarly, a second page is allocated and assigned to handle number 2.

The **xs** command displays information about the current status of expanded memory:

```
-xs
Handle 0000 has 0000 pages allocated
Handle 0001 has 0001 pages allocated
Handle 0002 has 0001 pages allocated

[lc-2]Physical page 00 = Frame segment C400
Physical page 01 = Frame segment C800
Physical page 02 = Frame segment CC00
Physical page 03 = Frame segment D000

   2 of a total   40 EMS pages have been allocated
   3 of a total   FF EMS handles have been allocated
-
```

DEBUG tells you that handle 1 and handle 2 each have one page allocated (handle 0 is used by the EMM and is not available to application programs).

DEBUG gives you the segment address of the four physical pages making up the page frame. In this case, the 16-Kbyte pages are contiguous with each other.

DEBUG also tells you that two out of a total 40H expanded memory pages are allocated, and three out of a total FFH expanded memory handles have been allocated.

The DEBUG command `xm` can be used to map an expanded memory page into the page frame. The format for the command is `xm lpage ppage handle`, where *lpage* is the logical page number of the expanded memory page to be mapped in, *ppage* is the physical page number of a page in the page frame, and *handle* is the number of the handle associated with the expanded memory page.

Figure 12-3 illustrates the current configuration of expanded memory. Two expanded memory pages have been allocated: one to handle 1 and one to handle 2. Neither of the pages has been mapped into the page frame.

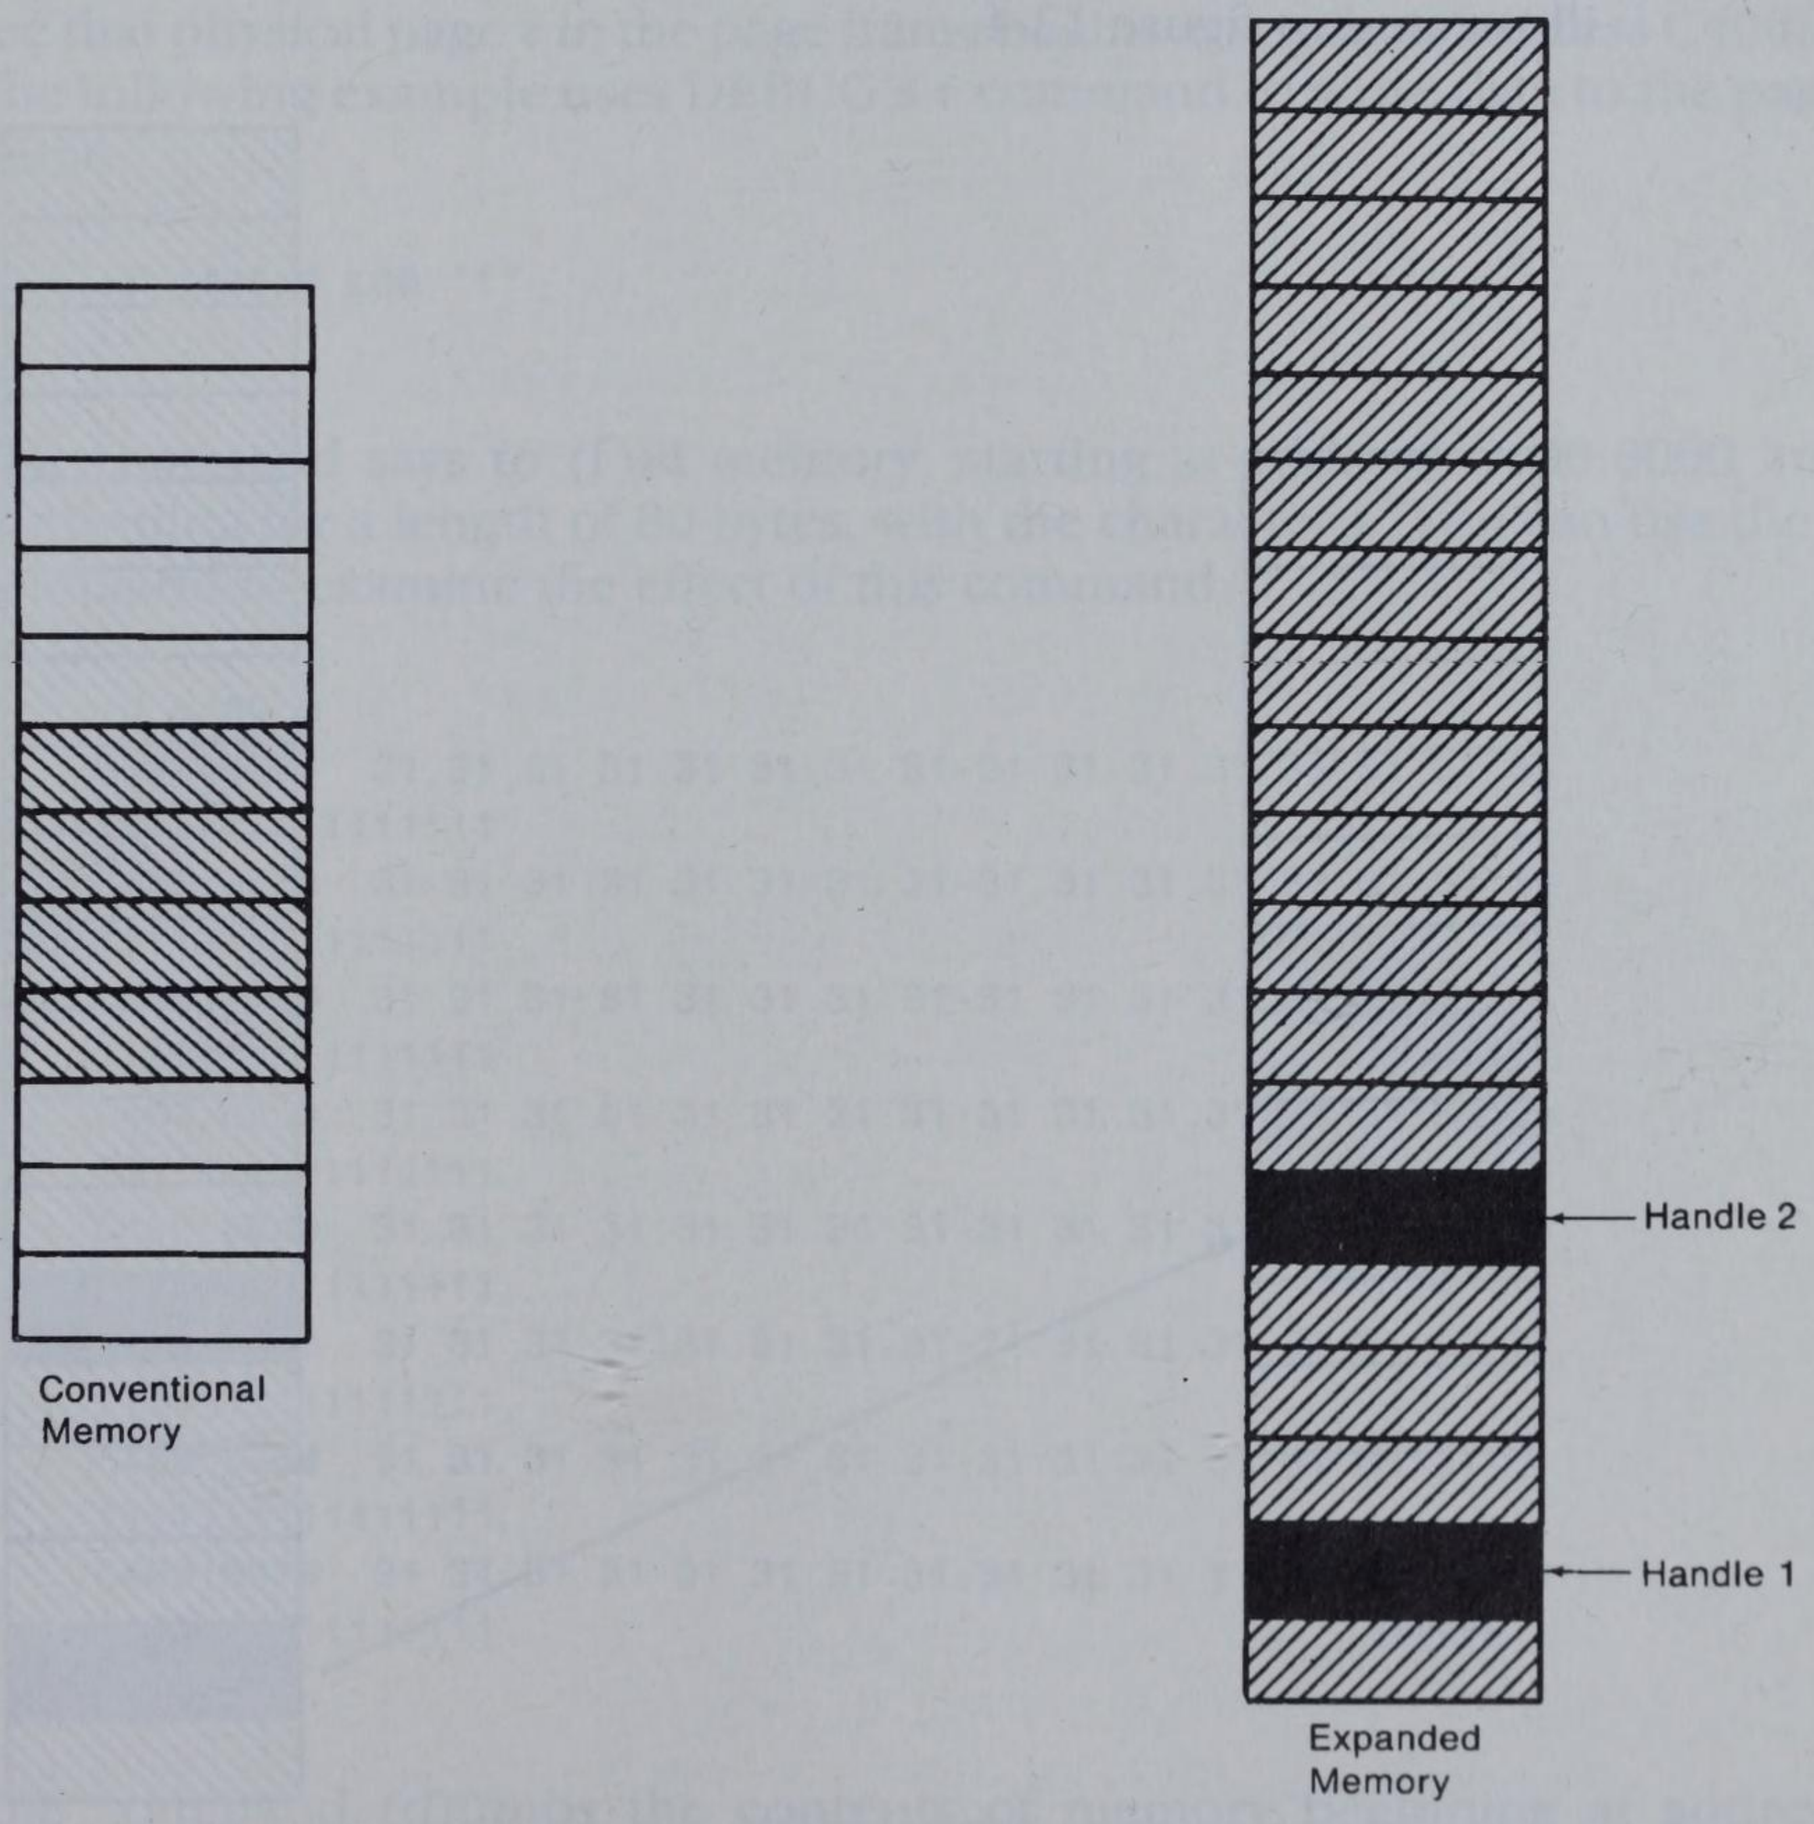

Figure 12-3. Two logical pages have been allocated. One page is allocated to handle 1; one page is allocated to handle 2.

In what follows, the `xm` command is used to map handle 1's page into the page frame:

```
-xm 0 0 1
Logical page 00 mapped to physical page 00
```

The command states that logical page `0` (the first zero), which is contained in the set identified by handle 1, is to be mapped into physical page `0` (the second zero). This changes the configuration of expanded memory to that illustrated in figure 12-4.

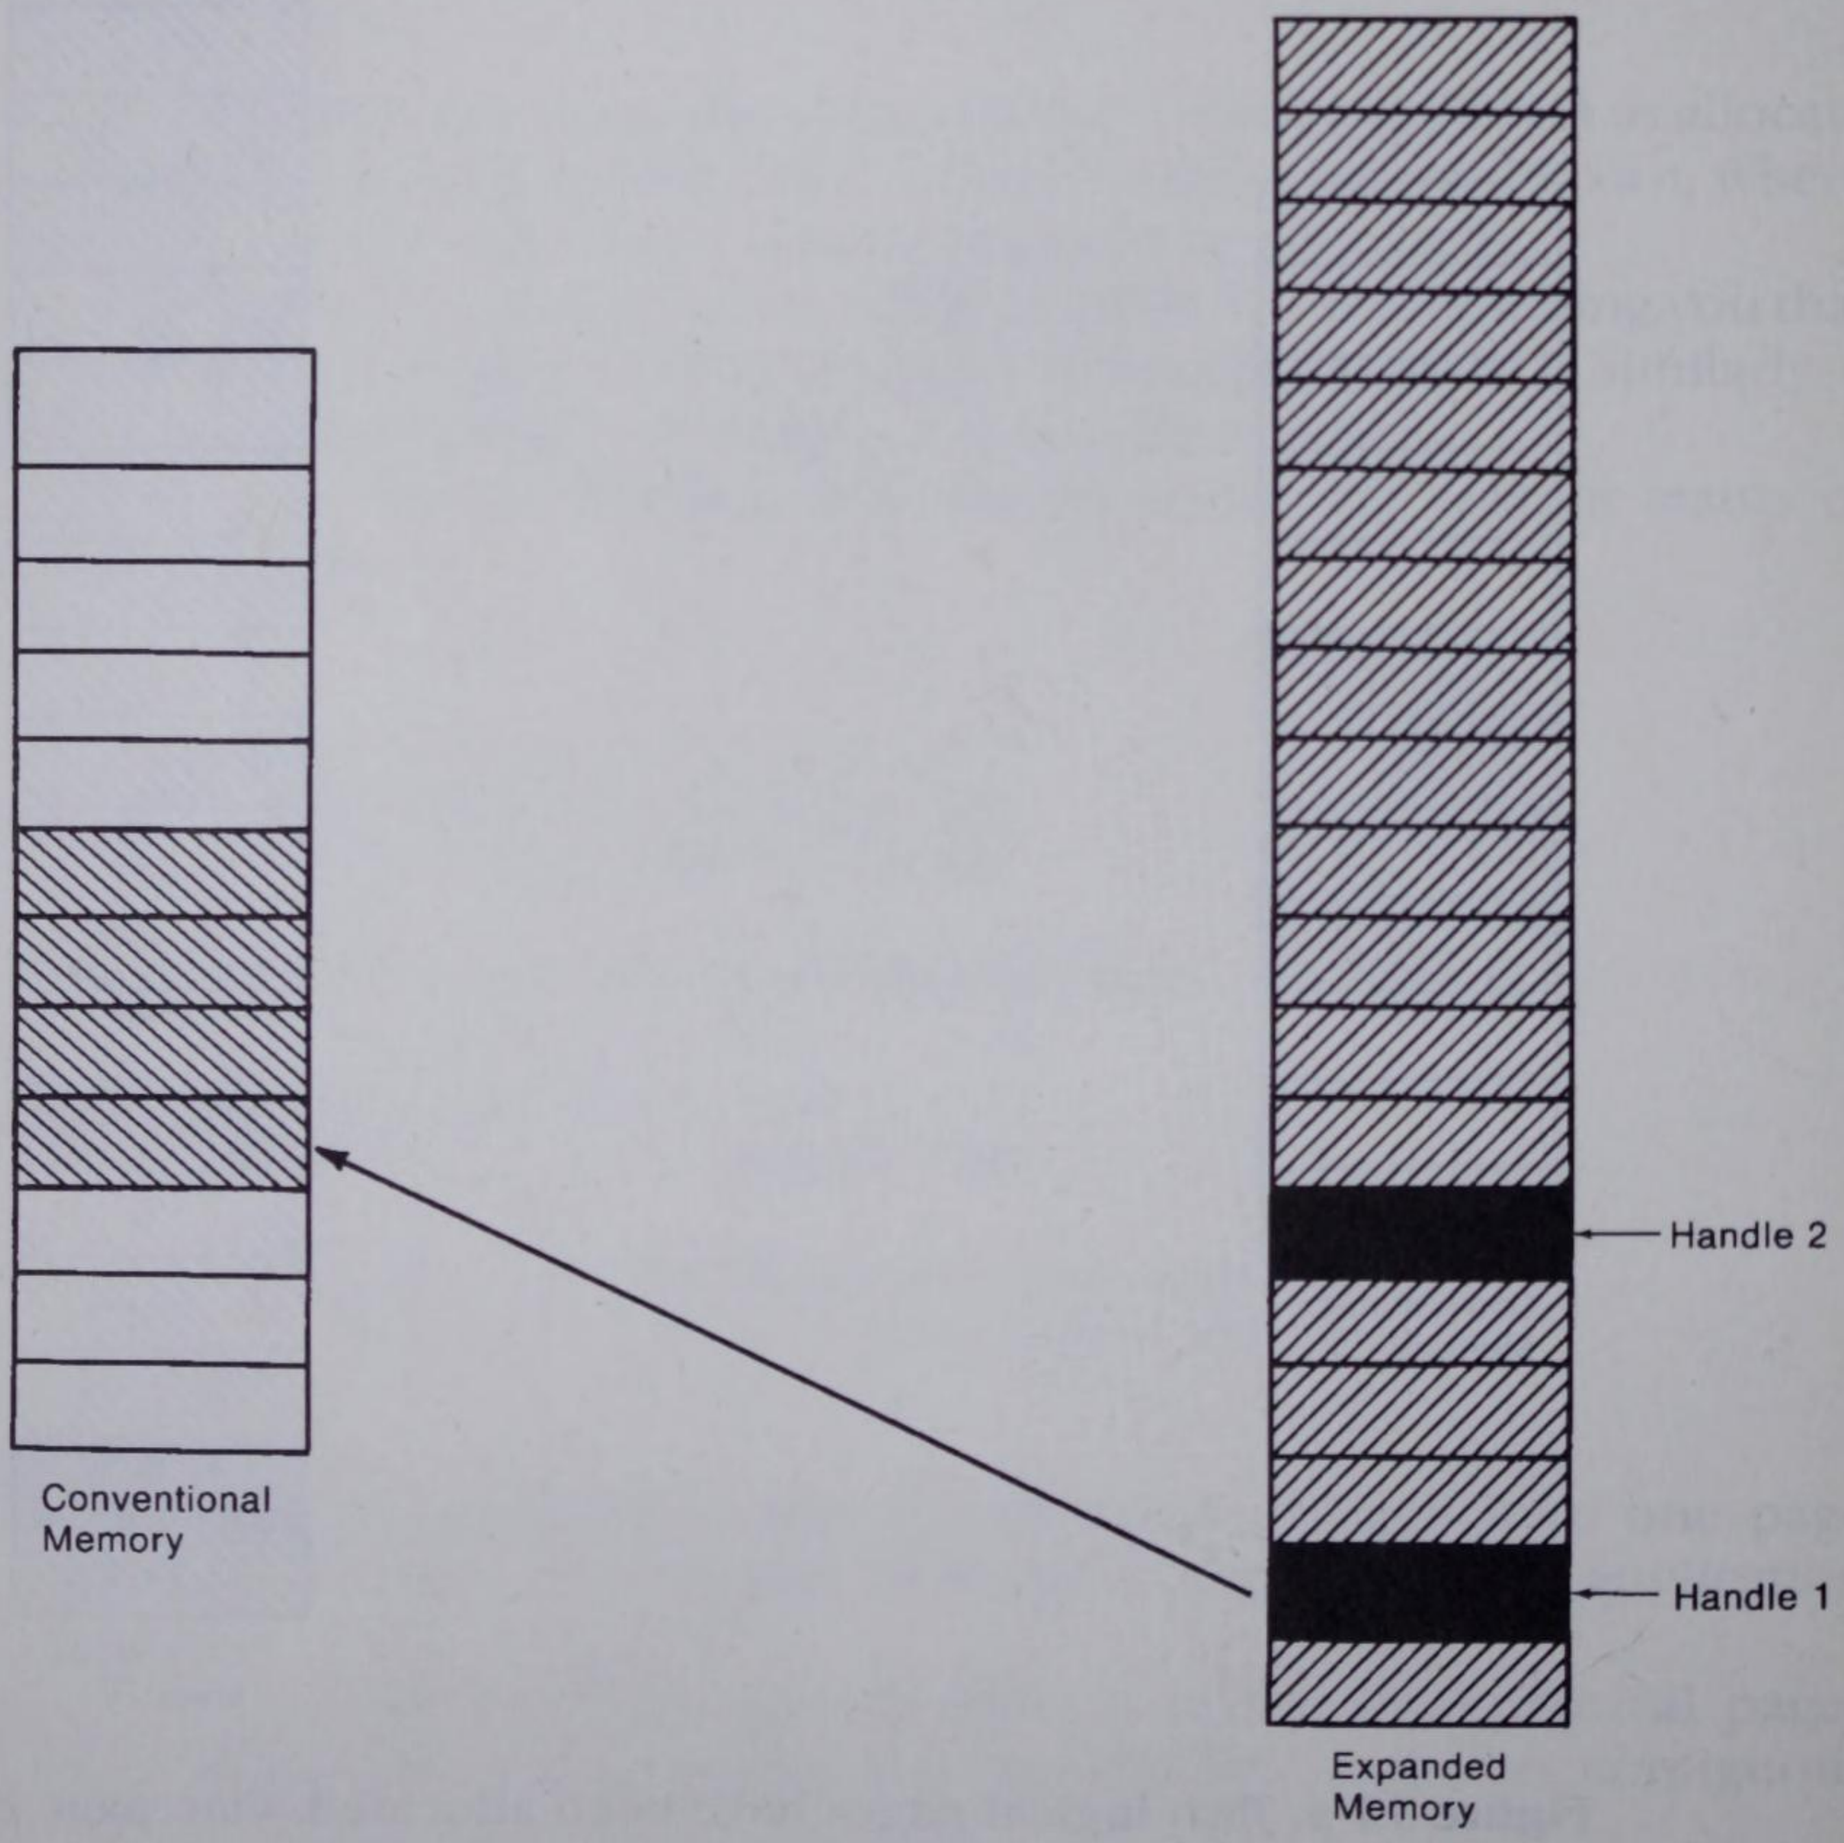

Figure 12-4. Logical page 0, handle 1 is mapped into physical page 0 of the page frame.

Once an expanded memory page has been mapped into the page frame, it may be read from or written to as though it were conventional memory. An application program can access the data in the page frame using a far (segment and offset) pointer.

Writing to and Reading from the Page Frame

We will use DEBUG to write some data to the page frame and then read it back. If you look back to the `xs` command that was previously issued, you will see that physical page `0` in the page frame begins at segment address C400H. The following example uses DEBUG's `f` command to write data to the page frame:

```
-f c400:0 L80 "1"
-
```

The command says to (f)ill memory, starting at address C400:0000 and continuing for a length of 80 bytes, with the character `1`. You can use the `d` command to examine the effect of this command:

```
-d c400:0
C400:0000  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0010  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0020  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0030  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0040  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0050  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0060  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0070  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
```

The command (d)umps the contents of memory beginning at address C400:000. You can see that the first 80 bytes of the page frame have been filled with a byte value of 31H, which corresponds to the character `1`.

Because `C400` is the segment address of the first page in the page frame, the `1`s in the previous example are actually written to expanded memory. The

location in expanded memory is the logical page that is currently mapped into the first page of the page frame (see figure 12-5).

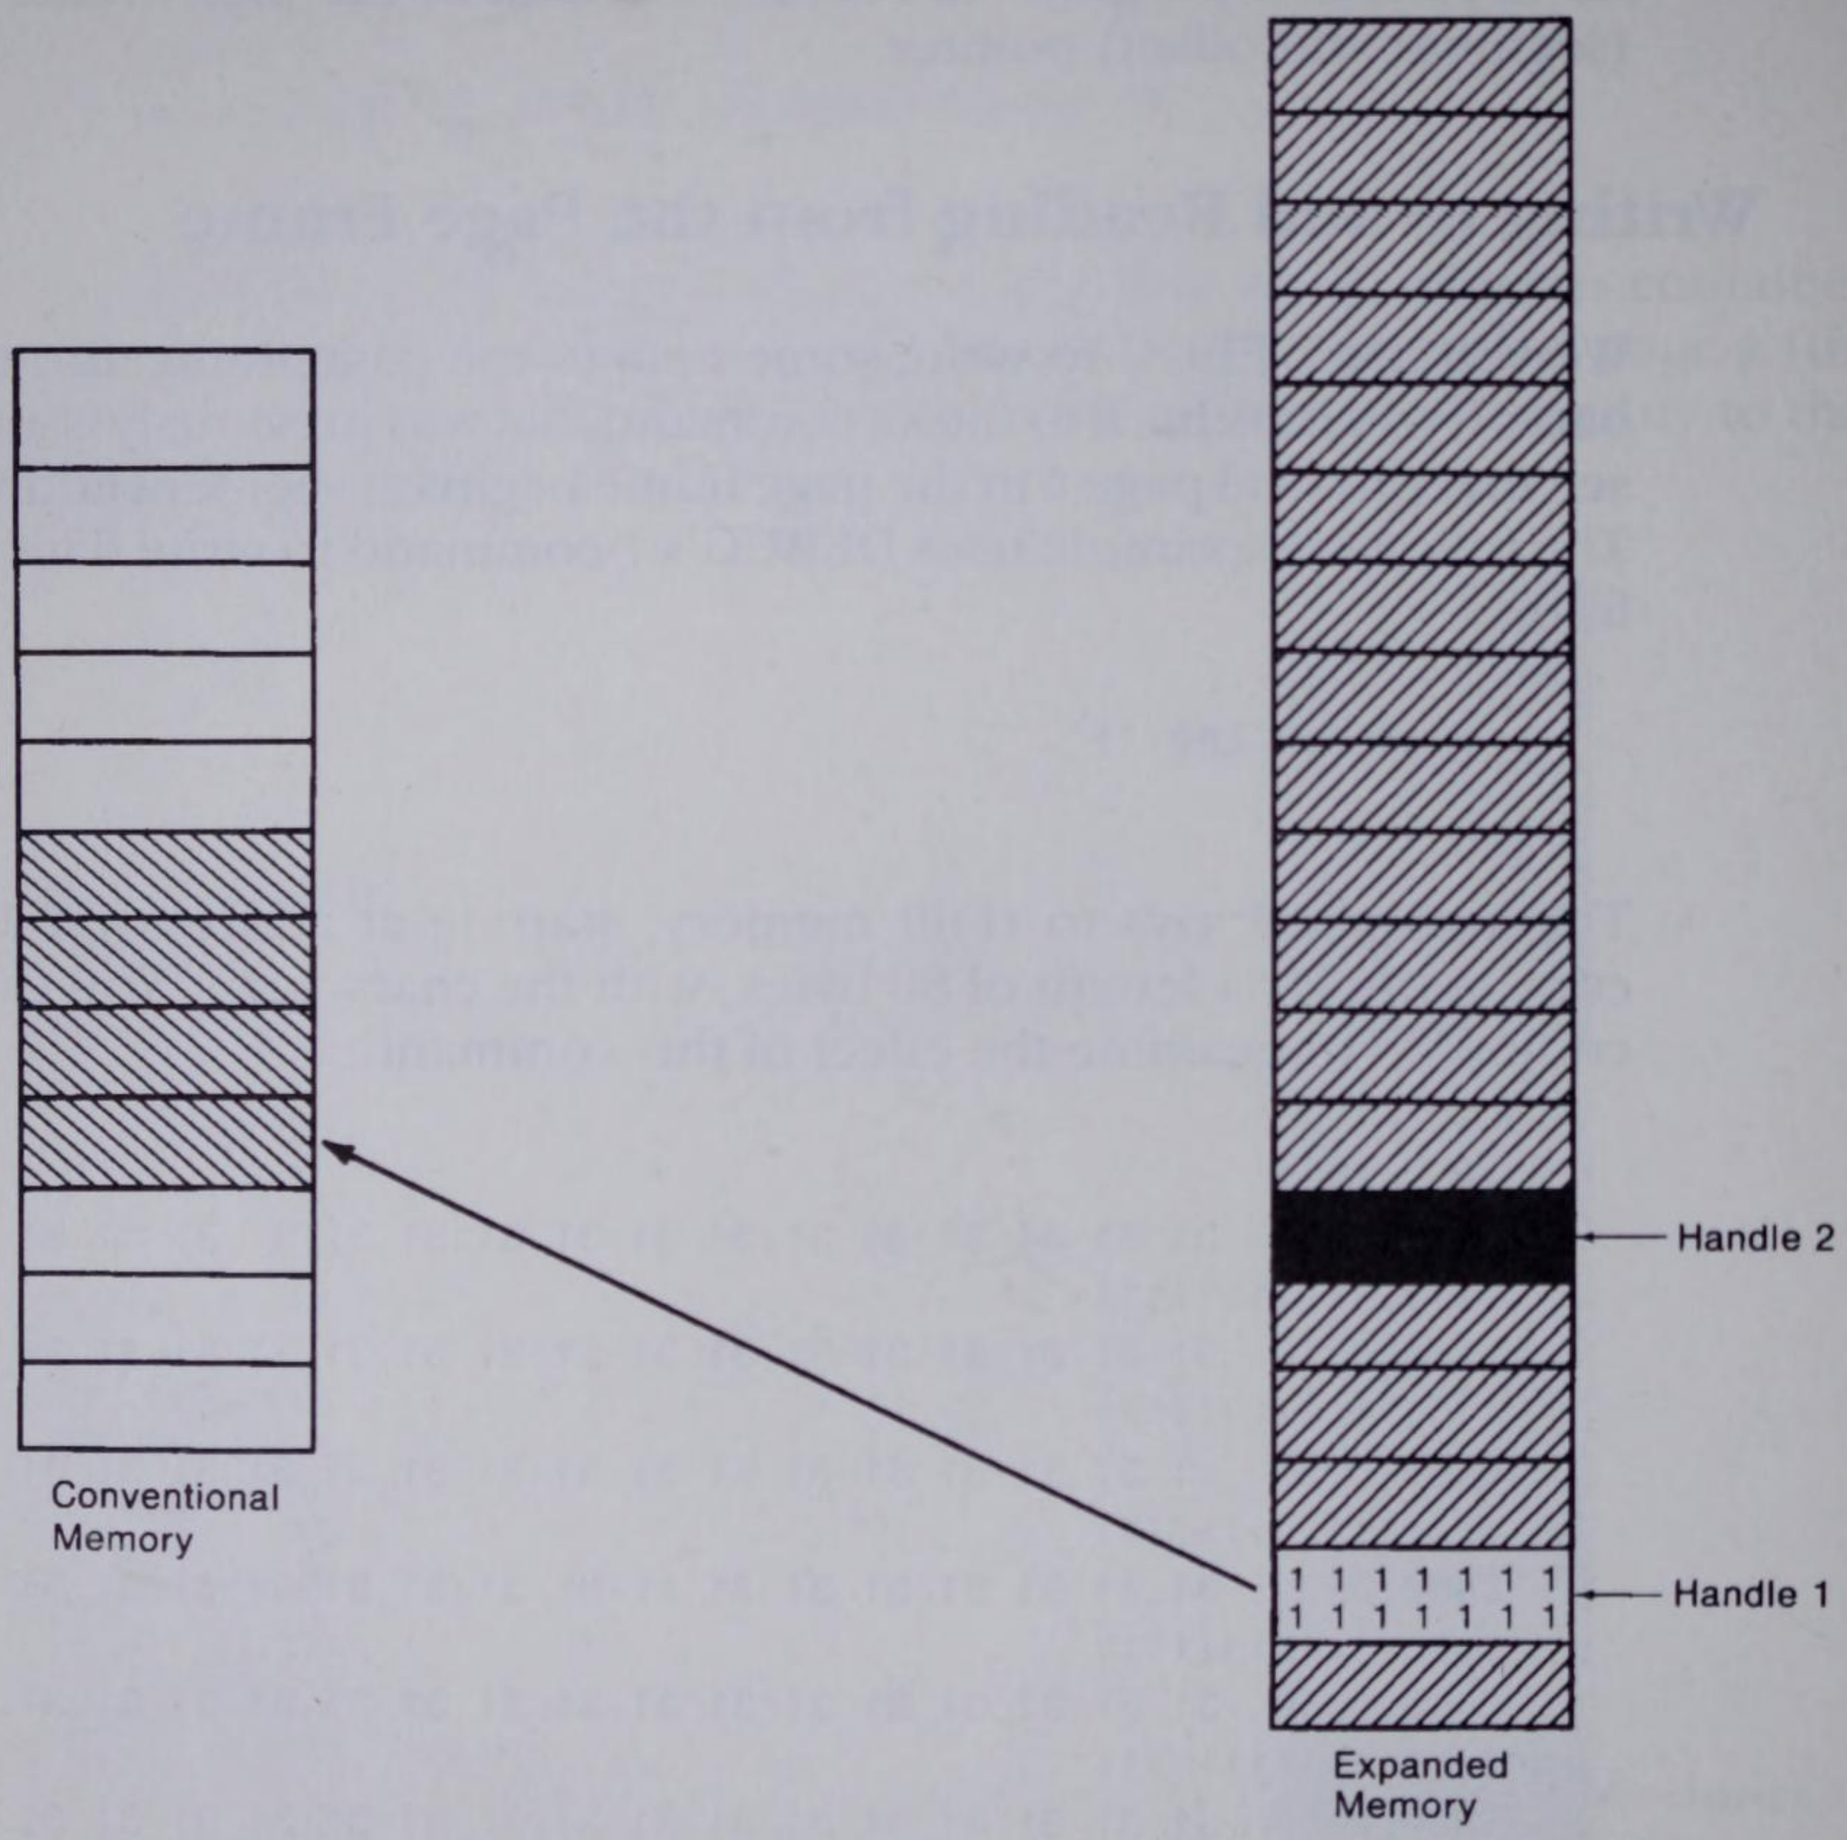

Figure 12-5. Data written to a page in the page frame ends up in a logical page in expanded memory.

If expanded memory is implemented with an expanded memory board, the data is physically stored in only one place—on the expanded memory board. It appears to be stored in the page frame due to the status of the registers on the expanded memory board.

If expanded memory is implemented with a software emulator that uses extended memory, then the data is physically in two places: in extended memory and in the page frame.

Context Switching

The *mapping context* is the current state of mappings between logical pages in expanded memory and physical pages in the page frame. At times, it is desirable to save the context, or a portion of the context, so that it might later be restored. For example, a large spreadsheet using expanded memory could easily have more data than could fit in the 64-Kbyte page frame at one time. The spreadsheet can map a portion of expanded memory into the page frame, read from and write to the page frame, and then, before mapping in another portion of expanded memory, save the mapping context. The spreadsheet can then recall the first portion of expanded memory by restoring the saved mapping context.

We will return to DEBUG to illustrate the concepts of mapping context and context saving. A final word of caution before you proceed, though. The next example will call interrupt 67H from DEBUG. If your system does not have EMM installed and you issue a call to interrupt 67H, your system will either crash or do something totally unpredictable. Don't try this example unless EMM is installed.

Expanded memory function 47H is used to save a portion of the mapping context. Before you call the function, place the appropriate handle number in the DX register. The call then saves a record of the mapping context that exists for that handle.

Take a look back at figure 12-5. A mapping exists between the single logical page assigned to handle 1 and physical page 0 in the page frame. This mapping context can be saved with the following code:

```
mov dx,01h
mov ah,47h
int 67h
```

This code can be executed from DEBUG as follows:

```
-a          ←start DEBUG's assembler
2059:0100 int 67
i]2059:0102          ←press Enter
-rax        ←set the AX register
AX 0000
:4700         ←AX=4700H
-rdx        ←set the DX register
DX 0000
:1        ←DX=01H
-r        ←check machine's state
AX=4700  BX=0000  CX=0000  DX=0001  SP=FFEE  BP=0000  SI=0000  DI=0000
```

```
DS=2059  ES=2059  SS=2059  CS=2059  IP=0100   NV UP EI PL NZ NA PO NC
2059:0100 CD67          INT     67
-p      ←execute interrupt 67H
AX=0000  BX=0000  CX=0000  DX=0001  SP=FFEE  BP=0000  SI=0000
DI=0000
DS=2059  ES=2059  SS=2059  CS=2059  IP=0102   NV UP EI PL NZ NA PO NC
2059:0102 1F            POP     DS
-
```

The example begins by starting DEBUG's assembler. This enables us to use assembly language mnemonics to place executable code into memory. After the instruction `int 67h` is entered, the assembler is terminated and the AX register is set to a value of 4700H. The DX register is then set to a value of 01H. Then the `r` command is entered to check the value of all of the registers. At this point, the system is set to call expanded memory function 47H. The 01H in DX tells the EMM to save the mapping context of handle 1. The DEBUG command `p` is used to execute int 67H and then halt execution. You can tell that the call executed successfully, because AH is set to zero upon return from the interrupt.

At this point, the mapping context in figure 12-5 has been saved. You can verify the save by first changing the context and then attempting to restore the original context.

The `xm` command can be used to alter the context. The following command changes the context to that illustrated in figure 12-6:

```
-xm 0 0 2
-
```

The command states that logical page `0` (the first zero), which is contained in the set identified by handle `2`, is to be mapped into physical page `0`.

The next two commands fill the first 80 bytes of the page frame with the character `2` and then display the results:

```
-f c400:0 180 '2'
-d c400:0
C400:0000  32 32 32 32 32 32 32 32-32 32 32 32 32 32 32 32
2222222222222222
C400:0010  32 32 32 32 32 32 32 32-32 32 32 32 32 32 32 32
2222222222222222
C400:0020  32 32 32 32 32 32 32 32-32 32 32 32 32 32 32 32
2222222222222222
C400:0030  32 32 32 32 32 32 32 32-32 32 32 32 32 32 32 32
2222222222222222
C400:0040  32 32 32 32 32 32 32 32-32 32 32 32 32 32 32 32
```

```
2222222222222222
C400:0050  32 32 32 32 32 32 32 32-32 32 32 32 32 32 32 32
2222222222222222
C400:0060  32 32 32 32 32 32 32 32-32 32 32 32 32 32 32 32
2222222222222222
C400:0070  32 32 32 32 32 32 32 32-32 32 32 32 32 32 32 32
2222222222222222
-
```

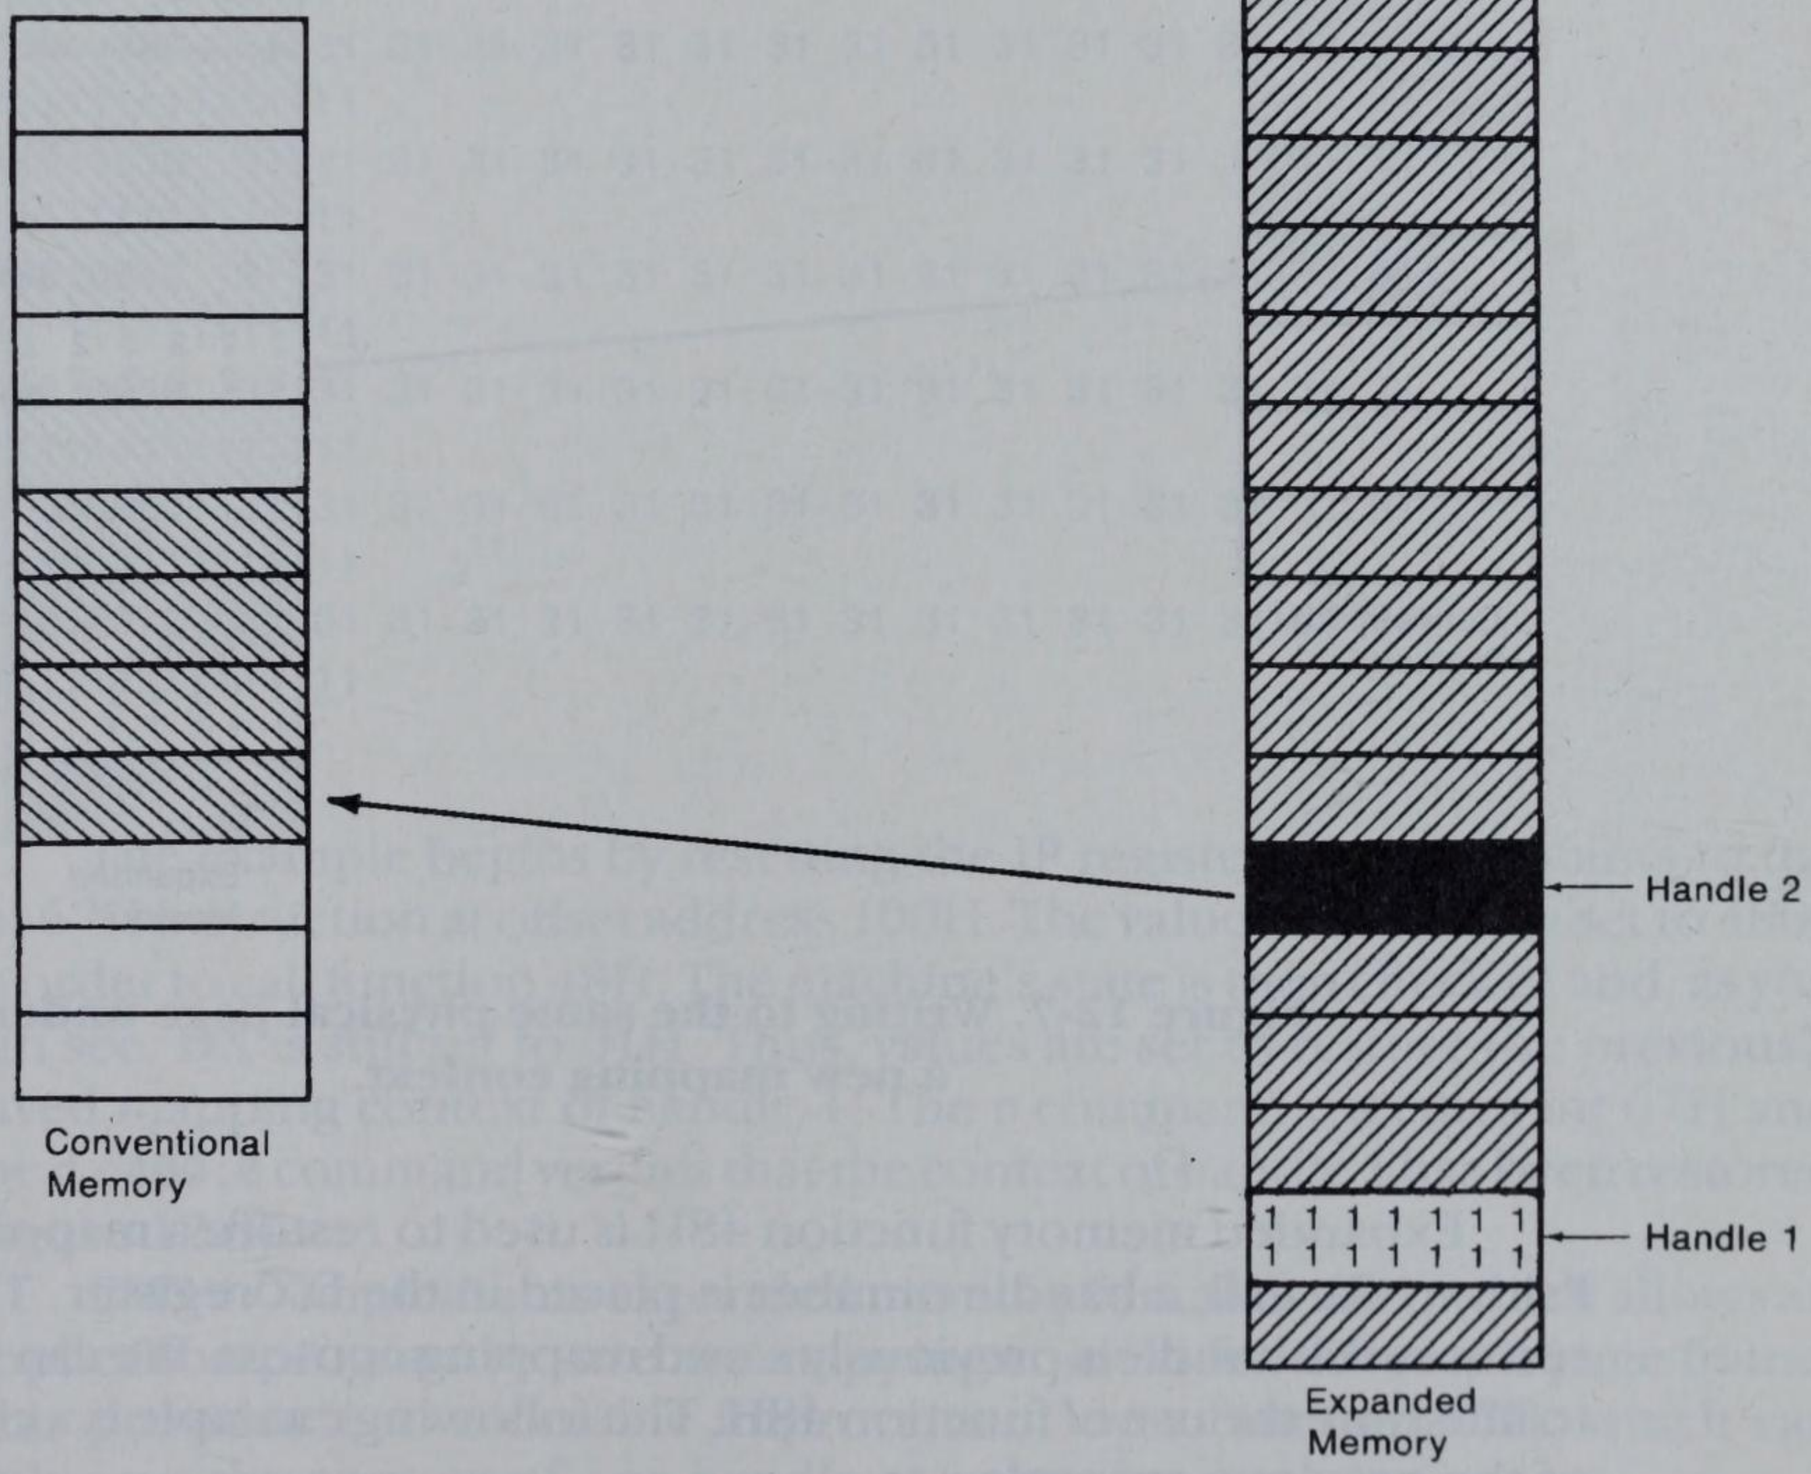

Figure 12-6. A new mapping context. Note that the content of the page belonging to handle 1 is preserved.

Figure 12-7 illustrates the configuration of expanded memory at this point.

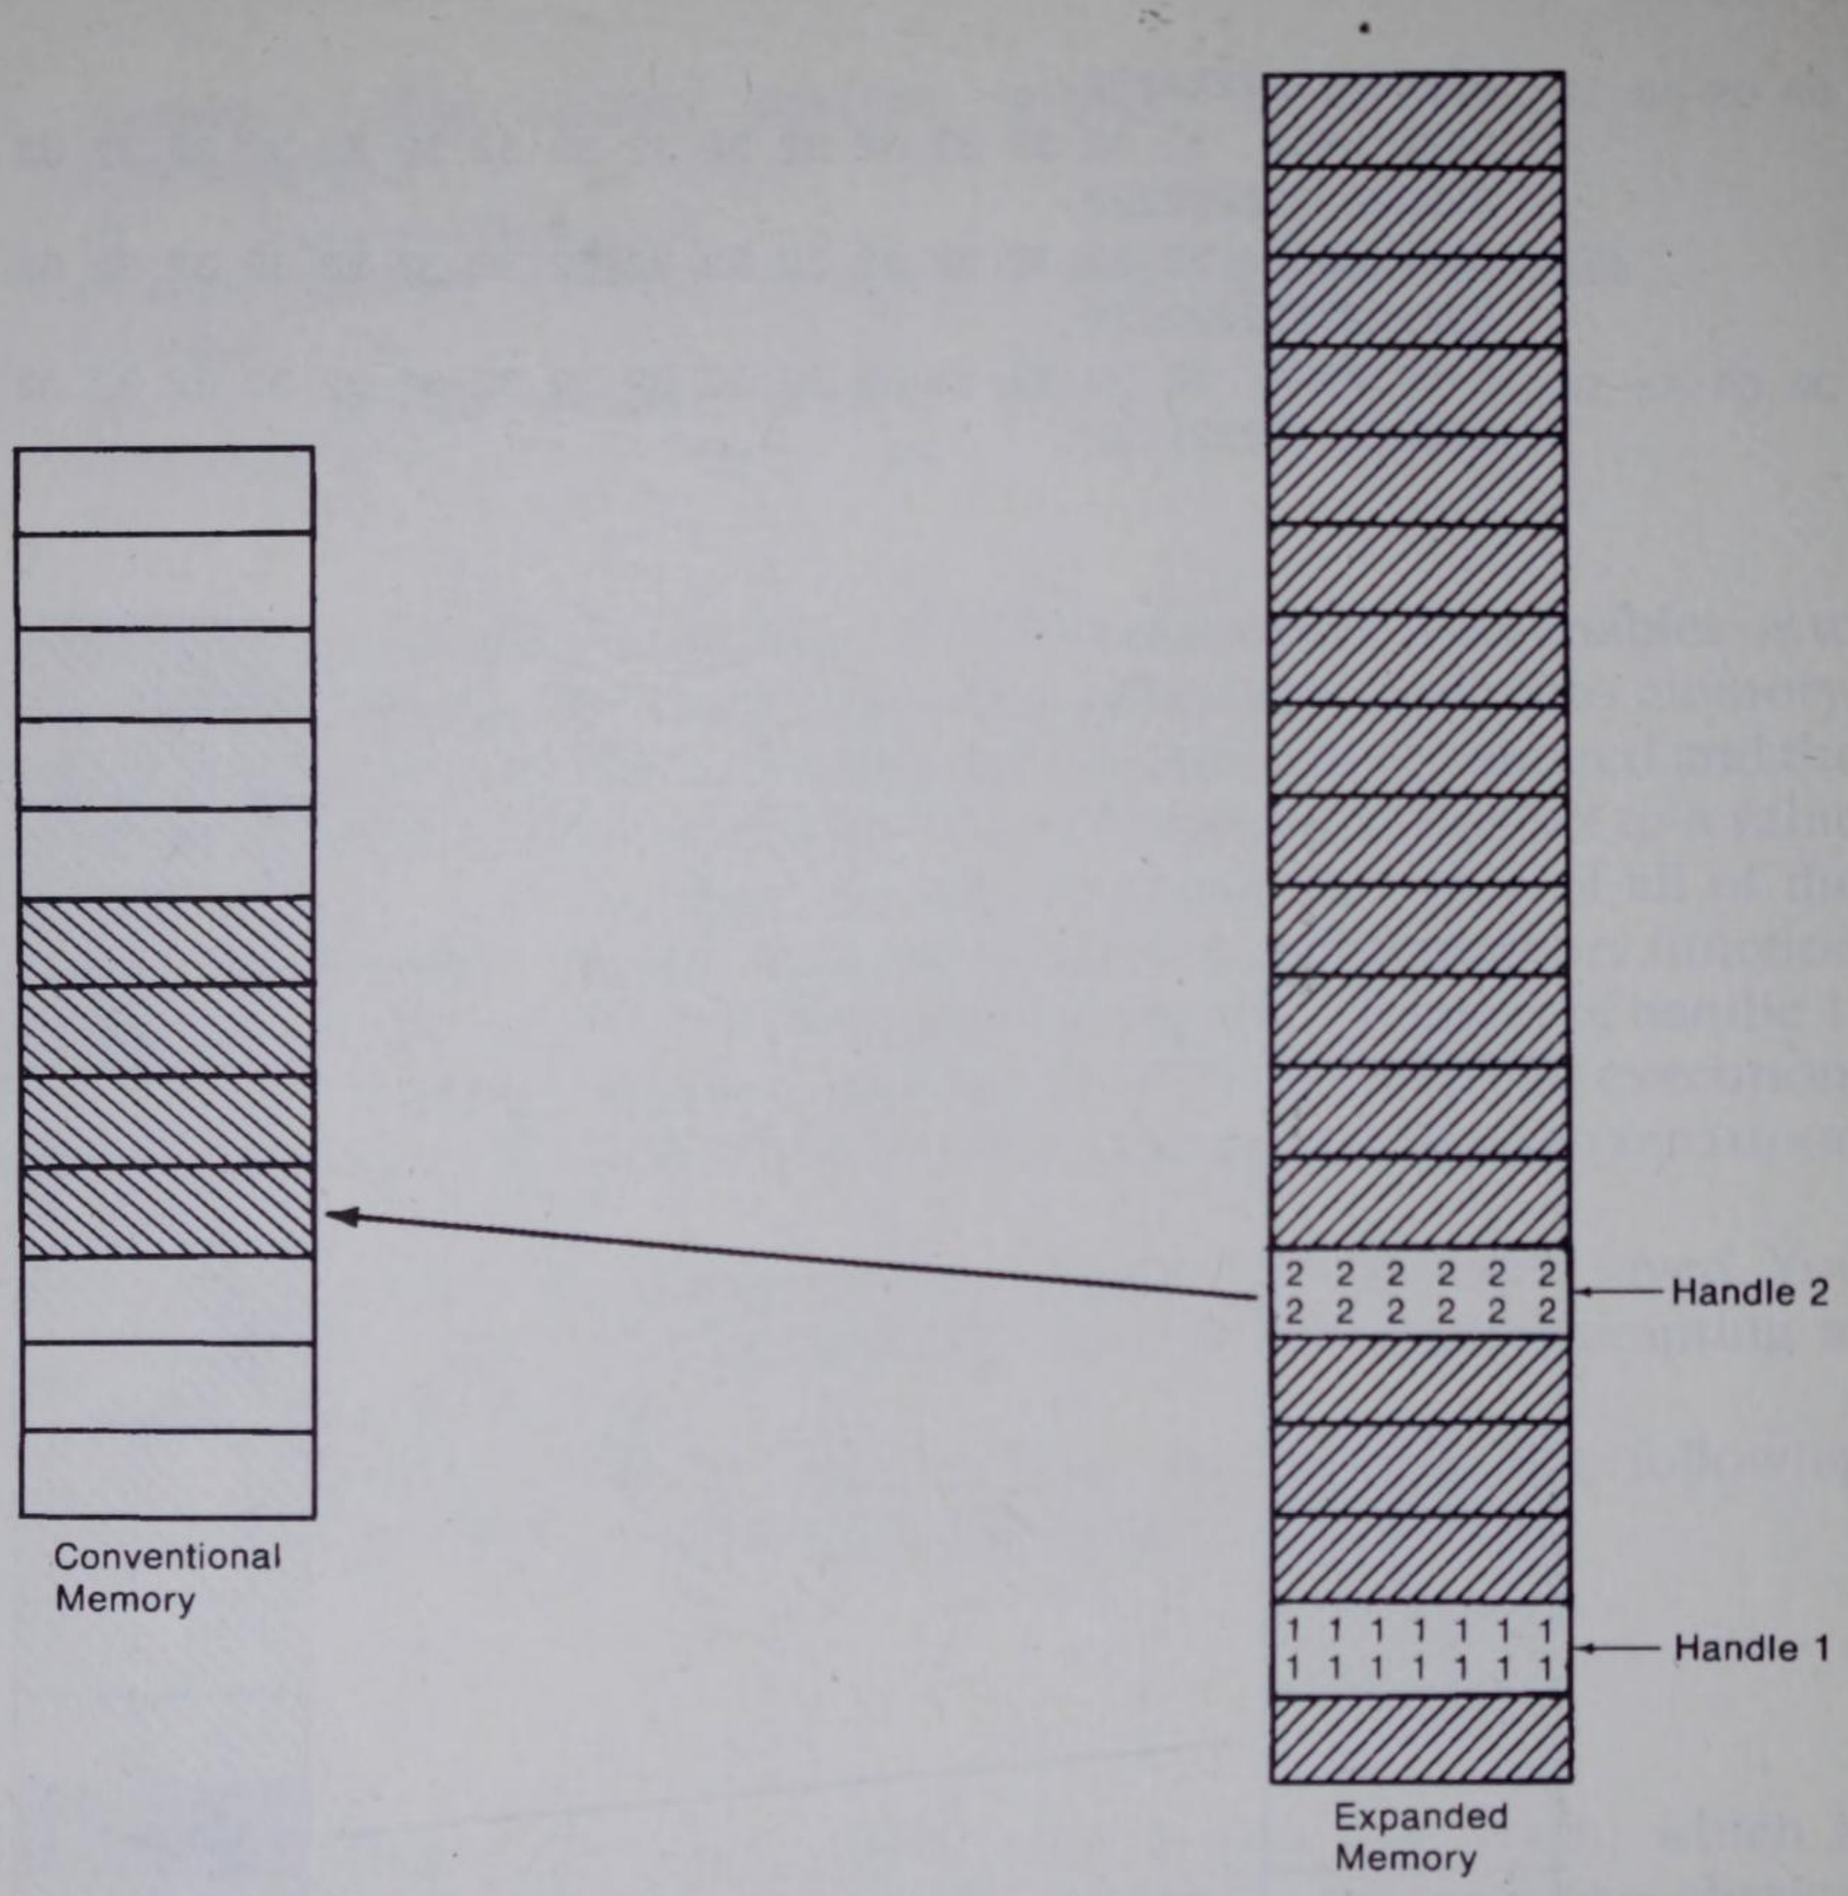

Figure 12-7. Writing to the same physical page under a new mapping context.

Expanded memory function 48H is used to restore a mapping context. Prior to the call, a handle number is placed in the DX register. The function restores the handle's previously saved mapping context. We can use DEBUG to illustrate the use of function 48H. The following example is a continuation of the previous example:

```
-rip        ←set the IP register
IP 0102
:100        ←IP=100H
-rax        ←set the AX register
```

```
AX 0000
:4800       ←AX=4800H
-r       ←check machine's state
AX=4800  BX=0000  CX=0000  DX=0001  SP=FFEE  BP=0000  SI=0000  DI=0000
DS=5E2F  ES=5E2F  SS=5E2F  CS=5E2F  IP=0100   NV UP EI PL NZ NA PO NC
5E2F:0100 CD67          INT     67
-p     ←restore context
AX=0000  BX=0000  CX=0000  DX=0001  SP=FFEE  BP=0000  SI=0000  DI=0000
DS=5E2F  ES=5E2F  SS=5E2F  CS=5E2F  IP=0102   NV UP EI PL NZ NA PO NC
5E2F:0102 5D            POP     BP
-d c400:0       ←check context restored
C400:0000  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0010  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0020  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0030  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0040  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0050  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0060  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
C400:0070  31 31 31 31 31 31 31 31-31 31 31 31 31 31 31 31
1111111111111111
-
```

The example begins by resetting the IP register so that it points to the int 67H instruction at offset address 100H. The value of AX is then set to 4800 in order to call function 48H. The machine's state is then checked and, as you can see, DX is still set to 01H. Thus, values are set to restore the previously saved mapping context of handle 1. The `p` command executes int 67H and the `d c400:0` command verifies that the context of handle 1 has been restored (figure 12-8).

EMS 4.0 implements expanded memory function 4EH, which allows an application program to save the mapping context for the entire page frame. This provides a considerable improvement over function 47H, which can only save the context of one handle at a time.

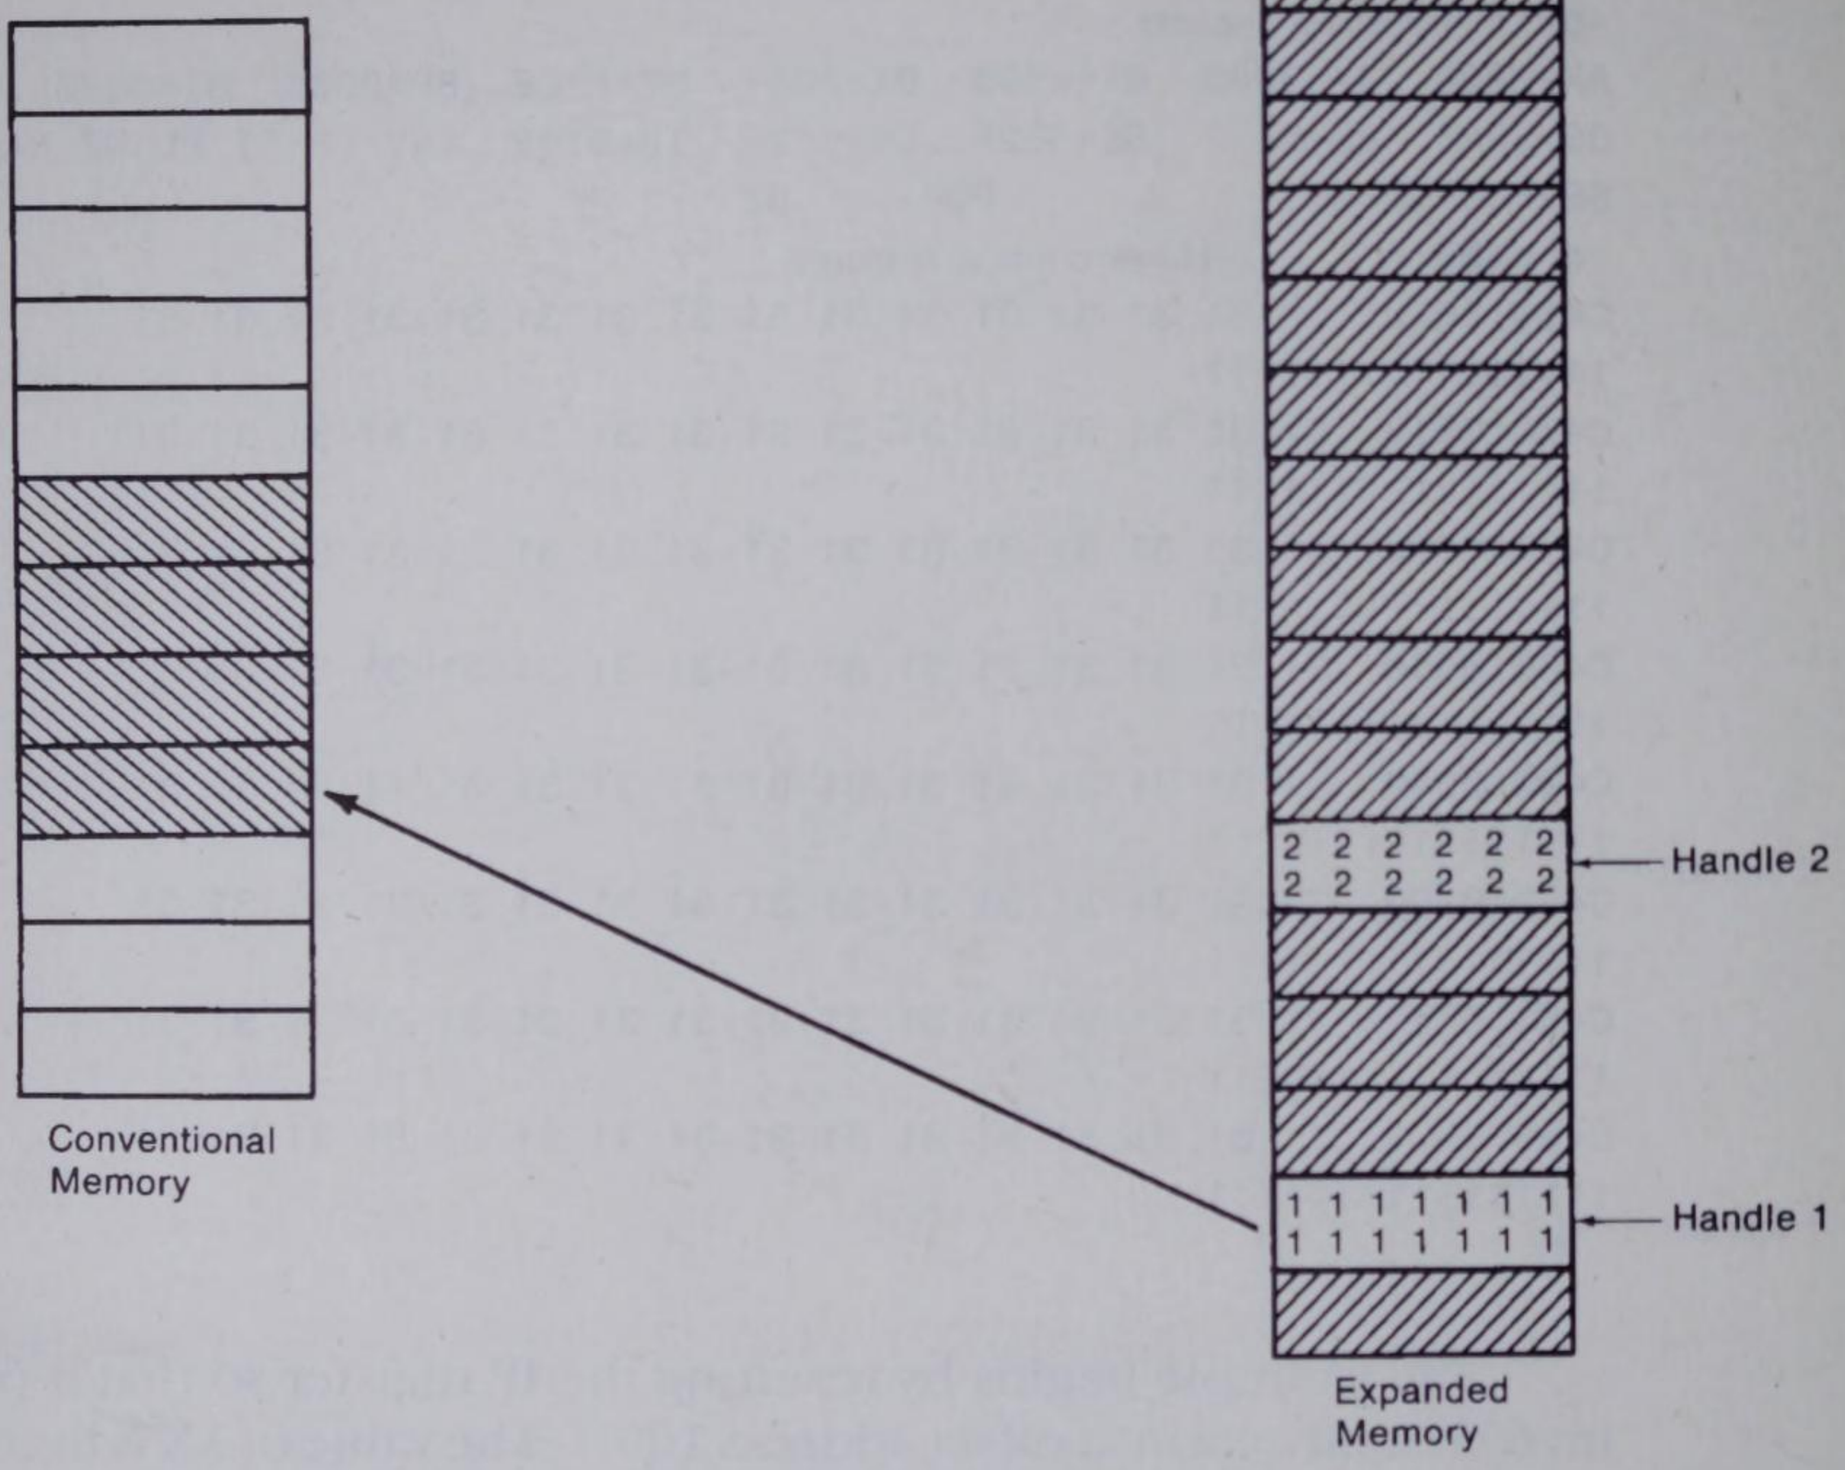

Figure 12-8. The original mapping context is restored.

Deallocating Pages

An application program must deallocate its expanded memory pages when it is done using them. This makes the pages available for use by other applications. A well-designed program will deallocate its expanded memory programs even when it terminates in an abnormal fashion (such as when the user presses Ctrl-Break).

Expanded memory function 45H is used to deallocate pages. Prior to the call, place a handle number in the DX register. The function deallocates the expanded memory pages that correspond to the handle number.

The MS-DOS 4.X version of DEBUG uses the xd command to deallocate pages. The format for the command is

```
xd handle
```

EMS 4.0 Enhancements

All of the expanded memory functions used in this chapter's tutorial are implemented in EMS 3.2 and 4.0. The discussion has mentioned some enhanced functions (4EH and 58H) that are only implemented in EMS 4.0. This discussion explores some other enhancements provided by EMS 4.0.

Executing Code in Expanded Memory

Prior to EMS 4.0, it was a bit of a chore for the application programmer to link code in conventional memory to code in expanded memory. It could be done, but it was difficult. EMS 4.0 made the process much easier by implementing expanded memory functions 55H and 56H.

Function 55H is called *Alter Page Map and Jump*. When this function is called, a new page map is mapped into the page frame and control is passed to the address specified by the application. Unlike the other expanded memory functions, this function does not return control to the calling application. It is up to the code that received control to return control to the caller. Details on the use of function 55H are too involved to be presented here. Interested readers should consult the references mentioned at the end of this chapter.

Function 56H is named *Alter Page Map and Call*. When the function is called, a new page map is mapped into the page frame and program execution branches to an address specified by the application program. The function terminates when the called code issues a *far return*. Execution returns to the calling application, and the old page map is mapped into the page frame. Readers interested in the details of using function 56H should consult the references mentioned at the end of this chapter.

Moving/Exchanging Blocks of Memory

EMS 4.0 function 57H allows an application program to move data between expanded memory and conventional memory. Moving may also be carried out between two locations in conventional memory or two locations in expanded memory. Up to 1 Mbyte may be moved with a single call to this function.

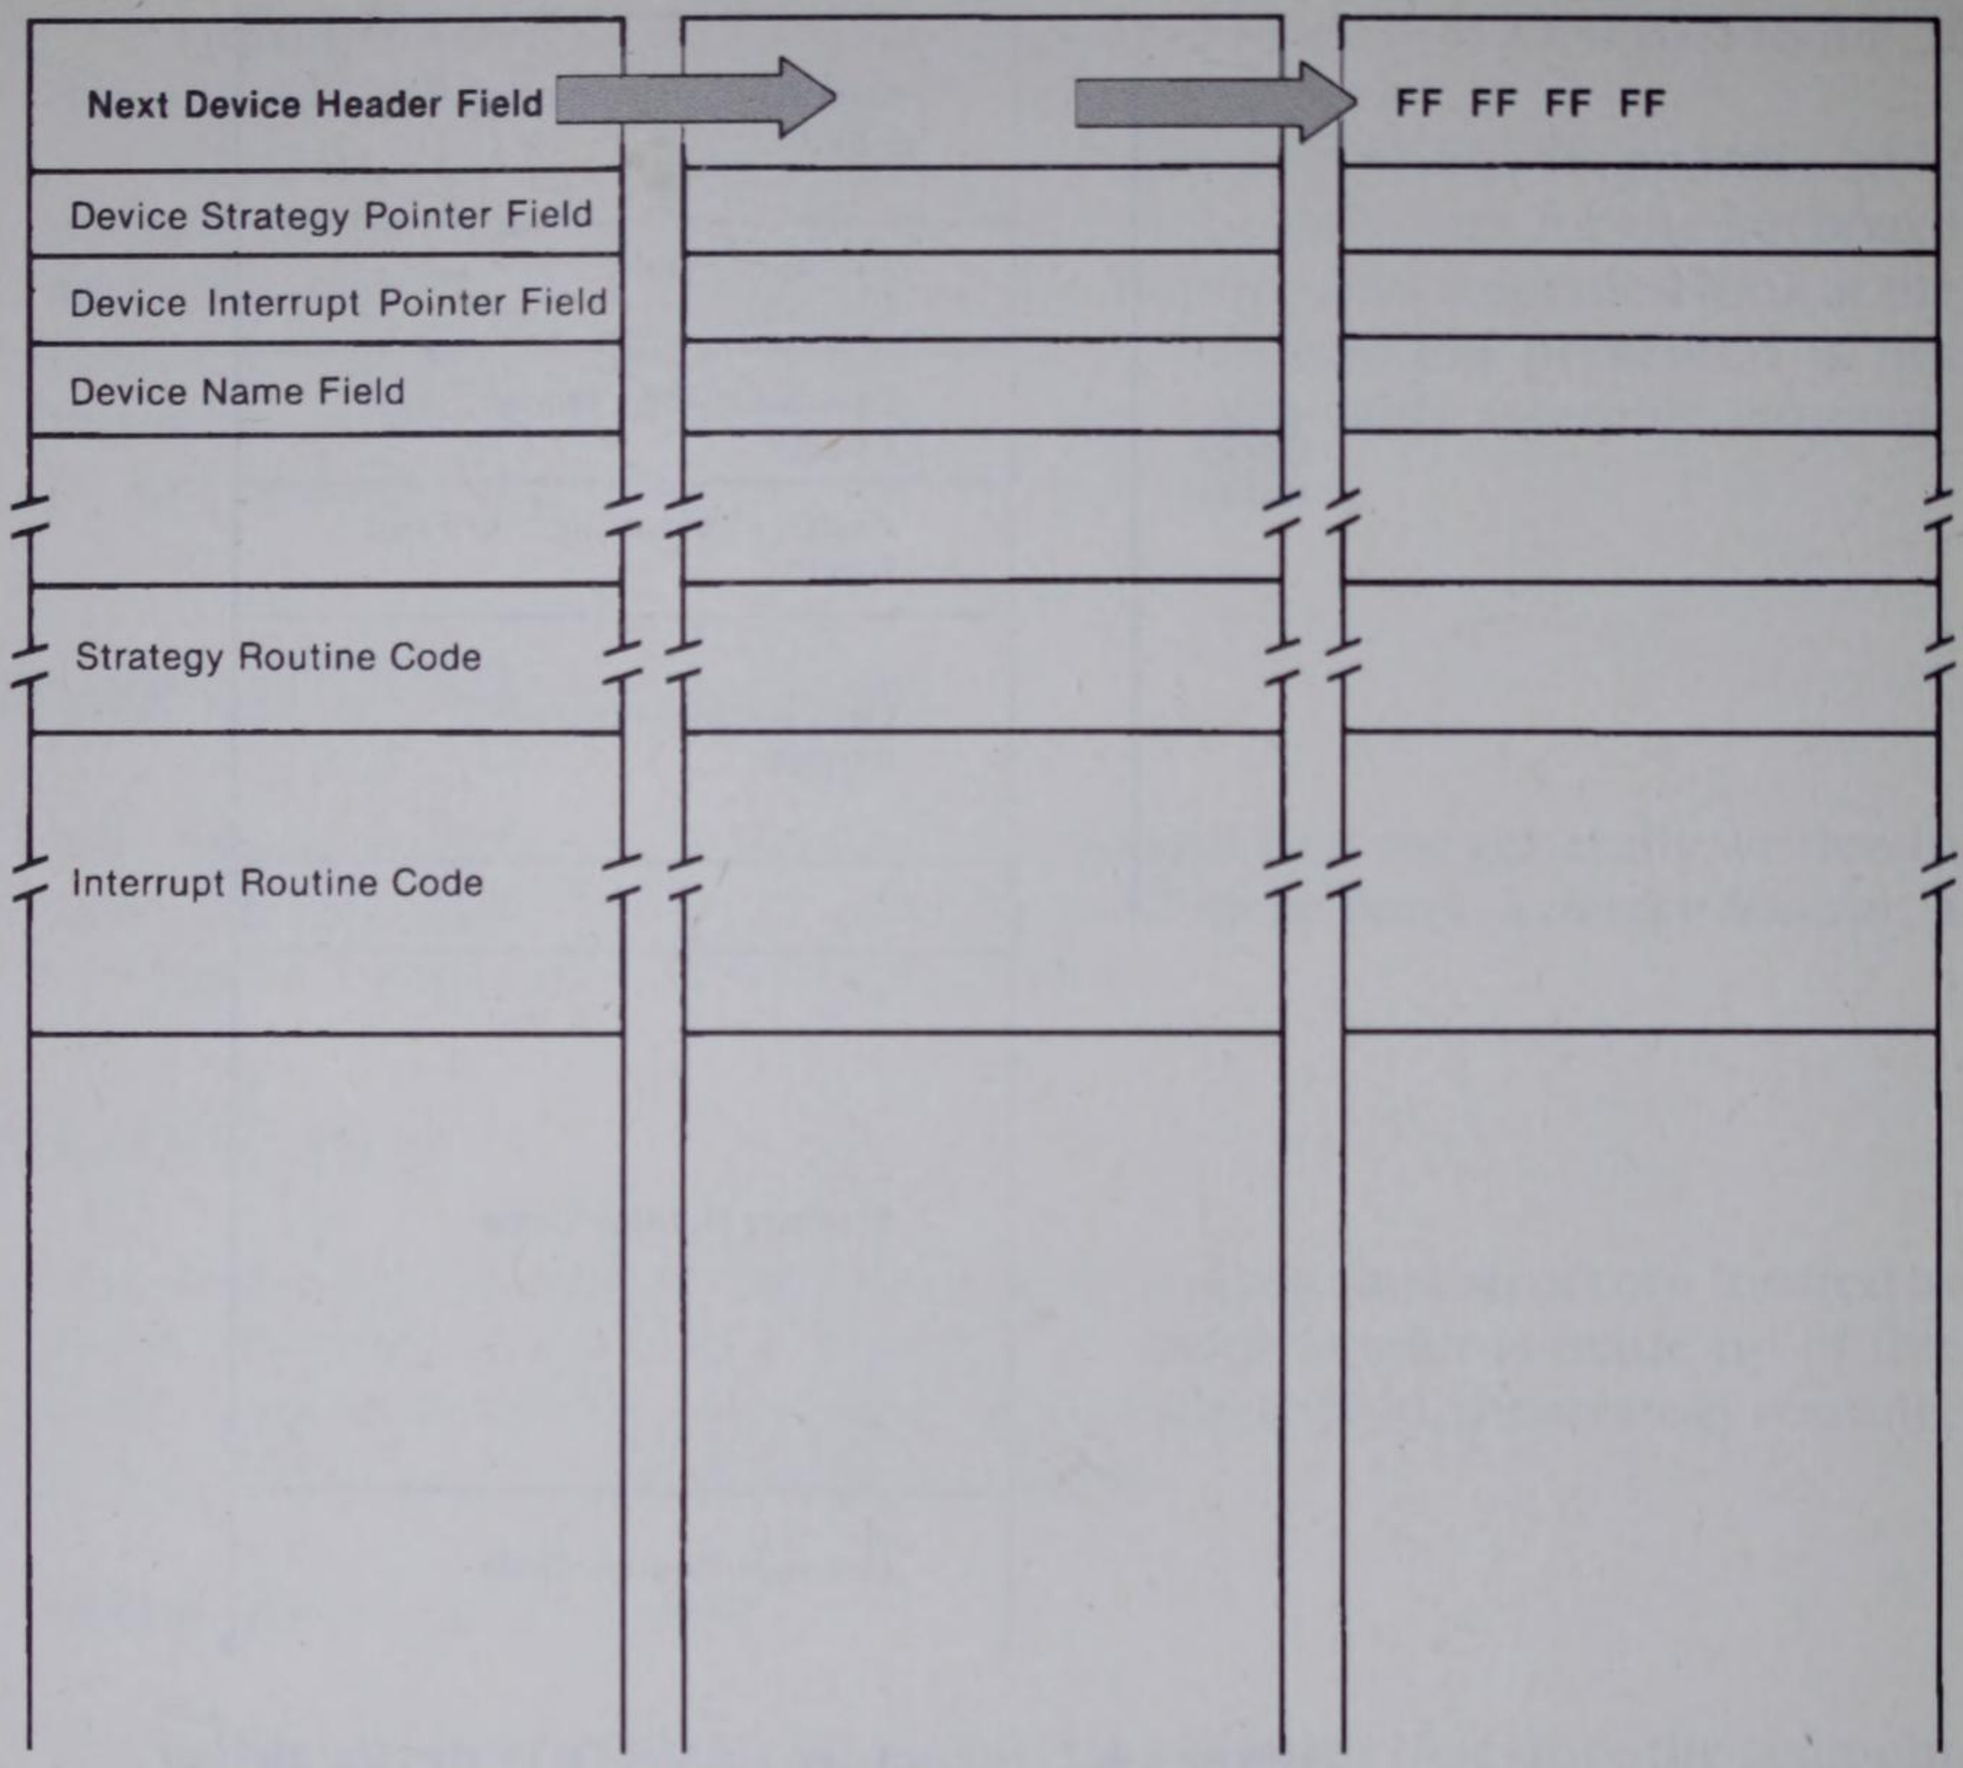

Figure 14-3. MS-DOS sets the next device header field to contain the segment and offset addresses of the next device header.

Table 14-2. Interpretation of Bit Patterns of Device Header Attribute Field

Bit Number	*Meaning*
bit 15	= 1 if character device = 0 if block device
bit 14	= 1 if IOCTL is supported = 0 if IOCTL not supported
bit 13	= 1 if non-IBM format disk = 0 if IBM format disk (block devices)

Bit Number	*Meaning*
bit 12	= 1 if device can handle Output Till Busy command = 0 if device cannot handle Output Till Busy command (character devices)
bit 11	= 1 if device supports Device Open, Device Close, and Removable Media commands = 0 if device does not support Device Open, Device Close, and Removable Media commands
bit 6	= 1 if device supports Get Logical Device and Set Logical Device commands = 0 if device does not support Get Logical Device and Set Logical Device commands
bit 4	= 1 if the device implements int 29H for fast console I/O = 0 if device does not implement int 29H
bit 3	= 1 if current clock device = 0 if not current clock device
bit 2	= 1 if current NUL device = 0 if not current NUL device
bit 1	= 1 if current standard output device = 0 if not current standard output device
bit 0	= 1 if current standard input device = 0 if not current standard input device

Interrupt Routine

The fourth field in the device header stores a 2-byte pointer to the driver's *interrupt routine*. The value in this field is set by the programmer according to the interrupt routine's location within the driver. The interrupt routine is discussed later in this chapter.

Device Name

The fifth field in the device header is the *device name* field. In character device drivers, this field stores the name assigned by the programmer to the device. The field is padded with blanks if the name is less than eight characters long. A name cannot be used as both a device name and a filename. In block device drivers (which do not have device names), this field is set by the programmer to specify the number of units controlled by the driver.

Support for Advanced Hardware Features

EMS 4.0 provides support for a set of advanced hardware features that are just starting to appear on a new generation of expanded memory boards. The newer boards have *multiple sets of mapping registers*, which allow context switches to be performed almost instantly. The boards also have *DMA registers*, which preserve the mapping context so that direct memory access (DMA) can be carried out. DMA is the process whereby certain tasks, such as reading data from a disk, can be performed without tying up the CPU. EMS 4.0 function 5BH is implemented to support both multiple mapping registers and DMA registers.

Another new hardware feature allows expanded memory boards to preserve a mapping context when a warm boot of the machine occurs (such as when the user presses Ctrl-Alt-Break). EMS 4.0 function 5CH is provided to support such hardware. The function serves to warn the system that a warm boot is about to occur.

Conclusion

The purpose of this chapter has been to convey an understanding of what expanded memory is and how it operates. The examples provide some insight into how application programs use expanded memory. Many details concerning expanded memory have not been covered in this chapter.

The interested reader is referred to *The Waite Group's MS-DOS Developer's Guide,* Second Edition, for a more detailed examination of programming with expanded memory. You can obtain a free copy of LIM EMS 4.0 by contacting Intel Corporation (in the United States call 800-538-3373; elsewhere, call 503-629-7354).

CHAPTER

13

Terminate and Stay Resident Programs

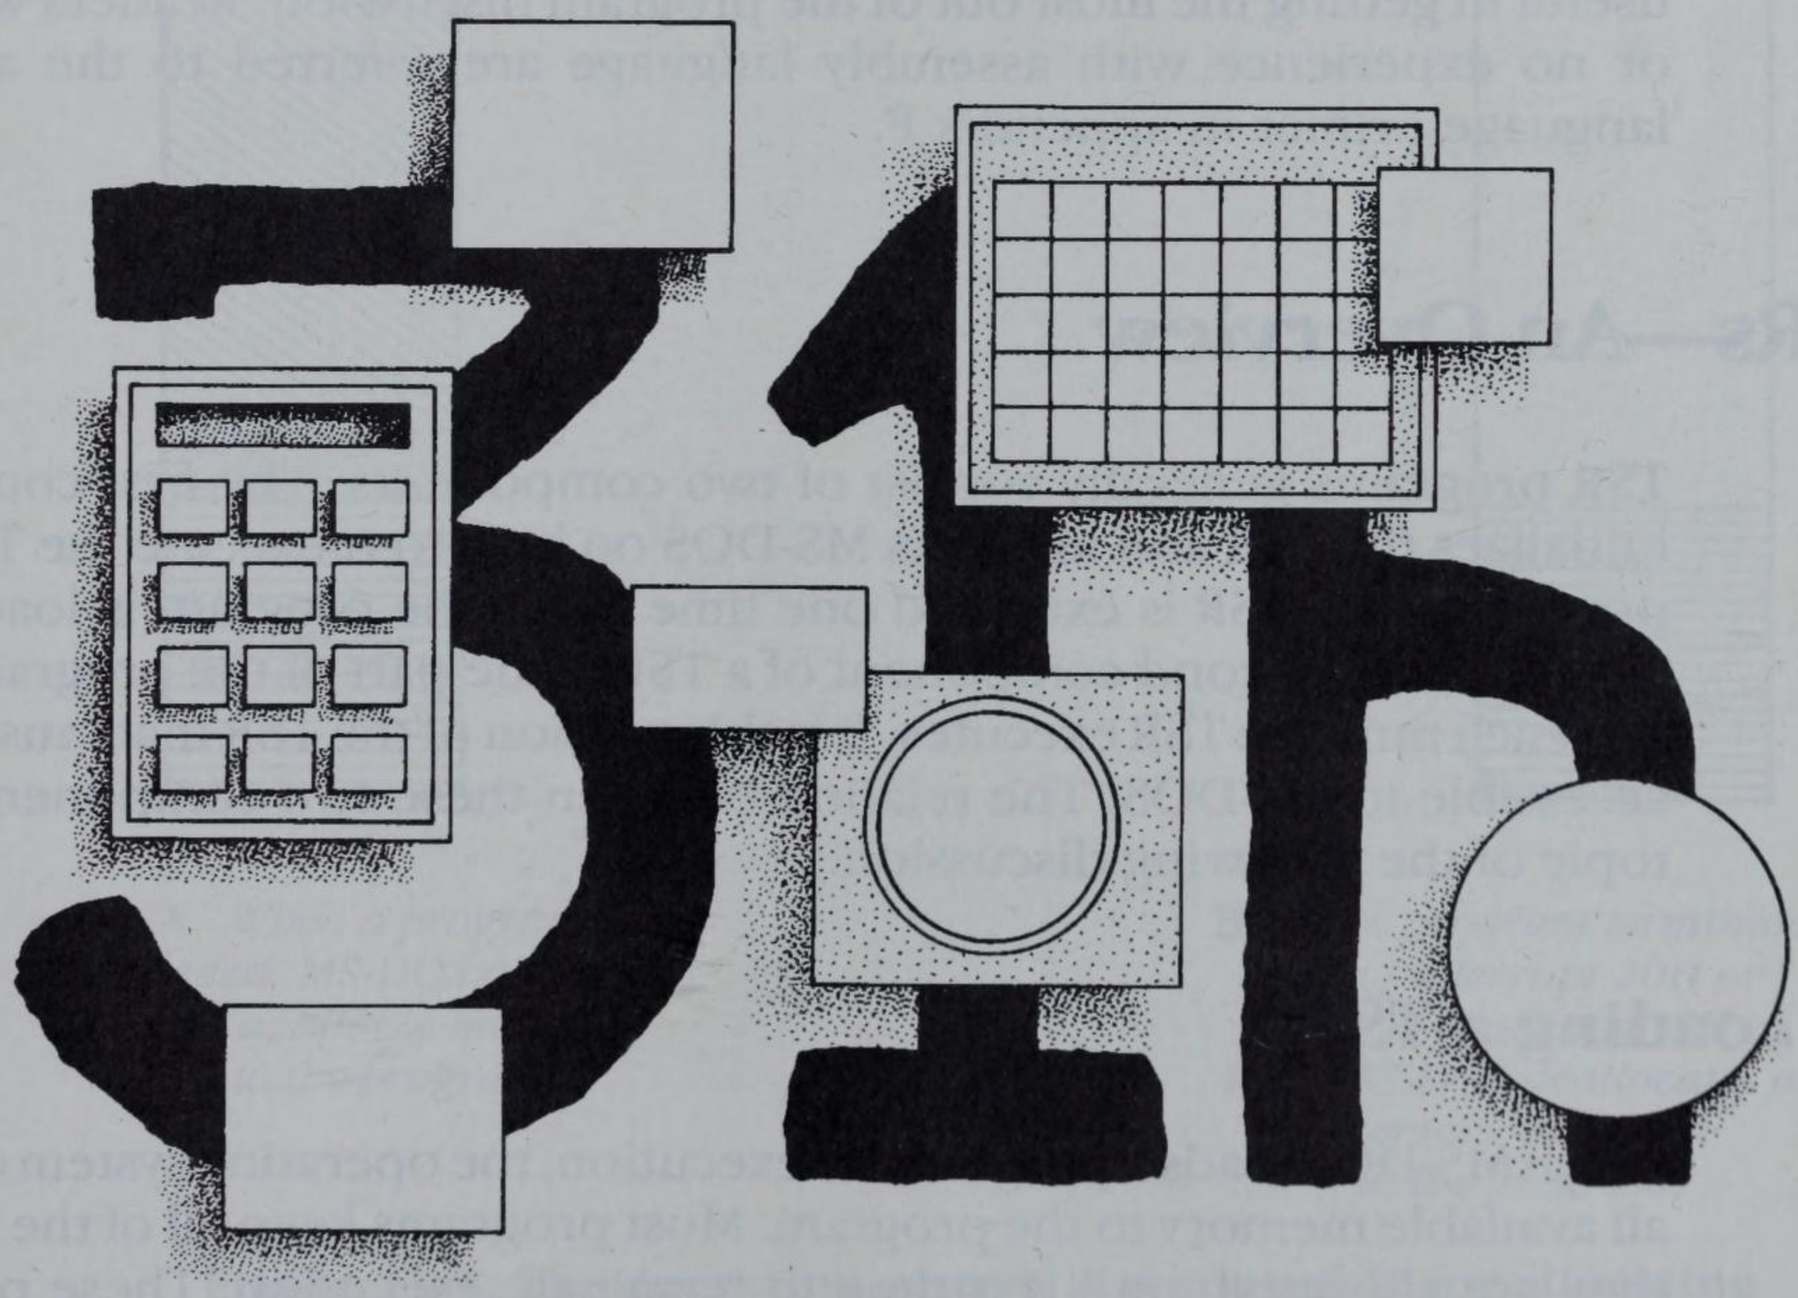

TSRs—An Overview
Guidelines for a Peaceful Coexistence
POPCLOCK—An Example of a TSR

Programs that remain loaded in memory after their execution terminates are called *terminate and stay resident (TSR)*. There are many types of TSRs, ranging from MS-DOS utilities such as PRINT.COM and APPEND.EXE to the popular "pop-up" utilities such as SideKick. This chapter discusses the way in which TSRs are constructed. The first section describes, in a general way, fundamental techniques for keeping a program resident after execution and subsequently accessing the program so that it can be reexecuted. The second section discusses in some detail the important issues that must be addressed when you want to write a well-behaved TSR. Finally, a working TSR program, POPCLOCK, is presented and discussed in the third section of the chapter.

The material presented requires an understanding of interrupts and the MS-DOS function calls. Appendix A contains an introductory discussion on interrupts. The MS-DOS interrupts and function calls that are used extensively in this chapter are also discussed in appendix A.

The TSR presented at the end of this chapter is written in assembly language. Some familiarity with assembly language programming will be useful in getting the most out of the program discussion. Readers with little or no experience with assembly language are referred to the assembly language primer in appendix F.

TSRs—An Overview

TSR programs generally consist of two components. The first component initializes the TSR and instructs MS-DOS on how to reexecute the TSR. This portion of the TSR is executed one time when the program is loaded into memory. The second component of a TSR is the part of the program that is run each time the TSR executes. It is this portion of the TSR that must remain accessible to MS-DOS. The relation between these two components is the topic of the following discussion.

Loading a TSR

When MS-DOS loads a program for execution, the operating system allocates all available memory to the program. Most programs keep all of the memory they are allocated until it is time to terminate execution. These programs then terminate by issuing a call to interrupt 20H or DOS function 4CH, either of which directs MS-DOS to deallocate all of the program's memory and make it available for use by other programs (see figure 13-1).

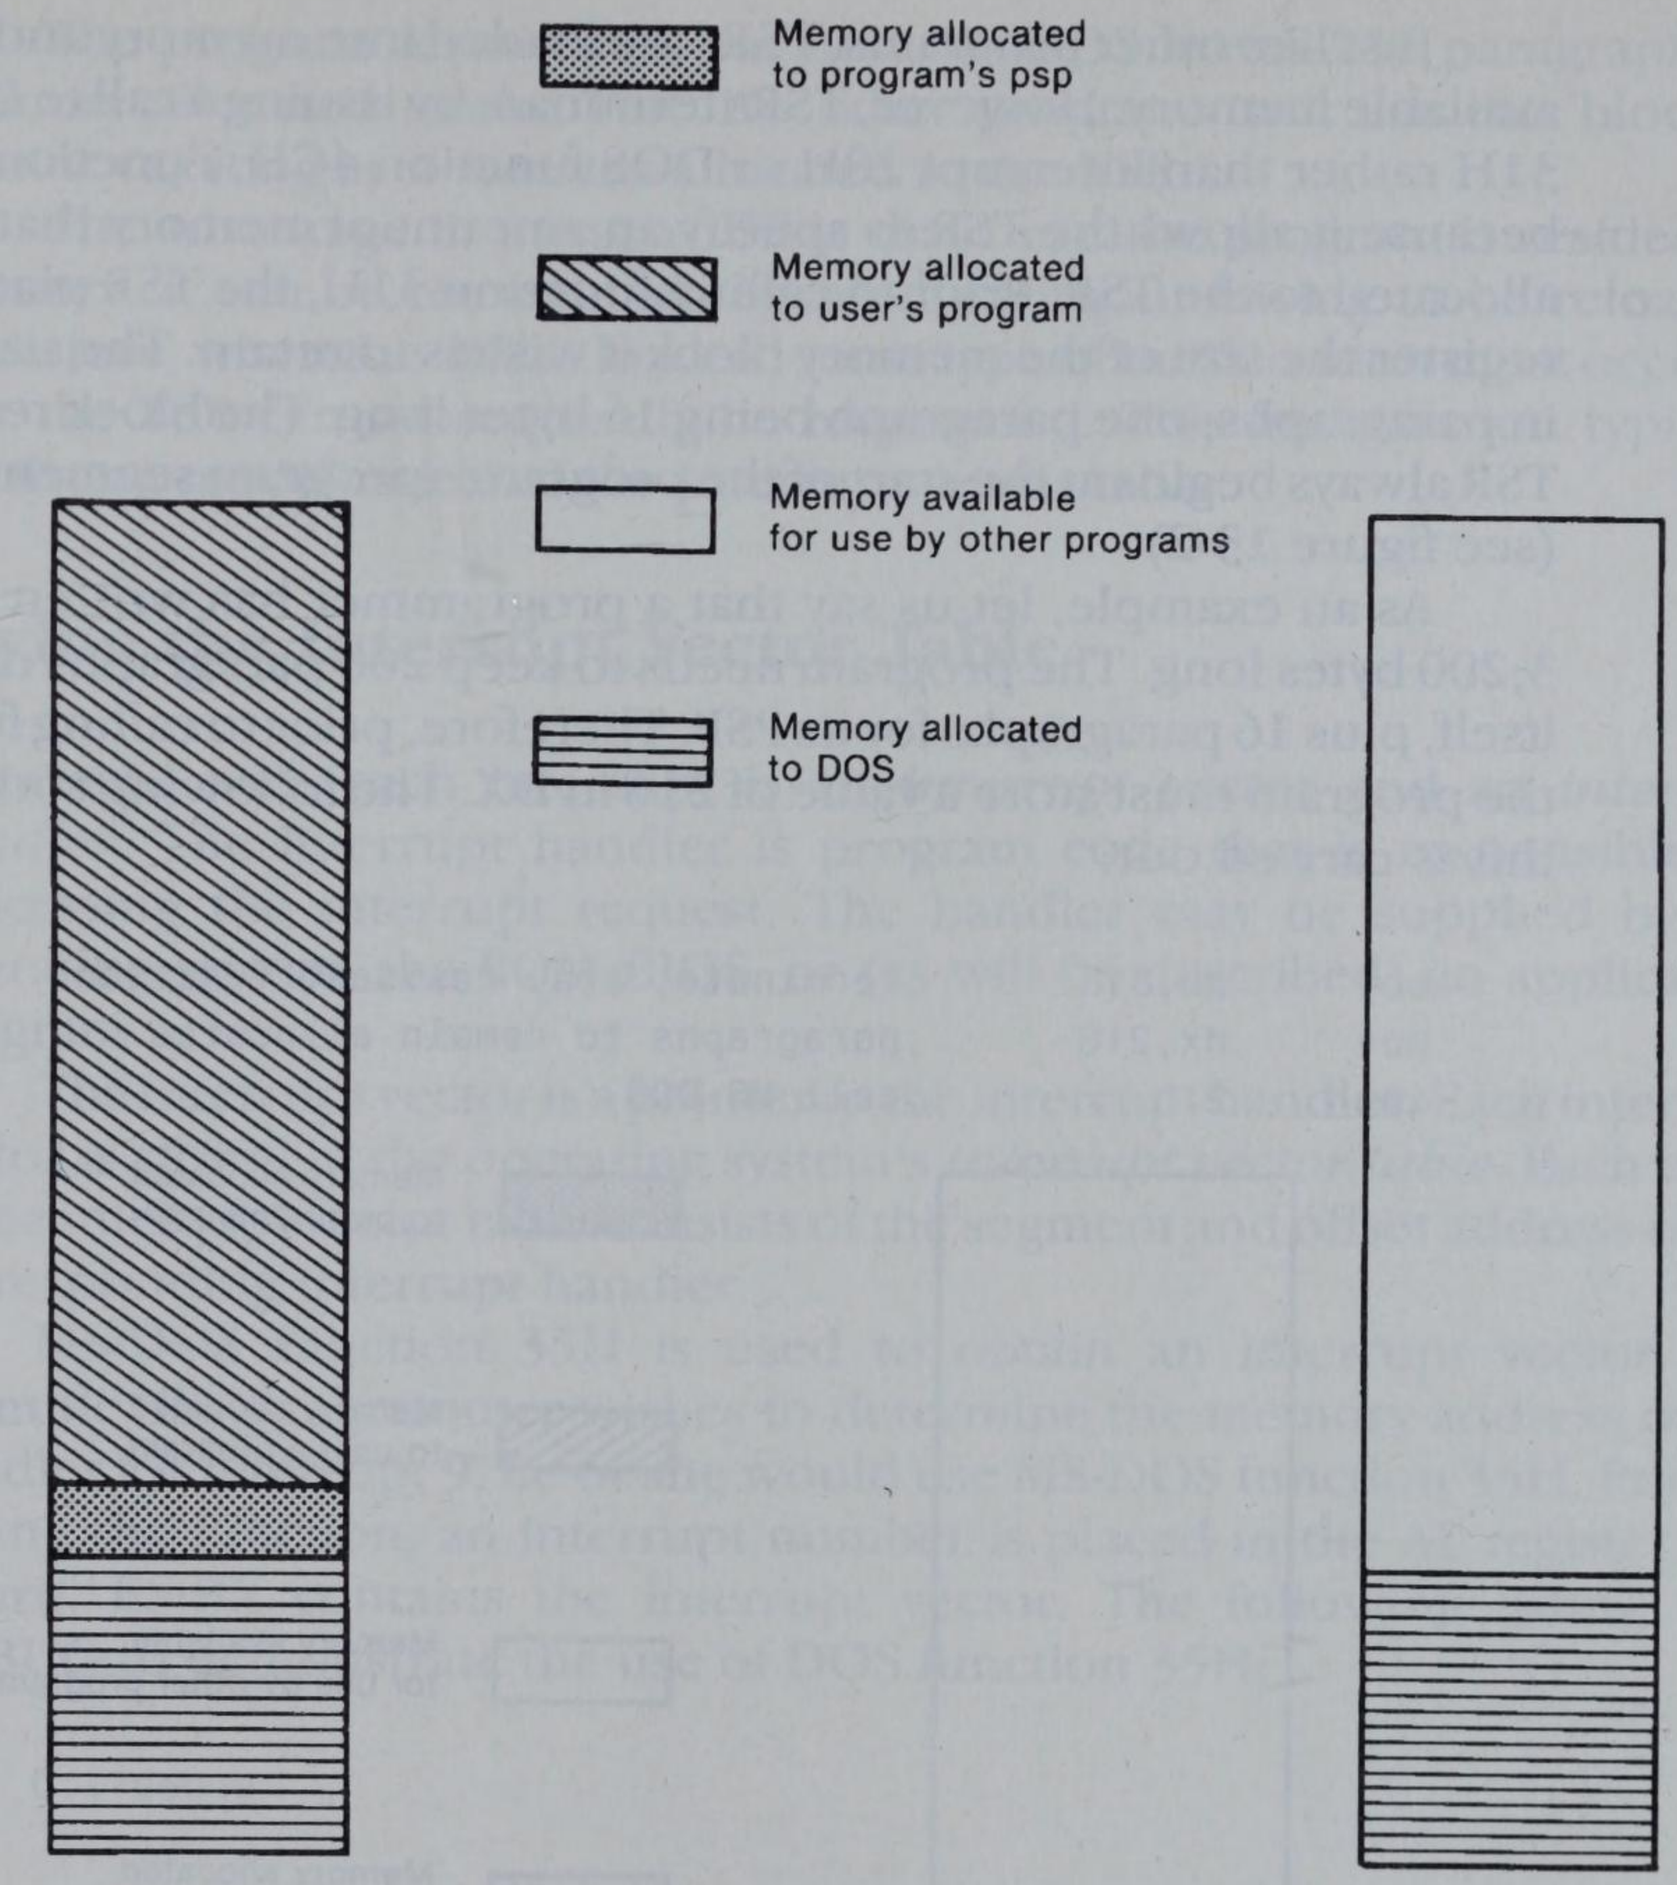

A. *When a program is loaded, MS-DOS allocates all available memory to the program.*

B. *If the program terminates using interrupt 20H or MS-DOS functions 31H or 4CH, MS-DOS deallocates all memory allocated to the program.*

Figure 13-1. The operating system is responsible for allocating and deallocating memory.

Just like other programs, TSRs are loaded into memory and allocated all available memory. However, TSRs terminate by issuing a call to DOS function 31H rather than interrupt 20H or DOS function 4CH. Function 31H is used because it allows the TSR to specify an amount of memory that is to remain allocated to the TSR. Prior to calling function 31H, the TSR places in the DX register the size of the memory block it wishes to retain. The size is specified in paragraphs, one paragraph being 16 bytes long. The block retained by the TSR always begins at the start of the program's program segment prefix (PSP) (see figure 13-2).

As an example, let us say that a programmer has written a TSR that is 3,200 bytes long. The program needs to keep 200 paragraphs of memory for itself, plus 16 paragraphs for its PSP. Therefore, prior to calling function 31H, the program must store a value of 216 in DX. The following code shows how this is carried out:

```
mov     ah,31h      ;terminate, stay resident function
mov     dx,216      ;paragraphs to remain allocated
int     21h         ;call MS-DOS
```

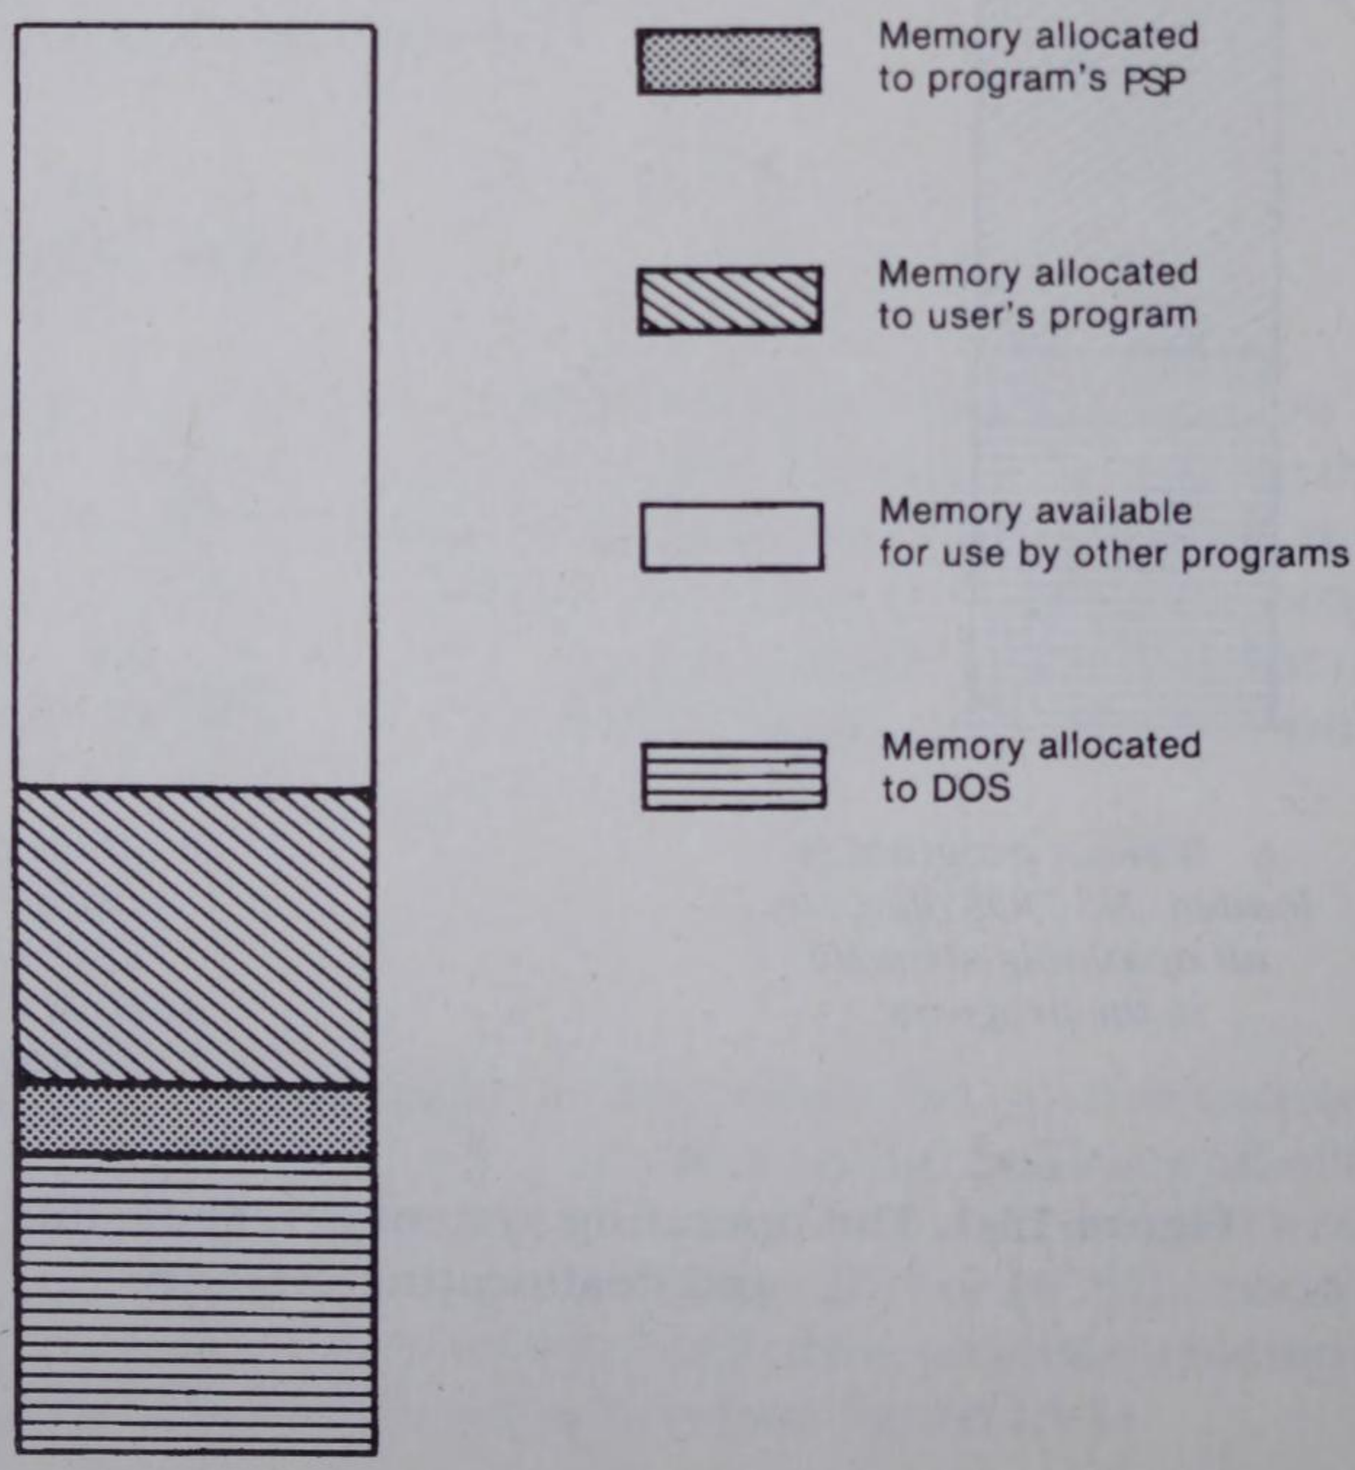

Figure 13-2. When a program terminates using MS-DOS function 31H, a block of memory remains allocated to the program.

The program terminates, but now MS-DOS leaves 216 paragraphs of memory allocated to the TSR. No other programs will use this block of memory as long as it remains allocated to the TSR.

The advantage in using a TSR is that once the program is resident in memory, it can be reexecuted repeatedly without having to be reloaded. Therefore, when the TSR is loaded, some type of initialization must occur so that the TSR can subsequently be reexecuted. This initialization typically involves a modification of the interrupt vector table.

Modifying the Interrupt Vector Table

Associated with each interrupt is an *interrupt vector* and an *interrupt handler*. The interrupt handler is program code that is responsible for processing the interrupt request. The handler may be supplied by the operating system, the ROM BIOS, or (as will be described) an application program.

The interrupt vector is a pointer to the interrupt handler. Each interrupt vector is stored in the operating system's *interrupt vector table*. Each entry in the interrupt vector table consists of the segment and offset address of the corresponding interrupt handler.

MS-DOS function 35H is used to obtain an interrupt vector. For example, if a programmer wishes to determine the memory address of the handler for interrupt 9, he or she would use MS-DOS function 35H. Prior to calling the function, an interrupt number is placed in the AL register. On return, ES:BX contains the interrupt vector. The following listing uses DEBUG to demonstrate the use of DOS function 35H:

```
C:\>debug

-a                              ;start DEBUG assembler
1226:0100 mov ah,35             ;request function 35h
1226:0102 mov al,9              ;return vector for int 9
1226:0104 int 21                ;call MS-DOS
1226:0106       ←press Enter

-g 106                          ;execute, stop at offset 106
AX=3509 BX=E987 CX=0000 DX=0000 SP=FFEE BP=0000 SI=0000 DI=0000
DS=1226 ES=F000 SS=1226 CS=1226 IP=0106  NV UP EI PL NZ NA PO NC

1226:0106 6D      DB      6D
-q

C:\>
```

On return from the function call, ES:BX contains the vector for interrupt 9.

The interrupt vector table is modified by using MS-DOS function 25H. This function is used by a programmer who writes an interrupt handler to replace the one provided by the operating system or the ROM BIOS. Prior to calling the function, the segment:offset address of the new handler is placed in DS:DX and the corresponding interrupt number is placed in AL. The following code modifies the interrupt table so that the vector for interrupt 9 will point to address 1010:2234:

```
mov ah,25h          ;request function 25h
mov al,9            ;modify vector for int 9
mov ds,1010h        ;segment of new handler
mov dx,2234h        ;offset of new handler
int 21h             ;call MS-DOS
```

During initialization, a TSR uses functions 25H and 35H to establish the conditions under which the TSR is reexecuted. For example, a pop-up TSR may be designed to execute each time that a particular key combination is pressed. The programmer might decide to modify the interrupt vector table so that the entry for interrupt 9 pointed to the TSR. Then each time a key was pressed, the TSR would begin to execute. The TSR would check to see which key combination had been pressed. If the appropriate combination had been pressed, the TSR would pop up. However, if any other key combination were detected, the TSR would pass control to the old interrupt 9 handler and that handler would process the keyboard input in the standard fashion. The following pseudocode shows how this would be carried out:

Initialization:

•

•

•

—get int 9 vector using function 35H

—save segment address of old handler

—save offset address of old handler

—reset int 9 vector with function 25H

—on call, DS has segment of new handler

—on call, DX has offset of new handler

—terminate and stay resident

New Handler:

•
•
•

—determine key(s) pressed
—if "hotkey" pressed, pop up
—call old handler, using save addresses

•
•
•

That, in a general sense, is how TSRs operate. Unfortunately, writing a working TSR is much more complicated. Several factors must be considered so that TSRs can peacefully coexist with MS-DOS, with the application program currently being run, and with any other TSRs that might be in memory at the same time. These considerations are discussed next.

Guidelines for a Peaceful Coexistence

Writing a TSR is an exercise in circumventing DOS. There are two reasons why this is true. First, MS-DOS was designed to be a *unitasking* operating system. This means that MS-DOS is meant to run one program, throw it away, run another, throw it away, and so on. Asking MS-DOS to supervise more than one program at a time is beyond the operating system's capabilities. The programmer must circumvent this deficiency to get a working TSR.

The second reason why TSRs require a circumvention of MS-DOS is that TSR programmers must use features of MS-DOS that are not officially documented by Microsoft or IBM. Using undocumented features is always a risky proposition, but for now TSR programmers have no other choice. They must rely on their own wits, as well as the wits of their fellow programmers, in unraveling the features of MS-DOS needed to write properly behaved TSRs. Recently, however, Microsoft published a set of guidelines for TSRs, including official documentation of many of the features presented in this chapter.

Some of the features of MS-DOS presented here remain undocumented, but all are well known and used by most programmers writing TSRs. Therefore, they can be considered reliable until proven otherwise. Unfortunately, it must be added that all undocumented features must be used cautiously and at the programmer's own risk. Because there is no official documentation of what the features do, programmers have nothing to fall back on if the features behave in an unexpected fashion. Programmers must also bear in mind that Microsoft and IBM have repeatedly stated that any or all of the undocumented features of MS-DOS may not be supported in future versions.

With that disclaimer out of the way, let us continue with the discussion of TSRs. There are three areas of consideration that must be addressed by TSR programmers. The first area relates to the manner in which the interrupt vector table is modified. Any modification of the table must use a technique called *chaining*. Chaining preserves the integrity of the system that existed prior to modification of the interrupt table.

The second area of consideration for the TSR programmer centers around the problem of *reentry*. Problems with reentry result from MS-DOS's deficiency in preserving its current state when an interrupt occurs. Getting around the reentry problem requires heavy reliance on undocumented MS-DOS features.

The third area of consideration for the TSR programmer involves TSRs' access to files. As will be discussed, TSRs must make special adjustments if they will be accessing files through the use of file handles.

Chaining

Whenever a TSR modifies the interrupt vector table, it is essential that the program "chains" onto the old interrupt handler. *Chaining* is the process by which the new interrupt handler always issues a call to the old interrupt handler. The new handler accomplishes this by using a pointer to the old handler. The pointer is usually saved during initialization of the TSR. Chaining is illustrated in figure 13-3.

Chaining is necessary if TSRs are to coexist with each other. To understand why, consider what would happen if two TSRs were loaded into memory. If both of the TSRs modified the same interrupt vector, then the vector would end up pointing to whichever TSR was loaded into memory last. If this TSR did not chain to the first TSR, the first TSR would never execute. Chaining must be implemented so that TSRs can execute regardless of the loading order.

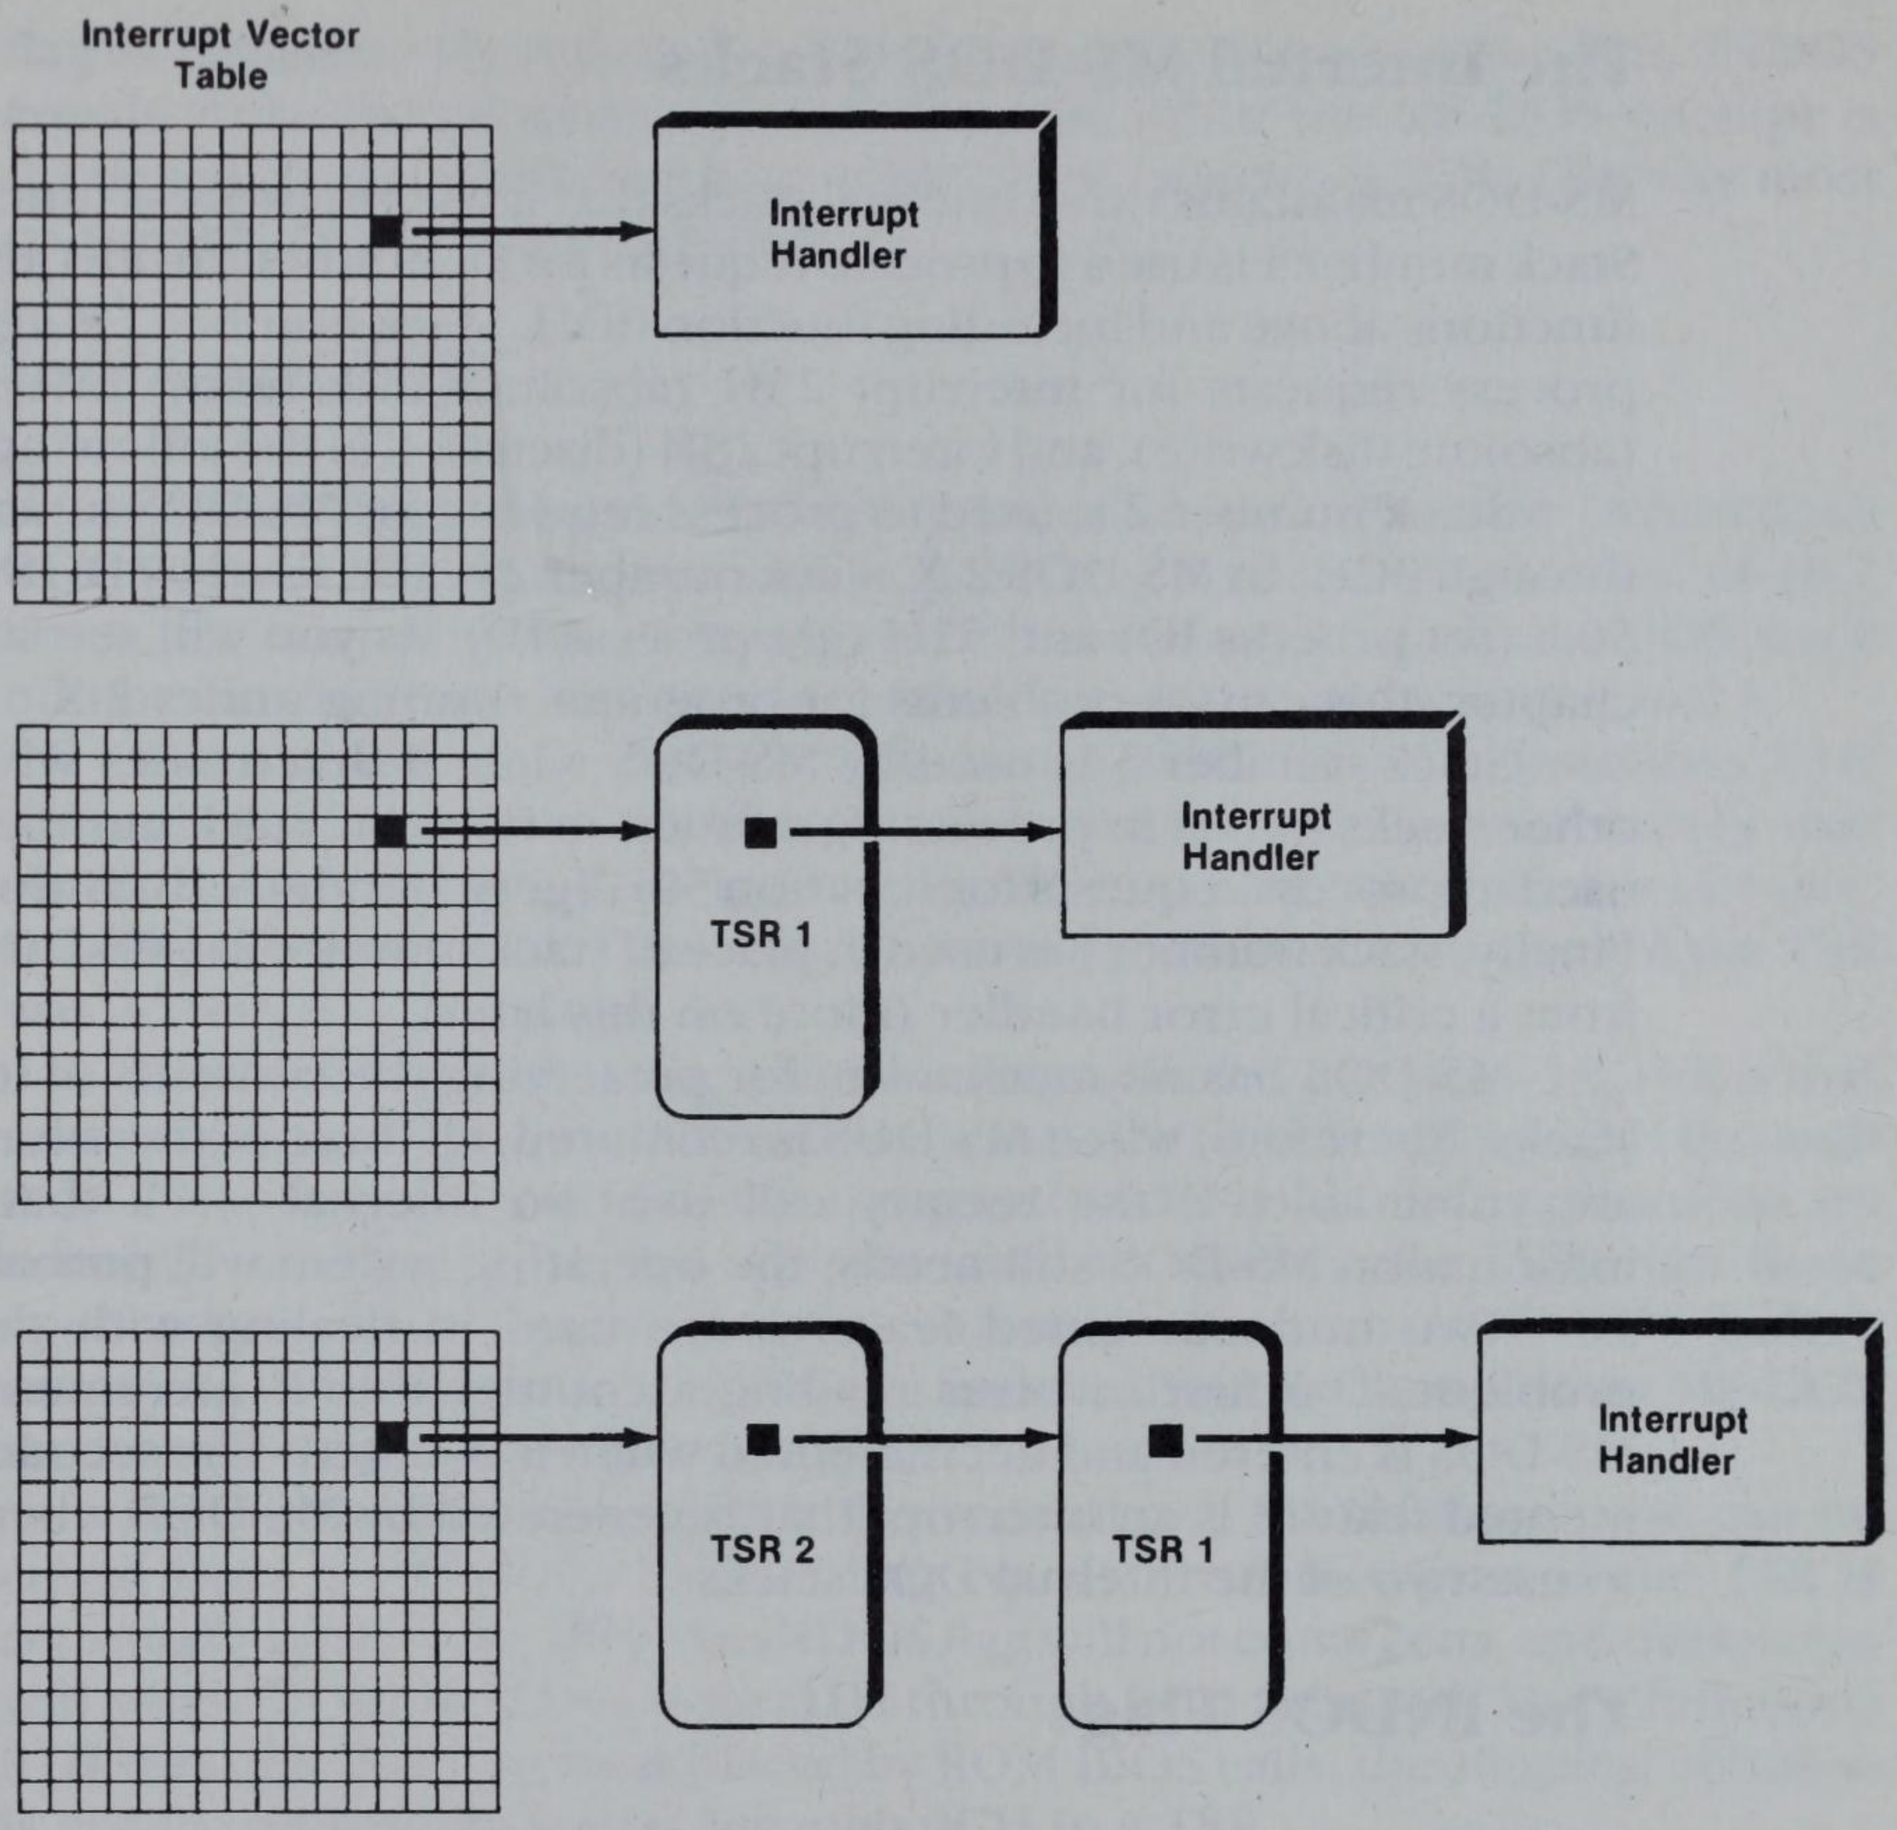

Figure 13-3. Chaining ensures that all handlers are serviced.

The Problem of Reentry

Whenever a program issues a DOS function call, the operating system is said to be *entered*. If an interrupt occurs while MS-DOS is entered, and the interrupt handler issues a function call, MS-DOS is said to be *reentered*. Reentry can cause MS-DOS to crash flat on its face. Therefore, precautions must be taken to ensure that reentry occurs only under certain circumstances. To understand further what reentry is and how it can be controlled, we need to discuss MS-DOS's internal stacks.

The Internal MS-DOS Stacks

MS-DOS maintains three internal stacks that it uses to process function calls. Stack number 1 is used to process requests for DOS function 00H and all DOS functions above and including function 0DH. Stack number 1 is also used to process requests for interrupt 25H (absolute disk read), interrupt 26H (absolute disk write), and interrupt 28H (discussed in the following section).

Stack number 2 is used to process requests for MS-DOS functions 01H through 0CH. In MS-DOS 2.X, stack number 2 is also used by DOS functions 50H (set process ID) and 51H (get process ID). As you will see later in this chapter, this causes problems for programs running under 2.X.

Stack number 3 is used by MS-DOS while it determines which of the other stacks to use in processing a function request. Stack number 3 is also used to process requests for function 59H (get extended error information). Finally, stack number 3 is used in place of stack number 2 if MS-DOS is called from a critical error handler (more on this later).

MS-DOS has no mechanism for preserving the contents of its internal stacks. Therefore, when MS-DOS is reentered, all three of the internal stacks are vulnerable. If the reentry call uses an internal stack that contains information MS-DOS still needs, the operating system will probably crash.

Two undocumented features are used in dealing with the reentry problem. The first involves reading a counter that is incremented when MS-DOS is entered and decremented when it is exited. The second undocumented feature is an interrupt that is generated by MS-DOS when it is safe to use two of the internal DOS stacks.

The INDOS Flag

MS-DOS maintains an internal counter that the operating system increments each time MS-DOS is entered, and decrements each time it is exited. The counter is called the "INDOS flag," even though it is not really a flag (which is either set or clear) but is a counter (which can have any nonnegative value).

TSR programs locate the INDOS flag using DOS function 34H. On return from this call, the ES register contains the flag's segment address, and the BX register contains the flag's offset address. Function 34H should be executed when the TSR is initialized and the flag's address is stored in variables local to the TSR. Then, when the TSR is reexecuted, the status of the flag can be determined directly, without using function 34H. This is important because calling function 34H can result in reentry and system failure.

There is some confusion about the true significance of the INDOS flag. Before we get into the details of using the flag, it is important to recognize its major limitation. Whenever the MS-DOS prompt is displayed, the INDOS

flag is nonzero. Therefore, if a TSR program executes only when INDOS equals zero, the program will not function when the MS-DOS prompt is displayed. Some additional way is needed to activate a TSR. The way most commonly used is interrupt 28H.

Interrupt 28H

If the INDOS flag is set, and MS-DOS is processing a call for any of functions 01H through 0CH, interrupt 28H is generated by MS-DOS at a rate of 18.2 times per second. Because functions 01H through 0CH all use DOS stack number 2, interrupt 28H is a signal that it is safe to use stacks 1 and 3.

When a TSR is accessed via interrupt 28H, MS-DOS functions 01H through 0CH cannot be called, because interrupt 28H ensures only that stacks 1 and 3 are safe. In fact, interrupt 28H ensures that stack 2 is not safe, so calling functions 01H through 0CH almost guarantees a crash if the TSR was activated by interrupt 28H.

The problem with using only interrupt 28H for access to the TSR is that many application programs do not issue calls for DOS functions 01H through 0CH. Therefore, interrupt 28H is not generated when these applications are running. Another interrupt must be used to activate the TSR from these applications. The handler for this interrupt must check INDOS before executing the TSR, because nothing is known about the status of the MS-DOS stacks when the interrupt is invoked.

My experience with TSRs indicates that any MS-DOS function can be called from a TSR if the INDOS flag equals zero. However, if the TSR is activated by interrupt 28H, the INDOS flag will not equal zero, and the system will probably crash if functions 01H through 0CH are used. Since functions 01H through 0CH can be replaced by ROM BIOS calls, the simplest solution is not to use functions 01H through 0CH in a TSR.

Critical Error

A *critical error* occurs when a peripheral device is needed by MS-DOS, but the device is not available. Typical situations causing a critical error are open drive doors or printers that are off-line.

When a critical error occurs, MS-DOS sets a *critical error flag* and invokes interrupt 24H. Interrupt 24H is a call to the critical error handler that is responsible for recovering from the critical error. Most users of MS-DOS are familiar with the `Abort, Retry, Fail?` message, which is displayed by the critical error handler when a drive door is left open.

Executing a TSR while a critical error is being processed can cause the system to crash. Therefore, before you execute a TSR, always check the status of the critical error flag. If the flag is clear, execution can proceed. The

address of the critical error flag is obtained by using (undocumented) DOS function 5DH, subfunction 6. On return from the call, ES contains the flag's segment address, and BX contains its offset. This function is demonstrated as part of the program presented at the end of this chapter.

Programmers must also consider how their TSR will handle critical errors. The simplest course is to make no provisions for critical errors. In that case, the TSR will rely on the critical error handler for the program that was interrupted by the TSR. Such an arrangement will suffice if a TSR does not perform disk I/O. However, if you are writing a TSR that performs disk I/O, you should consider writing a critical error handler for the TSR. Each time the TSR is activated, change the interrupt 24H vector to point to the new handler. Each time the TSR terminates, change the vector so that it points to the old handler.

File Handles and TSRs

Whenever MS-DOS loads a program into memory, it assigns the program a *process ID*. In all cases, the process ID is nothing more than the segment address of the program's PSP. The current process ID is the ID of the program currently running. MS-DOS stores this ID internally and uses it when a program accesses a file through the use of file handles. Recall from chapter 11 that each program stores a list of file handles in its PSP. When MS-DOS receives a request to access a file, the operating system sees which process ID is current and looks in the corresponding PSP to locate the file handle.

Unfortunately, when a TSR executes, MS-DOS does not change the current process ID. The operating system considers the application that was running to be the current one. It is the responsibility of the programmer to make the TSR current. The TSR is made current as follows:

1. MS-DOS function 51H is used to obtain the current ID. This is the ID of the program that was running when the TSR was invoked. The function returns the ID in BX. The ID is saved for later use.

   Function 51H is not documented but is implemented in MS-DOS 2, 3, and 4. It is documented in DOS 5. Function 51H is identical to function 62H.

2. MS-DOS function 50H, undocumented prior to DOS 5, is used to set the current ID equal to the TSR's PSP address. Before the function is called, BX is set to equal the PSP address. This can be accomplished by pushing CS to the stack and popping BX.

   Once the TSR is made current, it can use the file handles that are stored in its PSP.

3. Prior to returning to the application, the TSR uses function 50H to restore the current ID to the value it had before executing the TSR.

As was mentioned earlier, functions 50H and 51H use DOS stack number 2 under MS-DOS 2.X. This causes a serious problem, because it groups these two functions with functions 01H through 0CH. If we follow the guidelines discussed previously, functions 50H and 51H should be avoided in TSRs running under MS-DOS 2.X. Fortunately, there is a way to fool MS-DOS and get around this problem.

When the critical error flag is set, MS-DOS thinks a critical error is being processed. Under these conditions MS-DOS uses stack number 3 in place of stack number 2. Thus, a TSR running under MS-DOS 2.X can set the critical error flag, use functions 50H and 51H, and then clear the critical error flag.

POPCLOCK—An Example of a TSR

POPCLOCK.ASM (listing 13-1) is a TSR program that implements a pop-up clock. You will need an assembler, such as Microsoft's Macro Assembler, for this program. Once the program is loaded, the clock will pop up whenever the left and right shift keys are simultaneously pressed. POPCLOCK runs under MS-DOS 2.0 and later versions. POPCLOCK works with monochrome, CGA, EGA, and VGA adapters, although the clock will not pop up if the display is in graphics mode.

POPCLOCK is presented to illustrate the points about TSRs that are discussed in this chapter. As you can see from the length of listing 13-1, even simple TSRs such as POPCLOCK tend to be long programs. It is important to recognize, however, that a lot of the code in POPCLOCK is generic, in the sense that it can be used again in other programs. Therefore, once you have the code for one TSR, much of the work for subsequent TSRs is already done.

To make our discussion more manageable, we will divide POPCLOCK.ASM into four parts and discuss each separately. The four parts are: lines 22–72, lines 73–202, lines 203–483, and lines 484–589.

Lines 22–72 of the listing declare the variables used by the program. These variables will be explained as they are used.

Lines 73–202 make up the new interrupt handlers used by POPCLOCK. The program uses new handlers for the following interrupts:

Interrupt	Function
8H	Timer
9H	Keyboard hardware
10H	ROM BIOS video service
13H	ROM BIOS disk service
28H	MS-DOS scheduler

Lines 203–483 form the main portion of the TSR. This is the code that is executed each time the clock pops up.

Lines 484–589 make up the initialization portion of POPCLOCK. This section of code is executed once at load time and then discarded.

We will discuss the initialization portion of the program first, followed by the handlers and the main portion of the TSR.

Initialization

POPCLOCK is executed as a COM file; therefore, the first executable instruction in the program must be at offset 100H. The directive `org 100h` ensures that this is the case. The first instruction (line 20 of the listing) is a jump to `init`. Initialization begins (lines 495–498) by using MS-DOS function 34H to obtain the segment and offset address of the INDOS flag. The address is stored using two variables local to the program.

Next, the address of the critical error flag is obtained using DOS function 5DH, subfunction 6. The offset is saved in local variable `errflag_off`. Notice that it is necessary to restore DS on return from the call. This is because the segment address of the error flag is returned in DS. Saving the segment address is not required, because the critical error flag and the INDOS flag are always located in the same segment (in fact, the critical error flag is sometimes called INDOS2).

Lines 529–574 reset the interrupt vector table. For each of the interrupt vectors modified (8H, 9H, 10H, 13H, and 28H), function 35H is used to retrieve the original vector value, each original value is saved as two variables, and function 25H is then used to reset the vector so that it points to the new handler. Let's walk through the first one to clarify this.

In line 531, a value of 35H is placed in AH and a value of 08H is placed in AL. This indicates a request for MS-DOS function 35H (get interrupt vector) and specifies the vector for interrupt 8H. The segment address contained in the vector is returned in ES, the offset in BX. These values are saved as local variables in lines 533 and 534.

In line 536, a value of 25H is placed in AH and a value of 08H placed in AL. This indicates a request for DOS function 25H (set interrupt vector) and

specifies the vector for interrupt 8H. Prior to the call, the offset value for the new vector is placed in DX and the segment value in DS. The procedure `new8_hndlr` (line 76) is the new handler for interrupt 8H. Therefore, we want DX to store the offset of `new8_hndlr` and DS to store the segment. Notice that it is not necessary to place the segment address in DS, because DS already points to the correct segment. On return from the call, `new8_hndlr` is the new handler for interrupt 8H.

The process just described is repeated for the other interrupts used by the TSR. The program then displays a message stating that POPCLOCK is installed (lines 578–580). Notice that in the initialization portion of the program there is no concern about using MS-DOS functions 01H through 0CH. This is because during initialization the TSR owns the show. MS-DOS treats it like any other program. It is only when the TSR reexecutes by way of the modified interrupt table that issues of reentry must be considered.

Once the loaded message is displayed, initialization is complete and the program is ready to terminate but remain resident (lines 582–587). As mentioned earlier in the chapter, DOS function 31H requires that the amount of memory that is to remain allocated to the program be specified in DX. In order to determine how much memory is required, a dummy variable (line 482) is placed at the end of the portion of the program that is to remain resident. The number of bytes to save is simply the difference between the dummy variable's offset minus the offset of the start of the program. Adding 15 bytes rounds the block up to the next highest paragraph. In line 585, the block size is divided by 16 to give the number of paragraphs to keep. Finally, the AX register is set to request function 31H, and MS-DOS is called. The call now returns control back to MS-DOS, and POPCLOCK is resident in memory. Notice that the initialization portion of the code loses its memory allocation. The program is written this way because the initialization code is not needed after the program is loaded.

The Interrupt Handlers

Once initialization is completed, all of the new interrupt handlers are active. We will now discuss them one at a time, starting with the simplest and working our way up.

Interrupt 10H

The new handler for interrupt 10H is listed in lines 146–152. Recall that int 10H is the ROM BIOS video service. The purpose of the new handler is to set a flag each time int 10H is called. The flag will ensure that the clock does not pop up while a call to the video service is in progress. Such an event, if allowed to occur, could make a mess of the screen.

The new handler also chains to the old handler. This has to be done or the video service requests would not be processed. Before calling the old int 10H handler, the new handler must push the flags register to the stack (line 147). This is necessary because the original int 10H handler thinks it is being called by way of an interrupt rather than a procedure call. Therefore, the final instruction in the original handler is `iret` rather than `ret`. Recall that an `iret` instruction pops the segment address, the offset address, and the flags from the stack. If the flags were not pushed, something else would be popped, the stack would be out of sync, and some sort of system failure would no doubt ensue.

After pushing the flags, the handler increments `video_flag` and then chains to the original handler. On return, `video_flag` is decremented. The new handler then terminates with an `iret` instruction.

Interrupt 13H

The new handler (lines 157–165) for interrupt 13H (ROM BIOS disk service) is almost identical to the new handler for interrupt 10H. In this case, `disk_flag` is set each time the handler is called. This will ensure that no pop-ups occur while the disk is being accessed. Such an event could confuse the system, and data might be lost in the process.

There are some differences in `new13_hndlr` that should be explained. The original 13H handler sets the flag register according to the outcome of the service request. The new handler is written so that this information can be transmitted back to the original caller. First, notice that the flags are pushed in line 161. This is necessary because the decrement in the next line may affect the flags. After the decrement, the flags are popped and a `ret 2` is issued. This instruction tells MS-DOS to return to the caller and discard 2 bytes from the stack. But notice that `new13_hndlr` is declared as a `far` procedure. This means that when the `ret` is issued, MS-DOS pops a segment and offset address from the stack. The 2 bytes thrown away are the flags register, which was pushed when the new int 13H handler was originally called.

Interrupt 9H

Interrupt 9H is an interrupt generated by the hardware each time that a key is pressed or released. The new handler (lines 122–141) chains to the old handler, then uses function 2 of interrupt 16H to determine if the right and left shift keys are depressed. This function reads the byte at address 0000:0417H and stores the value in AL. This byte is set as follows:

If This Key Is Pressed	*This Bit Is Set*
Insert	7
Caps Lock	6
Num Lock	5
Scroll Lock	4
Alt	3
Ctrl	2
Left Shift	1
Right Shift	0

On return from the call to interrupt 16H, the handler executes `and al, 0fh` (line 130). This clears all the bits in AH and leaves AL unchanged. The next line compares the value in AL to 3. AL will equal 3 if the right and left shift keys are pressed. This is the signal to pop the clock. If the compare is false, the hot keys have not been pressed, so the handler jumps to the exit (line 133).

If the compare was true, the handler must continue. In line 135 the handler checks the value of `running_flag`. This flag is set by the main portion of the TSR each time that the clock is popped. The flag is cleared when the TSR exits. Therefore, if `running_flag` is set (not equal to zero), the clock is already popped and the handler exits. If `running_flag` is equal to zero, the clock is not currently popped. In this case, the handler sets `hotkey` equal to 18. The handler then exits (line 140) by an `iret`. The variable `hotkey` signals the handlers for interrupts 8H and 28H that the hot key combination has been pressed. The reasons for setting `hotkey` equal to 18 are discussed next.

Interrupt 8H

Interrupt 8H is the hardware timer interrupt. It is generated by the system's timer chip 18.2 times a second. Once POPCLOCK is loaded into memory, the new handler for interrupt 8H (lines 76–117) is called 18.2 times a second.

The first thing the new handler does is chain to the old handler (lines 77–78). The new handler then checks whether `hotkey` equals zero. If it does, the handler exits.

If `hotkey` is nonzero, the new handler checks whether `video_flag` or `disk_flag` is nonzero. Recall that these flags are set and cleared in the new handlers for interrupts 10H and 13H. If either of these flags is nonzero, we do not want to pop the clock. Accordingly, the program will jump to `dec_hkey` (line 114), and `hotkey` is decremented. Therefore, because the handler is called approximately 18 times a second, `hotkey` will remain nonzero for approximately a second if either `video_flag` or `disk_flag` is nonzero.

If both `video_flag` and `disk_flag` equal zero, the handler proceeds to the next step (line 88). The DI and ES register contents are saved, and ES:DI is set to point to the INDOS flag. If `indos` is nonzero, DI and ES are popped, `hotkey` is decremented, and the handler exited.

If `indos` equals zero, the handler proceeds. The next step is to check the critical error flag (lines 100–101). If the flag is nonzero, we do not want to pop the clock. ES and DI are popped, `hotkey` is decremented, and the handler is exited.

If the critical error flag equals zero, all is clear to pop the clock. First, ES and DI are popped from the stack (lines 104–105), `hotkey` is set to zero, and `do_it` (the main portion of the TSR) is called.

Interrupt 28H

Interrupt 28H provides the other "hook" into POPCLOCK. The new handler (lines 170–201) is very similar to the new handler for interrupt 8H. The only difference is that this handler does not need to check the INDOS flag. Recall that int 28H is called only when `indos` is set. However, int 28H also indicates that it is safe to use MS-DOS as long as certain precautions are followed (for example, staying away from DOS functions 01H–0CH).

As should *always* be done, the new int 28 handler chains to the old handler. The flags `hotkey`, `video_flag`, and `disk_flag` are checked as in the int 8H handler. If these flags check out correctly, the critical error flag is checked. If the flag equals zero, all is clear to pop the clock. The `hotkey` flag is set to zero, and `do_it` is called (line 197).

Popping the Clock

The portion of the program that actually displays the clock is the procedure `do_it` (lines 206–480). It is important to bear in mind that when `do_it` gets control, the only registers whose status is known are CS and IP. The other registers, particularly the other segment registers, have the values that were being used when the hot keys were pressed. Before `do_it` can use DS, SS, or ES, the registers must be set appropriately.

The first thing `do_it` does is set `running_flag`. This prevents the int 9H handler from setting `hotkey` while the clock is popped (refer back to lines 135–136).

Next, `do_it` sets up a local stack (lines 211–217). This is necessary to avoid disturbing the MS-DOS stack. The first step in setting up a local stack is disabling the interrupts (line 211). This is important because if an interrupt occurs before both SS and SP have been reset, the system could crash. Once the interrupts are disabled, the values in SS and SP are saved in local

variables, SS is set to equal CS (the local segment), and SP is set to point at the top of the local stack. Once the local stack is established, interrupts are enabled (line 217).

The contents of the MS-DOS registers are saved on the local stack (lines 219–227). Next, the ROM BIOS service is used to see if the display is in graphics mode (lines 231–236). If graphics are enabled, the program jumps to line 240, the stack is popped, the MS-DOS stack is reactivated, and the program issues a `ret`, which sends control back to either the new int 8H handler or the new int 28H handler. The handlers then issue an `iret` (line 110 or 200), and POPCLOCK is exited.

If the display is not in graphics mode, it is time to display the clock. Lines 259 through 263 save the cursor's position and size so that they can be restored when POPCLOCK exits.

The ROM BIOS Video Services

Because TSRs should avoid DOS functions 01H–0CH, they must rely on the ROM BIOS video services for output to the screen. The ROM BIOS video services are accessed via interrupt 10H. Before the call, a function number is placed in AH. This determines which service is provided. The ROM BIOS video services used by POPCLOCK are described here. Appendix A contains additional information on the use of the ROM BIOS interrupts.

Table 13-1 summarizes the AH values of int 10H by function.

Table 13-1. AH Values of Int 10H

AH Value on Call	*Function*
01H	**Set cursor type**. On the call, the first 4 bits in CH store the cursor's starting line and the first 4 bits in CL store the cursor's ending line.
02H	**Set cursor position**. On the call, BH contains the page number, DH contains the *y* coordinate of the cursor, and DL contains the *x* coordinate of the cursor.
03H	**Get cursor position**. On the call, BH contains the page number. On return, CH contains the starting line of the cursor, CL contains the ending line of the cursor, DH contains the cursor's *y* coordinate, and DL contains

continues

Table 13-1. continued

AH Value on Call	*Function*
	the cursor's *x* coordinate. Note that the starting and ending line determine the cursor's size, not its position.
07H	**Scroll window down**. On the call, AL contains the number of lines to scroll, BH contains the attribute used for the blanked area, CH contains the upper left *y* coordinate of the window, CL contains the upper left *x* coordinate of the window, DH contains the lower right *y* coordinate of the window, and DL contains the lower right *x* coordinate of the window. If AL equals zero on the call, the entire window is blanked.
08H	**Read attribute and character at cursor.** On the call, BH contains the page number. On return, AH contains the attribute byte, and AL contains the ASCII character byte.
09H	**Write character and attribute.** On the call, AL contains the ASCII character byte, BH contains the page number, BL contains the attribute byte, and CX contains the number of times the character is to be written. The character is written at the current position of the cursor. This function does not advance the cursor.
0AH	**Write character only.** On the call, AL contains the ASCII character byte, BH the page number, BL the color byte (if in graphics mode), and CX the number of times the character is to be written.
0FH	**Get display mode.** On return, AH contains the number of character columns on the screen, AL contains the display (0–3 and 7 are text), and BH contains the active page number.

Lines 276–295 use a nested loop to save the contents of the screen that will be covered by the clock. The inner loop is traversed once for each character saved. The outer loop is traversed once for each line saved.

Lines 299–316 create the window. Interrupt 10H, function 07H is called twice to create a window with a border around it. Lines 320–366 display the text contained in lines 62–63 of the listing.

Line 371 calls the procedure `gettime` (lines 449–480), which uses DOS function 2CH to get the current time. DOS function 2CH can be used safely, because it is not in the forbidden range of 01H–0CH.

Lines 368–396 display the time (finally!!), which is stored in the variables listed in lines 64–71.

Lines 394–395 call the keyboard BIOS service to check on the keyboard's status. If no key is pressed, the service returns with the zero flag set. If this is the case, the test at line 396 is true and the time display loop is traversed again. If a key is pressed, the BIOS function returns with the zero flag clear, the test at line 396 is false, and the loop is exited. On exiting from the loop, the character input by the user is discarded so that it will not interfere with whatever program is continued when POPCLOCK terminates.

Lines 401–433 restore the screen in a manner similar to that used in saving the screen's contents. Lines 435–443 restore the cursor to the position and size it had when the clock was popped.

Finally, the jump at line 445 sends execution back to line 240. The MS-DOS registers are restored, and the MS-DOS stack is reestablished. The `ret` at line 255 sends things back to either the int 8H handler or the int 28H. In either case, the handler issues an `iret` and the program continues where it left off when the hot keys were pressed.

Listing 13-1. Pop-up clock TSR program.

```
1   ;*************************************************************
2   ;                          POPCLOCK.ASM
3   ;
4   ;  A memory-resident program that provides a pop-up clock.
5   ;  DOS 2.0 or later version required.
6   ;  To create an executable version of this program, enter
7   ;  the following commands:

8   ;       C:\>masm popclock ;;;
9   ;       C:\>link popclock ;;;;
10  ;       C:\>exe2bin popclock popclock.com
11  ;       C:\>popclock
12  ;*************************************************************
13
14  cseg    segment         para public 'code'
15
16  assume  cs:cseg
17      org  100h  ;required for COM programs
18
19  begin:
```

continues

Listing 13-1. continued

```
20        jmp  init
21
22    ;*****************************************************************
23    ;Declare program variables
24    ;*****************************************************************
25    old8_hndlr      label dword     ;old int 8h handler
26    old8_off        dw        ?
27    old8_seg        dw        ?
28    old9_hndlr      label dword     ;old int 9h handler
29    old9_off        dw        ?
30    old9_seg        dw        ?
31    old10_hndlr     label dword     ;old int 10h handler
32    old10_off       dw        ?
33    old10_seg       dw        ?
34    old13_hndlr     label dword     ;old int 13h handler
35    old13_off       dw        ?
36    old13_seg       dw        ?
37    old28_hndlr     label dword     ;old int 28h handler
38    old28_off       dw        ?
39    old28_seg       dw        ?
40
41    hotkey          db        0     ;greater than 0 if hotkey pressed
42    video_flag      db        0     ;int 10h flag
43    disk_flag       db        0     ;int 13h flag
44    running_flag    db        0     ;equals 1 if program running
45
46
47    indos_off       dw        ?     ;offset of indos flag
48    indos_seg       dw        ?     ;segment of indos flag
49    errflag_off     dw        ?     ;offset of critical error flag
50
51    cur_pos         dw        ?     ;saves cursor's position
52    cur_size        dw        ?     ;saves cursor's size
53    sp_save         dw        ?     ;stores MS-DOS stack pointer
54    ss_save         dw        ?     ;stores MS-DOS SS register
55    screen_buf      dw 174 dup(?)   ;buffer to save screen contents
56
57                    db 255 dup ("#") ;local stack
58    stk_top         db         ("#") ;top of local stack
59
60    load_msg        db "POPCLOCK Installed",0dh,0ah
61                    db "Right & left shift to activate",0dh,0ah,"$"
62    brk_msg         db "Any key to continue"
63    time_msg        db "Current time is "
64    hour10          db        ?     ;store time of day
65    hour            db        ?
66                    db        ":"
```

```
67   min10          db        ?
68   min            db        ?
69                  db        ":"
70   sec10          db        ?
71   sec            db        ?
72   dos1_msg       db        "DOS 2.X or later required",0dh,0ah,"$"
73   ;*****************************************************
74   ;New handler for int 8h (timer)
75   ;*****************************************************
76   new8_hndlr     proc      near
77        pushf                          ;simulate INT
78        call old8_hndlr                ;chain to old handler
79
80        cmp  hotkey,0                  ;hotkey pressed?
81        je   hkey0                     ;if no, exit
82
83        cmp  video_flag,0              ;int 10h busy?
84        jne  dec_hkey                  ;if yes, dec. hotkey flag
85        cmp  disk_flag,0               ;int 13h busy?
86        jne  dec_hkey                  ;if yes, dec. hotkey flag
87
88        push di                        ;save registers
89        push es
90
91        ;Check value of indos flag.
92        ;
93        mov  di,indos_off              ;offset of flag
94        mov  es,indos_seg              ;segment of flag
95        cmp  byte ptr es:[di],0
96        jne  pop_stk                   ;exit if DOS busy
97
98        ;Check critical error flag.
99        ;
100       mov  di,errflag_off            ;offset of flag
101       cmp  byte ptr es:[lb]di],0
102       jne  pop_stk                   ;exit if flag set
103
104       pop  es                        ;restore registers
105       pop  di
106       mov  hotkey,0                  ;clear hotkey flag
107       call do_it                     ;run program
108
109  hkey0:
110       iret
111  pop_stk:
112       pop  es
113       pop  di
```

continues

Listing 13-1. continued

```
114   dec_hkey:
115       dec  hotkey
116       iret                          ;return to MS-DOS
117   new8_hndlr     endp
118
119   ;*************************************************************
120   ;New handler for int 9h (keyboard hardware interrupt)
121   ;*************************************************************
122   new9_hndlr     proc      near
123       sti                           ;enable interrupts
124       pushf                         ;simulate INT
125       call old9_hndlr
126
127       push ax                       ;save ax
128       mov  ah,2                     ;get shift key status
129       int  16h                      ;call BIOS keyboard routine
130       and  al,0Fh
131       cmp  al,3                     ;right and left shift pressed?
132       pop  ax
133       jne  exit_9                   ;if no, exit
134
135       cmp  running_flag,0           ;program already running?
136       jne  exit_9                   ;if yes, exit
137
138       mov  hotkey,18                ;hotkey active
139   exit_9:
140       iret                          ;return to MS-DOS
141   new9_hndlr     endp
142
143   ;*************************************************************
144   ;New handler for int 10h (ROM BIOS video service)
145   ;*************************************************************
146   new10_hndlr    proc      near
147       pushf                         ;simulate INT
148       inc  video_flag
149       call old10_hndlr
150       dec  video_flag
151       iret
152   new10_hndlr    endp
153
154   ;*************************************************************
155   ;New handler for int 13h (ROM BIOS disk service)
156   ;*************************************************************
157   new13_hndlr    proc      far
158       pushf                         ;simulate INT
159       inc   disk_flag
160       call  old13_hndlr
```

```
161         pushf                           ;protect flags
162         dec   disk_flag
163         popf                            ;restore flags
164         ret   2                         ;return to MS-DOS; discard 2 bytes
165     new13_hndlr     endp
166
167     ;*************************************************************
168     ;New handler for int 28h (DOS scheduler)
169     ;*************************************************************
170     new28_hndlr     proc      near
171         pushf                           ;simulate INT
172         call old28_hndlr                ;chain to old handler
173
174
175         cmp  hotkey,0                   ;hotkey pressed?
176         je   exit28                     ;if no, exit
177
178         cmp  video_flag,0               ;int 10h busy?
179         jne  exit28                     ;if yes, exit
180         cmp  disk_flag,0                ;int 13h busy?
181         jne  exit28                     ;if yes, exit
182
183         push di                         ;save registers
184         push es
185
186
187         ;Check critical error flag.
188         ;
189         mov  es,indos_seg
190         mov  di,errflag_off             ;offset of flag
191         cmp  byte ptr es:[di],0
192         pop  es                         ;restore registers
193         pop  di
194         jne  exit28
195
196         mov  hotkey,0                   ;clear hotkey flag
197         call do_it                      ;run program
198
199     exit28:
200         iret                            ;return to MS-DOS
201     new28_hndlr     endp
202
203     ;*************************************************************
204     ;DO_IT—Main portion of POPCLOCK
205     ;*************************************************************
206     do_it     proc  near
207         mov  running_flag,1             ;set running flag
```

continues

Listing 13-1. continued

```
208
209     ;Set up local stack and save DOS registers.
210         ;
211         cli                         ;disable interrupts
212         mov  sp_save,sp             ;save MS-DOS stack pointer
213         mov  ss_save,ss             ;save MS-DOS SS register
214         push cs
215         pop  ss                     ;local stack segment
216         mov  sp,offset stk_top      ;top of local stack
217         sti                         ;enable interrupts
218
219         push ax                     ;save MS-DOS registers
220         push bx                     ;on local stack
221         push cx
222         push dx
223         push si
224         push di
225         push ds
226         push es
227         push bp
228
229     ;Check display mode, exit if in graphics mode.
230         ;
231         mov  ah,0Fh                 ;get display mode function
232         int  10h                    ;call BIOS video service
233         cmp  al,3
234         jbe  get_cursor
235         cmp  al,7
236         je   get_cursor
237
238       ;Restore DOS stack and return to caller.
239         ;
240   exit: pop  bp
241         pop  es
242         pop  ds
243         pop  di
244         pop  si
245         pop  dx
246         pop  cx
247         pop  bx
248         pop  ax
249
250         cli
251         mov  ss,ss_save
252         mov  sp,sp_save
253         sti
```

```
254         mov  running_flag,0       ;clear flag
255         ret                       ;return to caller
256
257     ;In text mode, so continue.
258         ;
259     get_cursor:
260         mov  ah,03                ;get cursor position, BH has page
261         int  10h                  ;call BIOS
262         mov  cur_pos,dx           ;save cursor's position
263         mov  cur_size,cx          ;save cursor's size
264
265     ;Save contents of window.
266         ;
267         mov  ah,02                ;set cursor position
268         mov  dl,17                ;upper left of window
269         mov  dh,6
270         int  10h
271
272         push cs
273         pop  es                   ;make es local
274         mov  di,offset screen_buf
275         mov  cx,6                 ;save 6 rows
276     loop1:
277         push cx
278         mov  cx,29                ;save 29 columns
279     loop2:
280         cld                       ;clear direction flag
281         mov  ah,8                 ;read attribute and character
282         int  10h
283         stosw                     ;store in buffer
284
285         inc  dl                   ;move cursor to next column
286         mov  ah,02
287         int  10h
288         loop loop2                ;save next character
289
290         mov  dl,17                ;move cursor to start
291         inc  dh                   ;of next row
292         mov  ah,02
293         int  10h
294         pop  cx
295         loop loop1                ;save next row
296
297     ;Make window border.
298         ;
299         push bx                   ;save page number
300         mov  ax,0700h             ;blank a window
```

continues

Listing 13-1. continued

```
301         mov  bh,70h                 ;reverse attribute
302         mov  ch,6                   ;upper left y coordinate
303         mov  cl,17                  ;upper left x coordinate
304         mov  dh,10                  ;lower right y coordinate
305         mov  dl,45                  ;lower right x coordinate
306         int  10h                    ;call ROM video service
307
308     ;Clear window interior.
309         ;
310         mov  ax,0700h               ;blank a window
311         mov  bh,07h                 ;normal attribute
312         mov  ch,7                   ;upper left y coordinate
313         mov  cl,18                  ;upper left x coordinate
314         mov  dh,9                   ;lower right y coordinate
315         mov  dl,44                  ;lower right x coordinate
316         int  10h                    ;call ROM video service
317
318
319     ;Display window contents.
320         ;
321         pop  bx                     ;restore page number
322         mov  ah,02                  ;position cursor
323         mov  dh,10
324         mov  dl,21
325         int  10h
326
327         mov  ah,01h                 ;turn cursor off
328         mov  cx,1000h
329         int  10h
330
331         push cs
332         pop  ds                     ;make ds local
333         mov  si,offset brk_msg      ;quit prompt
334         mov  cx,19                  ;display 19 characters
335         cld                         ;forward direction
336     winloop1:
337         lodsb                       ;byte to AL
338         mov  ah,0ah                 ;write character only
339         push cx                     ;save loop counter
340         mov  cx,1                   ;output 1 time
341         int  10h
342
343         pop  cx                     ;restore loop counter
344         inc  dl
345         mov  ah,02                  ;advance cursor
346         int  10h
```

```
347         loop winloop1               ;display another character
348
349         mov  ah,02                  ;position cursor
350         mov  dh,8
351         mov  dl,19
352         int  10h
353
354         mov  cx,16                  ;display 16 characters
355     winloop2:
356         lodsb                       ;byte to AL
357         mov  ah,0ah                 ;write character only
358         push cx                     ;save loop counter
359         mov  cx,1                   ;output 1 time
360         int  10h
361
362         pop  cx                     ;restore loop counter
363         inc  dl
364         mov  ah,02                  ;advance cursor
365         int  10h
366         loop winloop2               ;display another character
367
368     ;Display time until key pressed.
369         ;
370     timeloop1:
371         call gettime                ;get current time
372
373         mov  ah,02                  ;position cursor
374         mov  dh,8
375         mov  dl,35
376         int  10h
377
378         mov  si,offset hour10
379         mov  cx,8                   ;8 characters to display
380
381     timeloop2:
382         lodsb                       ;byte to AL
383         mov  ah,0ah                 ;write character only
384         push cx                     ;save loop counter
385         mov  cx,1                   ;output 1 time
386         int  10h
387
388         pop  cx                     ;restore loop counter
389         inc  dl
390         mov  ah,02                  ;advance cursor
391         int  10h
392         loop timeloop2
393
394         mov  ah,01                  ;check input status
```

continues

Listing 13-1. continued

```
395         int  16h
396         jz   timeloop1              ;loop if no key pressed
397
398         mov  ah,00
399         int  16h                    ;throw away input
400
401     ;Restore screen and exit.
402         ;
403         mov  ah,02                  ;set cursor position
404         mov  dl,17                  ;upper left of window
405         mov  dh,6
406         int  10h
407
408         mov  si,offset screen_buf ;start of stored display
409         mov  cx,6                   ;restore 6 rows
410     loop11:
411         push cx                     ;save outer loop counter
412         mov  cx,29                  ;restore 29 columns
413     loop12:
414         cld                         ;clear direction flag
415         lodsw                       ;get character/attribute
416         mov  bl,ah                  ;attribute byte
417         mov  ah,9                   ;write character and attribute
418         push cx                     ;save inner loop counter
419         mov  cx,1                   ;write one time
420         int  10h                    ;call BIOS
421         pop  cx                     ;restore inner loop counter
422
423         inc  dl                     ;move cursor to next column
424         mov  ah,02
425         int  10h
426         loop loop12                 ;save next character
427
428         mov  dl,17                  ;move cursor to start
429         inc  dh                     ;of next row
430         mov  ah,02
431         int  10h
432         pop  cx                     ;restore outer loop counter
433         loop loop11                 ;save next row
434
435     ;Restore cursor to its size and position prior to call.
436         ;
437         mov  ah,1                   ;restore size
438         mov  cx,cur_size
439         int  10h
440
```

```
441         mov  ah,2                   ;restore position
442         mov  dx,cur_pos
443         int  10h
444
445         jmp  exit
446
447     do_it     endp                  ;end of main procedure
448
449     gettime   proc  near
450
451         mov  ah,2ch                 ;get time function
452         int  21h                    ;call MS-DOS
453
454     ;Hours returned in ch, minutes in cl, and seconds in dh.
455     ;Convert these to ASCII values and store.
456         ;
457         mov  bl,10
458
459         xor  ah,ah
460         mov  al,ch                  ;hours
461         div  bl
462         or   ax,3030h
463         mov  hour10,al
464         mov  hour,ah
465
466         xor  ah,ah                  ;minutes
467         mov  al,cl
468         div  bl
469         or   ax,3030h
470         mov  min10,al
471         mov  min,ah
472
473         xor  ah,ah                  ;seconds
474         mov  al,dh
475         div  bl
476         or   ax,3030h
477         mov  sec10,al
478         mov  sec,ah
479         ret
480     gettime  endp
481
482     last_byte     db     "$"
483
484     ;*************************************************************
485     ;INITIALIZE—Initializes POPCLOCK
486     ;*************************************************************
```

continues

Listing 13-1. continued

```
initialize      proc      near
assume   ds:cseg                ;variables in this segment


;Locate indos flag.
    ;
init:   mov   ah,34h
    int  21h
    mov  indos_off,bx           ;offset address of flag
    mov  indos_seg,es           ;segment address of flag

;Locate critical error flag.
    ;
    mov  ah,30h                 ;get MS-DOS version
    int  21h
    cmp  al,2
    jg   call5d                 ;function 5dh implemented
    je   calc                   ;MS-DOS 2.X, so calculate address
;Exit if DOS 1.X running.
    ;
    mov  dx,offset dos1_msg
    mov  ah,9
    int  21h
    int  20h                    ;return to MS-DOS
;Must be running 2.X so compute error flag's address.
    ;
calc:   mov   si,bx             ;bx has indos flag
    inc  si
    jmp  save_it
;Locate error flag using 3.X function 5dh.
    ;
call5d:  mov   ah,5dh           ;MS-DOS error function
    mov  al,6                   ;return flag address
    int  21h                    ;call MS-DOS
save_it: push  cs
    pop  ds                     ;reset ds
    mov  errflag_off,si


;Insert new handlers into interrupt chains.
    ;
    mov  ax,3508h               ;get int 8h vector
    int  21h
```

```
533         mov  old8_off,bx            ;save it
534         mov  old8_seg,es
535
536         mov  ax,2508h               ;set vector function
537         mov  dx,offset new8_hndlr
538         int  21h
539
540         mov  ax,3509h               ;get int 09h vector
541         int  21h
542         mov  old9_off,bx            ;save it
543         mov  old9_seg,es
544
545         mov  ax,2509h               ;set vector function
546         mov  dx,offset new9_hndlr
547         int  21h
548
549         mov  ax,3510h               ;get int 10h vector
550         int  21h
551         mov  old10_off,bx           ;save it
552         mov  old10_seg,es
553
554         mov  ax,2510h               ;set vector function
555         mov  dx,offset new10_hndlr
556         int  21h
557
558         mov  ax,3513h               ;get int 13h vector
559         int  21h
560         mov  old13_off,bx           ;save it
561         mov  old13_seg,es
562
563         mov  ax,2513h               ;set vector function
564         mov  dx,offset new13_hndlr
565         int  21h
566
567         mov  ax,3528h               ;get int 28h vector
568         int  21h
569         mov  old28_off,bx           ;save it
570         mov  old28_seg,es
571
572         mov  ax,2528h               ;set vector function
573         mov  dx,offset new28_hndlr
574         int  21h
575
576     ;Display message, then terminate but stay resident.
577         ;
578         mov  dx,offset load_msg
579         mov  ah,09h
```

continues

Listing 13-1. continued

```
580         int  21h
581
582         ;amount of memory to retain in dx
583         mov  dx,(offset last_byte - offset cseg + 15)
584         mov  cl,4
585         shr  dx,cl                  ;convert to paragraphs
586         mov  ax,3100h               ;TSR function
587         int  21h                    ;call MS-DOS
588
589     initialize      endp
590     ;
591     cseg      ends
592         end  begin                  ;end of program
```

CHAPTER

14

MS-DOS Device Drivers

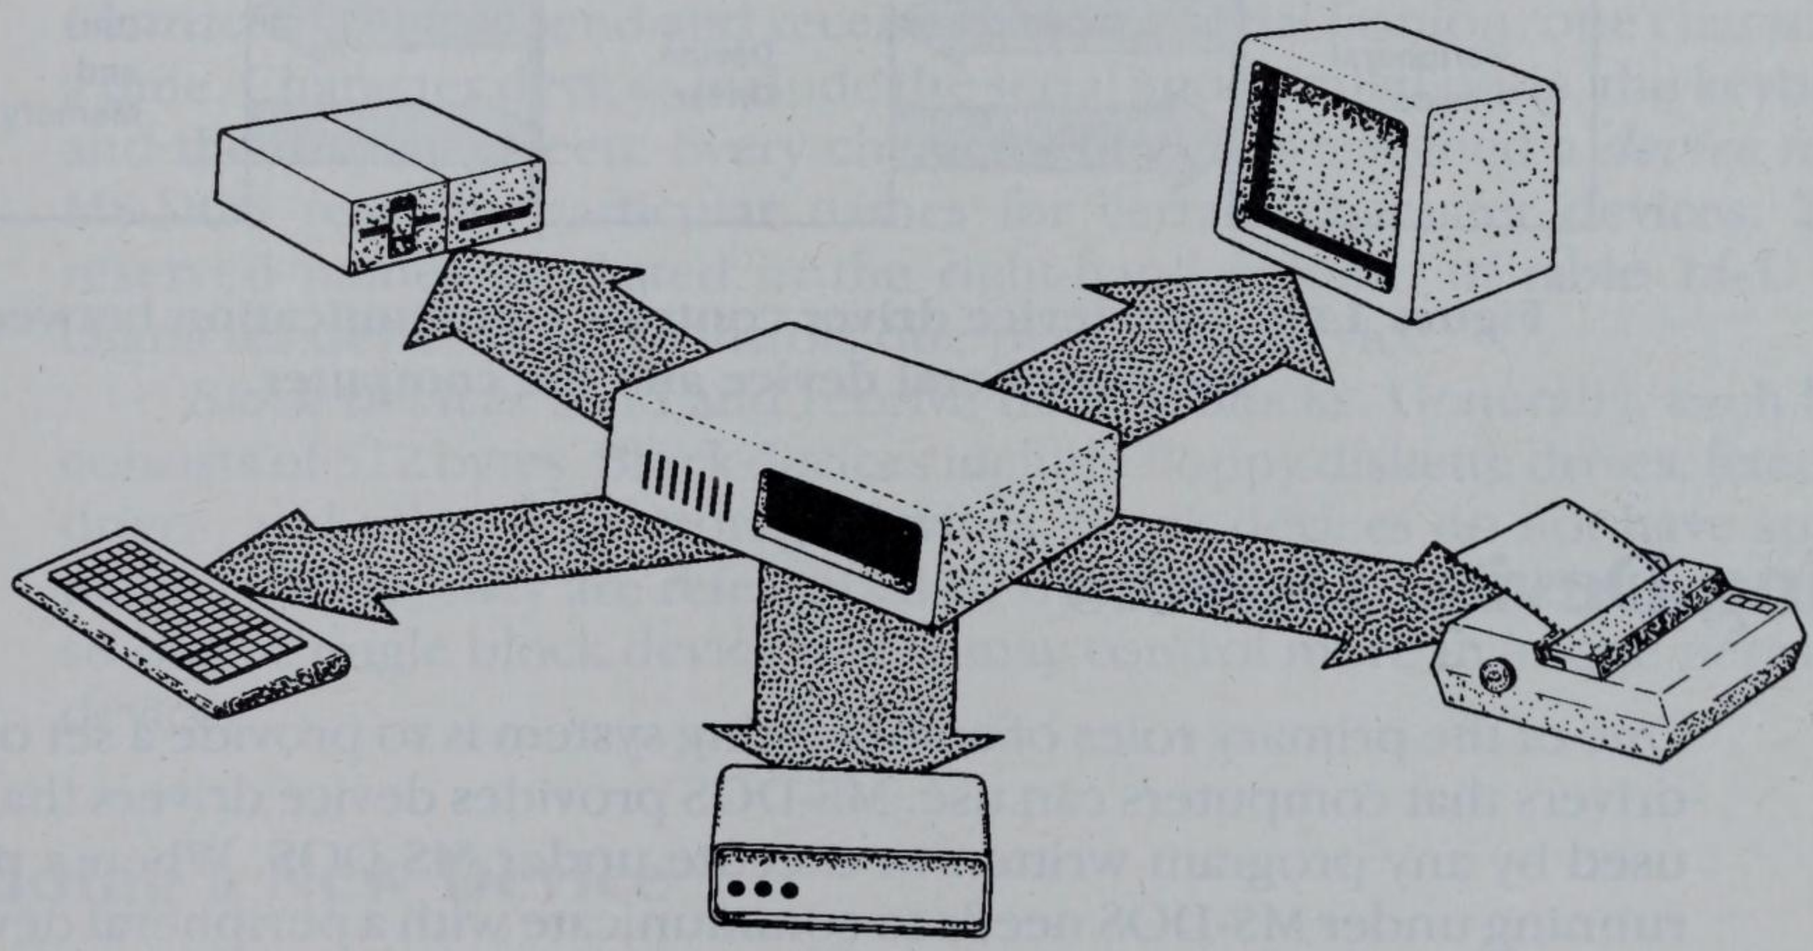

Using Device Drivers
Structure of Device Drivers
Function of Device Drivers
Device Commands

The two essential hardware elements of a computer are the central processing unit (CPU) and computer memory. All the other hardware components (disk drives, keyboards, video displays, printers, modems, mice, and so on) are considered external to the computer. These external components are called *peripheral devices,* or simply *devices.*

Communication between a peripheral device and the computer must be carried out according to strict guidelines determined by the computer and the particular peripheral device. For each peripheral device in a system, a separate computer program is responsible for regulating the communication between that device and the computer. These computer programs are called *device drivers* (figure 14-1). This chapter will discuss MS-DOS device drivers. The major portion of the discussion will center around *installable device drivers*.

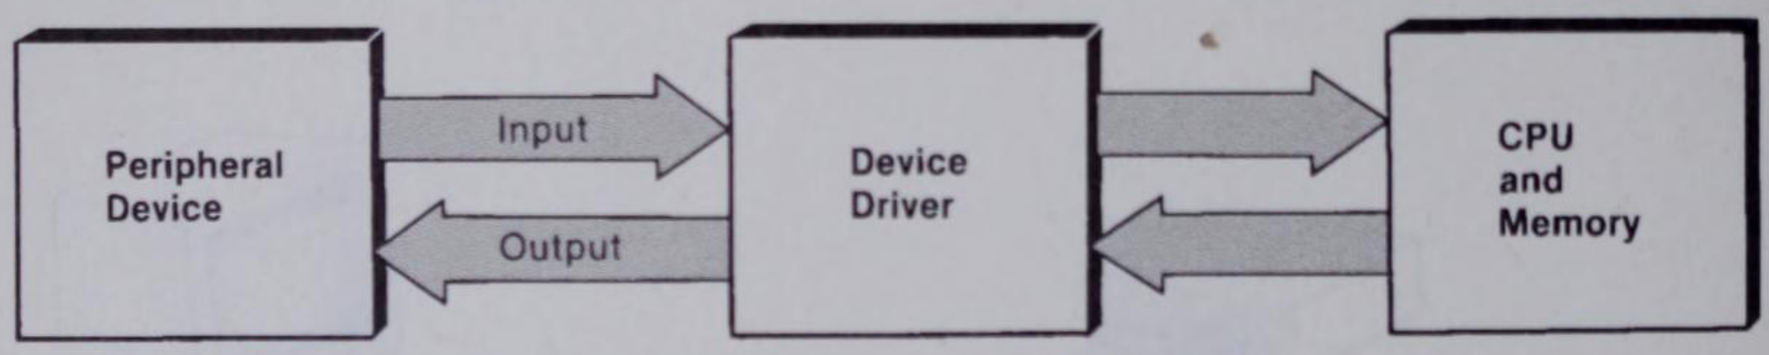

Figure 14-1. The device driver controls communication between the peripheral device and the computer.

Using Device Drivers

One of the primary roles of an operating system is to provide a set of device drivers that computers can use. MS-DOS provides device drivers that can be used by any program written to execute under MS-DOS. When a program running under MS-DOS needs to communicate with a peripheral device, the program tells MS-DOS which device it wants to communicate with and MS-DOS locates the proper device driver. Table 14-1 lists the standard device drivers provided with MS-DOS.

Table 14-1. Standard Peripheral Devices Supported by MS-DOS Device Drivers

Peripheral Device	*Device Type*[1]	*Device Name*
Console (keyboard/screen)	C	CON:
First asynchronous communications port	C	AUX: or COM1:

Peripheral Device	*Device Type*[1]	*Device Name*
Second asynchronous communications port	C	COM2:
First parallel printer	C	PRN: or LPT1:
Second parallel printer	C	LPT2:
Dummy device	C	NUL:
Floppy diskette drive	B	—
Fixed disk drive	B	—

[1]C = character device B = block device.

Character and Block Devices

Character devices send and receive data in a serial fashion, one character at a time. Character devices include the serial and parallel ports, the keyboard, and the display screen. Every character device is assigned a *device name*. MS-DOS reserves particular names for certain character devices. These reserved names are listed in the right-hand column of table 14-1. Each character device driver controls one peripheral device.

Block devices send and receive data in blocks. Generally, each block consists of 512 bytes. Block devices include floppy diskette drives, fixed disk drives, and other mass storage devices. Block devices do not have specific names; rather, they are referenced by drive designator letters (A, B, C, and so on). A single block device driver may control more than one peripheral device.

Adding a New Device

Prior to MS-DOS 2.0, there was no standardized way of adding a new device driver to the operating system. Manufacturers of peripheral devices were forced to modify the PC's BIOS (basic input output system) in order to incorporate their drivers. The problem with this approach was that modifications were often not compatible with each other. MS-DOS 2.0 changed all that with the introduction of installable device drivers.

Installable device drivers are stored as files. The drivers are installed in memory through the use of a text file named CONFIG.SYS. CONFIG.SYS is created by the user and stored in the root directory of the disk used to boot the system. Device drivers are installed by placing the following type of statement in CONFIG.SYS:

```
device=[d:][path]filename
```

During booting, MS-DOS checks whether there is a CONFIG.SYS file. If there is, MS-DOS installs the specified device driver(s).

Chapter 9 discusses the installation and use of ANSI.SYS, an installable console device driver that provides enhanced capabilities for the keyboard and display screen. The remainder of this chapter takes a detailed look at the structure and function of device drivers. The material presented is not required for users of MS-DOS. Some familiarity with assembly language programming will be useful in following the text.

Structure of Device Drivers

MS-DOS *device drivers* are computer programs that are generally written in assembly language. Device drivers consist of three parts: a *device header*, a *strategy routine*, and an *interrupt routine*.

Device Header

The device header (figure 14-2) is an 18-byte-long data structure located at the beginning of each device driver. The device header is made up of five fields: the next header pointer, the device attribute field, the strategy routine, the interrupt routine, and the device name.

Next Header Pointer

The first field of the device header consists of 4 bytes that store the segment and offset addresses of the *next device header*. As we will describe, MS-DOS creates a linked list of the drivers configured into the system. This first field serves as a pointer to the device header of the next driver in the linked list (figure 14-3). The programmer sets the value of this field to 1 (4 bytes of FFH), and MS-DOS inserts the appropriate pointer values as it constructs the linked list. The field retains a value of 1 in the header of the last driver in the linked list.

Device Attribute Field

The second field in the device header consists of 2 bytes that store the *device attribute* field. The bit pattern of this field is set by the programmer to contain descriptive information about the device controlled by the driver (table 14-2). The commands mentioned in table 14-2 are discussed later in this chapter.

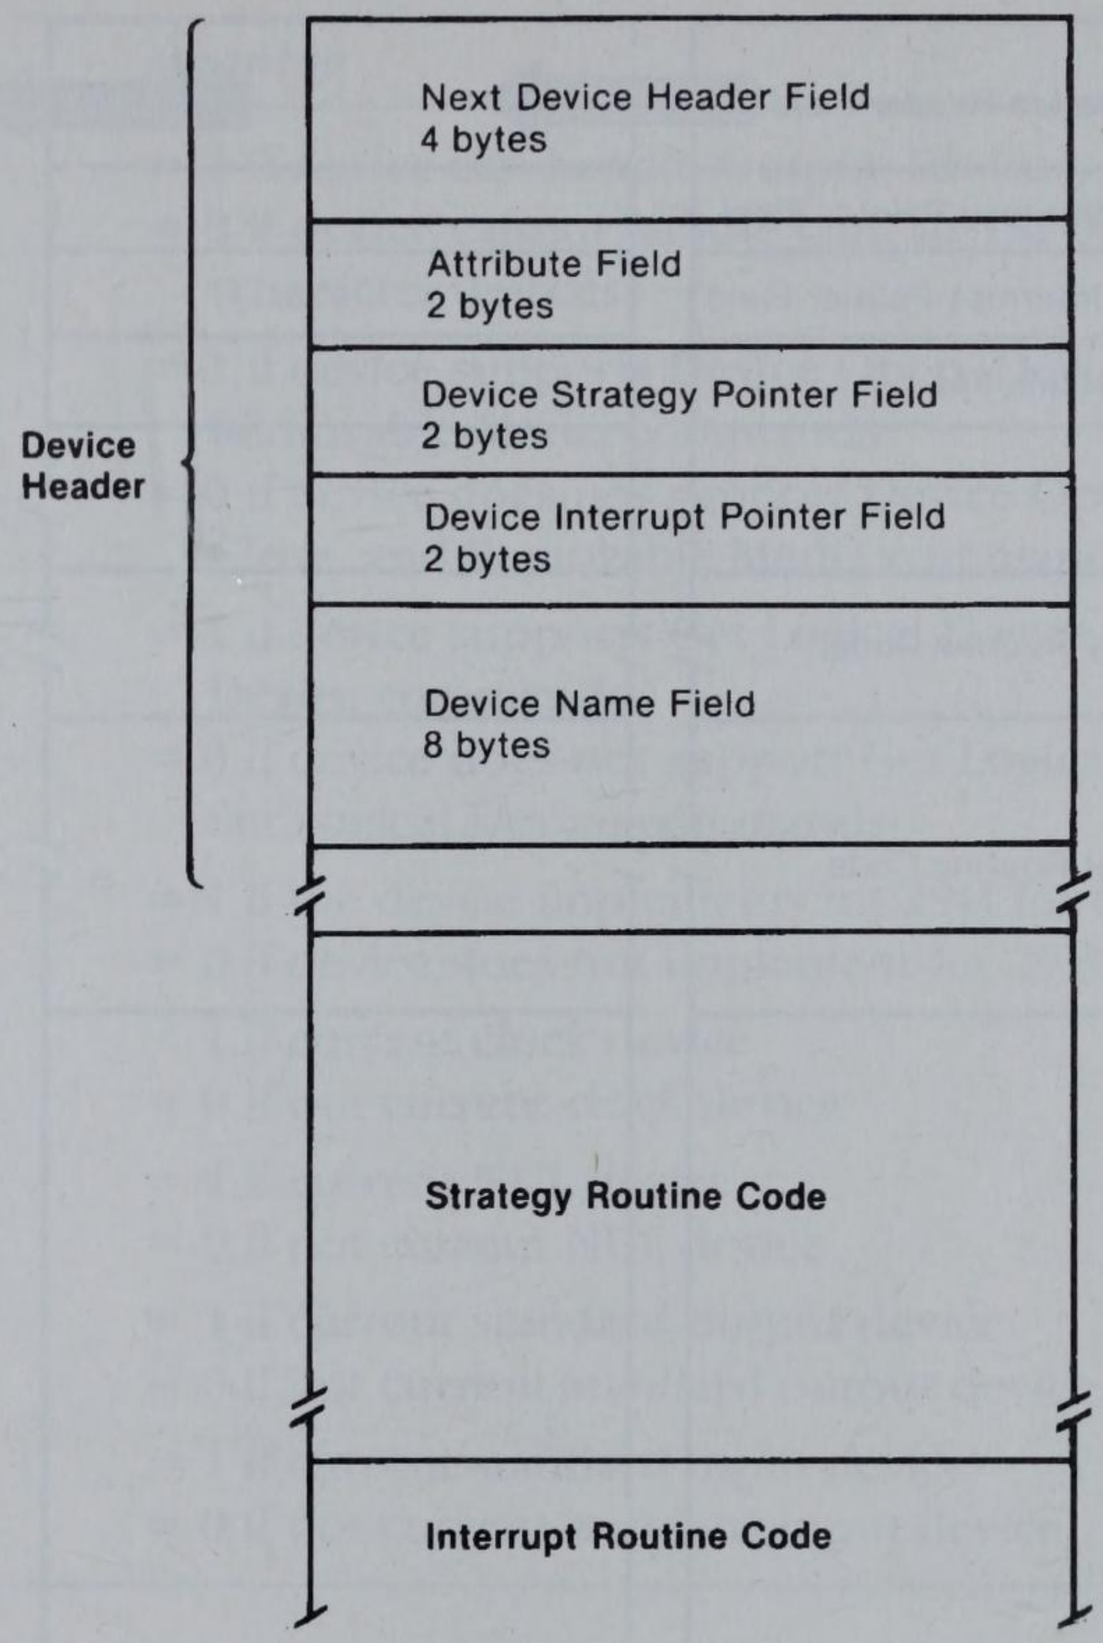

Figure 14-2. Structure of MS-DOS device driver.

Strategy Routine

The third field in the device header stores a 2-byte pointer to the driver's *strategy routine*. The programmer sets the value in this field according to the strategy routine's location within the driver. The strategy routine is discussed later in this chapter.

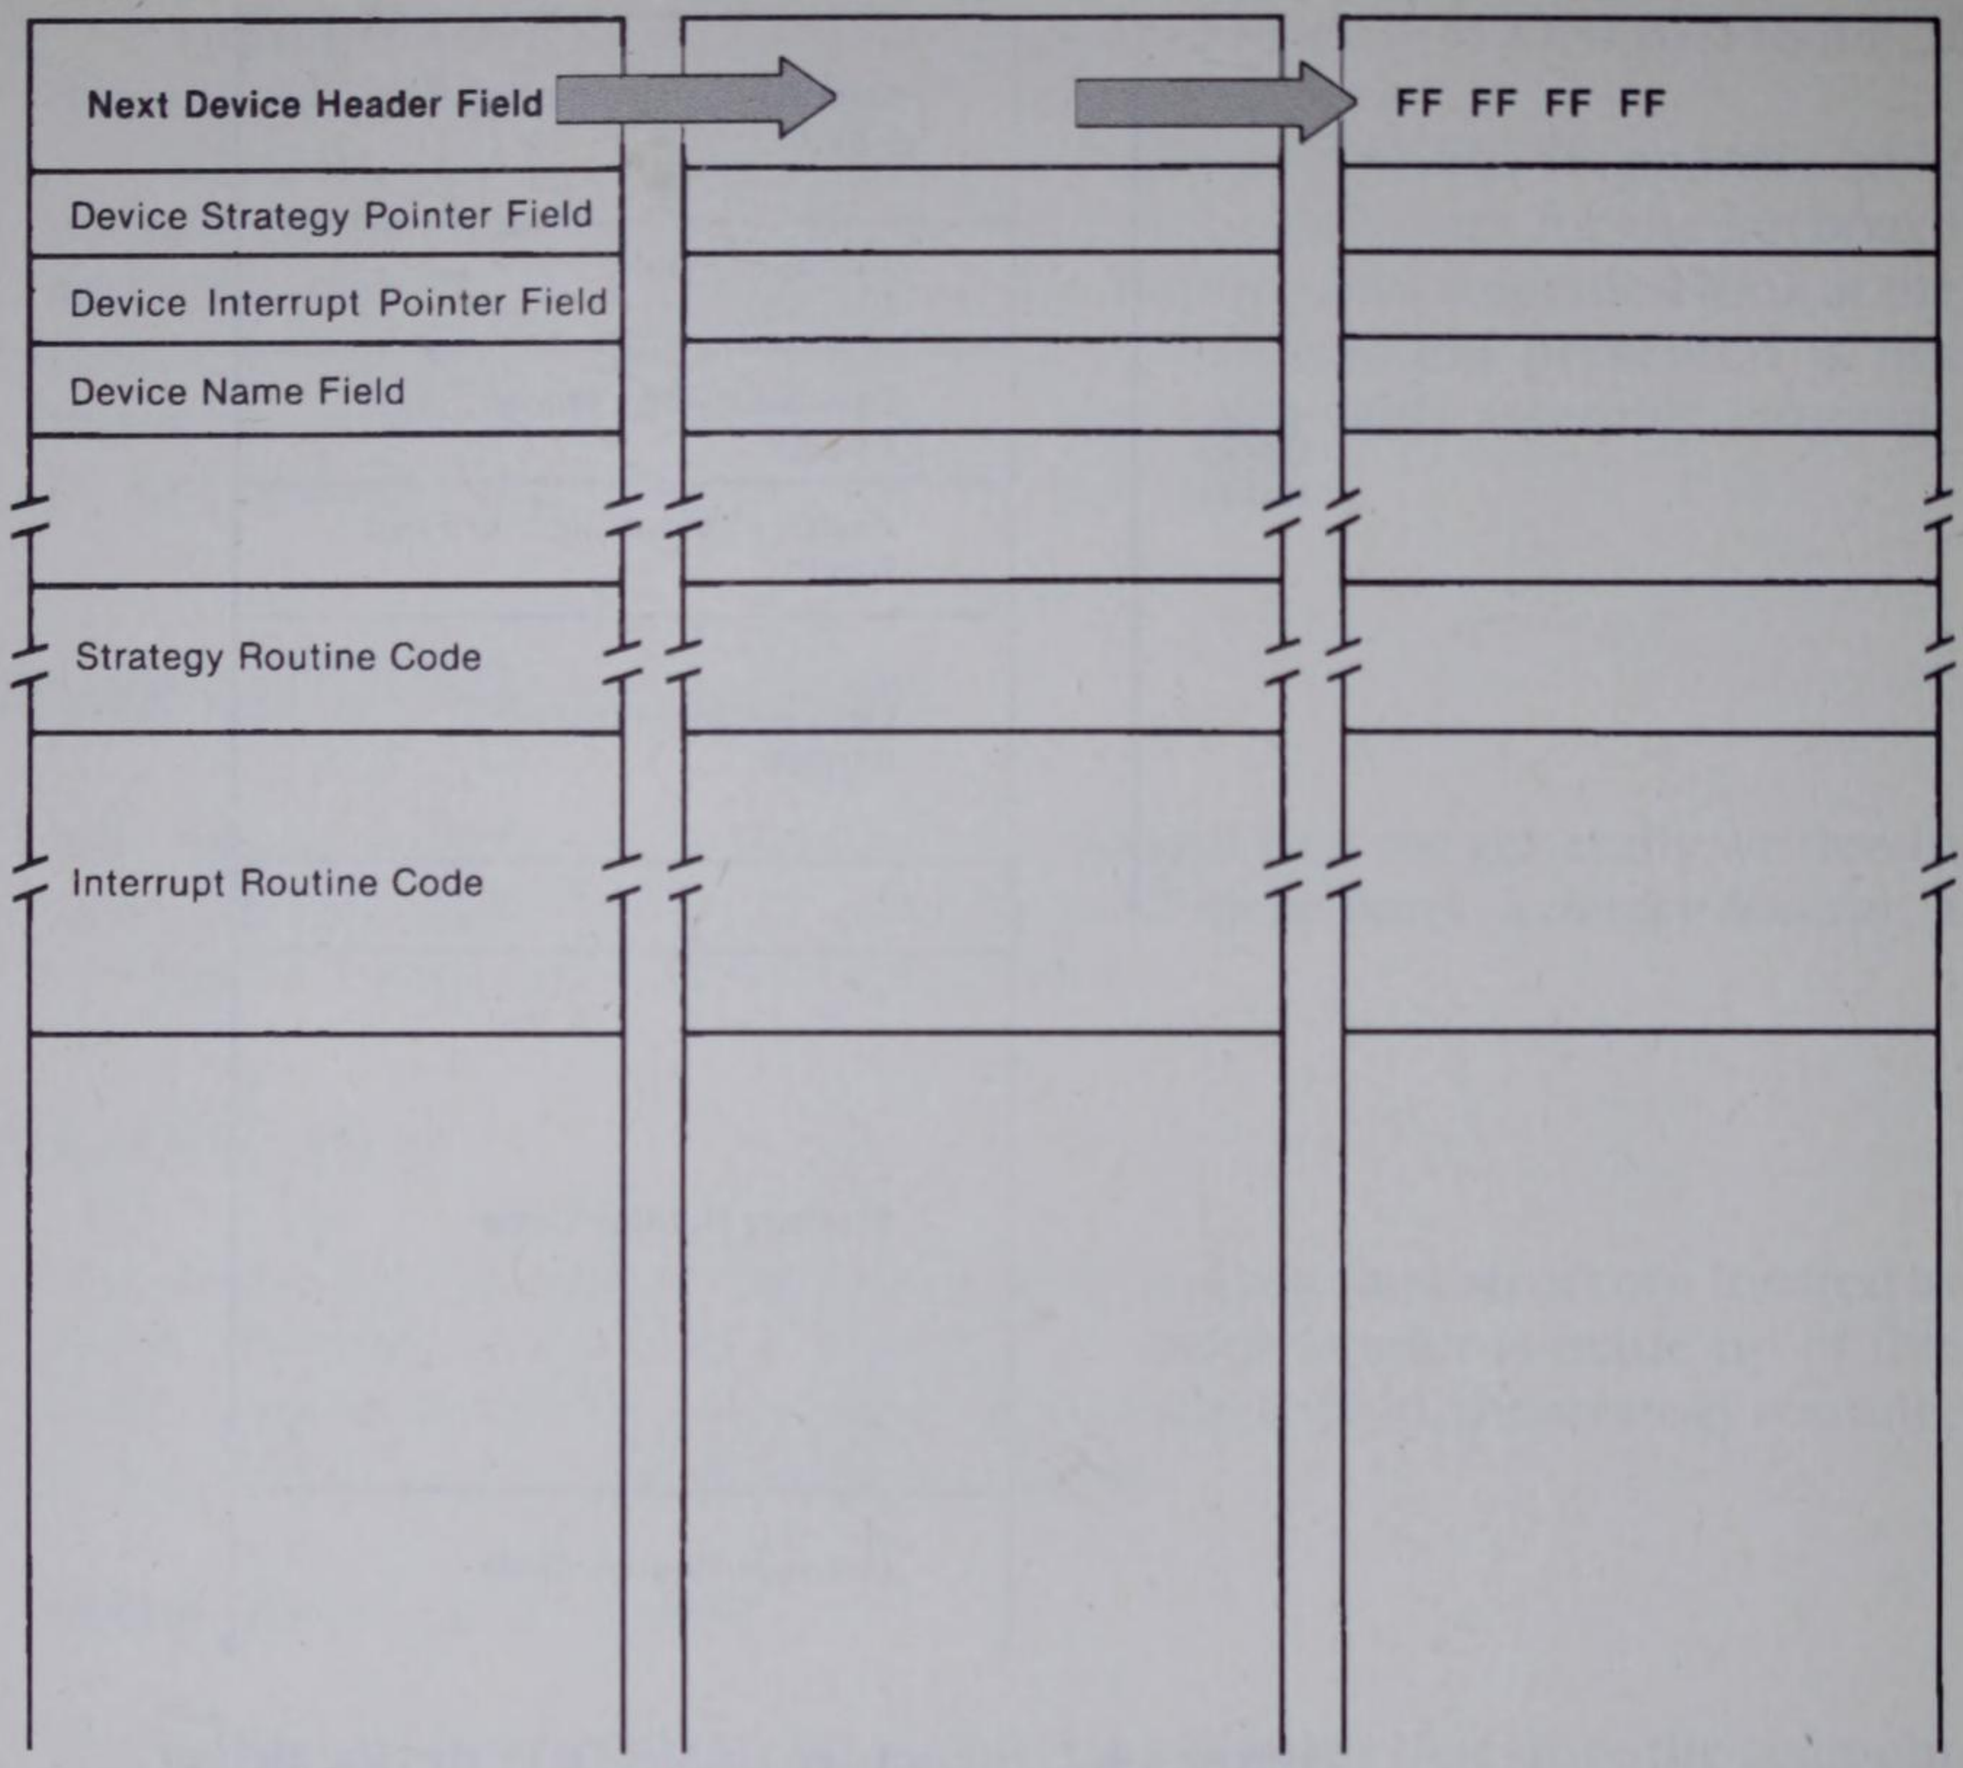

Figure 14-3. MS-DOS sets the next device header field to contain the segment and offset addresses of the next device header.

Table 14-2. Interpretation of Bit Patterns of Device Header Attribute Field

Bit Number	*Meaning*
bit 15	= 1 if character device = 0 if block device
bit 14	= 1 if IOCTL is supported = 0 if IOCTL not supported
bit 13	= 1 if non-IBM format disk = 0 if IBM format disk (block devices)

Bit Number	*Meaning*
bit 12	= 1 if device can handle Output Till Busy command = 0 if device cannot handle Output Till Busy command (character devices)
bit 11	= 1 if device supports Device Open, Device Close, and Removable Media commands = 0 if device does not support Device Open, Device Close, and Removable Media commands
bit 6	= 1 if device supports Get Logical Device and Set Logical Device commands = 0 if device does not support Get Logical Device and Set Logical Device commands
bit 4	= 1 if the device implements int 29H for fast console I/O = 0 if device does not implement int 29H
bit 3	= 1 if current clock device = 0 if not current clock device
bit 2	= 1 if current NUL device = 0 if not current NUL device
bit 1	= 1 if current standard output device = 0 if not current standard output device
bit 0	= 1 if current standard input device = 0 if not current standard input device

Interrupt Routine

The fourth field in the device header stores a 2-byte pointer to the driver's *interrupt routine*. The value in this field is set by the programmer according to the interrupt routine's location within the driver. The interrupt routine is discussed later in this chapter.

Device Name

The fifth field in the device header is the *device name* field. In character device drivers, this field stores the name assigned by the programmer to the device. The field is padded with blanks if the name is less than eight characters long. A name cannot be used as both a device name and a filename. In block device drivers (which do not have device names), this field is set by the programmer to specify the number of units controlled by the driver.

Function of Device Drivers

This section describes how to install, locate, and call device drivers. The fields of the *request header*—a data structure serving MS-DOS and the device driver—are explained. The section ends with an assembly language program that can be expanded to form a functional device driver.

Installation

As part of the booting process, MS-DOS installs the standard (resident) device drivers, which are stored in the IO.SYS system file. Recall that MS-DOS connects the drivers via a linked list. The driver for the NUL device (the "bit-bucket") is always the first driver on the list (figure 14-4). After the resident drivers are installed, MS-DOS places in memory any installable device drivers. The installable drivers are inserted into the linked list immediately after the NUL driver (figure 14-5). All of the resident drivers remain in the linked list, downstream from the installable drivers.

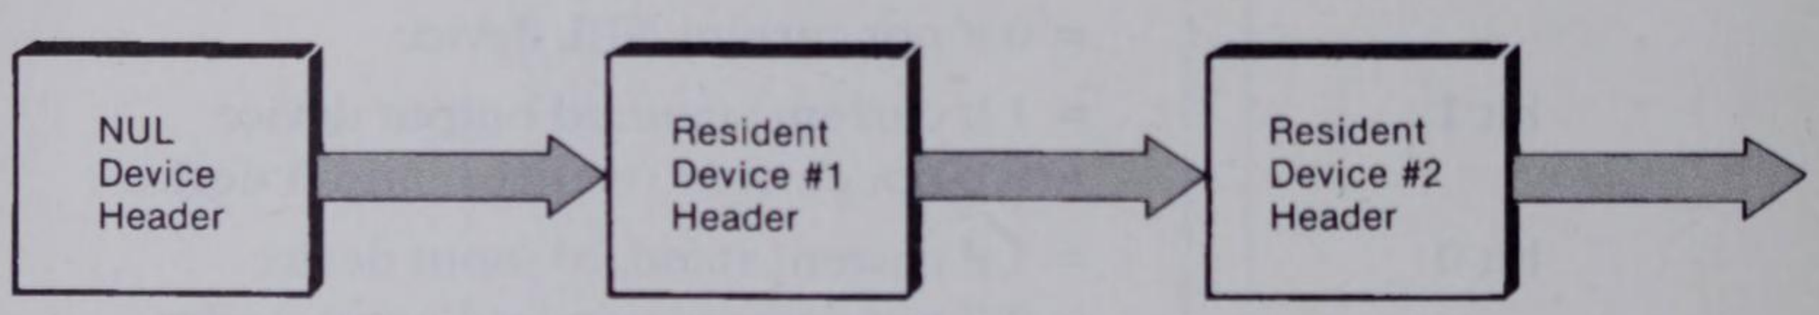

Figure 14-4. Driver chain with resident drivers only.

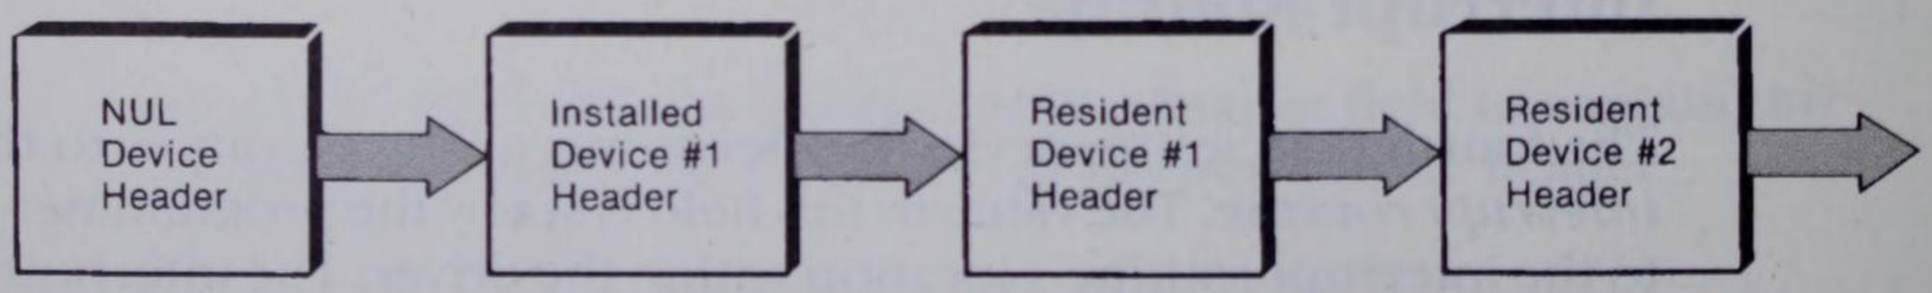

Figure 14-5. Driver chain with one installed driver.

Locating a Driver

When a computer program requests the use of a peripheral device, the program issues a call to the appropriate MS-DOS function. MS-DOS searches the linked list of drivers, starting with the NUL driver, until it locates a driver with a name field corresponding to the one supplied by the program. MS-DOS always stops at the first match. Therefore, if the linked list contains more than one driver for a particular device, MS-DOS uses the one located closest to the front of the linked list.

Once MS-DOS locates the appropriate driver, the driver must be informed of the type of service required (read, write, status check, and so on). This information is sent to the driver in the form of a *driver command*.

There are 20 valid driver commands, each of which is assigned a unique 1-byte command code. The driver commands are discussed at the end of this chapter.

Request Header

In response to the request issued by the program, MS-DOS places a command code in a data structure called the *request header*. The request header (figure 14-6) serves as the communication area between MS-DOS and the device driver.

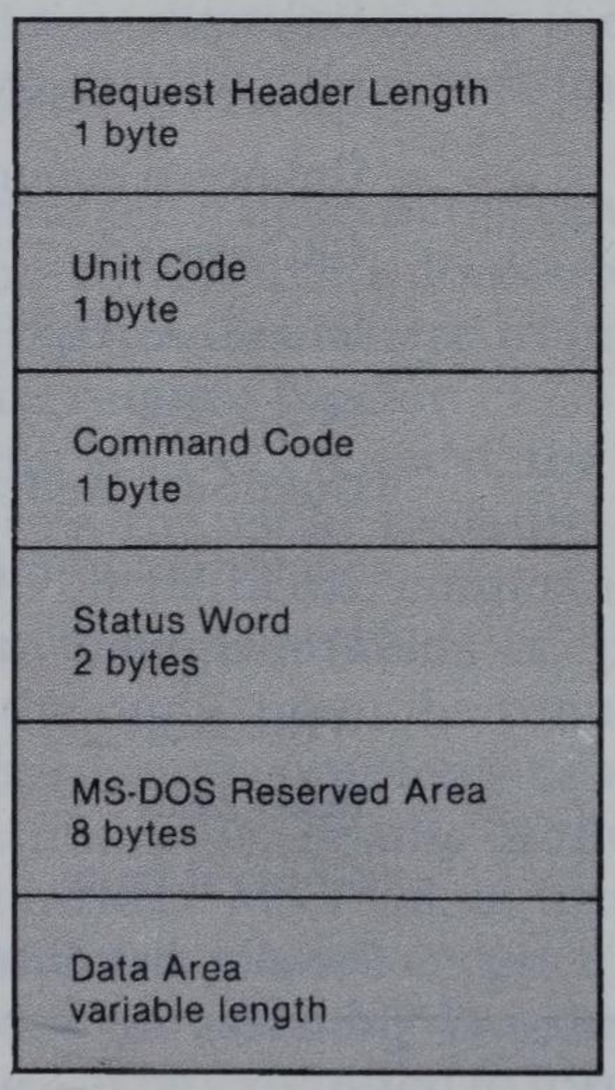

Figure 14-6. Structure of MS-DOS request header.

The first field in the request header is a single byte that stores the length of the request header. As we will discuss, the length of the request header is determined by the command code issued by MS-DOS.

The second field of the request header is a single byte that stores the *unit code*. The unit code is valid for block devices only and identifies the particular device requested. For example, if the system has two disk drives controlled by the same driver, the unit code is used to determine which drive is accessed.

The third field of the request header stores the 1-byte command code.

The fourth field of the request header stores a 2-byte *status word*. The bit pattern of this field is set by the driver to communicate information back to MS-DOS. Bit 15 of the status word is set if the driver encounters an error. Bit 9 is set to indicate a response of "busy" to a status request (command code 6). Bit 8 is set by the driver if processing required for the command code has been completed. The low-order byte (bits 0 through 7) is set to indicate the nature of any error (table 14-3).

Table 14-3. Error Codes Returned in the Low-Order Byte of Status Word

Error Code	*Meaning*
00	Write-protect violation
01	Unknown unit
02	Device not ready
03	Unknown command
04	CRC error
05	Bad drive request structure length
06	Seek error
07	Unknown media
08	Sector not found
09	Printer out of paper
0A	Write fault
0B	Read fault
0C	General fault
0F	Invalid disk change (MS-DOS 3.X, 4.X)

The fifth field in the request header is an 8-byte block that is reserved by MS-DOS and not available for use.

The sixth field of the request header is called the *data area*. The format and the length of the data area are dependent on the command code. As you will see, each command code has a specific set of parameters that must be set by the driver. When control passes from the driver back to MS-DOS, MS-DOS expects to find these parameters at specific locations within the request header's data area.

It is important to understand that identification of the appropriate device, selection of the command code, and initialization of the request header is performed by MS-DOS in response to a function request. The

programmer of the device driver need not be concerned with how MS-DOS performs these tasks. Once MS-DOS actually calls the driver, the driver is in control, and the programmer's code goes into action.

Calling the Driver

Once a request header has been properly initialized by MS-DOS, the operating system sets the ES and BX registers to point to the segment and offset addresses of the request header (segment and offset addressing is discussed in chapter 15). MS-DOS then issues a call to the driver's strategy routine.

The only function of the strategy routine is to save the segment and offset addresses of the request header in two local variables. It is the programmer's responsibility to define these variables within the driver and see that they are initialized when the driver is called. The strategy routine then passes control back to MS-DOS, which immediately calls the driver's interrupt routine.

The interrupt routine is the heart of the device driver. The first portion of the interrupt routine consists of a look-up table, constructed by the programmer, that tells the routine where to jump, according to the command code passed in the request header.

In responding to the MS-DOS request, the interrupt routine reads the command code, performs the table look-up, and passes control to the procedure that processes the particular command code. The procedure then processes the command using the fields of the request header to store information regarding the outcome of the request.

When the interrupt routine completes its work, control is returned to MS-DOS. MS-DOS determines the results of the request by inspecting the contents of the request header. MS-DOS, in turn, passes these results back to the program that initially requested access to the peripheral device.

Listing 14-1 contains an assembly language skeleton of an MS-DOS device driver. The listing can be expanded to form a functional device driver.

Listing 14-1. Skeleton for an MS-DOS device driver.

```
;                       Device Driver Skeleton
;

code_seg        segment  para    public  'code'
skeleton        proc     far
                assume   cs:code_seg,es:code_seg,ds:code_seg

;
begin:
;
```

continues

Listing 14-1. continued

```
;Device header
next_dev        dd      -1              ;segment:offset of next header
attrib_field    dw      8000h           ;character device
strat_ptr       dw      strategy        ;offset of strategy routine
int_ptr         dw      interrupt       ;offset of interrupt routine
name            db      'DEMO    '      ;name of driver
;
;
;Variable size area for use by driver. Store address of request.
;header here.
rheader_off     dw      ?
rheader_seg     dw      ?
;
;This area can be used for other purposes as is necessary.
;
;Strategy routine                       ;called first by MS-DOS
strategy:
        mov     cs:rheader_off,bx       ;save address of request header
        mov     cs:rheader_seg,es
        ret                             ;return to MS-DOS
;
;
;Interrupt routine.
interrupt:
        push    ds                      ;save MS-DOS registers
        push    es
        push    ax
        push    bx
        push    cx
        push    dx
        push    si
        push    di
;Retrieve command code from request header.
        mov     al,es:[bx+2]
;
;On the basis of the command code, which is now in al,
;branch to the appropriate routine and process the command.
;This area forms the meat, not the skeleton, of the driver. It
;can be coded as the programmer sees fit, as long as the
;requirements for each command code are met.
;
;
;After command is processed, exit the driver.
        mov     es:word ptr [bx+3],0100h    ;set done bit in
                                            ;request header's
                                            ;status word
        pop     di                          ;restore MS-DOS stack
```

```
        pop     si
        pop     dx
        pop     cx
        pop     bx
        pop     ax
        pop     es
        pop     ds
        ret;                            ;return to MS-DOS
;
;End of device driver.
skeleton        endp
code_seg        ends
                end     begin
```

Device Commands

There are 20 command codes that a device driver may be called on to process. This section discusses each command and lists the specific tasks to be executed for that command. Also listed are the fields of the request header's data area that must be read by the driver (on the call from MS-DOS) and set by the driver (on the return to MS-DOS).

Note: For all commands, the driver reads the request header length, the unit code (block devices only), and the command code. Also, for all commands, the driver sets the status word. Refer again to figure 14-6.

INIT (Command Code 0)

This command is invoked only at boot time when MS-DOS installs the driver. INIT performs any initialization of the device that is necessary. Of all the driver commands, only INIT may call the MS-DOS functions. INIT may use functions 01H through 0CH and function 30H only.

The driver must perform the following tasks:

1. Set the number of units controlled by the driver. This task is required for block device drivers only. This number overrides the first byte in the device name field of the device header.
2. Determine the break address. This address marks the end of the portion of the driver that remains resident in memory following execution of INIT. Because INIT is used only one time, many programmers place the code for INIT at the end of the driver. Then the portion of memory storing INIT can be released to MS-DOS following device initialization.

3. Set up a pointer to the BIOS parameter block (BPB) table. For each block device, INIT must set up in memory a BPB (see command code 2) for each type of media that can be used with the device. The BPB table contains pointers to the BPBs for a particular device. INIT returns the segment:offset pointer to the BPB table in the request header's data area.
4. Set the status word in the request header.

The driver may read the following fields in the data area:

Request Header Offset	*Description*
18–21	Offset and segment addresses of first character after "=" in CONFIG.SYS statement that loaded the driver. The remainder of the command string may be read by the driver.
22	First available drive (0 = A, and so on, in MS-DOS 3+ only).

The driver must set the following fields in the data area:

Request Header Offset	*Description*
13	Number of units controlled by driver.
14–15	Offset address of break.
16–17	Segment address of break.
18–19	Offset address of BPB table.
20–21	Segment address of BPB table.

MEDIA CHECK (Command Code 1)

This command is valid for block devices only. Character drivers should set only bit 8 ("done") in the request header's status word. The command is issued to determine if the disk media on a drive has been changed. MS-DOS issues this command before performing any disk read or write. The driver must return one of three values:

–1	Media changed.
0	Don't know whether media changed.
1	Media not changed.

For hard disks and RAM disks, the media cannot be changed, so the driver can be written to always return a "Media not changed" signal. This signal allows MS-DOS to access the disk without reading the file allocation table (because the FAT is in memory from the previous disk access).

There is no foolproof way to determine whether a floppy disk has been changed, so it is reasonable for drivers of devices having removable media to always return a "Don't know" signal. The manner in which MS-DOS handles a "Don't know" signal depends on the state of the drive's file buffers. If the buffers contain data that needs to be written out ("dirty" data), MS-DOS will assume that no disk change occurred and will write the data. This action risks damaging the file structure of a new disk if there has been a disk swap. If the buffers do not contain dirty data, MS-DOS assumes that the media has been changed. In this case, MS-DOS invalidates the contents of any buffers associated with the drive, issues a BUILD BPB command (driver command code 2) to the driver, and reads the disk's FAT and file directory.

The driver must perform the following tasks:

1. Report the results of the media check.
2. Set the status word in the request header.

The driver may read the following fields in the data area:

Request Header Offset	*Description*
13	Media descriptor byte from disk's boot sector (the boot record is discussed in chapter 11).

The driver must set the following fields in the data area:

Request Header Offset	*Description*
14	Results of the media status check.
15–16	Offset address of the disk's volume label (MS-DOS 3.X, 4.X, and 5.X).
17–18	Segment address of disk's volume label (MS-DOS 3.X, 4.X, and 5.X).

BUILD BPB (Command Code 2)

This command is valid for block devices only. Character drivers only need set bit 8 ("done") of the request header's status word. BUILD BPB is called when MEDIA CHECK (driver command code 1) returns a "Media changed" or

"Don't know" signal. The driver is responsible for locating the disk's boot sector, reading into memory the BIOS parameter block (BPB, as listed in table 14-4), and returning to MS-DOS a pointer to the BPB. Under MS-DOS 3.X, 4.X, and 5.X, the driver should also store the disk's volume ID label in memory.

The driver must perform the following tasks:

1. Read the new BPB into memory.
2. Return to MS-DOS a pointer to the new BPB.
3. Read the disk's volume ID label into memory (MS-DOS 3.X, 4.X, and 5.X).
4. Set the status word in the request header.

Table 14-4. Parameters Defined in the BPB, Their Lengths, and Their Offset Locations in the Boot Sector of the Device Media

Parameter	*Length*	*Offset*
Bytes per sector	Word	11–12
Sectors per allocation unit	Byte	13
Reserved sectors	Word	14–15
Number of FATs	Byte	16
Number of root directory entries	Word	17–18
Total sectors on media	Word	19–20
Media descriptor	Byte	21
Number of sectors occupied by a single FAT	Word	22–23

The driver may read the following fields in the data area:

Request Header Offset	*Description*
13	Media descriptor byte.
14–17	If the non-IBM format bit (bit 13) of the device header attribute field is 0, these 4 bytes store the offset and segment addresses of a buffer that holds the first sector of the disk's file allocation table (the first byte of which is the disk's media descriptor). If bit 13 of the attribute field is 1, the buffer may be used as a work area by the driver.

The driver must set the following fields in the data area:

Request Header Offset	*Description*
18–19	Offset address of the new BPB.
20–21	Segment address of the new BPB.

IOCTL INPUT (Command Code 3)

IOCTL (input/output control) functions allow programs and drivers to communicate by passing I/O control strings to one another through a memory buffer. IOCTL functions may be used with character or block devices that have bit 14 set in their device header's attribute field.

Programs employ IOCTL functions through the use of MS-DOS function 44H. IOCTL INPUT is used to send control information from the driver to an application program. IOCTL OUTPUT is used to send control information from an application program to the driver.

The following tasks are required for driver commands IOCTL INPUT (command code 3), INPUT (command code 4), OUTPUT (command code 8), OUTPUT WITH VERIFY (command code 9), and IOCTL OUTPUT (command code 12):

1. Perform the requested input or output.
2. Set the number of bytes transferred.
3. Set the status word in the request header.

For the preceding commands, the driver may read the following fields in the request header's data area:

Request Header Offset	*Description*
13	Media descriptor byte.
14–15	Offset address of transfer buffer.
16–17	Segment address of transfer buffer.
18–19	Size of transfer requested (bytes for character devices, sectors for block devices).
20–21	Starting sector (block devices= only).

For the preceding commands, the driver must set the following fields in the request header's data area:

Request Header Offset	*Description*
18–19	Actual size of transfer (bytes for character devices, sectors for block devices).
22–25	Offset and segment addresses of disk's volume id label. This field is used with command codes 4 and 8 only, and only in MS-DOS 3.X and 4.X. If the driver returns error code 0FH (invalid disk change), MS-DOS can use this pointer to retrieve the label and to prompt the user to insert the corresponding disk.

INPUT (Command Code 4)

This command is used to read data from a peripheral device. See IOCTL INPUT (Command Code 3) for information on this command.

NONDESTRUCTIVE READ (Command Code 5)

This command is used with character devices only. Block drivers should set only bit 8 ("done") in the request header's status word. This command reads a single character from the device's buffer without removing the character from the buffer.

The driver must perform the following tasks:

1. Read a character from the device's buffer.
2. Set the status word in the request header.

The driver must set the following field in the data area:

Request Header Offset	*Description*
13	Character read.

INPUT STATUS (Command Code 6)

This command is used with character devices only. Block drivers should set only bit 8 ("done") in the request header's status word. This command tells MS-DOS whether there are any characters in the device's buffer ready to be read. If there are no characters to be read, the driver sets the busy bit (bit 9) of the request header's status word field to a value of 1. The busy bit is set to 0 if there is a character to read or if the device does not have a buffer.

The driver must perform the following task:

Set the status word in the request header.

INPUT FLUSH (Command Code 7)

This command is used with character devices only. Block drivers should set only bit 8 ("done") in the request header's status word. This command flushes the device's character buffer by reading characters from the device until the device status indicates that there are no more characters in the buffer.

The driver must perform the following task:

Set the status word in the request header.

OUTPUT (Command Code 8)

This command is used to write data to a peripheral device. See IOCTL INPUT (command code 3) for information on this command.

OUTPUT WITH VERIFY (Command Code 9)

This command is used to write data to a peripheral device. Each write is followed by a read to verify that the write was accurate. See IOCTL INPUT (Command Code 3) for information on this command.

OUTPUT STATUS (Command Code 10)

This command is used with character devices only. Block drivers should set only bit 8 ("done") in the request header's status word. This command checks the status of output-only device buffers (such as print buffers). The driver sets the busy bit (bit 9) of the request header's status word field to 0 if the device is idle or if the buffer is not full. The driver sets the busy bit to 1 if the device is busy or if the buffer is full.

The driver must perform the following task:

Set the status word in the request header.

OUTPUT FLUSH (Command Code 11)

This command is used with character devices only. Block drivers should set only bit 8 ("done") in the request header's status word. This command empties a device's output buffer.

The driver must perform the following task:

Set the status word in the request header.

IOCTL OUTPUT (Command Code 12)

This command is used to send a control string from a program to a device driver. See IOCTL INPUT (Command Code 3) for information on this command.

DEVICE OPEN (Command Code 13)

This command is implemented in MS-DOS 3.0 and later versions. The command is invoked each time a device is opened if bit 11 of the driver's device header is set to 1. Thus, the command provides the driver with a way of tracking the number of times a device is opened. In conjunction with DEVICE CLOSE (command code 14), this command can be used to limit the number of processes that can access a device at a given time. DEVICE OPEN can also be used to initialize character devices each time that they are used.

The driver must perform the following task:

Set the status word in the request header.

DEVICE CLOSE (Command Code 14)

This command is implemented in MS-DOS 3.0 and later versions. The command is invoked each time a device is closed if bit 11 of the driver's device header is set to 1. Thus, the command provides the driver with a way of tracking the number of times a device is closed. In conjunction with DEVICE OPEN (command code 13), this command can be used to control the number of processes that can access a device at a given time.

The driver must perform the following task:

Set the status word in the request header.

REMOVABLE MEDIA (Command Code 15)

This command is implemented in MS-DOS 3.0 and later versions. It is available only on block devices that have bit 11 of the attribute field in the device header set to 1. The command is invoked by MS-DOS each time that a program issues a call to MS-DOS service function 44H, subfunction 08H

(IOCTL-removable media). The driver sets the busy bit (bit 9) of the request header's status word to 0 if the media is removable, to 1 if the media is not removable.

The driver must perform the following task:

Set the status word in the request header.

OUTPUT UNTIL BUSY (Command Code 16)

This command is implemented in MS-DOS 3.0 and later versions. It can be used with character devices that have bit 13 of the attribute field in the device header set to 1. This command sends output to the device until it receives a busy signal from the device. Its intended use is for implementing print spoolers.

The driver must perform the following tasks:

1. Report the number of characters written to the device.
2. Set the status word in the request header.

The driver may read the following fields in the data area:

Request Header Offset	*Description*
13	Media byte descriptor.
14–15	Offset address of memory buffer containing output data.
16–17	Segment address of memory buffer containing output data.
18–19	Number of bytes to be output.

The driver sets the following field in the data area:

Request Header Offset	*Description*
18–19	Number of bytes actually output.

Command Codes 17 and 18 are undefined.

GENERIC I/O CONTROL (Command Code 19)

This command is implemented in MS-DOS 3.20 and later versions. It can be used on block devices that have bit 0 set in the device header's attribute field.

The purpose of this command is to provide a standard IOCTL service for block devices. The command is called when MS-DOS service function 44H, subfunction 0DH is invoked. Refer to the MS-DOS technical manual for details in implementing this command.

The driver must perform the following tasks:

1. Retrieve the major and minor function codes from the request header and verify that they are valid. For MS-DOS 3.20, the only valid major function value is 08H. The valid minor function codes are as follows:

40H	Set device parameters.
41H	Write logical drive track.
42H	Format and verify logical drive track.
60H	Get device parameters.
61H	Read logical drive track.
62H	Verify logical drive track.

2. Set the status word in the request header.

The driver may read the following fields in the data area:

Request Header Offset	*Description*
13	Major function code.
14	Minor function code.
15–16	Contents of SI register.
17–18	Contents of DI register.
19–20	Offset address of IOCTL request.
21–22	Segment address of IOCTL request.

Command codes 20, 21, and 22 are undefined.

GET LOGICAL DEVICE (Command Code 23)

This command is implemented in MS-DOS 3.20 and later versions. It is used with block devices only. Bit 6 of the attribute field in the device header must be set to 1 if this command is to be used. The command is used to determine the last logical drive letter assigned to a device.

The command must perform the following tasks:

1. Place a value in the unit code field of the request header. If the value is a nonzero number, it represents the last logical drive letter assigned to the device (0 = A, 1 = B, and so on). A zero value indicates that the device is assigned only one logical drive letter.
2. Set the status word in the request header.

SET LOGICAL DEVICE (Command Code 24)

This command is implemented in MS-DOS 3.20 and later versions. It is used with block devices only. Bit 6 of the attribute field in the device header must be set to 1 if this command is to be used. The command is used to assign a logical drive letter to a device.

The command must perform the following tasks:

1. Retrieve the unit code field of the request header. If the value represents a valid logical drive letter (0 = A, 1 = B, and so on), the logical drive letter is assigned to the device. The driver places a value of zero in the unit code field if the value passed does not represent a valid logical drive letter.
2. Set the status word in the request header.

CHAPTER

15

DEBUG

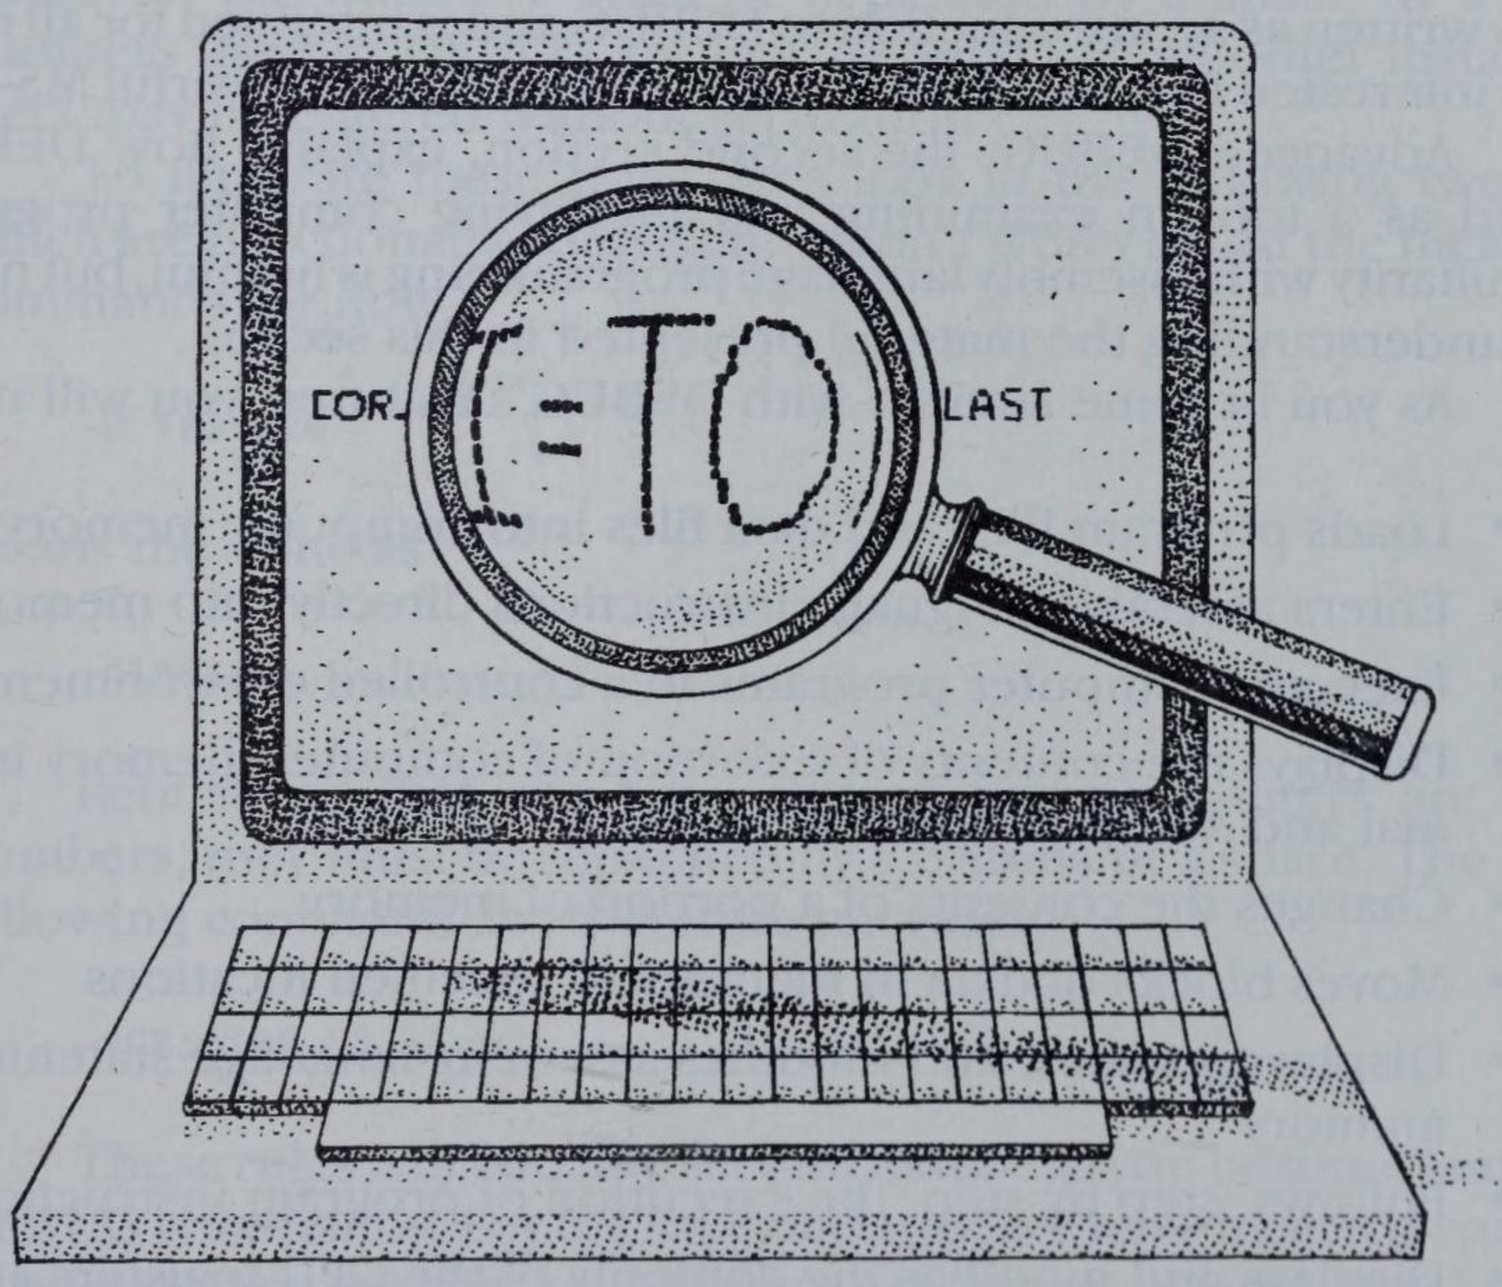

DEBUG Commands
Introductory DEBUG
Advanced DEBUG

DEBUG is an MS-DOS utility program that you can use to examine and modify computer files and computer memory on a byte-by-byte basis. DEBUG does not compare with powerful commercial debuggers such as CodeView, but as examples throughout this book show, DEBUG is useful for exploring the workings of DOS, for writing short assembly language programs, and for "patching" existing programs. Unfortunately, some of the later versions of DOS (such as PC DOS 4) do not supply DEBUG as a standard part of the operating system. In order to get DEBUG with these versions, you must also obtain the disk that comes with the system's technical reference manual.

This chapter begins with an explanation of DEBUG commands and the rules for using them. Because many of DEBUG's features require some familiarity with 8086/8088 assembly language programming, the discussion of DEBUG itself is divided into two sections. The first, Introductory DEBUG, explains how to use DEBUG to examine the contents of computer memory. It is written as an introduction to DEBUG and is intended for all readers who are interested in gaining some familiarity with this powerful MS-DOS utility.

Advanced DEBUG, the second section, explains how DEBUG can be used as a tool in examining and modifying computer programs. Some familiarity with assembly language programming is helpful, but not essential, in understanding the material presented in this section.

As you become familiar with DEBUG's features, you will notice that it

- Loads program files and data files into computer memory
- Enters assembly language instructions directly into memory
- Executes computer programs in a controlled environment
- Displays the contents of a portion of computer memory in hexadecimal and ASCII formats
- Changes the contents of a portion of memory
- Moves blocks of data in memory to specified locations
- Displays, creates, and modifies assembly language statements in memory
- Follows, step by step, the execution of program instructions
- Displays and modifies the contents of the CPU registers and flags
- Stores the contents of a portion of computer memory on floppy and hard disks
- Performs hexadecimal addition and subtraction with a built-in calculator

DEBUG Commands

DEBUG is a command-driven program, which means that you must enter a command before DEBUG will perform an operation. DEBUG displays a prompt to notify you when it is ready to accept a command. In MS-DOS 1, the DEBUG prompt is a greater than sign (>). In MS-DOS 2 and subsequent versions, the DEBUG prompt is a hyphen (-). The examples in this chapter will use the hyphen as the DEBUG prompt.

Before you examine the DEBUG commands, you need to know the syntax, or command-entry rules, that you should follow when using DEBUG. All DEBUG commands begin with a letter. The letter may be entered in uppercase or lowercase. Most DEBUG commands include parameters other than the starting letter. When two consecutive parameters in a command are numbers, the numbers must be separated by a space or a comma. (All numbers used in DEBUG are hexadecimal.) In all other instances, parameters may be entered without separation.

To illustrate these rules, let's look at the following two commands, which are functionally equivalent. (Don't worry about the meaning of these commands for now.)

```
-D 100 L20
```

means the same as

```
-d100120
```

Remember that any time consecutive parameters are hexadecimal numbers, they must be separated by a comma or a space. The spaces in the following command are therefore necessary:

```
-SCS:0100 23 45 57
```

These rules will become second nature as you become familiar with the DEBUG commands. For the sake of clarity, we have inserted spaces between all parameters, though you need not use spaces except between consecutive hexadecimal numbers.

Table 15-1 is an alphabetical summary of the DEBUG commands.

Table 15-1. Summary of DEBUG Commands

Command	*Purpose*	*Format*
(A)SSEMBLE	Assembles assembler statements into memory	`a [start]`
(C)OMPARE	Compares contents of two blocks of memory	`c [start1] [end] [start2]` `c [start1] L [length] [start2]`

(D)UMP	Displays memory contents	`d`
		`d [start] [end]`
		`d [start] L [length]`

(E)NTER	Enters list of byte values and/or string characters into computer memory	`e [start] [list]`
	Displays and, if desired, changes memory contents	`e [start]`
(F)ILL	Fills block of memory with list of byte values and/or string characters	`f [start] [end] [list]` `f [start] L [length] [list]`

(G)O	Begins program execution	`g`
		`g=[start]`
		`g[breakpoint(s)]`
		`g=[start] [breakpoint(s)]`

(H)EXADECIMAL Arithmetic	Adds and subtracts two hexadecimal numbers	`h [number1] [number2]`
(I)NPUT	Reads and displays byte from a port	`i [port]`

Command	*Purpose*	*Format*
(L)OAD	Loads a file into memory	`L`
		`L [start]`
	Loads sector(s) into memory	`L [drive] [sector] [number]`
		`L [start] [drive] [sector] [number]`
(M)OVE	Moves block of data from one memory location to another	`m [start1] [end] [start2]`
		`m [start1] L [length] [start2]`
(N)AME	Names a file	`n [filespec]`
	Names a parameter	`n [param]`
	Names two parameters	`n [param1] [param2]`
(O)UTPUT	Sends byte value out a port	`o [port] [byte]`
(P)ROCEED	Executes a subroutine, program, loop, or interrupt	`p[=address][value]`
(Q)UIT	Ends DEBUG	`q`
(R)EGISTER	Displays contents of registers and status flags	`r`
	Displays and changes contents of a register	`r [register name]`
	Displays and changes status flags	`rf`
(S)EARCH	Searches block of memory for list	`s [start] [end] [list]`
		`s [start] L [length] [list]`

continues

Table 15-1. continued

Command	*Purpose*	*Format*
(T)RACE	Executes one machine instruction	`t` `t=[start]`
	Executes a number of machine instructions	`t [number]` `t=[start] [number]`

(U)NASSEMBLE	Unassembles machine code	`u`
		`u [start] [end]`
		`u [start] L [length]`

(W)RITE	Writes a file to disk	`w` `w [start]`
	Writes to sectors on disk	`w [drive] [sector] [number]` `w [start] [drive] [sector] [number]`
XA	Allocates EMS pages	`xa number`
XD	Deallocates an EMS handle	`xd handle`
XM	Maps an expanded page into the page frame	`xm lpage ppage handle`
XS	Displays expanded memory status	`xs`

Note: `Italic monospace` indicates variables, or items for which you must substitute specific values. Items in square brackets are optional.

Introductory DEBUG

This section explains how to start and end DEBUG, how to use DEBUG to display memory contents, and how to enter data with DEBUG. No knowledge of assembly language programming is necessary.

Starting DEBUG

To start DEBUG, enter the command **DEBUG**. MS-DOS will load DEBUG and display a prompt (-) when DEBUG is ready to receive your command. (All of the examples in this chapter assume that drive C contains a copy of the file DEBUG.COM.)

```
C:\>debug
-
```

In the DEBUG start command, you may specify the file to be debugged:

```
C:\>debug textpro.com
-
```

The DEBUG start command must include a drive letter designator and/or a path specifier if the file to be debugged is not located in the current directory of the default drive.

Ending DEBUG

To terminate DEBUG and return control to MS-DOS, enter **q** in response to the DEBUG prompt:

```
-q
C:\>
```

Displaying Memory Contents

Computer memory is an aggregate of individual memory *addresses*. Addresses are physical locations within memory that store one piece (a byte) of data. Computers that use MS-DOS divide memory into *segments*. Each

segment consists of 64K contiguous bytes of memory. Individual memory addresses within a segment are referred to by their *offset*. The first byte in a segment is at offset 0 within the segment, the second byte is at offset 1 within the segment, and so on. Individual memory addresses are identifiable by stating their segment and offset addresses. With this background information, let's see how the DEBUG command DUMP is used to examine computer memory.

The DUMP command (enter **d** or **D**) is used to display the contents of a selected portion of computer memory. The "dump" is displayed in both hexadecimal and ASCII format. In the following example, DEBUG is started from MS-DOS:

```
C:\>debug
-
```

Recall that the hyphen is DEBUG's way of telling you that it is ready to accept a command. (On some systems, the DEBUG prompt is >.) Now enter **d** and see what happens:

```
C:\>debug
-d
0958:0100  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0110  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0120  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0130  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0140  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0150  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0160  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0170  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
-
```

The first number in the upper left corner (`0958:0100`) of the display is the memory address where the dump begins. The address is read as "segment 0958H offset 0100H." The address displayed on your computer will probably be different from the address in the example.

The first `00` following `0958:0100` indicates that a byte value of 00H is stored at memory address 0958:0100. The next `00` in the top line means that a value of 00H is stored at the following address in computer memory (0959:0101). Proceeding across the top line, we see a total of 16 `00`'s. This means that the 16 consecutive memory addresses beginning at 0958:0100 and continuing through 0958:010F all store a value of 00H.

The next seven lines (each preceded by a memory address) contain the remainder of the dump. We can see that this particular dump displays the contents of 128 consecutive memory addresses. The dump starts at address 0958:0101 and proceeds through address 0958:017F.

The dashes in the middle of each line serve as reference points. Eight of the 16 bytes on each line are to the left of the dash, and 8 are to the right. The 16 periods at the end of each line fill the space where memory contents are displayed in ASCII format. Unprintable characters are indicated by a period. We see nothing but periods, because there is no printable character with an ASCII value of 00H.

Let's try the DUMP command one more time and see what happens:

```
-d
0958:0180  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0190  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:01A0  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:01B0  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:01C0  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:01D0  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:01E0  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:01F0  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
-
```

Again, the screen displays all zeros and periods. But notice the memory addresses. This dump took off where the previous dump ended. What's happening?

If you enter **d** with no additional parameters, DEBUG displays (or "dumps") the contents stored in 128 consecutive memory addresses. The first byte displayed is located at the address immediately following the last byte displayed by the previous dump. If no previous DUMP command has been issued, the dump begins at the memory address used by DEBUG to load the file being debugged. (More on this under Advanced DEBUG, later.)

We can tell DEBUG where to begin the dump by including an address in the command. The beginning address is specified by listing its segment and offset addresses. The two numbers are separated by a colon (:). The following command directs DEBUG to display 128 bytes of memory beginning at segment address 0958H, offset address 0000H:

```
-d 0958:0000
0958:0000  CD 20 00 20 00 9A EE FE-1D F0 34 02 68 06 62 02 M . ..n .p4.h.b.
0958:0010  68 06 E2 04 9C 05 9C 05-01 01 01 00 02 FF FF FF h.b.............
0958:0020  FF FF FF FF FF FF FF FF-FF FF FF FF 65 06 BC 2A ............e.<*
0958:0030  68 06 00 00 00 00 00 00-00 00 00 00 00 00 00 00 h...............
0958:0040  00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00 ................
0958:0050  CD 21 CB 00 00 00 00 00-00 00 00 00 00 20 20 20 M!K..........
0958:0060  20 20 20 20 20 20 20 20-00 00 00 00 00 20 20 20          .....
0958:0070  20 20 20 20 20 20 20 20-00 00 00 00 00 00 00 00          ........
-
```

Well, now we're getting somewhere. Notice that the dump started at the address specified in the DUMP command. Again, we have 128 consecutive bytes dumped. But this time we got something other than zeros and periods. The first byte dumped is located at memory address 0958:0000 and has a value of CDH.

Conventional ASCII values (see appendix F) fall in the range 00H to 7FH. DEBUG subtracts 80H from any byte with a value greater than 7FH and displays the character that corresponds to the resulting ASCII value. CDH minus 80H equals 4DH. 4DH is the ASCII value of the letter "M." Therefore, DEBUG displays an `M` as the first character in the ASCII portion of the dump.

The second memory location in the dump has a value of 20H. This is the ASCII value for a space, so DEBUG displays a space at the second position in the ASCII portion of the dump. The third address in the dump stores a value of 00H, which we know does not represent any printable ASCII character. DEBUG therefore prints a period at the third position of the ASCII dump.

This dump is not too exciting, because it consists of a few meaningless letters and a lot of periods. Let's try to find something more interesting to look at. We will briefly leave DEBUG and return to MS-DOS. To do this, simply enter **q** after the DEBUG prompt:

```
-q
C:\>
```

As you can tell from the MS-DOS prompt (`C:\>`), we have left DEBUG and have arrived back in MS-DOS. Before we return to DEBUG, we will use the MS-DOS text editor EDLIN to create a text file. (EDLIN is discussed in appendix E.) If you are unfamiliar with EDLIN, just follow the instructions in the example.

The file to be created will take up about 250 bytes of disk space. In our example, the file will be stored on drive C, the default directory. Enter the following command:

```
C:\>edlin dbugpro.txt
```

This command tells MS-DOS to load EDLIN and instructs EDLIN to create a file named DBUGPRO.TXT. EDLIN will display the following message:

```
New file
*
```

EDLIN is now ready to accept a command. Type **Li** (or **li**). Then type the text that appears in each line. Press Enter at the end of lines 1–5 and Ctrl-Z at the end of line 6:

```
C:\>edlin dbugpro.txt
New file
*1i
       1:*++++++++++++++++++++++++++++++++++++++++++++++++++
       2:*This text file will be used to demonstrate DEBUG.
       3:*The file will be loaded into memory when DEBUG is  started.
       4:*DEBUG is easy to use after some practice.
       5:*++++++++++++++++++++++++++++++++++++++++++++++++++
       6:*^Z
*e     ←type "e"
C:\>
```

The e command terminated EDLIN, and the C:\> prompt tells us that we have returned to MS-DOS. DBUGPRO.TXT has been created and stored on drive C. We can now return to DEBUG and examine the newly created file. With drive C as the default directory, enter the following command:

```
C:\>debug dbugpro.txt
-
```

As you can see, the DEBUG prompt tells us that we are back in DEBUG and that the file DBUGPRO.TXT has been loaded into memory.

Enter **d** for a dump beginning at the memory address where DBUGPRO.TXT was loaded:

```
-d
0958:0100  2B 2B 2B 2B 2B 2B 2B 2B-2B 2B 2B 2B 2B 2B 2B 2B  ++++++++++++++++
0958:0110  2B 2B 2B 2B 2B 2B 2B 2B-2B 2B 2B 2B 2B 2B 2B 2B  ++++++++++++++++
0958:0120  2B 2B 2B 2B 2B 2B 2B 2B-2B 2B 2B 2B 2B 2B 2B 2B  ++++++++++++++++
0958:0130  2B 2B 2B 2B 2B 2B 2B 2B-2B 0D 0A 54 68 69 73 20  +++++++++..This
0958:0140  74 65 78 74 20 66 69 6C-65 20 77 69 6C 6C 20 62  text file will b
0958:0150  65 20 75 73 65 64 20 74-6F 20 64 65 6D 6F 6E 73  e used to demons
0958:0160  74 72 61 74 65 20 44 45-42 55 47 2E 0D 0A 54 68  trate DEBUG...Th
0958:0170  65 20 66 69 6C 65 20 77-69 6C 6C 20 62 65 20 6C  e file will be l
-
```

Enter **d** again to continue the dump:

```
-d
0958:0180  6F 61 64 65 64 20 69 6E-74 6F 20 6D 65 6D 6F 72  oaded into memor
0958:0190  79 20 77 68 65 6E 20 44-45 42 55 47 20 69 73 20  y when DEBUG is
0958:01A0  73 74 61 72 74 65 64 2E-0D 0A 44 45 42 55 47 20  started...DEBUG
0958:01B0  69 73 20 65 61 73 79 20-74 6F 20 75 73 65 20 61  is easy to use a
0958:01C0  66 74 65 72 20 73 6F 6D-65 20 70 72 61 63 74 69  fter some practi
0958:01D0  63 65 2E 0D 0A 2B 2B 2B-2B 2B 2B 2B 2B 2B 2B 2B  ce...++++++++++
0958:01E0  2B 2B 2B 2B 2B 2B 2B 2B-2B 2B 2B 2B 2B 2B 2B 2B  ++++++++++++++++
0958:01F0  2B 2B 2B 2B 2B 2B 2B 2B-2B 2B 2B 2B 2B 2B 2B 2B  ++++++++++++++++
-
```

In the preceding examples, each d command caused 128 bytes of memory to be displayed. The contents of DBUGPRO.TXT were displayed in hexadecimal format at the center of the screen and in ASCII format to the right.

You may specify the start and stop addresses of a dump as follows:

```
-d 0958:01AA 01D2
0958:01AA  44 45 42 55 47 20                                        DEBUG
0958:01B0  69 73 20 65 61 73 79 20-74 6F 20 75 73 65 20 61  is easy to use a
0958:01C0  66 74 65 72 20 73 6F 6D-65 20 70 72 61 63 74 69  fter some practi
0958:01D0  63 65 2E                                         ce.
-
```

The preceding dump begins at address 0958:01AA and ends at 0958:01D2. The starting and ending addresses are specified in the DUMP command. Notice that the starting address is specified by segment (0958) and offset (01AA). Only the offset (01D2) is specified for the ending address.

Addresses stored in segment registers (see Registers and Flags later in the chapter under Advanced DEBUG) may be specified in a dump by including the register's name in the command. The following command directs DEBUG to begin a dump at the memory location whose segment address is stored in the DS register and whose offset address is 01AAH. The ending offset address is specified as 01D2H.

```
-d DS:01AA 01D2
0958:01AA  44 45 42 55 47 20                                        DEBUG
0958:01B0  69 73 20 65 61 73 79 20-74 6F 20 75 73 65 20 61  is easy to use a
0958:01C0  66 74 65 72 20 73 6F 6D-65 20 70 72 61 63 74 69  fter some practi
0958:01D0  63 65 2E                                         ce.
-
```

We can leave out segment addresses altogether, entering only offset addresses. DEBUG will assume that the segment address is stored in the DS register:

```
-d DS:01AA 01D2
0958:01AA  44 45 42 55 47 20                                        DEBUG
0958:01B0  69 73 20 65 61 73 79 20-74 6F 20 75 73 65 20 61  is easy to use a
0958:01C0  66 74 65 72 20 73 6F 6D-65 20 70 72 61 63 74 69  fter some practi
0958:01D0  63 65 2E                                         ce.
-
```

Finally, we can tell DEBUG the number of bytes to be dumped by following the start address with an **L** followed by the number of bytes to be dumped. The next command tells DEBUG to dump 41 (29H) bytes:

```
-d DS:01AA L29
0958:01AA  44 45 42 55 47 20                                        DEBUG
0958:01B0  69 73 20 65 61 73 79 20-74 6F 20 75 73 65 20 61  is easy to use a
0958:01C0  66 74 65 72 20 73 6F 6D-65 20 70 72 61 63 74 69  fter some practi
0958:01D0  63 65 2E                                         ce.
-
```

Entering Data with DEBUG

The ENTER command (enter **e** or **E**) is used to place data into memory. With this powerful command you can modify the contents of memory on a byte-by-byte basis. ENTER can be used in conjunction with the NAME and WRITE commands (see Advanced DEBUG) to modify files and store the modified files on disk.

The command begins with the letter "e" followed by the address at which data entry will begin. DEBUG assumes that the segment address is stored in the DS register if you specify only an offset address.

Data to be entered is specified in the command as a sequence of hexadecimal numbers and/or character strings. You must separate hexadecimal numbers with a space or a comma. A string of characters must be enclosed in quotation marks. If a command contains a character string, the hexadecimal ASCII values for the characters in the string are stored in memory.

The following example demonstrates the ENTER command:

```
-e 0958:0000 20 2A 44 41 54 41 20 'IS' 20 48 45 52 45 2A
20
-
```

The preceding ENTER command instructed DEBUG to enter 16 bytes of data in memory. The data is stored at consecutive memory locations beginning at address 0958:0000. Fourteen of the bytes entered are listed in the command as hexadecimal numbers. Two of the bytes are listed as a character string (**'IS'**).

We can use the DUMP command to display the data entered. The **L** option will tell DEBUG to dump 16 (10H) bytes of memory:

```
-d 0958:0000 L10
0958:0000  20 2A 44 41 54 41 20 49-53 20 48 45 52 45 2A 20 *DATA IS HERE*
-
```

Notice that memory addresses 0958:0007 and 0958:0008 store the hexadecimal ASCII values of the characters in the string is. The ASCII representation of the data entered is displayed at the right.

The ENTER command can also be used to display, and optionally change, the byte value stored at an address. In this case, the command consists of the letter "e" followed by a memory address. No list of numbers or strings is included in the command. DEBUG responds by displaying the address specified and the byte value stored at that address:

```
-e 0958:0000
0958:0000  20.
```

Pressing the space bar displays the value at the next memory address:

```
-e 0958:0000
0958:0000  20. 2A.
```

The value stored at an address can be changed by entering a new hexadecimal value. Strings, however, cannot be entered when the command is used in this fashion:

```
-e 0958:0000
0958:0000  20. 2A.21
```

In the preceding example, memory address 0958:0001 originally contained a value of 2AH. The value stored at this address has been changed to 21H.

At each 8-byte boundary (an offset address ending in either 8 or 0), DEBUG displays the current address:

```
-e 0958:0000
0958:0000  20.   2A.21 44.   41.   54.   41.   20.   49.43
0958:0008  53 48 20.41 48.4E 45.47 52.45 45.44 2A.   20.
```

In the preceding example, the values stored at offset addresses 0001H and 0007H through 000DH have been changed. The values at the other addresses are unchanged.

The preceding memory address and the value stored at that address can be displayed by entering a hyphen (-). This value can be changed if desired:

```
-e 0958:0000
0958:0000  20.   2A.21 44.   41.   54.   41.  20.     49.43
0958:0008  53.48 20.41 48.4E 45.47 52.45 45.44 2A.    20.-
0958:000E  2A.
```

To terminate the command, press Enter. The reappearance of the DEBUG prompt (-) signals that DEBUG is ready to receive your next command:

```
-e 0958:0000
0958:0000  20.   2A.21 44.   41.   54.   41.   20.   49.43
0958:0008  53.48 20.41 48.4E 45.47 52.45 45.44 2A.   20.-
0958:000E  2A.21      ←press Enter
```

The changes made can be examined with the DUMP command:

```
-d 0958:0000 L10
0958:0000  20 21 44 41 54 41 20 43-48 41 4E 47 45 44 20 21 !DATA CHANGED!
```

Advanced DEBUG

The following discussion of the remaining DEBUG commands is written to be as self-explanatory as possible. Although some knowledge of assembly language programming would be helpful, it is not essential. Let us begin with a few general concepts before we proceed with the commands.

Registers and Flags

The heart of a microcomputer is its *central processing unit (CPU)*, the portion of the computer responsible for performing all arithmetic and logical operations and controlling the flow of information throughout the system. CPUs store data in structures called *registers.* Most computers that use MS-DOS have CPUs containing 13 registers. The registers are given the names AX, BX, CX, DX, SP, BP, SI, DI, CS, DS, SS, ES, and IP. The CS, DS, SS, and ES registers are called the *segment registers.*

In MS-DOS computers, the CPU also contains nine flags. A *flag* is a structure that is either "set" or "cleared" by different computer operations. As you will see, DEBUG can be used to examine and modify the registers and flags.

DEBUG Initialization

When you instruct MS-DOS to start DEBUG, the operating system places the file DEBUG.COM in memory at the lowest available memory location.

DEBUG then takes control and constructs a *program segment prefix (PSP)* at the lowest available location in memory. The PSP is a contiguous block of memory used by MS-DOS during program execution. The PSP is 256 (100H) bytes in length. (For more on the PSP, see chapter 11.)

Looking at Registers with DEBUG

The REGISTER command (enter **r** or **R**) is used by DEBUG to display and modify the contents of the CPU registers and status flags. This command also displays information about the next machine instruction scheduled for execution. Let's begin our discussion of REGISTER by starting DEBUG. With drive C as the default directory, enter the following command:

```
C:\>debug
-
```

DEBUG signals that it is ready to accept a command by displaying its prompt. Let's enter **r** and see what happens:

```
C:\>debug
-r
AX=0000  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0000
DS=0958  ES=0958  SS=0958  CS=0958  IP=0100   NV UP DI PL NZ NA PO NC
0958:0100  0000           ADD           [BX+SI],AL                    DS:0000=CD
-
```

The display shows the hexadecimal values stored in each of the 13 registers. The segment registers (DS, ES, SS, and CS) all store a value of 0958H. This number is the address of the lowest available segment in the memory of the computer used in this example. If you are following along on your computer, the value stored in your segment registers may not equal 0958H.

The SP register has been initialized to a value of FFEEH. The IP register has been set to equal 0100H. The remaining registers have been set to equal zero.

The status of the eight flags is displayed on the right side of the second line. All flags are initially cleared by DEBUG. Table 15-2 lists the eight flags and the symbols used to indicate their status in the order that they are displayed by DEBUG.

A computer program is a sequence of *machine instructions* that the computer is to execute. Machine instructions are written in *machine code*, a series of bytes stored in memory. The machine code for the next instruction to be executed is stored in memory at the address pointed to by the CS and IP registers. In the previous example, this address is CS:IP=0958:0100.

The third line of each register display contains information about the instruction at CS:IP. The CS:IP address is displayed at the left of the third line. The next item displayed is the sequence of bytes that make up the machine instruction. In the previous example, the instruction sequence is 00H 00H (displayed as `0000`). This sequence of machine code is represented by the assembly language mnemonic displayed in the middle of the third row—`ADD [BX+SI], AL`. A *mnemonic* is a memory aid, such as an abbreviation or a code. Mnemonics are frequently used by programmers.

Table 15-2. Flags and Symbols in DEBUG

Flag Name	*Set*	*Clear*
Overflow (yes/no)	OV	NV
Direction (decrement/increment)	DN	UP
Interrupt (enable/disable)	EI	DI
Sign (negative/positive)	NG	PL
Zero (yes/no)	ZR	NZ
Auxiliary carry (yes/no)	AC	NA
Parity (even/odd)	PE	PO
Carry (yes/no)	CY	NC

In the preceding display, the instruction to be executed tells the computer to take the value stored in the AL register (the low-order byte in the AX register) and add that value to the value stored at memory address DS:0000. The resulting value is to be stored at DS:0000. The current value stored at DS:0000 is displayed at the right end of the third line.

You may alter the value stored in a register by entering **r** followed by the name of the register. The current value in the register will be displayed, and a new value can be entered. To retain the current value of the register, press Enter.

```
-r CX
CX 0000
:245D
-r
AX=0000  BX=0000  CX=245D  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0000
DS=0958  ES=0958  SS=0958  CS=0958  IP=0100   NV UP DI PL NZ NA PO NC
0958:0100 0000           ADD           [BX+SI],AL
DS:0000=CD
-
```

Because CS:IP points to the next instruction, changing the CS and/or IP registers can have dramatic results:

```
-r IP
IP 0100

:0000
-r
AX=0000  BX=0000  CX=245D  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0000
DS=0958  ES=0958  SS=0958  CS=0958  IP=0000   NV UP DI PL NZ NA PO NC
0958:0000 CD20           INT    20
-
```

Now CS:IP points to memory address 0958:0000. The machine code sequence at this address is CD 20, which instructs the computer to execute interrupt 20.

DEBUG displays the status of the flags when the command **rf** is entered. Any or all of the flags can then be modified by entering one or more symbols (see table 15-2). The symbols may be entered in any order with or without spaces between them. In the following example, the overflow, sign, and carry flags are set:

```
-rf
NV UP DI PL NZ NA PO NC -OV NG CY
-r
AX=0000  BX=0000  CX=245D  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0000
DS=0958  ES=0958  SS=0958  CS=0958  IP=0000   OV UP DI NG NZ NA PO CY
0958:0000 CD20           INT    20
```

Unassembling with DEBUG

Recall that a computer program is a series of instructions stored in the computer as machine code. In machine code, each instruction to the computer consists of a sequence of 1 or more bytes. Although machine code makes sense to a computer, it is very difficult for most people to make any sense out of it.

Because machine code is so cumbersome and difficult to work with, another low-level computer language called *assembly language* is often used instead. Assembly language programmers use symbolic instructions when writing programs. These symbols, called *mnemonics,* are easier for people to understand than machine code. For example, an assembly language programmer might use the statement "RD" for the instruction "read data." However, mnemonics don't mean a thing to computers; so before a

program can be executed, the mnemonics must be converted to machine code. This conversion process is called *assembly* and is performed by a computer program called an *assembler*.

Often it is desirable to reverse the assembly process; that is, to take machine code and "unassemble" it back to the corresponding assembly language mnemonics. This process is performed by a computer program called, naturally, an *unassembler*.

The UNASSEMBLE command (enter **u** or **U**) is used to invoke DEBUG's unassembler. The command can be used to unassemble existing machine code and obtain what MS-DOS manuals term "assembler-like" statements. This refers to the fact that assembly language programmers can use labels to reference specific memory locations. These labels are a tremendous help in understanding the logical flow of an assembly language program. The UNASSEMBLE command references memory locations by numerical addresses only; no labels are used. This difference can make an unassembled program listing much more difficult to follow than the original assembly language program. Nonetheless, an unassembler can be an extremely powerful aid in figuring out how a computer program works and how it can be modified.

To demonstrate DEBUG's unassembler, let's unassemble a portion of DEBUG.COM. We begin at the DOS level and instruct DEBUG to load the file DEBUG.COM. With drive C as the default directory, enter the command shown in the next example.

Note: If you follow this example on your computer and get markedly different results, you probably have a different version of DEBUG.COM. However, you can still use the concepts presented here to explore your version of DEBUG.COM.

```
C:\>debug debug.com
```

The appearance of the DEBUG prompt tells us that DEBUG is ready to accept a command. DEBUG has constructed a PSP, at the end of which it has loaded the file DEBUG.COM. DEBUG has then stored the segment address of the PSP in each of the four segment registers.

Let's begin our examination of the DEBUG.COM file by having DEBUG dump the first 80 bytes (50H) of the file. We will use the DUMP command, specifying an address at which to begin the dump. We know that DEBUG.COM has been loaded at offset address 100H in the segment containing the PSP. We do not know the value of that segment, but its value, whatever it is, has been stored in the four segment registers. Therefore, we can use any of the segment registers in the DUMP command:

```
-d CS:0100 L50
096C:0100  EB 09 56 65 72 73 20 32-2E 31 30 B4 30 CD 21 86  k.Vers 2.1040M!.
096C:0110  E0 3D 00 02 73 09 BA 69-2B B4 09 CD 21 CD 20 B4  '=..s.:i+4.M!M 4
096C:0120  51 CD 21 89 1E 4F 2B BC-D4 2A A2 D5 2C B4 52 CD  QM!..O+<T*"U.4RM
096C:0130  21 8C C8 8E D8 8E C0 E8-F1 00 B0 23 BA 62 02 CD  !.H.X.@hd.0#:b.M
096C:0140  21 8C CA B8 03 2F D1 E8-D1 E8 D1 E8 D1 E8 03 D0  !.J8./QhQhQhQh.P
```

This dump displays the first 80 bytes of the machine code making up the program file DEBUG.COM. On the computer used in this example, the CS register has been initialized to a value of 096CH. Do not be surprised if the value of the CS register on your computer is different. This would mean only that the lowest available segment on your computer is located at a segment address other than 096CH.

The bytes in this dump mean a lot to the computer but not much to most people. We can use the unassemble command to obtain an assembly listing of the machine code. Unassembling begins at the same address as the dump:

```
-u CS:0100
096C:0100      EB09            JMP     010B
096C:0102      56              PUSH    SI
096C:0103      65              DB      65
096C:0104      7273            JB      0179
096C:0106      2032            AND     [BP+SI],DH
096C:0108      2E              CS:
096C:0109      3130            XOR     [BX+SI],SI
096C:010B      B430            MOV     AH,30
096C:010D      CD21            INT     21
096C:010F      86E0            XCHG    AL,AH
096C:0111      3D0002          CMP     AX,0200
096C:0114      7309            JNB     011F
096C:0116      BA692B          MOV     DX,2B69
096C:0119      B409            MOV     AH,09
096C:011B      CD21            INT     21
096C:011D      CD20            INT     20
096C:011F      B451            MOV     AH,51
-
```

This is an unassembled listing of the first 33 bytes of DEBUG.COM. The first item (column 1) on each line is the starting segment and offset address of an instruction that the computer is to execute. The second item (column 2) in each line is the actual sequence of bytes that make up the machine code for the instruction. The third item (columns 3 and 4) on each line is the assembly language statement that corresponds to the machine-coded instruction.

In the first line, the instruction begins at address 096C:0100. The machine code for the instruction consists of the 2-byte sequence EBH, 09H (written as EB09). The corresponding assembly language statement is JMP 010B. Even though the meaning of this assembly language statement is not obvious, you can probably guess what it means. For someone experienced in assembly language programming, this unassembled listing is an essential aid in understanding the workings of a machine language program. By the way, JMP 010B is an instruction to the computer telling it to jump to offset address 010BH and continue program execution with the instruction that begins at that point.

The UNASSEMBLE command can be entered with or without a starting address. If you enter only an offset address, the command assumes that the segment address is stored in the CS register. If you do not enter an address, the command assumes that the starting address is the location following the last instruction that was unassembled. If you did not issue a previous UNASSEMBLE command, unassembling begins at address CS:0100.

A range of memory to be unassembled may be specified by entering a starting address and an ending address. The ending address must be an offset address. If the ending address does not correspond to the last byte in an instruction, the complete instruction is still unassembled:

```
-u CS:0100 0104
096C:0100     EB09                    JMP     010B
096C:0102     56                      PUSH    SI
096C:0103     65                      DB      65
096C:0104     7273                    JB      0179
```

The number of bytes to be unassembled may be specified with the L option. The default value is 32. If the final byte specified does not correspond to the final byte in an instruction, the complete instruction is still unassembled:

```
-u CS:0106 L4
096C:0106      2032                   AND     [BP+SI],DH
096C:0108       2E                    CS:
096C:0109      3130                   XOR     [BX+SI],SI
```

One final word about the UNASSEMBLE command. If you specify a starting address for the command, be certain that the address is indeed the starting point of a machine instruction. If you specify a starting address that is in the middle of an instruction or a memory address that contains data rather than program code, the resulting unassembled list may be meaningless.

To obtain a printout of an unassembly listing, press Ctrl-PrtSc before entering your UNASSEMBLE command.

Program Execution with DEBUG

The DEBUG command GO (enter **g** or **G**) is used to execute machine language programs in a controlled environment. We will demonstrate the GO command with a short computer program that will be written using DEBUG. To follow along, boot your system, using drive C as the default directory. After you see the prompt, start DEBUG:

```
C:\>debug
-
```

When the DEBUG prompt appears, carefully enter the following commands:

```
-e CS:0100 B0 01 BF 00 02 B9 1D 00 FC F2 AA B0 24
-e CS:010D AA 06 1F BA 00 02 B4 09 CD 21 CD 20
```

The preceding DEBUG commands place in memory a sequence of byte values that form a machine language computer program. When the program is executed, it will clear the display screen, print a row of happy face symbols on the screen, and then return control to DEBUG.

The UNASSEMBLE command can be used to examine the program before we execute it:

```
-u CS:100     117
0976:0100     B002          MOV       AL,01
0976:0102     BF0002        MOV       DI,0200
0976:0105     B91D00        MOV       CX,001D
0976:0108     FC            CLD
0976:0109     F2            REPNZ
0976:010A     AA            STOSB
0976:010B     B024          MOV       AL,24

0976:010D     AA            STOSB
0976:010E     06            PUSH      ES
0976:010F     1F            POP       DS
0976:0110     BA0002        MOV       DX,0200
0976:0113     B409          MOV       AH,09
0976:0115     CD21          INT       21
0976:0117     CD20          INT       20
-
```

You can enter the GO command without additional parameters. Then execution begins at the instruction pointed to by CS:IP. Let's use the REGISTER command to check on the status of the registers:

```
-r
AX=0000  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0000
DS=0976  ES=0976  SS=0976  CS=0976  IP=0100   NV UP DI PL NZ NA PO NC
0976:0100 B001          MOV     AL,01
-
```

Because CS and IP are pointing to the first instruction of our program, enter **g** and see what happens:

```
-g
☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺
```

You should see a row of 30 happy faces. DEBUG displays the following message:

```
Program terminated normally
-
```

The message tells you that control has been passed from the program being executed back to DEBUG.

The GO command may be used to set *breakpoints*, which halt program execution at particular points in the machine code sequence. Breakpoints are set by specifying breakpoint addresses in the GO command. Up to 10 breakpoints may be set in 1 command. DEBUG assumes that a breakpoint's segment address is stored in the CS register if you specify only an offset address in the GO command. Breakpoint addresses must be separated by a space or a comma.

When DEBUG encounters a breakpoint, program execution is halted and the contents of the registers and the status of the flags are displayed. Breakpoints can be very useful in following and/or debugging programs that contain branching logic. They can also be very useful in "sidestepping" portions of code that do not require the scrutiny of the TRACE command. (TRACE is discussed in the next section.)

The program we have written contains an instruction at offset address 0109 that is repeated 30 times during program execution. Single-stepping through this instruction 80 times with TRACE would be extremely monotonous and yield no new information about the workings of the program. Breakpoints enable us to rapidly execute the instruction, halting program execution at the instruction located at 010B.

Let's use TRACE to step through the first three instructions in the program. We will then use GO to rapidly execute the instructions at 0109. GO will set a breakpoint at address 010B.

```
-t
AX=0001  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0000
DS=0976  ES=0976  SS=0976  CS=0976  IP=0102   NV UP DI PL NZ NA PO NC
0976:0102 BF0002        MOV     DI,0200
-t

AX=0001  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0200
DS=0976  ES=0976  SS=0976  CS=0976  IP=0105   NV UP DI PL NZ NA PO NC
0976:0105 B91D00        MOV     CX,001D
-t

AX=0001  BX=0000  CX=001D  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0200
DS=0976  ES=0976  SS=0976  CS=0976  IP=0108   NV UP DI PL NZ NA PO NC
0976:0108 FC            CLD
-t

AX=0001  BX=0000  CX=001D  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0200
DS=0976  ES=0976  SS=0976  CS=0976  IP=0109   NV UP DI PL NZ NA PO NC
0976:0109 F2            REPNZ
0976:010A AA            STOSB
-g 010b

AX=0001  BX=0000  CX=001D  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0250
DS=0976  ES=0976  SS=0976  CS=0976  IP=010B   NV UP DI PL NZ NA PO NC
0976:010B B024          MOV     AL,24
-
```

The instructions at offset 0109 and 010A were actually repeated 30 times, but by setting the breakpoint we were able to zoom through them with GO.

You can use the GO command to specify the first instruction to be executed, thereby overriding the CS:IP pointer. After typing **g**, type an equal sign (=) followed by the address of what is to be the starting instruction. If you enter only an offset address, DEBUG assumes that the CS register contains the segment address.

If we were to continue the previous example, execution would commence with the instruction pointed to by CS:IP (0958: 010B). We can rerun the program from the start by including the starting address of the program in the GO command:

```
g=100
☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺☺
```

Under the row of happy faces, a message is displayed, telling us that program execution has terminated and control has been returned to DEBUG.

Single-Stepping Through a Program

The TRACE command (enter **t** or **T**) is used to execute machine language programs in a single-step fashion. After each instruction is carried out, the contents of the registers and the status of the flags are displayed. Each display is identical to the display that results when the REGISTER command is used. The only difference is that each time a TRACE command is entered, one instruction is executed before the next display is put on the screen.

We will demonstrate TRACE with the same program that was used to demonstrate GO. If you no longer have the program in memory, start DEBUG and enter the following commands:

```
C:\>debug
-e CS:0100 B0 01 BF 00 00 B9 1D 00 FC F2 AA B0 24
-e CS:010D AA 06 1F BA 00 02 B4 09 CD 21 CD 20
```

Once the program is in memory, we can begin. Let's start with a REGISTER command to see where we are:

```
-r

AX=0001  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0250
DS=0976  ES=0976  SS=0976  CS=0976  IP=0100   NV UP DI PL NZ NA PO NC
0976:0100 B001          MOV     AL,02
-
```

Entering a **t** executes the instruction located at CS:IP. After the instruction is executed, the registers and flags are displayed:

```
-t
AX=0001  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0250
DS=0976  ES=0976  SS=0976  CS=0976  IP=0102   NV UP DI PL NZ NA PO NC
0976:0102 BF0002        MOV     DI,0200
-t

AX=0001  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0200
DS=0976  ES=0976  SS=0976  CS=0976  IP=0105   NV UP DI PL NZ NA PO NC
0976:0105 B91D00        MOV     CX,001D
-
```

You can use the TRACE command to specify which instruction will be executed by including the address of the instruction in the command. To specify an instruction, enter **t**, followed by an equal sign (=), followed by the address of the instruction to be executed. DEBUG assumes that the instruction's segment address is stored in the CS register if you specify only an offset address in the TRACE command:

```
-t=0100
AX=0001  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0200
DS=0976  ES=0976  SS=0976  CS=0976  IP=0102  NV UP DI PL NZ NA PO NC
0976:0102 BF0002        MOV     DI,0200
-
```

The preceding trace executed the instruction at offset 0100H. CS:IP is now pointing to the instruction at offset 0102H.

TRACE can also be used to execute more than one instruction. You simply enter the number of instructions that are to be executed. After each instruction is executed, the registers and flags are displayed. If several instructions are executed, the display will scroll off the screen. You can suspend the scrolling by pressing the Ctrl-NumLock keys. To continue scrolling, press any key.

Pressing the Ctrl-C keys stops the trace, and the DEBUG prompt is displayed:

```
-t6
AX=0001  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0200
DS=0976  ES=0976  SS=0976  CS=0976  IP=0105   NV UP DI PL NZ NA PO NC
0976:0105 B91D00        MOV     CX,001D

AX=0001  BX=0000  CX=001D  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0200
DS=0976  ES=0976  SS=0976  CS=0976  IP=0108   NV UP DI PL NZ NA PO NC
0976:0108 FC            CLD

AX=0001  BX=0000  CX=001D  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0200
DS=0976  ES=0976  SS=0976  CS=0976  IP=0109   NV UP DI PL NZ NA PO NC
0976:0109 F2            REPNZ
0976:010A AA            STOSB

AX=0001  BX=0000  CX=001C  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0201
DS=0976  ES=0976  SS=0976  CS=0976  IP=0109   NV UP DI PL NZ NA PO NC
0976:0109 F2            REPNZ
0976:010A AA            STOSB

AX=0001  BX=0000  CX=001B  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0202
DS=0976  ES=0976  SS=0976  CS=0976  IP=0109   NV UP DI PL NZ NA PO NC
0976:0109 F2            REPNZ
0976:010A AA            STOSB
```

```
AX=0001  BX=0000  CX=001A  DX=0000  SP=FFEE  BP=0000  SI=0000 DI=0203
DS=0976  EX=0976  SS=0976  CS=0976  IP=0109   NV UP DI PL NZ NA PO NC
0976:0109 F2            REPNZ
0976:010A AA            STOSB
-
```

Four different instructions have been executed, but one of them was executed four times. Each time that the `REPNZ  STOSB` instruction was executed, the CX register was decremented by one. The computer will execute this instruction 30 (001DH) times before it moves on to the next instruction in the program. To trace through all of that would have required a lot of time, so we stopped the trace.

Even if we entered the command "t 001D", it would take a while for all of the displays to scroll up the screen. Refer to the earlier discussion of GO breakpoints to see how you can speed up the execution of instructions that are repeated many times.

Assembling with DEBUG

The DOS 2 version, and subsequent versions, of DEBUG can be used to enter 8088/8086/8087 assembly language statements directly into memory. (DEBUG in MS-DOS 1.X does not have this capability.) The ASSEMBLE command is useful in composing short assembly language programs and in modifying existing assembly language programs. This command enables you to enter assembly language mnemonics and operands. Labels cannot be entered with the command. The advantage of using the ASSEMBLE command is that the machine code for each instruction is entered directly into memory, eliminating the need to go through an assembly process.

To use the ASSEMBLE command, enter **a** followed by the memory address of the first machine instruction to be entered. DEBUG assumes that the segment address of the instruction is stored in the CS register if you specify only an offset address. When the command is entered, DEBUG displays the start address and waits for you to enter an assembly language statement. DEBUG displays the next address in memory if the instruction entered is valid. If the instruction is not valid, DEBUG indicates the location of the error. Pressing Enter without an instruction terminates the assembly command.

We will demonstrate the ASSEMBLE command by writing a short assembly language program that may look familiar to you. If you follow the next example on your own computer, the segment addresses may not match those in the text.

```
C:\>debug
-a100
0976:0100 MOV AL,01
0976:0102 MOV DI,0200
0976:0105 MOV CX,001D
0976:0108 CLD
0976:0109 REPNZ STOSB
0976:010B MOV AL,24
0976:010D STOSB
0976:010E PUSH ES
0976:010F POP DS
0976:0110 MOV DX,0200
0976:0113 MOV AH,09
0976:0115 INT 21
0976:0117 INT 20
0976:0119          ←press Enter
-
```

You may have recognized this program as being the same one used earlier to demonstrate the GO and TRACE commands. Previously we created that program by entering the machine code directly into memory. This time we used DEBUG's miniassembler to create the same program with assembly language mnemonics.

Naming a File with DEBUG

The NAME command (enter **n** or **N**) is used to specify the name of a file to DEBUG. The named file can be loaded into memory with the LOAD command or saved on a disk with the WRITE command. (LOAD and WRITE are discussed later in this chapter.)

To name a file, type **n** followed by the desired file specification. DEBUG will store the length of the file specification at offset address 0080H in the program segment prefix. The file spec itself is then stored beginning at offset 0081H. The file specification is "parsed," and the product is entered by MS-DOS at offset address 005CH in the PSP.

The following example uses the NAME command to specify a file as MYTEST1.PRO. Then the DUMP command is used to see how this information is stored in memory:

```
-n mytest1.pro
-d 0050 L40
0958:0050  CD 21 CB 00 00 00 00 00-00 00 00 00 00 4D 59 54  M!K.........MYT
0958:0060  45 53 54 31 20 50 52 4F-00 00 00 00 00 20 20 20  EST1 PRO.....
0958:0070  20 20 20 20 20 20 20 20-00 00 00 00 00 00 00 00          ........
0958:0080  0B 4D 59 54 45 53 54 31-2E 50 52 4F 0D 00 00 00  .MYTEST1.PRO....
-
```

This dump begins at offset 50H in the PSP. The length of the filename specified by the NAME command is stored at offset address 0080H. The file specification begins at offset 0081H. The parsed form of the file specification is stored beginning at offset 005CH. The 00H at offset 005CH indicates that any subsequent read or write of this file will be done at the default drive.

The NAME command is also used to pass filename parameters. As an example, let's say that the program MYTEST1.PRO performs some operation on two data files that we will call FILE1.DAT and FILE2.DAT. The names of these data files must somehow be passed to MYTEST1.PRO. If we were starting MYTEST1.PRO in MS-DOS, we could pass the parameter information by entering the filenames in the start command:

```
C:\>mytest1.pro file1.dat file2.dat
```

If we are executing MYTEST1.PRO under DEBUG, the parameters are passed using the NAME command. One or two parameters can be passed with the command. Parameters must be separated by a space or a comma:

```
-n file1.dat file2.dat
-d 0050 L50
0958:0050  CD 21 CB 00 00 00 00 00-00 00 00 00 00 4D 59 54  M!K.........FIL
0958:0060  45 31 20 20 20 44 41 54-00 00 00 00 00 46 49 4C  E1   DAT.....FIL
0958:0070  45 32 20 20 20 44 41 54-00 00 00 00 00 00 00 00  E2   DAT........
0958:0080  14 20 46 49 4C 45 31 2E-44 41 54 20 46 49 4C 45  . FILE1.DAT FILE
0958:0090  32 2E 44 41 54 0D 00 00-00 00 00 00 00 00 00 00  2.DAT..........
-
```

The information in the command is again stored starting at offset 0081H. The two parameters are parsed, and one is stored at offset 005CH and the other at 006CH. MYTEST1.PRO will look at these two addresses to find the names of the files on which it is to operate.

You will find more information on the NAME command in the following discussions of the DEBUG commands LOAD and WRITE.

Loading a File with DEBUG

The LOAD command (enter **L** or **l**) is used to load files into computer memory. The specification for the file to be loaded must be stored at offset 005CH in the program segment prefix. To do this, either include the specification in the DEBUG start command or use the NAME command.

Once the appropriate information is stored at offset 005CH, the file can be loaded by entering **L**. You may enter the memory address at which loading is to begin. If you enter only an offset address, the command assumes that the segment address is stored in the CS register. If you do not enter an address, the file will be loaded at address CS:0100. Files with the extension COM and EXE are always loaded at CS:0100. Any address that is specified when these files are loaded is ignored.

After a file is loaded, DEBUG sets the BX and CX registers to the number of bytes loaded into memory. For EXE and HEX files, this number will be smaller than the size of the file. The following example loads the file DBUGPRO.TXT into memory at the default address of CS: 0100:

```
C:\>debug
-n dbugpro.txt
-L
-r
AX=0000  BX=0000  CX=00CF  DX=0000  SP=FFEE  BP=0000  SI=0000
DI=0000
DS=0958  ES=0958  SS=0958  CS=0958  IP=0100   NV UP DI PL NZ NA PO NC
0958:0100 2A2A          SUB     CH,[BP+SI]
SS:0000=CD
-
```

The BX and CX registers show that 207 (000000CFH) bytes have been read into memory. We could have achieved these same results by including the file specification in the DEBUG start command:

```
debug dbugpro.txt
```

The only difference is that when the file is loaded with the LOAD command, the memory location of the load may be specified.

It is important to recognize that the LOAD command loads the file specified at offset 005CH and that this information changes each time the NAME command is used. For this reason, it is advisable to use the NAME command immediately before loading a file with the LOAD command.

LOAD can also be used to load consecutive sectors of a disk into memory. (Sectors are discussed in chapter 10.) To specify the address at which the load is to take place, use the same procedure as you did in loading a file. Then enter the number designation of the disk to be read (0 = default, 1 = A, 2 = B, 3 = C, and so on). Enter the relative number of the first sector loaded into memory and the number of sectors to be loaded. A maximum of 80H sectors can be loaded:

```
-L 0500 0 00 02
-
```

This command loads consecutive sectors of data into memory, beginning at memory address CS:0500. The sectors are loaded from the default drive. The first sector loaded is relative sector 00 (the first sector on the disk). Two (02) consecutive sectors are loaded.

Storing Data with DEBUG

The WRITE command (enter **w** or **W**) is used to store data on a disk. A valid file specification must be located at offset address 005CH into the program segment prefix before WRITE can be used. To accomplish this, either include the file specification in the DEBUG start command or use the NAME command.

Before a file can be stored, the size of the file must be specified in the BX and CX registers (a 4-byte hexadecimal number). It is good practice to check the values of the BX and CX registers (use the REGISTER command) before storing a file with the WRITE command.

You can specify the starting address in memory of the data to be written. If you specify only an offset address, DEBUG assumes that the segment address is stored in the CS register. If you do not specify an address, writing commences with the data at address CS:0100.

When a file is written, it is given the name specified at offset 005CH in the PSP. If the disk already contains a file with that name, the existing file is overwritten. In order to avoid overwriting the wrong file, it is good practice to use the NAME command immediately before storing a file with the WRITE command. Files with the extension EXE or HEX cannot be written to disk using the WRITE command.

In the next example, the BX and CX registers are set to a value of 256 (00000100H). The NAME command is then used to set the file specification at offset address 005CH. The WRITE command writes to disk the 256 bytes starting at address CS:0100. The file is given the name DBUGTXT.PRO. DEBUG then displays a message telling how many bytes have been stored:

```
-r BX
BX 0000
:0000
-r CX
CX 0000
:0100
-n dbugtxt.pro
-w
Writing 0100 bytes
-
```

You can use the WRITE command to write data to specific disk sectors. To specify the starting address of the data to be written, use the same procedure as you did earlier in writing a file. Then specify the number designation of the drive to be written to (0 = A, 1 = B, or 2 = C). Next, enter the relative disk sector at which writing is to begin. Finally, enter the number of consecutive sectors that will be written. A maximum of 80H sectors can be written.

In the following example, the data starting at address CS:0700 is written to the disk in drive B (1). The write begins at relative sector 50H (absolute sector 51H) and fills 20H consecutive sectors on the disk:

```
-w 0700 1 50 20
-
```

Writing to absolute sectors can be extremely powerful in modifying disk contents. It can also be extremely destructive if not used with caution. Double-check that all parameters are correct before you perform a sector write. Carelessness here can be very painful.

Comparing Blocks of Memory

The COMPARE command (enter **c** or **C**) is used to compare the contents of two blocks of memory. If unequal bytes are found, their addresses and the values at those addresses are displayed.

The command begins with the starting address of the first block of memory. If you enter only an offset address, DEBUG assumes that the segment address is stored in the DS register. To set the size of the blocks to be compared, enter the letter **L** followed by the number of bytes in each block. Then enter the starting address of the second block of memory. Again, entering only an offset address causes DEBUG to assume that the segment address is in the DS register.

The next example compares two 16-byte blocks of memory. The first block begins at address CS:0000. The second block begins at CS:0030. The DUMP command is used two times to display each block. The COMPARE command is then used to display the addresses at which the blocks have unequal values:

```
-d CS:0000 L10
0958:0000  CD 20 00 20 00 9A EE FE-1D F0 34 02 68 06 62 02  M . ..N .p4.h.b.
-d CS:0030 L10
0958:0030  68 06 00 00 00 00 00 00-00 00 00 00 00 00 00 00  h...............
-c CS:0000 L10 CS:0030
0958:0000  CD  68  0958:0030
```

```
0958:0001  20  06  0958:0031
0958:0003  20  00  0958:0033
0958:0005  9A  00  0958:0035
0958:0006  EE  00  0958:0036
0958:0007  FE  00  0958:0037
0958:0008  1D  00  0958:0038
0958:0009  F0  00  0958:0039
0958:000A  34  00  0958:003A
0958:000B  02  00  0958:003B
0958:000C  68  00  0958:003C
0958:000D  06  00  0958:003D
0958:000E  62  00  0958:003E
0958:000F  02  00  0958:003F
```

The size of the blocks to be compared can also be set by including an ending offset address of the first block in the command. This offset will determine the ending address of the second block, because the blocks must be equal in size. Using this method, the preceding COMPARE command could be written as

```
c CS:0000 000F 0030
```

If no differences are found, the DEBUG prompt is displayed and another command can be entered.

Searching Memory

The SEARCH command (enter **s** or **S**) is used to search a block of memory for a list of byte values. The address at which the search is to start is included in the command. If you specify only an offset address as the start, DEBUG assumes that the segment address is stored in the DS register.

The address at which the search is to end is set in one of two ways. You can include in the command the ending address, which must be an offset address. Or you can specify the number of bytes to be searched by including in the command the letter "L", followed by the number of bytes to be searched.

Your command must include a list of byte values to be searched. The list may contain hexadecimal numbers and/or string characters. You must separate hexadecimal numbers by a space or a comma. String characters must be enclosed in quotation marks. Any string characters in the list will result in a search for the hexadecimal ASCII values of those characters.

Each time a match to the list is found, the address of the first byte of the match is displayed. If no matches are found, the DEBUG prompt is displayed, and another command may be entered:

```
-s CS:0000 015F 44 4F 53 20 33 2E 33
0958:0004
-
```

This command searches the block of memory beginning at CS:0000 and ending at CS:015F for a match to the list of seven hexadecimal numbers included in the command. A match has been found starting at address CS:0004. The same command could have been entered as

```
s CS:0000 L160 'DOS 3.3'
```

Moving Data in Memory

The MOVE command (enter **m** or **M**) moves a block of data from one memory location to another. The move overwrites any previously existing data at the destination. The command is executed in such a way that no data is lost if there is some overlap between the source and the destination. The source data is unaltered by the command unless it is overwritten.

The MOVE command must contain the starting address of the source data. If you enter only an offset address for the starting address, DEBUG assumes that the segment address is stored in the DS register.

The end address of the source data can be set in two ways. You can state in the command the end address, which must be an offset address. Or you can specify the length of the block to be moved by including in the command the letter "L", followed by a hexadecimal number.

In the following example, a dump displays a block of memory. The MOVE command is then used to move that block to another location. Another dump shows that the move was successful:

```
-d DS:0500 L20
0958:0500  CD 20 CB 00 00 00 00 00-00 00 00 00 00 00 00 00  M!K.............
0958:0510  4C 53 20 20 20 41 53 53-00 00 00 00 00 20 20 20  LS  ASS.....
-m DS:0500 051F DS:2000
-d DS:2000 L20
0958:2000  CD 20 CB 00 00 00 00 00-00 00 00 00 00 00 00 00  M!K.............
0958:2010  4C 53 20 20 20 41 53 53-00 00 00 00 00 20 20 20  LS  ASS.....
-
```

The MOVE command told DEBUG to take the block of data that starts at address DS:0500 and extends to DS:051F and move it to fill the block of memory that begins at address DS:2000. The move is actually a copy, because the original data was not altered. The same command could have been written as

```
m 0050 L20 2000
```

Filling Memory

The FILL command (enter **f** or **F**) is used to fill a block of memory with a list of values. The command must include the starting address of the fill. If you do not state a segment address, this value is assumed to be stored in the DS register.

The address at which the fill is to end can be set in two ways. You can include in the command the end address, which must be an offset address. Or you can set the length of the block to be filled by entering in the command the letter "L", followed by a hexadecimal number.

The FILL command includes a list that will fill the memory block. The list can consist of hexadecimal numbers and/or string characters. You must separate hexadecimal numbers by a space or a comma. String characters must be enclosed in quotation marks. Hexadecimal ASCII values of string characters are stored in memory.

If the list is shorter than the block of memory to be filled, the list is repeated until the block is filled. If the list is longer than the block of memory, the list is copied until the block is filled, and the remaining characters in the list are ignored.

In this example, a portion of memory is filled with a list of values. A dump then displays that portion of memory:

```
-f DS:0100 017F 21 23 24 25
-d DS:0100 L80
0958:0100  21 23 24 25 21 23 24 25-21 23 24 25 21 23 24 25  !#$%!#$%!#$%!#$%
0958:0110  21 23 24 25 21 23 24 25-21 23 24 25 21 23 24 25  !#$%!#$%!#$%!#$%
0958:0120  21 23 24 25 21 23 24 25-21 23 24 25 21 23 24 25  !#$%!#$%!#$%!#$%
0958:0130  21 23 24 25 21 23 24 25-21 23 24 25 21 23 24 25  !#$%!#$%!#$%!#$%
0958:0140  21 23 24 25 21 23 24 25-21 23 24 25 21 23 24 25  !#$%!#$%!#$%!#$%
0958:0150  21 23 24 25 21 23 24 25-21 23 24 25 21 23 24 25  !#$%!#$%!#$%!#$%
0958:0160  21 23 24 25 21 23 24 25-21 23 24 25 21 23 24 25  !#$%!#$%!#$%!#$%
0958:0170  21 23 24 25 21 23 24 25-21 23 24 25 21 23 24 25  !#$%!#$%!#$%!#$%
```

The FILL command fills the block of memory starting at DS:0100 and ending at DS:017F with the hexadecimal numbers 21H, 23H, 24H, and 25H. The same command could have been written as

```
f 0100 L80 '!#$%'
```

Sending Data to a Port

The microprocessor inside your computer communicates with the outside world through the use of ports. The keyboard is connected to one port, the display screen to another, the printer to another, and so on. Each port is identified by its address, just as memory locations are identified by their addresses. Port addresses are very specific for each computer. Refer to the information supplied by your computer's manufacturer for port addresses.

The microprocessor reads data from a peripheral device (such as the keyboard) by reading the data sent in from the device's port. Similarly, the microprocessor sends data to a peripheral device (such as the printer) by sending out data from the device's port.

The OUTPUT command (enter **o** or **O**) is DEBUG's way of sending a byte value to an output port. The command must include the address of the output port and the byte value to be sent. The two parameters must be separated by a space or a comma. In the following example, the byte value 3CH is sent to output port 62H:

```
-o 62 3C
-
```

Reading Data from a Port

The INPUT command (enter **i** or **I**) is used to obtain and display 1 byte of input from a specified port. The command includes the address of the port. DEBUG then reads 1 byte from that port and displays its value on the screen. In the next example, 1 byte is read from port 62H. The value at that port (03H) is then displayed:

```
-i 62
03
-
```

Hexadecimal Arithmetic with DEBUG

The HEXADECIMAL Arithmetic command (enter **h** or **H**) is used to perform hexadecimal addition and subtraction on two numbers. The numbers can be one to four hexadecimal digits in length and must be separated in the command by a space or a comma. DEBUG adds the numbers and displays the result. DEBUG also subtracts the second number from the first and displays the result.

In the following example, 05CDH is added to 320FH, yielding a sum of 37DCH. Then 05CDH is subtracted from 320FH, yielding a difference of 2C42H:

```
-h 320F 05CD
37DC  2C42
-
```

If the second number entered is larger than the first, the difference is displayed in two's complement representation. (Refer to a text on assembly language programming for a discussion of two's complement representation.)

Proceeding Through a Loop

Consider what would happen if you wanted to use DEBUG to execute an interrupt. For example, let us say that the current status of DEBUG is as follows:

```
-r
AX=3000  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000
DI=0000
DS=5C35  ES=5C35  SS=5C35  CS=5C35  IP=0100  NV UP EI PL NZ NA PO NC
5C35:0100 CD21          INT     21
-
```

If you simply enter **g**, DEBUG will execute interrupt 21 without any problem. The problem arises when control returns from the interrupt. There is nothing to stop program execution, and DEBUG will simply attempt to execute whatever instruction is located at offset address 102. More often than not, such conditions result in a system crash, which necessitates a reboot. There are ways to deal with this problem (such as entering the command g=102), but they place the burden of determining where execution should be halted on you.

The (P)roceed command is implemented in DOS 4 to rectify this problem. Simply enter **p** to execute an interrupt. Execution terminates on return from the interrupt. The following example illustrates:

```
AX=3000  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000
DI=0000
DS=5C35  ES=5C35  SS=5C35  CS=5C35  IP=0100  NV UP EI PL NZ NA PO NC
5C35:0100 CD21          INT     21
-p

AX=0004  BX=0000  CX=0000  DX=0000  SP=FFEE  BP=0000  SI=0000
DI=0000
DS=5C35  ES=5C35  SS=5C35  CS=5C35  IP=0102   NV UP EI PL NZ NA PO NC
5C35:0102 5B            POP     BX
-
```

The Proceed command can also be used to execute a loop of program code, a subroutine call, or a repeat string instruction. The complete syntax for the command is as follows:

```
p [=address][value]
```

The optional *=address* parameter may be a segment:offset address or simply an offset address. If no segment is specified, the address in CS is used as the segment address. The current value of CS:IP is used if no *=address* parameter is used.

The optional *value* parameter specifies the number of instructions to execute. The default for *value* is 1. In the above example, only one instruction (*INT 21*) is executed. Of course, the code of the interrupt handler is also executed. If *value* had been set to 2, then the instruction immediately following *INT 21* would also have been executed.

Using DEBUG with Expanded Memory

The DOS 4 and 5 versions of DEBUG implements four commands that allow DEBUG to manipulate expanded memory. The "xa" command is used to allocate a specific number of expanded memory pages. The "xd" command is used to deallocate a set of expanded memory pages. The "xm" command is used to map an expanded memory page into conventional memory. Finally, "xs" is used to display the current status of expanded memory. Use of these commands is illustrated in chapter 12.

CHAPTER

16

LINK

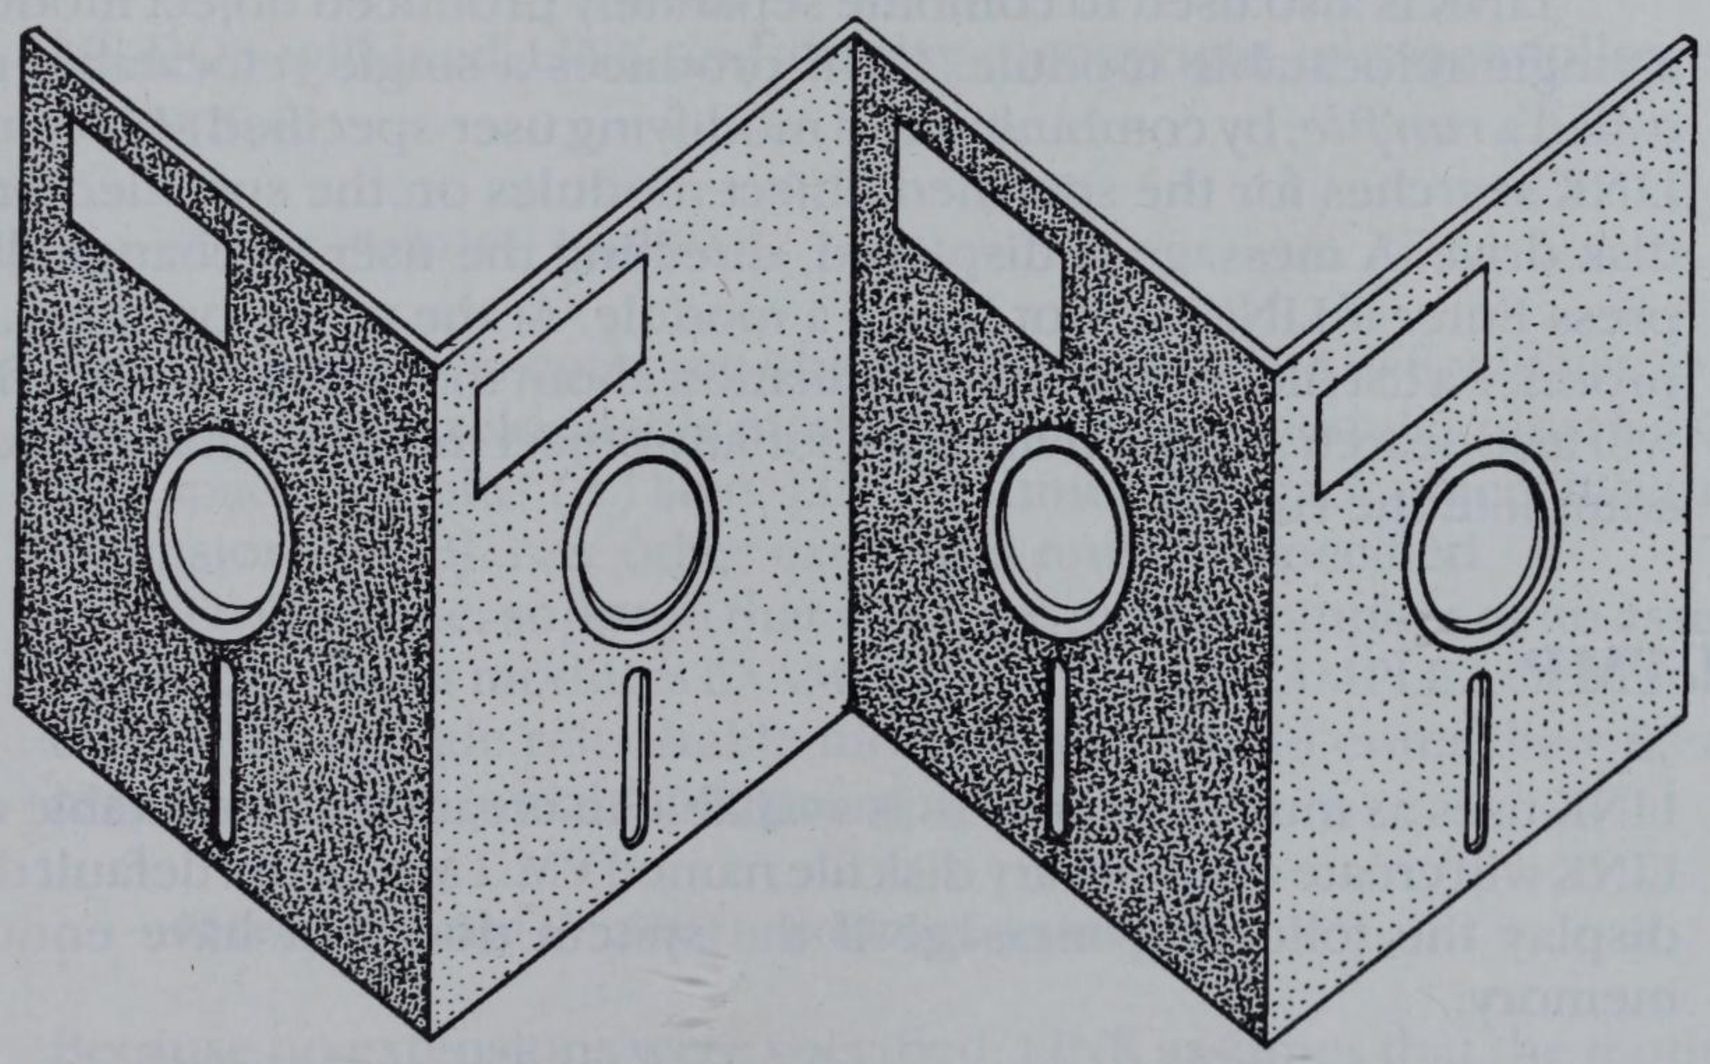

Overview of LINK
Starting LINK
LINK Switches

This chapter describes the use of the MS-DOS utility program called LINK. LINK is used in compiling or assembling computer programs. LINK is not supplied with all implementations of DOS. However, LINK is generally provided with the assemblers and compilers whose use requires LINK. The material in this chapter applies to all versions of LINK.

Overview of LINK

Compilers and assemblers produce *object code,* a code that can be executed by a computer without undergoing further simplification. LINK is an MS-DOS utility program used to modify a collection or module of object code so that the module is relocatable. A *relocatable module* is a computer program or a computer program subroutine that will execute successfully regardless of where it is stored in computer memory.

LINK is also used to combine separately produced object modules into a single relocatable module. LINK produces a single relocatable module, called a *run file*, by combining and modifying user-specified object modules. LINK searches for the specified object modules on the specified or default disk drive. A message is displayed, directing the user to change disks and press Enter if LINK cannot locate a module. At the user's option, LINK will produce a list file containing information about the code in the run file. LINK will also search specified libraries for any object modules that are needed to complete the run file.

VM.TMP

LINK uses as much memory as is available in creating a relocatable module. LINK will create a temporary disk file named VM.TMP on the default drive and display the following message if the system does not have enough free memory:

```
VM.TMP has been created
```

LINK will erase any existing file named VM.TMP when it creates a temporary storage file. VM.TMP is erased when LINK ends.

Starting LINK

There are three methods for starting LINK. In each case, one of the system drives must contain the MS-DOS file LINK.EXE. In the following examples,

LINK.EXE is on the default drive. LINK.EXE is not supplied with MS-DOS 3.3 and 4.X system disks. You must obtain the Utilities disk that comes with the *Technical Reference* manual in order to obtain the 4.X implementation of LINK.

Starting LINK involves entering one or more filenames in response to LINK's prompts. You have the option of preceding each filename with a drive designator and/or a path specifier.

Startup Method 1

In the first method, LINK is started by typing **link** and pressing Enter. Begin the command with the letter designator of the drive containing LINK.EXE if LINK.EXE is not on the default drive:

```
C:\>link
```

MS-DOS will load LINK and display a copyright message followed by the prompt:

```
Object Modules [ .OBJ]:
```

This is a prompt to enter the object module(s) that LINK will use to produce the run file (the relocatable module). Individual modules must be separated by a space or a plus (+) sign. LINK assumes that each object module has an extension of OBJ. Any other extension must be specified.

To illustrate, suppose that you have used a compiler or an assembler to create the object modules EXAMPLE1.OBJ and EXAMPLE2.OBJ. To combine them into a single relocatable module, you would enter their filenames in response to the initial LINK prompt:

```
Object Modules [ .OBJ]: example1+example2
```

Because no extensions were specified, LINK assumes that the modules have an extension of OBJ.

LINK next prompts you to enter the name to be given to the run file:

```
Run File [EXAMPLE1.EXE]:
```

If you do not enter a filename, LINK will default to the filename of the first object module listed in the previous command. A run file must have an extension of EXE. Any other extension will be ignored.

When you press Enter, LINK will display the following prompt:

```
List File [NUL.MAP]:
```

Enter a filename if you want LINK to create a *list file.* The list file contains the name and size of the segments within the relocatable module. The list file will also contain any errors that are detected by LINK. (Later, this chapter discusses list files again and present an example.) LINK gives the list file an extension of MAP if an extension is not specified. Press Enter if you do not want a list file created.

LINK's final prompt asks you for the names of any library files to be searched for unresolved references:

```
Libraries [.LIB]:
```

Some compilers contain a default library that LINK will search if you press Enter. LINK will look for the compiler library on the default drive. If the library is not on the default drive, LINK will look for it on the drive specified by the compiler.

You may specify up to eight library files to be searched. LINK assumes an extension of LIB if an extension is not specified. Individual filenames must be separated by a space or a plus sign (+). If your response to the prompt includes a drive designator, LINK will look for the listed library file(s) on the specified drive. LINK will search the drive specified by the compiler (or the default drive) if no drive designator is included.

```
Libraries [.LIB]: c:mylib+yourlib+a:hislib+c:
```

The preceding response directs LINK to search the files MYLIB.LIB and YOURLIB.LIB on the C drive, HISLIB.LIB on the A drive, and the default library (if one exists) on the C drive.

LINK will search the library files in the order that they are listed. If there is a default library, it will be searched last. When LINK finds the module that contains the symbol it is looking for, that module is processed in the normal fashion. LINK displays a message telling you to enter a new drive designator letter when it cannot find a specified library file.

You can use a comma to end a response to a LINK prompt. When you use a comma, you can type your response to the next prompt without waiting for the prompt to be displayed:

```
Object Modules [.OBJ]: example1,
List File [NUL.MAP]: example1
Libraries [.LIB]:
```

The first command tells LINK the name of the object module. The comma following the object module tells LINK that the response to the next prompt (run file) is also entered on the first line. In this case, no name is entered for the run file, so LINK assigns the default filename to the run file. Notice that the prompt for the run file is not displayed. The last two commands tell LINK to create a list file named EXAMPLE1.MAP and to search the default library file.

The first two commands in the previous example could have been combined as follows:

```
Object Modules [.OBJ]: example1,,example1
Libraries [.LIB]:
```

In this example, the first command ends with two commas, followed by the name that LINK will assign to the list file. Notice that the prompt for the list file is not displayed.

If you end any of the responses to a LINK prompt with a semicolon, the remaining responses will be assigned their defaults. No further prompts will be displayed:

```
Object Modules [.OBJ]: example1;
```

This command tells LINK that **example1** is the object module. Because the command ends in a semicolon, the remaining prompts are not displayed and are assigned their defaults.

Startup Method 2

In the second method for starting LINK, the responses to the LINK prompts can be included in the LINK start command. The responses must be listed in the order in which LINK displays the prompts (`Object Modules`, `Run File`, `List File`, or `Libraries`). You must separate each response from the next with a comma.

LINK will prompt for any responses that were not included in the start command:

```
C:\>link example1,,example1

Microsoft Object Linker V2.00
(C) Copyright 1982 by Microsoft Inc.

Libraries [.LIB]:
```

The start command tells MS-DOS to load LINK. The start command also tells LINK to search for the module EXAMPLE1.OBJ, assign the run file its default filename, and create a list file named EXAMPLE1.MAP. Notice that the prompts for these responses are not displayed.

If you include responses to LINK prompts in the start command and end the command with a semicolon, any subsequent prompts will not be displayed and they will be assigned their defaults:

```
C:\>link example1;

Microsoft Object Linker V2.00
(C) Copyright 1982 by Microsoft Inc.
```

This start command loads LINK and tells LINK to search for EXAMPLE1.OBJ. The three remaining prompts are not displayed and are assigned their defaults.

Startup Method 3

The third method for starting LINK requires that you store a set of LINK responses in a text file. These responses must be stored in the order that the LINK prompts are displayed. LINK can then be started by including the name of the text file in the LINK start command. This method is convenient when you are entering a long list of object modules. A long response to the object module or library prompt may be stored on several lines by using a plus sign (+) to continue a response onto the next line.

A text file containing a sequence of responses can be created from your keyboard. Starting at the MS-DOS command level (the DOS prompt is displayed), type **copy con:** and then type the filename of the text file that you will be creating. The filename may be preceded by a drive designator letter and/or a pathname.

In the following example, a text file named SAMPLE1.TXT is created:

```
C:\>copy con: sample1.txt      ←Enter
example1+example2+example3,,;      ←Enter
^Z      ←you press Ctrl-Z and Enter
        1 File(s) copied
```

To start LINK with a text file, type **link**, followed by a blank space and the symbol @, followed by the filename and extension of the text file. LINK will assume that the first character in the filename is a blank if you include a space between the @ and the filename of the text file:

```
C:\>link @sample1.txt

Microsoft Object Linker V2.00
(C) Copyright 1982 by Microsoft Inc.

Object Modules [.OBJ]: example1+example2+example3
Run File [EXAMPLE1.EXE]:
List File [EXAMPLE1.MAP]:
```

The responses to the prompts have been extracted from the file SAMPLE1.TXT. LINK automatically searches for the object modules EXAMPLE1, EXAMPLE2, and EXAMPLE3. LINK then assigns the default filename to the run file and creates a list file named EXAMPLE1.MAP. The library prompt is not displayed because of the semicolon at the end of the response line. LINK assigns the default response to the library prompt.

LINK Switches

LINK provides seven optional switches that you can specify when starting LINK. Each switch directs LINK to perform certain tasks when constructing a relocatable module. To specify a switch, type a forward slash (/) followed by the first letter of the switch name at the end of a response line. You may include a switch when using any of the three methods for starting LINK. Switches may be specified on any response line. Each letter specifying a switch must be preceded by a forward slash.

The /High Switch

Within each relocatable module, LINK stores information that tells MS-DOS where to load the module in computer memory. Normally, this information instructs MS-DOS to load the module at the lowest-available address in memory. The */high switch* tells LINK to construct a module that MS-DOS will load at the highest-available memory address.

The next command directs LINK to combine the object modules EXAMPLE1 and EXAMPLE2 into a relocatable module. LINK will produce a run file named EXAMPLE1.EXE (the default) and a list file named EXAMPLE.MAP. The default library file will be searched. The LINK switch /high (entered as /**h**) directs LINK to produce a run file that MS-DOS will load at as high a memory location as possible. Enter the following command:

```
C:\>link example1+example2,,example1;/h
```

The /high switch should not be used when you are linking Pascal or FORTRAN object modules.

The /Dsallocate Switch

The */dsallocate switch* (entered as /**d**) directs LINK to create a run file that loads all data at the high end of the data segment. If this switch is not used, LINK will create a run file that loads data at the low end of the data segment. The /dsallocate switch is required when linking Pascal or FORTRAN object modules.

The /Linenumber Switch

LINK will generate a list file when it is instructed to do so. The list file contains a list of the segments in the run file as well as each segment's relative start and stop addresses. A *segment* is a contiguous portion of the run file, which may be up to 64 Kbytes in length. Segments are generally used to partition a run file into functional components. Each segment within an object module is assigned to a class by the programmer. LINK combines the segments of the specified object modules according to each segment's class.

A segment's *relative start address* is the location of the first byte in a segment relative to the first byte in the run file. For example, if the first byte of a segment is the first byte of the run file, the segment's relative start address is 0. A segment's *relative stop address* is the location of the last byte in a segment relative to the first byte in the run file. For example, if the last byte of a segment is the 100th byte of the run file, the segment's relative stop address is 99 (99 bytes from the first byte in the run file).

The */linenumber switch* (entered as /**l**) tells LINK to include in the list file the line numbers and relative addresses of the *source statements* in each object module. Source statements are the statements in a computer program in the form that they are entered by the programmer. The /linenumber switch only works with object modules produced by a compiler that numbers each source statement (such as the BASIC compiler).

The /Map Switch

Symbols (such as variable names) that are shared by two or more object modules are called *public symbols*. Symbols are designated as being "public" by the compiler or assembler used to create the modules. The */map switch* (entered as /**m**) directs LINK to include in the list file all public symbols that are defined in the specified object modules.

The next set of commands directs LINK to create a list file named EXAMPLE.MAP. The MS-DOS command TYPE is then used to display EXAMPLE.MAP. Enter the boldface commands in the following:

```
C:\>link example1,,example1/m

Microsoft Object Linker V2.00
(C) Copyright 1982 by Microsoft Inc.

Libraries [.LIB]:

C>type example.map

Start   Stop    Length  Name          Class
00000H  000C7H  00C8H   STACKSG       STACK
000D0H  000D5H  0006H   DATASG        DATA
000E0H  000F2H  0013H   CODESG        CODE

Origin    Group

Address             Publics by Name

000D:0004           AAA
000D:0002           PRICE
000D:0000           QTY

Address             Publics by Value

000D:0000           QTY
000D:0002           PRICE
000D:0004           AAA

Program entry point at 000E:0000
```

The first portion of the list file contains the name, class, length, and start and stop addresses of each segment in the run file.

The second section in the list file is headed `Origin Group`. A *group* consists of one or more segments contained in the specified object modules that are to be combined into a single segment in the run file. Groups are defined by the programmer during program assembly or compiling. Any groups defined by the compiler or assembler are listed here, along with their relative starting addresses (origin) within the relocatable module. The module in this example does not contain any groups.

The third section of the list file is an alphabetical listing of the public symbols contained in the object modules. The relative addresses of each symbol within the relocatable module are also listed.

The fourth section of the list file is a listing of the public symbols contained in the object modules ordered by their relative addresses within the module.

The final line in the list file gives the relative address of the run file's *entry point*. The entry point is the location of the first executable computer instruction contained in the run file.

The /Pause Switch

The */pause switch* (entered as **/p**) is used to suspend LINK execution before the run file is written to disk. This gives you the opportunity to swap disks. To demonstrate the use of the /pause switch, enter the boldface command in the following:

```
C:\>link example1,,example1/p

Microsoft Object Linker V2.00
(C) Copyright 1982 by Microsoft Inc.

Libraries [.LIB]:
About to generate .EXE file
Change disks      ←press Enter when ready
```

It is important not to remove a disk if the VM.TMP file or the list file is to be stored on it.

The /Stack:[*Number*] Switch

The stack is a segment within the run file that is used to store data during program execution. Compilers and assemblers provide information in the object modules that allows LINK to compute the required size of the stack. The */stack:[*number*] switch* can be used to override the stack size that is indicated in the object modules.

Any hexadecimal number from 0001H to FFFFH may be specified for the size of the stack in bytes. LINK will create a stack with 0200H bytes if you specify a number less than 0200H (decimal 512). Enter the following command to create a run file with a stack that contains 0300H bytes:

```
C:\>link example1,,example1/s:300
```

The /No Switch

The */no switch* (entered as /**n**) directs LINK not to search the default library file for unresolved external references. For example, if you are linking modules that were created with a Pascal compiler, you could enter /**n** at the end of a response to a LINK prompt and LINK would not search PASCAL.LIB for any unresolved external references.

PART

2

MS-DOS Commands

- APPEND
- ASSIGN
- ATTRIB
- BACKUP
- BREAK
- BUFFERS
- CALL
- CHCP
- CHDIR
- CHKDSK
- CLS
- COMMAND
- COMP
- COPY
- COUNTRY
- CTTY
- DATE
- DEL
- DEVICE
- DEVICEHIGH
- DIR
- DISKCOMP
- DISKCOPY
- DOS
- DOSKEY
- DRIVPARM
- ECHO
- ERASE
- EXE2BIN
- FASTOPEN
- FC
- FCBS
- FDISK
- FILES
- FIND
- FOR
- FORMAT
- GOTO
- GRAFTABL
- GRAPHICS
- IF
- INSTALL
- JOIN
- KEYB
- KEYBxx
- LABEL
- LASTDRIVE
- LOADHIGH
- MEM
- MIRROR
- MKDIR
- MODE
- MORE
- NLSFUNC
- PATH
- PAUSE
- PRINT
- PROMPT
- RECOVER
- REM
- RENAME
- REPLACE
- RESTORE
- RMDIR
- SELECT
- SET
- SETVER
- SHARE
- SHELL
- SHIFT
- SORT
- STACKS
- SUBST
- SWITCHAR
- SWITCHES
- SYS
- TIME
- TREE
- TRUENAME
- TYPE
- UNDELETE
- UNFORMAT
- VER
- VERIFY
- VOL
- XCOPY

MS-DOS Commands

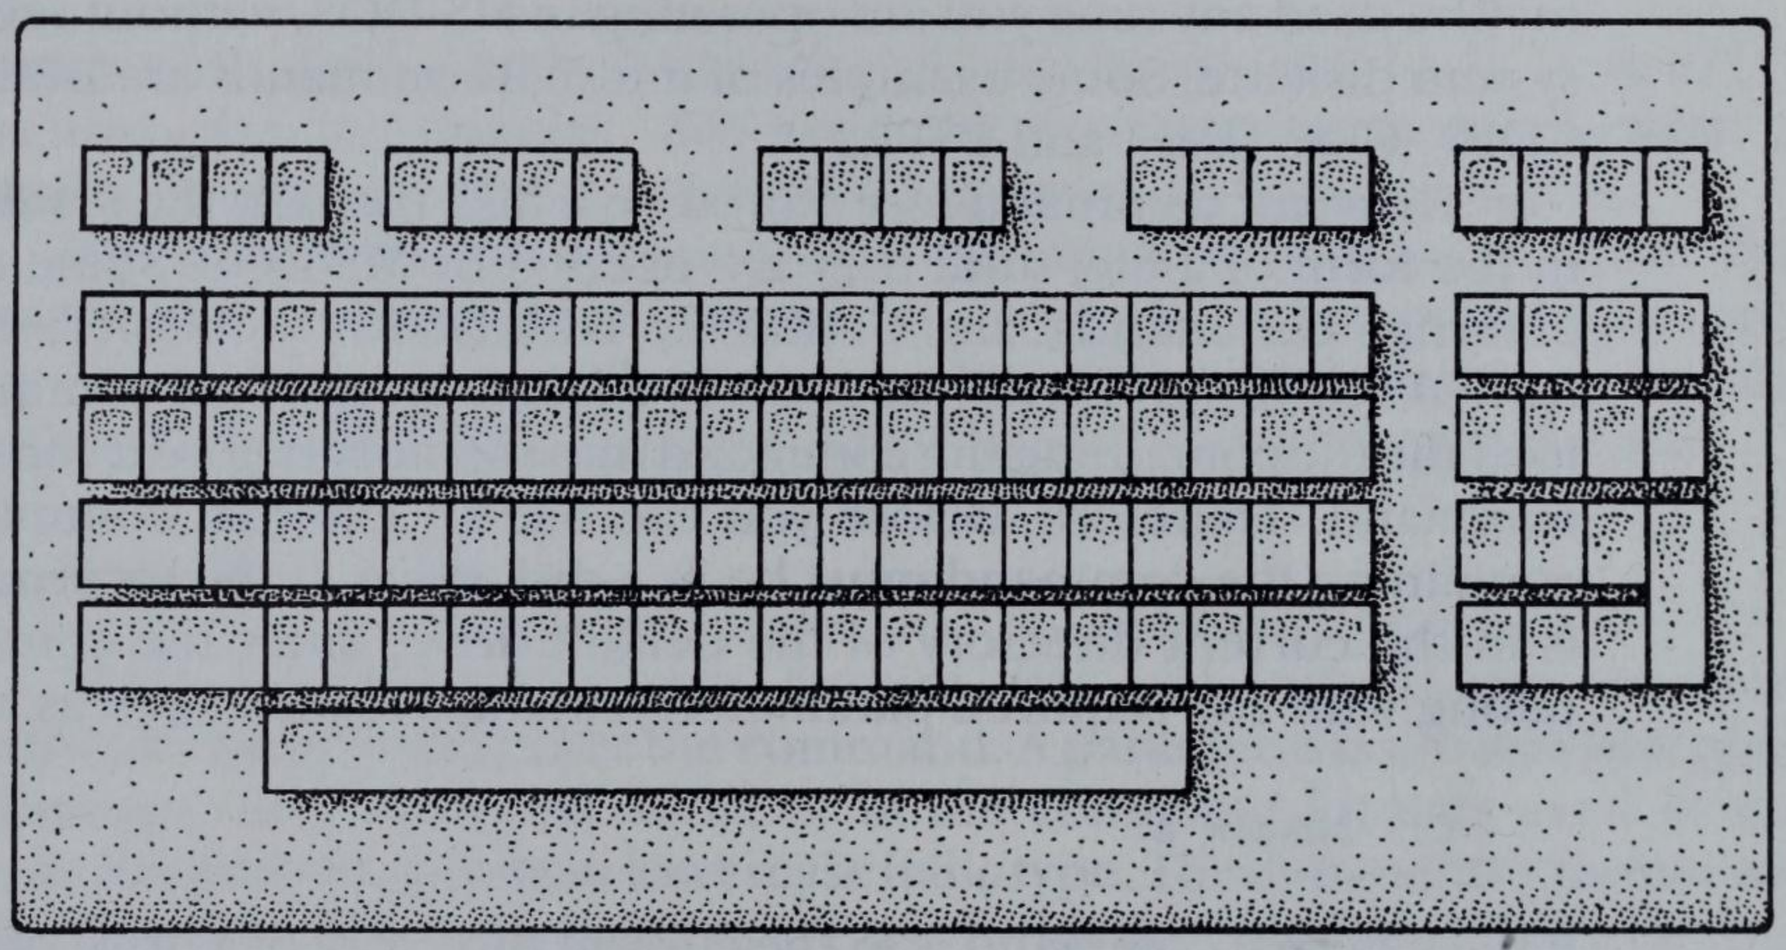

MS-DOS is a *command-driven* operating system. In other words, when you enter a command into your computer, MS-DOS carries it out by performing the appropriate actions. This part of the book discusses each of the MS-DOS commands by explaining their characteristics, use, and format and giving you examples of each command. The discussion of each command begins with a heading such as the one you see here:

CLS

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

The first line in the heading shows the command in uppercase letters. The second line describes the command as being either an internal or an external command. *Internal* commands are those commands that have been built into MS-DOS. Whenever MS-DOS is booted, these commands are automatically loaded into memory. Internal commands are executed immediately and may be used any time you are operating in MS-DOS, without reinserting the system diskette. Some examples of internal commands are BREAK, CHDIR, COPY, CLS, TIME, and TYPE.

External commands are stored on a disk (usually the system diskette), in the form of a file, until they are needed by MS-DOS. Some examples of external commands are CHKDSK, DISKCOPY, FORMAT, PRINT, and RECOVER. When you tell MS-DOS to execute an external command, it must load the file containing the command into memory before it can perform the command. Therefore, before you can use an external command, the file containing the command must be in a disk drive. If the external command is in the current directory of the default drive, enter the command name (along with any required parameters), using a format such as this:

```
C:\>chkdsk a:
```

If the external command is in the current directory of a drive other than the default, precede the command name with the letter specifier of the appropriate drive:

```
A:\>c:chkdsk b:
```

If the external command is not in the current directory of a drive, precede the command name with the path specifier to the appropriate directory:

```
A:\>c:\dos\chkdsk b:
```

The PATH command can be used to establish a set of path specifiers for MS-DOS to use in looking for external commands. Path specifiers in this set need not be included on the command line when you invoke an external command. Thus, if MS-DOS is stored on your hard disk and you include a path to the MS-DOS directory in your AUTOEXEC.BAT file, you do not have to remember which commands are external. You also won't have to remember where the external commands are stored. The system will find and load

them without a command-line path. Current directories, default drives, and path specifiers are discussed in chapters 2 and 3.

The third line in the heading tells you which version(s) of MS-DOS can execute the command. For example, the notation *MS-DOS 2.X* refers to all versions of MS-DOS with a major version of 2 (such as 2.00 and 2.10). Following the convention used throughout this book, the terms *MS-DOS*, *DOS*, and *PC DOS* are used interchangeably, unless otherwise specified.

Command Format

Whenever MS-DOS displays the system prompt (such as `A:\>`, `B:\>`, or `C:\>`), you may enter a command. However, you must use the proper *format*, or pattern, for that particular command. Let's look at some examples.

The format for the command CLS (CLear Screen) is simply CLS. This means that to execute the command, you type **cls** and press the Enter key. Remember that you may use either uppercase or lowercase letters to type the command; MS-DOS will automatically convert all letters to uppercase.

```
C:\>cls          ←Enter
```

Many MS-DOS commands require that you include one or more *parameters* when you enter the command. A parameter is an item that gives additional information to MS-DOS. In the command formats used in this book, parameters appear in lowercase italic type. The command's format will tell you which, if any, parameters are used with the command. For example, the format for the command SYS (SYStem files) is `SYS d:`. The *d*: is a parameter indicating that you should specify a drive. If you do not enter a drive letter designator (for example, c: or a:), MS-DOS will use the *d*efault drive. Suppose that you wish to use drive A. Your command statement will look like this:

```
C:\>sys a:       ←Enter
```

Some parameters are optional. When the parameter is enclosed in square brackets [like this], the inclusion of that parameter is optional. For example, the format for the command VOL (VOLume) is `VOL [d:]`. Because the *d*: is in brackets, you may enter the command with or without the drive designator. MS-DOS will interpret the command one way if the parameter is present, another way if it is not.

Many MS-DOS 2.X, 3.X, 4.X, and 5.X command formats include the word *path*. *Path* is a variable parameter telling MS-DOS which path, or

course, to take in travelling from one directory to another. In place of the word *path*, you must enter the directory names, separated by a backslash (\). The directory names become the "path specifiers." Let's look at the format for the command MKDIR (MaKe DIRectory):

```
MKDIR [d:]path
```

The format tells us that the drive designator is optional, because the *d*: is in brackets. However, although *path* is a variable (you must type a real path specifier rather than the word *path*), it is not shown in brackets, so you must enter some directory name(s). You can find more information about paths in chapter 3.

Other parameters frequently found in MS-DOS command formats are *filename* and *.ext*. When you see these variable words in the format and they are not surrounded by brackets, you must type the name of the file (up to eight characters in length) and its extension (a period and up to three characters), if there is an extension. For example, the format for the command TYPE is

```
TYPE [d:][path]filename[.ext]
```

As you can see, this command requires a *filename* parameter. Optional parameters are the drive designator, path specifier, and filename extension.

Some MS-DOS commands require a *source* and a *target* file. The source contains the data to be used in executing the command. The target contains the data that is the result of command execution. You may specify multiple sources and targets with the use of wildcards, as discussed later in this introduction.

Command Notation

You have probably noticed that several kinds of typefaces and punctuation marks are used in the command formats. The following is a guide to their meaning:

- Items in monospace type with no brackets are ones that must be entered. You may use either uppercase or lowercase letters.
- Items in [*bracketed monospace italics*] are optional variables; although optional variables appear in square brackets, you should not type them when you replace the variable with actual values.
- Items in [bracketed monospace] are optional but not variable.

- Items in *monospace italics* with no brackets are variables that must be entered.
- Items in **monospace bold** show what a user has entered in examples.

Include all punctuation marks as shown in the format, including commas, colons, semicolons, question marks, slashes, and quotes. Also include any parentheses and plus signs.

Items separated by a vertical bar (|) are either/or entries. ON|OFF means either ON or OFF. An ellipsis (. . .) following items means that you may repeat the items as often as needed. As mentioned before, items in square brackets are optional. Do not enter vertical bars, ellipses, or square brackets.

Wildcards

Most MS-DOS commands allow the use of *wildcards* in filenames and filename extensions. Sometimes called "global characters," wildcards replace one or more specific characters in the filename or its extension. When wildcards (? and *) are used, the command is executed once for each matching file that is found. You will find more information about wildcards in chapter 2.

Switches

Another kind of parameter found in some MS-DOS commands is a *switch*. A switch instructs MS-DOS to execute a command in a certain way. To use a switch, type a forward slash (/) followed by a letter or number. The command format will show you which, if any, switches can be used with the command. For example, here is the format for the pre-DOS 5 DIR (DIRectory) command:

```
DIR [d:][path][filename][.ext][/P][/W]
```

As you can see, DIR has two switches, `/P` and `/W`. Both are optional, because they are enclosed in brackets. Depending on which switch you select, MS-DOS will scroll the directory and pause (/P) when the screen is full, or it will list the directory in wide (/W) columns across the screen. Any switches that may be used with a particular command are explained in the discussion for that command.

Using MS-DOS on a Network

Many computer network packages link computers running under MS-DOS. The details of setting up and starting these networks depend on the package used and are not discussed here. Instead, we will make some general remarks about how MS-DOS commands behave on a network.

Network drives are assigned drive letters, just like drives on your own machine. Suppose that Manny and Joe are using separate computers, but both the computers are on the same network. Manny's computer has drives A, B, and C. Joe's computer also has drives A, B, and C. Manny decides that he wants to use Joe's drive C and that he (Manny) wants to call it drive D. Manny enters a command telling MS-DOS and the network software that, from now on, whenever Manny says drive D, he means Joe's drive C. To Manny, Joe's drive C is network drive D.

Most MS-DOS commands treat network drives like any other drive. For example, if Manny enters the command `dir d:`, he sees the contents of Joe's drive C. However, some MS-DOS commands (see box) do not work with network drives. For most of these commands, prohibiting their use with network drives seems reasonable. Network drives are shared resources and must be used respectfully. For example, Joe probably would not appreciate it if Manny entered the command `format d:` and MS-DOS executed it. Although some of the restricted commands (such as FASTOPEN and VERIFY) do not appear to pose any danger to the network drives, they may nevertheless be unusable on network drives because of implementation problems.

MS-DOS Commands That Cannot Be Used with Network Drives

CHKDSK	FASTOPEN	JOIN	SUBST
DISKCOMP	FDISK	LABEL	SYS
DISKCOPY	FORMAT	RECOVER	VERIFY

APPEND

External
MS-DOS 3.2, 3.3, 4.X, 5.X

Function: Directs MS-DOS to nonexecutable files.

Format:
```
APPEND [/E] [/X]
APPEND d:path [;d:[path]]. . .
APPEND /X:ON (DOS 4.X and 5.X only)
APPEND /X:OFF (DOS 4.X and 5.X only)
APPEND /PATH:ON (DOS 4.X and 5.X only)
APPEND /PATH:OFF (DOS 4.X and 5.X only)
```

Examples:
```
append /x /e
append c:\word;c:\turbo
```

The APPEND command provides a long awaited, much needed enhancement to the PATH command. PATH establishes a list of subdirectories for MS-DOS to search when a file is not located in the current directory. Unfortunately, the information supplied by PATH is useful only in locating files with a filename extension of EXE, COM, or BAT (executable files). The APPEND command corrects this deficiency by allowing the inclusion of nonexecutable files in a directory search path.

Many programs, particularly word processors, consist of an executable file (the "program") plus one or more nonexecutable files. A help facility is an example of a nonexecutable file. Versions of MS-DOS prior to 3.2 have no way of finding such files if the files are not located in the current directory. APPEND overcomes this limitation by providing MS-DOS with path information to all files, regardless of filename extension.

The parameters used with APPEND are path specifiers separated by semicolons. APPEND allows up to 128 characters in the complete path specification.

An Example

The word processor used to write this book consists of one executable file (WP.EXE) and four nonexecutable files (WPMSG.TXT, WPSYSD.SYS, WPHELP.TXT, or WPQUE.SYS). The five files are stored in the subdirectory \WORD. APPEND is used to let MS-DOS know about the location of these files as follows:

```
C:\>append c:\word
```

Once the command is entered, any subdirectory can be used as the current directory, because APPEND provides the operating system with the information

required to locate all of the files used by the word processor. Notice that the APPEND path specifier included a drive letter. This is a good practice to follow, because it allows MS-DOS to locate files regardless of which drive is currently the default.

APPEND is a terminate and stay resident program (see chapter 13). This means that the first time you invoke APPEND, the program is read from the disk and stored in memory. APPEND then remains in memory until the system is turned off or restarted. Once loaded into memory, APPEND can be used to display, modify, or cancel the APPEND path specifier.

Displaying the APPEND Path Specifier

MS-DOS will display the APPEND path specifier in response to APPEND.

```
C:\>append c:\word

C:\>append
APPEND=c:\WORD

C:\>append c:\word;c:\turbo
C:\>append
APPEND=C:\WORD;C:\TURBO
```

Cancelling APPEND's Path Specifier

APPEND followed by a semicolon cancels the APPEND path specifier.

```
C:\>append
APPEND=C:\WORD;C:\TURBO

C:\>append ;

C:\>append
No Append
```

APPEND remains in memory when the path specifier is cancelled. A new specifier can be set at any time.

DOS Functions and the /X Switch

MS-DOS carries out most of its work through the use of the MS-DOS *functions*. Use of the functions is discussed in appendix A, but understanding the role of three of the functions is helpful when you use the APPEND command.

EXEC

MS-DOS uses the function called EXEC to load and run executable files. You can use the /x switch, an optional APPEND parameter, to control the operating system's use of EXEC.

The /x switch allows EXEC to use the APPEND search path to locate and run executable files. The following example, using DOS 4.X, illustrates the use of the /x switch.

```
C:\>append                      ←load APPEND without /x

C:\>append c:\batch             ←set APPEND search path

C:\>test                        ←execute TEST.BAT

Bad command or file name        ←EXEC can't find TEST.BAT

C:\>append /x                   ←make search path available

C:\>test                        ←try TEST.BAT again

TEST.BAT executed               ←EXEC can find it now
```

The first command in the example loads APPEND into memory. The command does not include the /x switch; therefore, the APPEND search path is not available to EXEC.

The second command sets the APPEND path specifier to be **c:\batch**.

The command **test** is simply a command to execute the batch file TEST.BAT. In the example, TEST.BAT happens to be in the directory C:\BATCH. Because the APPEND search path is not available, EXEC cannot locate TEST.BAT and the batch file fails to execute.

The command **append /x** makes the APPEND search path available to EXEC. EXEC locates TEST.BAT and the batch file echoes a message to indicate that it has executed successfully.

FIND FIRST and FIND NEXT

DOS uses the function FIND FIRST to locate the first file in a directory that matches a wildcard specification. The function FIND NEXT is used to locate any additional files in the directory that match the wildcard. As an example, the command `copy *.bat b:` uses FIND FIRST to identify the first file in a directory that has an extension of BAT. After copying the first file, the command uses FIND NEXT to identify the next BAT file in the directory. The file is copied and FIND NEXT is used again to locate the next BAT file. The process repeats until all of the BAT files have been copied.

The /x switch controls the action taken by DOS when FIND FIRST fails to find a match in the current directory. If /x has been "set" (by executing `append /x`), FIND FIRST will look in each of the directories of the APPEND path specifier until it finds a match for the wildcard. If /x has not been set, FIND FIRST will send DOS a `File not found` error, and the process will terminate.

When /x is set, FIND FIRST will stop in the first directory that contains a match. FIND NEXT is then used to locate additional matches in the same directory. The process will terminate when the last file in that directory is located.

Using the /X Switch

The /x switch is more flexible in DOS 4.X and 5.X than in DOS 3.2 or 3.3. In 4.X and 5.X, you can use the command at any time simply by entering **append /x** (or, equivalently, **append /x:on**) at any time. Similarly, **append /x:off** turns /x off at any time.

In DOS 3.2 and 3.3, the /x switch can only be used the first time APPEND is invoked. Thus, if you load APPEND into memory with the command **append**, the /x switch is permanently off. The only way to turn it on is to reboot the system and load APPEND with the command **append /x**. Similarly, when the switch is on, the only way to turn it off is to reboot and load APPEND without using the /x.

The /E Switch

DOS normally stores the value of the APPEND path specifier at a memory location known only to the operating system. Users and application programs have no direct access to the specifier.

You can use the /e switch to direct DOS to store the APPEND path specifier as an environment variable. Environment variables are directly accessible to both users and application programs. Enter the command **set** to display the DOS environment variables.

The /e switch can be used only when APPEND is first loaded into memory.

The /Path Switch

So far you have seen how DOS uses APPEND when it is unable to locate a file. DOS normally uses APPEND regardless of whether a filename is preceded by a path specifier. For example, if the command `copy c:\batch\test.bat b:` is entered, and the directory C:\BATCH does not contain a file named TEST.BAT, DOS will use the APPEND path specifier in an attempt to locate the file.

The /path switch, available with the DOS 4.X and 5.X implementations of APPEND, enables you to modify this behavior. If you enter **append /path:off**, DOS will not use APPEND when a filename is preceded by a path specifier or a drive letter. For example, if you enter **append /path:off** and then try to execute the COPY command in the previous paragraph, the command will simply terminate if the directory C:\BATCH does not contain a file named TEST.BAT.

The command `append /path:on` reverses the effect of `append /path:off`. Either of these commands may be entered at any time.

The PC DOS 4.00 version of the /path switch contains a bug that affects the DOS batch file processor. As you have seen, if the /x switch is set to "on", DOS will use APPEND to locate batch files that are to be executed. Unfortunately, the batch file processor gets confused by the /path switch. When the switch is set to "off", DOS displays the confusing message `Batch file missing` when it attempts to execute a batch file that has been located using the APPEND path specifier.

Problems with APPEND

APPEND is a very useful command. Unfortunately, APPEND is not as well designed or well behaved as it should be. The design problem centers around the fact that any file read with the APPEND path specifier is written to the current directory. The directory setup used in writing this book illustrates the problem. The word processor is stored as \WORD\WP.EXE. The contents of this section of the book are stored as \BOOK\COMMANDS\APPEND.DOC. One way to set up the system is as follows:

```
C:\>append /e /x

C:\>append c:\book\commands

C:\>cd \word
```

With \WORD as the current directory, the word processor can be started, and, using the APPEND path specifier, the word processor can locate APPEND.DOC for editing. The problem is that following any changes to the file, the word processor writes APPEND.DOC to the current directory \WORD. The original file remains unchanged in \BOOK\COMMANDS.

Fortunately, this problem has a simple solution. I can make BOOK\COMMANDS the current directory, and use APPEND to locate WP.EXE:

```
C:\>append c:\word

C:\>cd \book\commands
```

Now any changes made to APPEND.DOC are stored in the original file.

I find problems like this somewhat amusing, but obviously the potential for real trouble exists. Even IBM acknowledges that a problem exists. The PC DOS 3.30 manual states that "APPEND /X may cause problems with some applications. If you experience problems using the /x option, you may want to use the APPEND command without it." The manual reports that the APPEND path specifier must be cancelled before you can use the commands BACKUP and RESTORE. In addition, the manual says that APPEND must be used before the ASSIGN command is used. The DOS 4.X and 5.X version of APPEND has been modified to deal with some of these problems, but the use of APPEND still requires caution.

I have used APPEND while writing this book and have not experienced any serious problems. However, I back up my data frequently and always have my fingers crossed. At this point, the value of APPEND appears to outweigh the apparent risks.

ASSIGN

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Reassigns the disk operation drive to another drive.

Format: `ASSIGN [x[=]y[. . .]]`

Examples:
```
assign
assign a=c
assign a=c b=c
```

Note: The commands JOIN and SUBST are more flexible and are safer to use than ASSIGN. Their use is recommended as an alternative to ASSIGN.

Some computer programs will execute only on systems with a particular drive configuration. For example, a program may require that any data used in the program be located on drive A. The ASSIGN command enables you to overcome this limitation by reassigning the specified disk drive to another disk drive.

Suppose you have a program that requires data to be on drive A, but you want to keep the data on your hard disk, drive C. You can use ASSIGN to tell MS-DOS that all references to drive A are to be redirected to drive C (the hard disk). Note that you do not have to enter a colon after the drive letter when you are using the ASSIGN command:

```
C:\>assign a=c
```

Now each time that the program looks for data on drive A, MS-DOS will automatically redirect the program to drive C.

You may make more than one reassignment with each ASSIGN command. The following command tells MS-DOS to redirect all references for drives A and B to drive C:

```
C:\>assign a=c b=c
```

Entering ASSIGN with no parameters cancels any previous ASSIGN commands and you are returned to the original drive:

```
C:\>assign
```

ASSIGN is designed primarily for use with MS-DOS 1.X programs that are run on systems without hard disks. ASSIGN should be used only when necessary and then with caution. Reassigning a floppy disk drive to the hard disk will redirect *all* access of the floppy disk to the hard disk. Each read or write operation that is intended for a floppy disk will be redirected to the hard disk. Unless you exercise great care, you can inadvertently overwrite all or part of the hard disk.

The makers of MS-DOS recommend that application programs be written so that the user specifies the drive configuration of the system on which the program will be run. Restricting programs to a particular configuration is discouraged.

Note that the MS-DOS commands DISKCOPY and DISKCOMP will ignore any drive reassignments made with ASSIGN. ASSIGN should not be used with BACKUP, RESTORE, LABEL, JOIN, SUBST, or PRINT, because drive reassignments can confuse these commands, causing unpredictable results.

ATTRIB

External
MS-DOS 3.X, 4.X, 5.X

Function: Modifies read-only, archive, system, and hidden file attributes.

Formats: `ATTRIB [+R | -R][+A` (or)
`-A][d:][path]filename[.ext][/S]` (DOS 3-5)
`ATTRIB [+S | -S][+H` (or)
`-H][d:][path]filename[.ext]` (DOS 5)

Example: `attrib +r mypro.c`

MS-DOS maintains a set of *file attributes* for each file. Each file's attributes are a composite of six individual characteristics that the file may possess. The ATTRIB command enables you to modify these attributes. With DOS 3 and 4, you can use ATTRIB to modify the *read-only* and *archive* attributes. With DOS 5, you can also use ATTRIB to modify the *system* and *hidden* attributes. See chapter 10 for detailed information about file attributes and for a set of programs you can use to directly modify a file's hidden attribute.

The Read-Only Attribute

MS-DOS files that possess a read-only attribute cannot be written to or erased. ATTRIB can be used to mark files as read-only, thereby protecting the files from accidental modification or erasure. The command format `attrib +r filename` makes a file read-only. The command `attrib -r filename` removes read-only protection, and `attrib filename` displays a file's read-only status.

The following commands give the file MYPRO.C read-only status, confirm that the file is read-only, remove the read-only status, and confirm that the read-only status has been removed.

```
C:\>attrib +r mypro.c        ←set as read-only

C:\>attrib mypro.c           ←request attribute status

      R C:\MYPRO.C           ←MS-DOS displays (R = read-only)

C:\>attrib -r mypro.c        ←remove read-only status
```

```
C:\>attrib mypro.c          ←request attribute status

        c:\MYPRO.C          ←read-only removed
```

The Archive Attribute

MS-DOS turns on a file's archive attribute each time that the file is modified. In 3.2 and later versions of MS-DOS, the archive attribute can also be set by using the command format `attrib +a` *`filename`*. A file's archive attribute may be cleared with the command `attrib -a` *`filename`*. The command format `attrib` *`filename`* displays the status of a file's archive attribute. See the discussions of the commands BACKUP, RESTORE, and XCOPY for information on how MS-DOS uses a file's archive attribute.

The Hidden and System Attributes

A file will not be listed when a DIR command is issued if the file's *hidden* attribute is set. The DOS 5 version of ATTRIB enables you to set or clear a file's hidden attribute, for example:

```
attrib secret.txt +h
```

System files are components of the MS-DOS operating system. System files are identified by a system file attribute. The DOS 5 version of ATTRIB enables you to set or clear a file's system attribute, for example:

```
attrib printer.sys +s
```

Files with either their hidden or system attribute set will not be affected when the ATTRIB command includes a wildcard specifier, unless the command sets or clears the hidden or system attribute. For example, the following command will not affect any hidden files in the current directory:

```
attrib *.* +r
```

However, the following command will set the read-only attribute of all hidden files in the current directory. The hidden files will also have their hidden attributes cleared:

```
attrib *.* +r -h
```

Note that under DOS 5, using the /a switch with the DIR command you can display files with any particular attributes, including hidden or system.

Processing Directories

ATTRIB processes files in the specified (or default) directory which match the file specified in the command line. The /s switch directs ATTRIB to also process all files in the subdirectories of the specified (or default) directory. The following example is executed with \BOOK as the default directory:

```
C:\>dir          ←display contents of \BOOK

 Volume in drive C is HARDDISK
 Directory of C:\BOOK

.        <DIR>    3-27-90  3:52p
..       <DIR>    8-11-90  6:10p
NEW      <DIR>    8-11-90  8:10p
OLD      <DIR>    8-11-90  8:11p
MISC    DOC    3210  9-23-90 11:07a
      5 File(s)  3954688 bytes free

C:\>attrib *.* /s                    ←request attribute status for files
                                       in \BOOK and all subdirectories

A     C:\BOOK\NEW\ATTRIB.DOC         ←MS-DOS displays status for files in
                                       subdirectory \BOOK\NEW

A     C:\BOOK\NEW\ASSIGN.DOC

A     C:\BOOK\NEW\TMP\INTRO.DOC      ←status for files in \BOOK\NEW\TMP

A     C:\BOOK\OLD\DIR.DOC            ←status for files in \BOOK\OLD

A     C:\BOOK\MISC.DOC               ←status for files in \BOOK
```

BACKUP

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Backs up files and directories.

Formats:
```
BACKUP d:[path] [filename[.ext]] d:[/S] [/M] [/A]
[/D:mm/dd/yy] [/T:hh:mm:ss] [/F]
[/L[:[d:][path][filename][.ext]]]
```

Examples:
```
backup c: a:
backup c:*.doc a:
backup c:\ a: /s
```

The BACKUP command is a DOS utility that you use to make backup copies of disk files. Although BACKUP can be used to back up individual files, its primary value is in backing up groups of files or even the entire contents of a hard disk.

Backup copies are stored in *archival* form. This means that the files are stored in a format that is specific for backup storage. They cannot be used for other purposes. Archival files are converted back into standard DOS files using the DOS RESTORE command.

The BACKUP command enables you to select files for archival storage on the basis of path specifier, filename, date stamp, and/or time stamp. You can also back up files that have been changed since they were previously backed up.

DOS 3.X, 4.X, and 5.X can store archive files on either floppy disks or hard disks. On floppy disks, the archive files are stored in the root directory. The BACKUP utility *erases any existing files* in the root of any floppies storing archive files (unless you use the /a switch).

On hard disks, the archive files are stored in a subdirectory named \BACKUP. The BACKUP utility *erases any existing files* in the \BACKUP directory on the hard drive storing the archive files (unless you use the /a switch). Archive files cannot be stored on the logical drive containing the original files. (A hard drive with two DOS partitions consists of two logical drives; see chapter 1.)

The DOS 2.X version of BACKUP stores archive files only on floppy disks. The files are stored in the root directory. The BACKUP utility *erases any previously existing files* in the root of floppies storing the archive files (unless you use the /a switch).

Many users have experienced problems trying to restore archive files that were created with an earlier version of DOS. For example, archive files created with the DOS 2.X version of BACKUP cannot be converted back to standard files with the DOS 3.X version of RESTORE. You can avoid this problem by using equivalent versions of BACKUP and RESTORE. If you want to archive some files prior to installing a new version of DOS, first boot your system using the floppy with the new DOS. Then use the new DOS version

of BACKUP to create your archive files, before installing the new DOS on your system. This will guarantee that your archive files are compatible with the new version of RESTORE.

Backing Up a File

To create a backup copy of a hard disk file, first type **backup**, then type the file specification of the file you are copying, next type the drive designator (such as **a:**) of the target disk (the floppy disk that will store the copy), and finally type any of the four optional switches (see the following discussions).

A *file specification* consists of a letter designating the drive holding the file, followed by the name of the path leading to the directory holding the file, followed by the filename and filename extension of the file. If the BACKUP command does not include a drive letter and path for the file to be copied, BACKUP will assume that the file to be copied is in the current directory of the default drive.

Wildcard characters (see chapter 2) may be used in the filenames and file extensions. When wildcards are used, all of the matching files in the specified (or default) directory will be backed up.

The first example uses BACKUP to make a copy of the hard disk file LOTSA.DAT. The backup will be stored on the target disk in drive A.

```
C:\>backup c:lotsa.dat a:
```

MS-DOS beeps and displays this warning:

```
Insert backup diskette 01 in drive A:
Warning! Diskette files will be erased
Strike any key when ready
```

BACKUP will erase any data on the disk before making the backup copy, unless you use the /a switch. This warning gives you a chance to substitute another disk if you wish. After you double-check to ensure that you have the right disk in drive A, go ahead and press any key. BACKUP will copy the hard disk file onto the disk in drive A and display the following message on the screen:

```
*** Backing up files to diskette 01 ***
\a:lotsa.dat
```

Keeping Track of Your Backups

BACKUP will prompt you to insert another disk if the backup process will exceed the capacity of the target disk. Given the tremendous storage capacity of a hard disk, it is not uncommon to need several disks to finish the job. A good practice is to keep a written record of important BACKUP sessions. You can get a printed copy of the BACKUP screen display by first turning on the printer, then pressing Ctrl-PrtSc before you enter the BACKUP command. All screen display will be echoed (copied) to your printer. At the end of the backup session, press Ctrl-PrtSc again to stop the echoing process.

For a convenient way to automate this record-keeping process, see the following discussion of the /l switch in Other BACKUP Switches.

Backing Up a Directory

All the files in a directory will be backed up if the BACKUP command does not contain a filename. In the following example, all the files in the subdirectory SUBDIR1 will be backed up. Notice that MS-DOS lists each file in the subdirectory as it is being backed up.

```
C:\>backup c:\subdir1 a:
Insert backup diskette 01 in drive A:
Warning! Diskette files will be erased
Strike any key when ready

*** Backing up files to diskette 01 ***
\SUBDIR1\FILE1
\SUBDIR1\FILE2
\SUBDIR1\FILE3
\SUBDIR1\FILE4
```

Backing Up an Entire Disk

The /s switch is used with BACKUP to copy all files in a directory as well as all files in all subdirectories contained in the directory. This capability allows you to back up an entire hard disk, preserving the disk's directory structure in the process.

If you have a hard disk, it is good practice to store an archive copy of the disk's entire contents. Then, if a disaster such as accidental formatting of the disk occurs, you will be able to restore the hard disk's file contents and directory structure in a straightforward manner.

The following example shows how you can use BACKUP to archive your entire hard disk. You will have to do this if you are upgrading to DOS 4.X or 5.X and wish to create a disk partition larger than 32 Mbytes.

If you are upgrading to DOS 4.X or 5.X, you should boot your system with the new system floppy and then use the new version of BACKUP to back up your entire hard disk. After archiving your files, you can reformat your hard disk with the new versions of FDISK and FORMAT and then use the new version of RESTORE to restore your archived files.

```
C:\>backup c:\ a: /s /l:c:\utils\backup.log

Insert backup diskette 01 in drive A:

WARNING! Files in the target drive
A:\ root directory will be erased
Press any key to continue . . .
```

The command says to create on drive A an archive file containing the contents of the root directory on drive C. The **/s** switch says to include all files contained in all subdirectories of the root. Thus, all files on drive C will be stored in the archive. The **/l** switch says to create a log file. The log file will record the names of the files stored in the archive. The log file is to have the name **c:\utils\backup.log**.

Once the command is entered, DOS will prompt you to insert the backup disk in drive A. DOS will also warn you that any files contained in the root directory of drive A will be erased.

Once the backup disk is in drive A, you can start the backup process by pressing any key. DOS will display the complete path specifier and filename of each file as it is copied to the archive file. DOS also prompts you to insert another disk when the disk in drive A becomes full.

Backing Up Modified Files

The /m switch is used to back up any files that have been modified since the last BACKUP session. This handy option can save you time and disk space, because it selects only those files that need to be backed up.

Let's say that you use your hard disk to store your word processing documents. All of the documents have a filename extension of DOC. If you have several hundred document files, it can be difficult to keep track of which files need to be backed up and which files have already been backed up. But you needn't concern yourself with this problem because BACKUP and /m will take care of it for you. All you need to do is enter the following command at the end of each word processing session:

```
C:\>backup *.doc a:/m
```

Any document file that was modified in the work session will automatically be backed up.

Backing Up Files by Date

The /d switch is used with BACKUP to copy files that were created, or last modified, on or after a specific date. The following command will back up any files in the root directory that were created or modified after December 11, 1990.

```
C:\>backup c:\ a:/d:12-11-90
```

Backing Up Files by Time

The /t switch, first implemented in MS-DOS 3.3, enables you to back up files that were created or modified after a specified time of day. The following example creates a backup of all files in the root directory that have a time stamp later than 3:00 pm. The backup copies are stored on drive A.

```
C:\>backup c:\*.* a:/t:15:00:00
```

Other BACKUP Switches

Using the /a switch, you can add archive files to the root directory of floppies or to the \BACKUP subdirectory of hard disks without erasing preexisting data.

The /f switch enables you to store archive files on a previously unformatted disk. MS-DOS must be able to read the file FORMAT.COM in order to execute this option. The DOS 4.X and 5.X versions of BACKUP will automatically format an unformatted disk. The /f switch is therefore not implemented in these versions.

The /l switch, first implemented in MS-DOS 3.3, directs BACKUP to create a *log file*. The log file consists of a record of all files that have been backed up, along with the date and time of the backup. The log file can be useful in keeping track of files that have been archived. You can specify a drive, path, and filename for the log file. The default is BACKUP.LOG stored in the root of the source drive.

Restrictions with BACKUP

The commands ASSIGN, JOIN, and SUBST instruct MS-DOS to redirect all references for one device to another device. For example, ASSIGN may be used to redirect all references for drive A to drive C. Each of these commands can put MS-DOS in a state that is confusing to BACKUP. The effect is that BACKUP results may be unpredictable if one of these commands has previously been used.

Another restriction in using BACKUP occurs with the APPEND command. BACKUP used in conjunction with APPEND may result in loss of data. See the discussion of APPEND for details.

BACKUP and ERRORLEVEL

ERRORLEVEL is a variable that has special meaning to MS-DOS. The value of ERRORLEVEL is set by the BACKUP command, as follows:

0	BACKUP command completed in normal fashion.
1	No files were found on the hard disk that match the file(s) specified in the BACKUP command.
3	Execution of the BACKUP command was terminated by the user pressing Ctrl-Break.
4	The BACKUP command was terminated due to an error in execution.

Once the value of ERRORLEVEL has been set, ERRORLEVEL may be used in conjunction with the IF command in an MS-DOS batch file. ERRORLEVEL enables you to create batch files that are executed according to the outcome of a BACKUP command. See the discussion of the IF command for further details.

BREAK

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Controls the frequency with which MS-DOS checks for Ctrl-C and Ctrl-Break.

Formats: `BREAK ON`
`BREAK OFF`
`BREAK`

Example: `break on`

Pressing the Ctrl-C or Ctrl-Break key combinations will generally terminate a program and return control of the computer to MS-DOS. You can use the BREAK command to control the frequency with which MS-DOS checks for these key combinations.

The command `break off` directs MS-DOS to check for Ctrl-Break and Ctrl-C only during input and output operations (such as reading the keyboard or sending characters to the display screen).

The command `break on` directs MS-DOS to check for Ctrl-Break and Ctrl-C whenever a call is made to the operating system's service functions. The service functions are discussed in appendix A, but for purposes of understanding the BREAK command you need only to know that MS-DOS checks for Ctrl-Break and Ctrl-C much more frequently when BREAK is on.

You can enter `break` (with no additional parameters) to see if BREAK is currently on or off.

You can use the BREAK command on the MS-DOS command line, in a batch file, or in the special MS-DOS file CONFIG.SYS (refer to chapter 5 for a discussion of CONFIG.SYS). When BREAK is used in CONFIG.SYS, an equal sign (=) must be placed between BREAK and its parameter (`break=on` or `break=off`).

BUFFERS

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Establishes the number of disk buffers that MS-DOS creates in memory.

Formats: `BUFFERS=xx`
`BUFFERS=xx[,yy]` (DOS 4 and 5)
`BUFFERS=xx[,yy] [/X]` (DOS 4 only)

Note: BUFFERS can only be used in the file CONFIG.SYS.

Examples:
```
buffers=5
buffers=15,5
```

A *disk buffer* is an area of memory that MS-DOS uses to store data being written to, or read from, a disk. A buffer serves as a way station between the disk and the portion of memory storing a program's data.

MS-DOS transfers data between a disk and a buffer in 512-byte increments. To illustrate how a buffer is used, consider what happens when a program requires a 128-byte record stored on disk. MS-DOS reads a 512-byte portion of the file from the disk. Contained within these 512 bytes are the 128 bytes needed by the program. The 128 bytes are transferred to the program's data area in memory. If the program subsequently requires another 128-byte record, MS-DOS first determines whether the record is already stored in a buffer. If it is, no disk access is required.

The BUFFERS command is used to establish the number of disk buffers set up by MS-DOS during booting. Increasing the number of buffers can speed program execution, but only up to a point. The more buffers that exist, the more sectors that can be stored in memory; hence, fewer accesses of the disk are necessary. However, the more buffers you use, the longer it takes MS-DOS to search all the buffers to see whether the needed sector is already in memory. Eventually it becomes faster to access the disk than to search all the buffers.

The amount of memory taken up by the disk buffers is another consideration. Each buffer adds 528 bytes to the amount of memory taken up by MS-DOS. By increasing the amount of memory needed by MS-DOS, the amount of memory available for program data is reduced. Thus, the additional buffers can increase the frequency of disk accesses, causing the program to slow down.

If disk access tends to follow a random pattern, as would be the case in querying a large database, increasing the number of disk buffers should significantly improve performance. Alternatively, if disk access is primarily sequential, as is the case with most word processing applications, increasing the number of disk buffers will generally not result in as dramatic an improvement in performance. Chapter 5, "Configuring Your System," contains additional guidelines on the use of BUFFERS.

You can use BUFFERS to set up from 1 to 99 buffers in conventional memory. In addition, the DOS 4.X version of BUFFERS allows you to create up to 10,000 buffers in expanded memory. Users of DOS 5 can use the DOS command to place the buffers in extended memory (see DOS 4 and 5 enhancements described later).

On DOS versions prior to 3.3, the default value for BUFFERS is 2. This is the number of disk buffers created if CONFIG.SYS does not contain a BUFFERS statement.

In DOS 3.3, 4.X, and 5.X, the default is determined by the system's hardware. If the amount of random access memory (RAM) is less than or equal to 128 Kbytes and all disk drives are less than 360 Kbytes, the BUFFERS default is 2.

If RAM is less than or equal to 128 Kbytes and one or more disk drives is 360 Kbytes or greater, the BUFFERS default is 3.

If RAM is greater than 128 Kbytes and less than or equal to 256 Kbytes, the BUFFERS default is 5.

If RAM is greater than 256 Kbytes and less than or equal to 512 Kbytes, the BUFFERS default is 10.

If RAM is greater than 512 Kbytes, the BUFFERS default is 15.

Enhancements in DOS 4 and DOS 5

The DOS 4.X version of BUFFERS allows you to place disk buffers in expanded memory and also to establish the size of *a read-ahead buffer.*

The /x switch tells DOS to place the disk buffers in expanded memory. You can create up to 10,000 disk buffers when the buffers are placed in expanded memory. Of course, you will need an expanded memory card and expanded memory software in order to use this option. Unfortunately, that is often not enough. Many users of PC DOS 4.X report that the switch does not work on their systems. In general, the /x switch operates correctly only on systems with IBM expanded memory cards. This may be why the switch was discontinued in DOS 5.

Users of DOS 5 can store the disk buffers in normally unused portion of memory known as the HMA by including the statement `DOS=HIGH` in CONFIG.SYS. This will free up some conventional memory for use by application programs. Refer to the discussion of the DOS command in part 3 of this book for additional information.

When an application program needs data on the disk, DOS determines which disk sector is storing the data. The operating system then reads that sector into memory. If the application program is primarily performing sequential readings of the disk—that is, one sector is read, followed by the adjoining sector, and so on—it is advantageous for DOS to "look ahead" and read a sequence of sectors into memory each time a disk access is performed. This reduces the total number of disk accesses required and speeds up the program's execution. Programs such as word processors, which typically perform a large amount of sequential disk access, may experience improved performance by increasing the number of look-ahead sectors.

The DOS 4 and 5 versions of BUFFERS accepts a second parameter, which enables you to establish the number of look-ahead sectors that are read into memory. You may specify a value of 1 to 8 for the number of sectors

to "read ahead." All of the read-ahead sectors are placed in a single buffer. Each read-ahead sector requires 512 bytes of memory. No read-ahead buffer is created if the second parameter is not specified. The following example illustrates the use of BUFFERS in DOS 4 or DOS 5:

```
buffers=15,5
```

The statement (which must be contained in the CONFIG.SYS file) creates 15 disk buffers in expanded memory. In addition, a read-ahead buffer is created that contains 5 read-ahead sectors.

CALL

Internal
MS-DOS 3.3, 4.X, 5.X

Function: Allows a batch file to be called (executed) from another batch file. Control returns to the first batch file when the called batch file terminates.

Format: `CALL filename`

Example: `call batfile2`

The CALL command is a batch file command that is used to execute one batch file from within another batch file. The called batch file receives its own copy of the DOS environment, which it may modify. Control returns to the first batch file when the called batch file terminates. The environment of the calling batch file is not affected by any changes made by the called batch file to its environment. Use of the CALL command is illustrated in chapter 4, MS-DOS Batch Files.

CHCP

Internal
MS-DOS 3.3, 4.X, 5.X

Function: Selects a code page for the system.

Note: Refer to appendix D for an overview of code pages and code page switching.

Format: `CHCP [xxxx]`

Examples:
```
chcp
chcp 850
```

The CHCP command selects a specific code page for each device in the system that supports that code page. Before you use CHCP, you must invoke the NLSFUNC command. The following two commands assign code page 850 to the system:

```
C:\>nlsfunc
C:\>chcp 850
```

Note that the NLSFUNC command need be invoked only one time after the system is booted.

CHCP with no parameters displays the system's currently active code page.

```
C:\>chcp

Active code page:  437
```

CHDIR

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Changes the current directory or displays the current directory's path.

Format: `CHDIR [[d:]path]`

Examples:
```
chdir \suba1\suba2
cd a:\subb1
chdir
cd
```

The *current directory* is the directory in which MS-DOS is currently active. At any given time, there is only one current directory for each drive in the system. You can use the command CHDIR (CHange DIRectory) to instruct MS-DOS to change the drive's current directory. You can also use CHDIR to display the path to a drive's current directory. This command can be entered as `chdir` or abbreviated as `cd`.

Changing the Current Directory

To change the current directory, type **chdir** (or **cd**) and then type the path to the new current directory. Suppose that the path from the root directory to the subdirectory SUBA2 is ROOT DIRECTORY, SUBA1, SUBA2 (see figure 1). MS-DOS represents this path as \SUBA1\SUBA2. Note that the root directory is indicated by the first backward slash.

The following command will make SUBA2 the current directory of drive C:

```
C:\>chdir \suba1\suba2
```

To change the current directory of a drive that is not the default drive, type the drive letter designator and then type the path:

```
C:\>cd a:\subb1
```

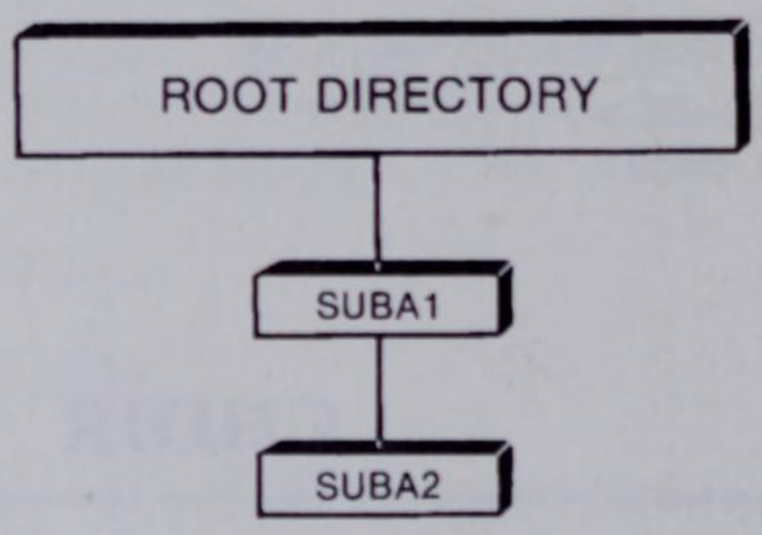

Figure 1. File structure for root directory, SUBA1, SUBA2.

Displaying the Path to the Current Directory

Entering **chdir** (or **cd**) with no parameters directs MS-DOS to display the path to the current directory of the default drive:

```
C:\>chdir
C:\SUBA1\SUBA2
```

To display the path to the current directory of a drive other than the default, type **chdir** (or **cd**), followed by the letter designator of the drive:

```
C:\>cd a:
A:\SUBB1
```

You can find more detailed information on directories, subdirectories, current directories, and paths in chapter 3.

Shorthand for the Parent Directory

Chapter 3 explained that two periods (..) is a shorthand notation for the parent of the current directory. This shorthand is especially useful when you are using the CHDIR (or CD) command. For example, let's say that the current directory is C:\DOS_BIB\WORK and you want to change directories to C:\DOS_BIB\SACS. You could enter the command CD C:\DOS_BIB\SACS. However, this involves a fair amount of typing and requires that you remember the full path specifier. Because the current directory and the one you want to change to have the same parent, you can enter **CD ..\SACS**. This is a very useful technique that can save you a lot of typing.

CHKDSK

External
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Functions: Analyzes the file allocation table (FAT), the directory, and any subdirectories on a disk.

Analyzes the status of computer memory.

Formats: `CHKDSK [d:]`
`CHKDSK [d:][filename.ext][/F][/V]` (MS-DOS 2.X, 3.X, 4.X, 5.X)

Examples:
```
chkdsk
chkdsk b:
chkdsk/f
chkdsk b:letter.doc /f/v
```

The CHKDSK (CHecK DiSK) command is an MS-DOS utility that checks the condition, or status, of a disk's data. MS-DOS stores data in files on a disk. It

keeps track of the files on the disk by consulting the disk's directory and file allocation table (FAT). CHKDSK analyzes the FAT and the disk directory (and any subdirectories) for errors and problems. To prevent minor problems from turning into major ones, it is a good idea to run CHKDSK occasionally on all your hard disks and floppy disks. You will find more information about the structure and role of the FAT and the file directory in chapter 10.

Using CHKDSK

Because CHKDSK is an external command, a copy of the file CHKDSK.COM must be available to the system before you can use the command. This means that either CHKDSK.COM must be in the current directory of the default drive or that the location of CHKDSK.COM must have been specified by the PATH command (see the discussion of PATH).

To check a disk, type **chkdsk** and then type the letter designator of the drive containing the disk to be checked. If you do not enter a drive letter designator, CHKDSK will examine the disk in the default drive:

```
C:\>chkdsk

Volume HARDDISK created Jul 6, 1991 2:14p
10592256 bytes total disk space
   57334 bytes in 3 hidden files
  184320 bytes in 42 directories
10264576 bytes in 846 user files
   86016 bytes available on disk

  524288 bytes total memory
  320704 bytes free

C:\>
```

The preceding command did not include a drive letter designator, so CHKDSK examined the disk in the default drive; it did not find any errors. The status report displays information about the disk and the computer memory. The first five lines under the volume line report the total disk space taken up, the number of files on the disk, and the remaining available space. The last two lines report on the amount of memory used up and the amount still available.

The MS-DOS 2.X and subsequent versions of CHKDSK have four additional features:

- If a filename is included in the command, CHKDSK will display the number of noncontiguous areas (sectors) on the disk that contain the named file. Although files that are highly fragmented (having many noncontiguous areas) are acceptable, they can slow down system performance. If you use the wildcard *.* as a filename, CHKDSK will report on each fragmented file in the current directory. You can specify another directory by preceding the *.* with a path specifier and a backslash (\). A fragmented file can be copied into a contiguous area on another disk with the COPY command.
- The /f switch instructs CHKDSK to attempt to correct any errors detected. CHKDSK always asks whether it should attempt to correct any errors that it detects. However, CHKDSK makes no attempt to correct the errors if /f was not used. Unfortunately, CHKDSK cannot correct all errors. Commercial programs such as PC-Tools, Norton Utilities, and Mace Utilities contain disk sector editors and other powerful utilities that can help you correct errors reported by CHKDSK.
- The /v switch directs CHKDSK to display the filename and path specifier of each file on the disk. A good way to find a file on a hard disk is to "pipe" the output of `chkdsk /v` to the FIND command using the following format:

```
chkdsk c: /v ¦ find filename
```

  Piping of DOS commands is discussed in chapter 6.
- You can redirect the status report and any messages to a disk file by using the following command:

```
C:\>chkdsk b: > file
```

  Note: Do not use the /f switch in the CHKDSK command if you are redirecting CHKDSK's output.

CHKDSK Error Messages

Allocation Error, Size Adjusted

The file's entry in the file directory indicates that the file is larger than the amount of disk space allocated for the file in the FAT. The /f switch directs CHKDSK to truncate the file so that its size matches the allocation specified by the FAT.

Cannot CHDIR to file specifier

The first entry in each subdirectory is given the name ".", which represents the directory itself. The second entry in each subdirectory is given the name "..", which represents the subdirectory's parent directory. CHKDSK displays this error message if either of these entries is corrupted. CHKDSK asks you whether it should Convert directory to file. If you answer yes, the subdirectory is converted to a standard file. Recognize that this new file only contains the contents of the subdirectory. It does not contain the contents of the files listed in the subdirectory. These files become lost clusters when the subdirectory is converted. CHKDSK also asks you whether it should convert these lost clusters to files ("lost clusters" are discussed later). CHKDSK does not take any action if the /f switch was not used.

Cannot CHKDSK a Network Drive (or SUBSTed or ASSIGNed Drive)

CHKDSK cannot be used to check any drives on a local area network. It also cannot be used on logical drives created with the DOS commands SUBST and ASSIGN.

Contains invalid cluster, file truncated

The causes of this message are the same as for Allocation error, size adjusted.

file specifier contains N noncontiguous blocks

If you enter the command **chkdsk** *.*, CHKDSK displays this message for each file in the current directory that is stored in noncontiguous blocks. This does not represent an error, but highly "fragmented" files can slow down disk access. Commercial programs (such as Mace UnFrag and Disk Optimizer) are available to "defrag" highly fragmented disks.

Convert directory to file (Y/N)?

This message is preceded by the name of a directory (or subdirectory) that is no longer functional because of one or more invalid entries. CHKDSK asks whether you want this directory converted to a file (which could then be examined with DEBUG). If you enter **Y** (and /f was included in the CHKDSK command), the directory will be converted to a file. If you enter **N**, no conversion is made.

Convert lost chains to files (Y/N)?

A *cluster* is a unit of space on a disk. The cluster is said to be "lost" when the FAT entry for the cluster is a nonzero number but the cluster does not belong to any file. A contiguous set of lost clusters is called a *lost chain*. This message asks whether you want each lost chain stored in a file. If you reply **Y**, MS-DOS creates a separate file for each lost chain. The files are named FILE*nnnn*.CHK, where *nnnn* is a sequential number beginning with 0000. If you reply **N**, MS-DOS converts to zero the entries in the FAT that correspond to the lost chains and makes available for new files the areas in the disk occupied by the lost chains. Regardless of your reply, no changes will be written to the disk if you did not include /f in the CHKDSK command.

Disk error writing FAT *x*

CHKDSK was unable to update the FAT. The x will either be 1 or 2, depending on which copy of the FAT CHKDSK was trying to update.

. Entry (or .. Entry) has bad attribute (or link or size)

The first (".") or second ("..") entry in a subdirectory is defective. The 3.X and 4.X versions of CHKDSK will attempt to fix this error if the /f switch was used.

Error found, F parameter not specified
Corrections will not be written to disk

The /f switch was not included with the CHKDSK command. The results of the CHKDSK analysis will be displayed, but no changes will be written to the disk.

filename is cross-linked:
On cluster *xx*

Two files are said to be *cross-linked* when the FAT indicates that a cluster belongs to both files. The message will be displayed twice, once for each file that is cross-linked. CHKDSK does not take any action when this situation occurs. Cross-linked files can be salvaged, either partially or entirely, by copying each of the files onto another disk.

First cluster number is invalid, Entry truncated

This message will be preceded by the name of a file. The file's first cluster, which is located in the file directory, is invalid. The file will be truncated to a length of zero if the /f parameter was included in the CHKDSK command.

Insufficient room in root directory
Erase files from root and repeat CHKDSK

CHKDSK has been instructed to convert lost chains into files. Unfortunately, there is not enough room in the root directory for all the files that CHKDSK wants to create. To solve this problem, copy the files already recovered to another disk. Then delete the recovered files from the original disk. Rerun CHKDSK on the original disk to recover the remaining lost chains.

Invalid subdirectory

CHKDSK has found an invalid entry in the subdirectory that is named. CHKDSK will attempt to correct the error if the /f parameter was included in the CHKDSK command.

Probable non-DOS disk
Continue (Y/N)?

The first byte of the FAT does not contain a valid entry. CHKDSK will indicate the possible corrective measures if you reply with **Y**. However, the changes will not be written to the disk if the /f parameter was not included in the CHKDSK command.

***xxxxxxx* bytes disk space freed**

An error in the FAT has been corrected by truncating a file. The portion of the disk previously allocated to the file is now available for data storage.

***xxx* lost clusters found in *yyy* chains**

A cluster is "lost" if the FAT entry for the cluster is a nonzero number but the cluster does not belong to any file. A contiguous group of lost clusters is

called a *lost chain*. CHKDSK will ask whether you want to convert each lost chain to a file or if you want to free the disk space taken up by the chains.

CLS

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Clears the screen and moves the cursor to home position.

Format: `CLS`

Example: `cls`

The CLS (CLear Screen) command clears the display screen and moves the cursor to the home position. CLS sends the ASCII character sequence ESC[2J to the console device driver. This is the ANSI command sequence for clearing the screen and moving the cursor to home position.

On some systems, the ANSI.SYS device driver must be installed by the user before the CLS command will operate. See chapter 9 for information on installing the ANSI.SYS device driver.

COMMAND

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Invokes a secondary command processor.

Formats: `COMMAND[/C string][/P]`
`COMMAND[d:][path][/C string][/P][/E:xxxxx]` (MS-DOS 3.X, 4.X, 5.X)
`COMMAND /MSG` (MS-DOS 4.X and 5.X)
`COMMAND device` (MS-DOS 5.X)

Examples:
```
command
command /c dir
command /c do it.bat
command nul
```

The *command processor* serves as the interface between you and the operating system. It displays the system prompt on the screen, interprets the command you enter, and acts according to the contents of that command. The primary MS-DOS command processor is COMMAND.COM.

You can use COMMAND to invoke a secondary command processor. Invoking the command directs COMMAND to (1) load a copy of the command processor into memory and (2) pass control to the copy (the secondary command processor). MS-DOS uses the path specifier contained in the command to locate the copy of COMMAND.COM that will be loaded. If COMMAND.COM is not stored in the specified directory, or if no path specifier is included in the command, MS-DOS uses the path stored in the environment to locate COMMAND.COM.

To invoke a secondary command processor, type **command**:

```
C:\>command
```

On the surface, it appears as though nothing has happened, but you are now operating under the control of a secondary command processor. If you get a `Bad file or command` message, insert your working copy of the system disk in drive A and try again.

To leave the secondary command processor and return control to the primary command processor, type **exit**:

```
C:\>exit
```

Again it appears as though nothing has happened, but you are now back under the control of the primary command processor.

COMMAND Switches

Use the **/c** switch when you invoke a secondary command processor so you can enter a command line:

```
C:\>command /c dir
```

This command tells MS-DOS to load a secondary command processor and instructs the secondary command processor to execute a DIR command.

The /c switch is occasionally used to allow a batch file to run another batch file. Starting with DOS 3.3, CALL should be used for this purpose. CALL does not require the loading of a secondary command processor.

The /p switch tells MS-DOS to keep the secondary command processor in memory even if an EXIT command is issued. The /p switch is used when you want to increase the size of the MS-DOS environment (see chapter 11). If you issue both /p and /c, the /p switch is ignored.

The /e:*xxxxx* switch, first implemented in MS-DOS 3.1 but not documented until version 3.2, is used to set the size of the environment that is passed to the secondary command processor. If no environment size is specified, the secondary command processor inherits an environment that is the same size as the environment of the primary command processor.

In version 3.1, *xxxxx* sets the number of paragraphs (16-byte blocks) in the environment. The allowable range is 10 to 2,048.

In 3.2 and later versions, *xxxxx* sets the number of bytes in the environment. The allowable range is 160 to 32,768, the environment size being rounded up to the nearest multiple of 16.

The environment variables of the primary processor are inherited by the secondary command processor. Any modifications that the secondary command processor performs on its environment variables are local. The modifications do not affect the environment variables of the primary command processor. The MS-DOS environment and environment variables are discussed in chapter 11.

The /MSG switch is implemented in DOS 4.X and subsequent versions for use on floppy disk systems. The switch directs DOS to load error message information into memory along with the secondary command processor. This eliminates the need to read a floppy disk each time an error is encountered. You do not need to use this switch on systems with a hard disk drive.

The DOS 5 version of COMMAND enables you to specify an input/output device for the secondary command processor. For example, if you want to invoke a secondary command processor and have the AUX device be the standard input/output device, you would enter the following command: **command aux**. Refer to the discussion of the CTTY command for further information on changing the standard input/output device.

Purpose of a Secondary Command Processor

A secondary command processor allows a computer program or batch file to use other programs, other batch files, or MS-DOS commands. It works something like this: MS-DOS is booted, and the (primary) command processor is loaded into memory and takes control. You enter the name of the file containing a computer program; the command processor loads the program and passes control to it. Your program begins to execute and at some point

loads a secondary command processor. The secondary processor receives control, at which point any program, batch file, or MS-DOS command may be executed. At some point, the secondary command processor is exited, and control returns to the original computer program (see figure 2). See chapter 4 for a discussion of the role of a secondary command processor in executing batch files.

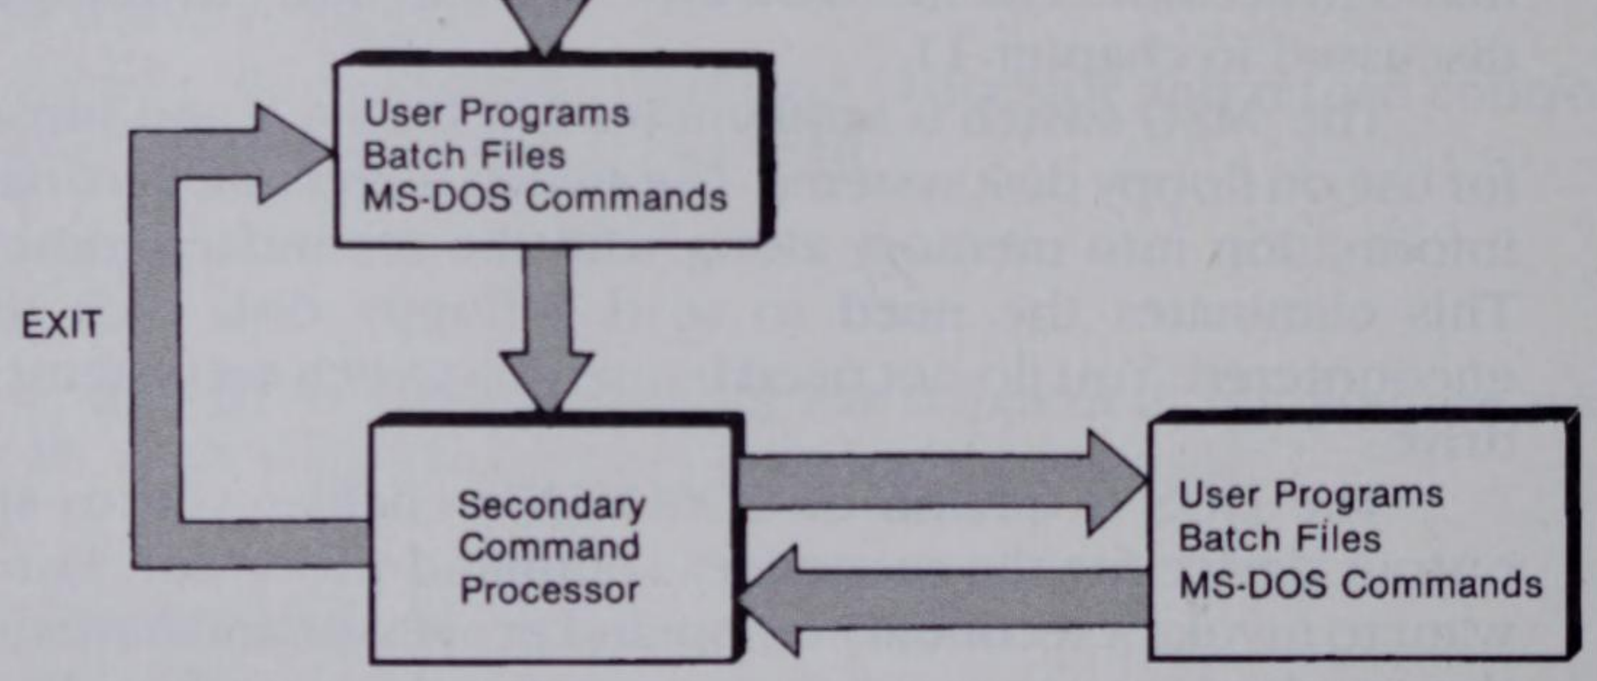

Figure 2. Loading a secondary command processor.

COMP

External
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Compares the contents of one file with the contents of another file.

Format: `COMP [d:][path][filename[.ext]][d:][path][filename[.ext]]`

Examples:
```
comp
comp testfile.txt
comp a:testfile.txt b:testfile.txt
```

Note: COMP is the file comparison utility that is included with PC DOS (the version of MS-DOS designed for the IBM personal computer). Although many other microcomputers also include a file comparison utility program, the following description and comments relate specifically to COMP. They can, however, be applied generally to other MS-DOS file comparison utilities.

The COMP (COMPare files) command compares files on a byte-by-byte basis. The first byte of file A is compared with the first byte of file B, and so on. Any mismatches are displayed. The comparison is halted if 10 mismatches are detected. COMP tells you that the `Files compare OK` if no mismatches are detected. At the completion of a comparison, you are asked whether you want to compare another pair of files. No comparison is made if the files are unequal in size. COMP is an external command; therefore, one of the disks in the system must contain a copy of the file COMP.COM. In the examples presented here, COMP.COM is stored on the C drive. If COMP.COM is not on the default drive, all commands must be preceded by the appropriate drive letter designator.

Using COMP

FC is another file comparison utility that comes with DOS 5. FC uses different methods for comparing text and binary files. The information presented by FC is generally more useful than the information presented by COMP, particularly when text files are compared. Refer to the discussion of FC later in Part 2.

To compare two files, first type the name of the primary file and then type the name of the secondary file:

```
C:\>comp one.txt b:one.txt
```

MS-DOS responds:

```
C:ONE          .TXT and B:ONE          .TXT

Files compare ok

Compare more files (Y/N)? _
```

If you enter **Y**, COMP will prompt you to enter the names of two other files to be compared. If you enter **N**, the MS-DOS prompt will reappear.

COMP can compare files with different names when the files are on the same disk or on different disks. It can compare files with the same name only if they are on different disks or in different directories on the same disk.

COMP may be started without specifying one or both of the files to be compared. COMP will prompt you for the unnamed file(s):

```
C:\>comp

Enter primary filename
one.txt
Enter 2nd filename or drive id
b:

C:ONE     .TXT and B:ONE     .TXT

Files compare ok

Compare more files (Y/N)? _
```

Notice that only the drive designator was entered for the second file. COMP looks for a file with the same name as the first filename when the second parameter contains only a drive and/or a path.

COMP displays any mismatches between files by listing the hexadecimal offset of the mismatch(es) and the hexadecimal byte value of each file at that offset. *Offset* refers to a byte's position in the file relative to the first byte in the file. The first byte in the file is at offset 0, the second byte at offset 1, and so on.

```
C:\>comp one.txt two.txt

C:ONE     .TXT and A:TWO     .TXT

Compare error at offset 8
File 1 = 6B
File 2 = 6A

Compare more files (Y/N)? _
```

COMP checks whether the final byte of each comparison is an end-of-file (EOF) marker (hexadecimal 1A). If a marker is found, COMP does not take any action. If no marker is found, COMP displays the following message:

```
EOF marker not found
```

COMP determines a file's size from information stored in the file directory. Some computer programs produce directory entries that round a file's size to a multiple of 128. In these cases, COMP may read more data than what actually resides within the file. Failure to find an EOF marker may indicate that mismatches were detected beyond the end of the file.

Wildcard characters can be used to specify files for comparison. The following command tells COMP to compare all files on drive C that have a filename extension of TXT with the file on drive B having the same filename but an extension of ASM:

```
C:\>comp *.txt b:*.asm
```

A message will be displayed if a matching file cannot be located on drive B.

COPY

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Functions: Copies an existing file.
Combines two or more existing files into one file.
Transfers data between peripheral devices and files.

Format:

```
COPY [/A][/B][d:][path]filename[.ext][/A] [/B]

[+[d:][path]filename[.ext][/A][/B ]. . . [d:][path][filename

[.ext]][/A][/B][/V]
```

Examples:

```
copy file1
Copy file1+file2 b:file3
copy con: file4.txt
```

COPY is one of the most important MS-DOS commands. It is used primarily to make copies of existing MS-DOS files. However, you can also use COPY to combine one or more existing files into one file through a process called *concatenation*. Yet another way to use COPY is in the transfer of data between peripheral devices and files.

Copying Files

To copy a file, type **copy** and then type the file specification of the original file (*source file*), followed by the file specification of the file that will contain the copy (*target file*). MS-DOS will make the copy and display a message telling you how many copies it has made:

```
C:\>copy file.txt b:file.txt
        1 File(s) copied
```

You may omit the filename of the duplicate file if the name is the same as the original file's. In such cases, the copy must be placed on a separate disk or in a separate directory on the same disk as the original file. The following command will copy FILE.TXT to drive B:

```
C:\>copy file.txt b:
        1 File(s) copied
```

Users of MS-DOS 2.X and subsequent versions may include the path(s) for the original and/or the duplicate file(s). If one or both paths are not specified, MS-DOS will default to the current directory. The following command places a copy of FILE.TXT in the subdirectory DATA on drive C. The original copy of FILE.TXT is located in the current directory of drive C.

```
C:\>copy file.txt\data
        1 File(s) copied
```

A file may be copied to the same directory on the same disk only if the copy is given a different name:

```
C:\>copy file.txt file2.txt
        1 File(s) copied
```

You can use wildcard characters with the COPY command in filenames and/or extensions. (See chapter 2 for information on MS-DOS wildcards.) The following command copies all files with an extension of DOC that are located on drive C in the subdirectory LETTERS. The copies will be placed in the subdirectory BACKUP of drive B. MS-DOS will display the name of each file as it is copied. Each copied file will have the same name as the original. At the end of the copying process, MS-DOS will display a message stating the number of files that have been copied:

```
C:\>copy \letters *.doc b:\\backup
COUNTRY.DOC
TICTOCK.DOC
WHATSUP.DOC
ITHURTS.DOC
QUACK.DOC
        5 File(s) copied
```

Combining Files

COPY may be used to concatenate (combine) two or more files. The files to be combined must be specified in the COPY command and separated with a plus (+) sign. The resulting file will be a combination of the specified files, and the files will be in the order in which they were listed in the command.

The next example copies the files LIST1.TXT and LIST2.TXT into a new file named BIGLIST.TXT. The original files LIST1.TXT and LIST2.TXT are preserved. At the end of the copying process, MS-DOS states the number of copies created:

```
C:\>copy list1.txt+list2.txt biglist.txt
        1 File(s) copied
```

Files may be concatenated without specifying a name for the new file. If no name is specified, the new file is given the name of the first file listed for concatenation. The first file is replaced on the disk by the new file.

Wildcard characters may be used in concatenating files. The following command will combine all the files in the current directory of drive C having an extension of TXT. The combined file will be given the filename COMBINE.DAT:

```
C:\>copy *.txt combine.dat
LETTER1.TXT
INSERT1.TXT
INSERT2.TXT
        1 File(s) copied
```

When concatenating with wildcards, you must specify in the COPY command the filename of the new file. Otherwise, MS-DOS will try to copy the first file listed (LETTER1.TXT in the example) onto itself and the copying process will terminate.

The following command will combine each file having the form *.TXT with a matching file having the form *.DAT. If a match exists, the two files will be combined into a file named *.DOC. For example, the files LETTER1.TXT and LETTER1.DAT will be combined into the file LETTER.DOC and so on:

```
C:\>copy *.txt+*.dat *.doc
LETTER1.TXT
LETTER1.DAT
LETTER2.TXT
LETTER2.DAT
ESSAY1.TXT
ESSAY2.DAT
        3 File(s) copied
```

Use wildcards carefully when you combine files. Let's say that you want to combine all files having an extension of DOC into a filename BIG.DOC. That should be as simple as

```
copy *.doc big.doc
```

Right? Unfortunately, it's not so simple.

As soon as the combination process begins, MS-DOS creates the file BIG.DOC. If there was a previously existing BIG.DOC, it is lost and the new BIG.DOC takes its place. Once the new BIG.DOC is on the scene, MS-DOS sees it as a valid *.DOC file and will entertain thoughts about adding BIG.DOC to the combined file. But BIG.DOC *is* the combined file. Fortunately, MS-DOS is smart enough to know not to add BIG.DOC to itself. The following message is displayed:

```
Content of destination lost before copy
```

MS-DOS then proceeds on its merry way, looking for other *.DOC files and adding them to BIG.DOC in the normal fashion. The preceding message will be displayed whether or not BIG.DOC existed before the combining began. The problem is that if BIG.DOC previously existed, it will be written over by the new BIG.DOC and lost. To compound the problem, the new BIG.DOC will not contain the contents of the old BIG.DOC.

There are two ways to avoid this problem. You can specify BIG.DOC as an existing file that is to be appended to the other *.DOC files:

```
copy big.doc+*.doc
```

Or you can specify a name for the new file that does not match the wildcard filename:

```
copy *.doc big.dat
```

Using COPY to Update the Time/Date Stamp

The COPY command can be used to update the time and date stamp of a file:

```
copy anyfile.ext+,,
```

Unfortunately, if you attempt to update several time/date stamps with a single command (as in `copy *.*+,,`), MS-DOS will update only the stamp of the first file it finds that matches the wildcard.

COPY Switches

There are three optional switches that you may include in a COPY command. Two of the switches (/a and /b) control the way in which COPY reads and writes files. The third switch (/v) is used to verify the accuracy of a COPY operation.

The /a switch tells COPY to treat a file as an ASCII (text) file. If the file is to be copied, this switch tells COPY to copy the file up to, but not including, the first end-of-file marker (hexadecimal 1A). Any data after the marker is not to be copied. If the file is to be a copy, the /a switch tells COPY to add an end-of-file marker to the end of the file.

The /b switch tells COPY to treat a file as a binary file. If a file is to be copied, this switch tells COPY to copy the entire file based on the size stored in the file directory. If a file is to be a copy, the /b switch tells COPY not to place an end-of-file marker at the end of the file.

An /a or a /b switch applies to the preceding file specification and to all succeeding file specifications until another /a or /b switch is encountered. The file status is set to the default when a COPY command does not include an /a or /b switch. For copying of files, the default file status is binary (/b). For concatenation, the default file status is ASCII (/a).

The /v switch is used to verify the accuracy of the execution of a COPY command. Verification causes the system to run more slowly. The /v parameter provides the same check on COPY as the VERIFY command.

Copying to a Peripheral Device

COPY can be used to send files to peripheral devices and to transfer data between devices. The command is used in the same way as described previously, the only difference being that device names are used in place of file specifications. For example, suppose that you want to print a file named SECRET.TXT. All you have to do is use the COPY command and PRN, the reserved device name for the printer (see table 6-1 in chapter 6 for a list of reserved device names):

```
C:\>copy secret.txt prn
        1 File(s) copied
```

You can reverse the process and use COPY to send a file from a peripheral device to a file. A useful way to take advantage of this capability, and one that is used throughout this book, is to create a text file directly from the keyboard. The keyboard is a peripheral device with the reserved name "CON". The command `copy con` *`filespec`* tells MS-DOS to create a file from data input at the keyboard. Type your text in the normal fashion, pressing Enter at the end of each line. When the complete file has been typed, press Ctrl-Z and Enter. The file will be written to the disk:

```
C:\>copy con: keyboard.txt
This is a sample file that is being created from
the keyboard. Ctrl-Z is typed and the Enter key is
pressed to send the file to the disk. The file can then
be viewed by entering the command TYPE KEYBOARD.TXT.
^Z

        1 File(s) copied
```

Copying Between Devices

COPY can be used to send data from one peripheral device to another. The command is used just as described so far, except that one device name is included as the source of the data and a second device name is included as the recipient of the data. In the next example, COPY is used to send data from the keyboard (CON) to the printer (PRN). Press Enter at the end of each line, and press Ctrl-Z and Enter when you have entered the complete file:

```
C:\>copy con: prn
This is a sample file to demonstrate the use of COPY
in sending data between peripheral devices. At the end
of the input you will press Ctrl-Z and then press Enter.
This text will be sent to the printer.
^Z
        1 File(s) copied
```

Attempts to COPY a device while in binary status will generate this message:

```
Cannot do binary read from a device
```

The problem can be corrected by removing the binary switch or specifying ASCII status with the /a switch.

COUNTRY

External
MS-DOS 3.X, 4.X, 5.X

Function: Specifies country-specific information such as date, time, and currency formats.

Note: COUNTRY can be used in CONFIG.SYS only.

Formats: `COUNTRY=xxx` (MS-DOS 3.0 through 3.2)
`COUNTRY=xxx,[yyy][,[d:][[path]filename[.ext]]]`
(MS-DOS 3.3, 4.X, 5.X)

Example:
```
country=001
country=001,437,c:\dos\country.sys
```

The COUNTRY command, first implemented with MS-DOS 3.0, enables you to specify certain country-specific information such as the date, the time, and currency formats.

Versions 3.0 through 3.2 use this command in a very straightforward manner. A statement of the form `country=xxx` is included in the CONFIG.SYS file, with *xxx* being a valid three-digit country code. See appendix D for a listing of the valid country codes.

Use of the command is more complicated in MS-DOS 3.3, 4.X, and 5.X. The format is as follows:

```
COUNTRY=xxx,[yyy][,[d:]filename[.ext]]
```

The *xxx* parameter remains a valid 3-digit country code. The *yyy* parameter specifies a code page. A single country has two code pages. COUNTRY determines which code page to use as the system code page. Refer to appendix D for an overview of code pages and code page switching.

The *filename* parameter refers to the country information file (COUNTRY.SYS).

If there is no COUNTRY= statement in CONFIG.SYS, the default country code is 001, the default code page is 437, and the default country information file is \COUNTRY.SYS.

CTTY

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Functions: Changes the standard input/output to an auxiliary console. Restores the standard input/output to the keyboard and screen.

Format: `CTTY device name`

Examples:
```
ctty com1

ctty con
```

The keyboard and the display screen form the standard input/output device. This means that unless MS-DOS is instructed otherwise, it will look to the keyboard for input and will send output to the display screen. The CTTY command is used to make another peripheral device (such as a modem attached to an asynchronous communications port) the standard input/output device.

To use the CTTY command, type **ctty** and then type the name of the device that will be the new standard input/output device. (See chapter 6 for a list of device names reserved by MS-DOS.) The following command makes the modem attached to the first asynchronous communications port the standard input/output device:

```
C:\>ctty com1
```

Once this command is entered, MS-DOS will look to the port for input data. It will no longer be possible to enter data from the keyboard in the normal fashion.

The following command will restore the keyboard and display screen as the standard input/output device. The command must be entered at the current input device:

```
C:\>ctty con
```

CTTY enables you to use any character device as the standard input/output device. Simply type **ctty** and then type the name of the device that is defined in the device driver. (See chapter 14 for a discussion of devices and device drivers.)

One of the most useful applications of the CTTY command is to suppress all output to the screen during the execution of a batch file. As an example of when you might use this command, consider the following batch file:

```
@echo off
copy *.* d:
```

The first line suppresses the display of the batch file commands. But `@echo off` has no effect on the screen output generated by the command `copy *.* d:`. Therefore, the name of each file will be displayed on the screen as the file is copied.

Having the filenames scroll across the screen may serve no useful purpose and might be distracting to the person using the batch file. *All* output to the display screen can be suppressed by modifying the batch file as follows:

```
@echo off
ctty nul
copy *.* d:
ctty con
```

The command `ctty nul` makes the nul device the standard input/output device. `Nul` represents a peripheral device that does nothing. Any data sent to the nul device disappears. Any attempts to read data from the nul device return nothing. By making nul the standard output device, any display intended for standard output is swallowed by nul and doesn't appear on the display screen.

The command `ctty nul` also turns off the keyboard. You will not be able to use your keyboard if you enter that command. But from a batch file, you can turn both your keyboard and display screen back on with the command `ctty con`. This tells DOS that the CON device (keyboard and display screen) is again the standard input/output device.

DATE

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Functions: Displays the current date known to MS-DOS. Changes the date known to MS-DOS.

Format: DATE [*mm-dd-yy*]

Examples:
```
date
date 10-30-91
```

The DATE command is used to display and set the current date known to MS-DOS. Each time that you create or modify a file, MS-DOS stores this date as a part of the file's entry in the disk directory.

To display the current date known to MS-DOS, type **date**. MS-DOS will display the date, including the day of the week (Mon, Tue, Wed, and so on). Then MS-DOS will ask if you want to change the current date:

```
C:\>date
Current date is Fri   10-28-91
Enter new date:
```

To enter a new date, use the form *mm-dd-yy* or *mm/dd/yy*, where:

mm is a one- or two-digit number from 1\12,
dd is a one- or two-digit number from 1\31,
yy is a two-digit number from 80 to 99 or a four-digit number from 1980 to 2099.

```
C:\>date
Current date is Fri   10-28-91
Enter new date: 10/30/91
```

If you want to leave the current date unchanged, just press Enter:

```
C:\>date
Current date is Mon   10-28-91
Enter new date:      ←Enter
```

You may specify the current date in the DATE command:

```
C:\>date 10/30/89
```

MS-DOS will prompt for another date if you enter an invalid date.

On machines with permanent clocks, the MS-DOS 3.3 and subsequent implementations of DATE reset the permanent clock's date.

DEL

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Deletes (erases) one or more files from a disk.

Formats: `DEL [d:][path][filename[.ext]]`
`DEL [d:][path][filename[.ext]] [/P]` (MS-DOS 4.X and 5.X)

Examples:
```
del badfile.txt
erase badfile.txt
```

The DEL (DELete) command, also known as the ERASE command, is used to remove a file(s) from a disk. To use DEL, type **del** (or **erase**) and then type the file specification of the unneeded file. (See chapter 2 for a discussion of file specifications.) If you do not include a drive designator and/or a path in the filespec, MS-DOS assumes that the file is located on the default drive and/or in the current directory. In the following example, a file in the current directory of the default drive is deleted:

```
C:\>del badfile.txt
```

You can delete a group of files with a single command by using wildcard characters. (See chapter 2 for a discussion of wildcards.) Use wildcards with caution, however, because it is easy to inadvertently erase files that you wanted to save. The command in the next example deletes all files in the current directory of drive B that have an extension of DOC:

```
C:\>del a:*.doc
```

Entering a file specification of *.* tells MS-DOS to delete all the files in the current directory. MS-DOS checks to make sure that you really want to do this:

```
C:\>del *.*
Are you sure (Y/N)? _
```

Type **N** and press Enter if you are not sure. If you are sure you want to delete all the directory's files, type **Y**, double-check that you really are sure, say goodbye to the files, and press Enter.

MS-DOS 4.X and 5.X feature the /p switch, which directs the operating system to display each file's name and ask for confirmation that the file is to be deleted.

The 4.X implementation of DEL also enables you to delete the files in a directory by just specifying the directory's name. For example, if \TMP is a directory, you can delete the files in \TMP by entering the command **del \tmp**. In response to this command, MS-DOS displays the message

```
All files in directory will be deleted!
Are you sure (Y/N)?
```

All files in \TMP will be deleted if you enter **y**.

Actually, DEL does not remove files from a disk. It only modifies the file directory so that MS-DOS treats the files as if they did not exist. The DOS 5 UNDELETE command and other commercially available programs use this fact to recover erased files. The important point here is that if you think you may want to recover an erased file, do *not*, under any circumstances, write any data to that disk. If you do that, the file really does go "bye-bye."

Note that DEL cannot be used to remove a subdirectory. (See the discussion of RMDIR.) Also, DEL cannot be used to delete a file that has its read-only attribute set.

DEL should be used carefully if you use ASSIGN, JOIN, or SUBST. These commands direct MS-DOS to treat one device as if it were another. For example, ASSIGN may be used to direct all references for drive A to drive C. When conditions like this exist, it is easy to inadvertently delete files that you want to keep, so be careful.

DEVICE

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Instructs MS-DOS to install a device driver.

Note: DEVICE can be used in a CONFIG.SYS file only.

Format: `DEVICE=[d:][path]filename[.ext]`

Example: `device=ansi.sys`

The DEVICE command is used to give MS-DOS the filename(s) of any user-specified device drivers that are to be installed in computer memory. (See chapter 14 for a discussion of installable device drivers and their use.)

The DEVICE command can be used only as a statement within a CONFIG.SYS text file. The statements in CONFIG.SYS are read by MS-DOS each time that the system is booted. If any of the statements in CONFIG.SYS are DEVICE commands, MS-DOS will store (install) in computer memory the device driver named in the command.

To enter a DEVICE command, type **device=** and then type the filename and filename extension of the device driver that is to be installed in memory. A DEVICE command can be added to an existing CONFIG.SYS file with a text editor such as EDLIN (chapter 8). A new CONFIG.SYS file can be created by using the command `copy con`. (See the COPY command discussion entitled Copying Between Devices.)

CONFIG.SYS must be stored in the root directory of the default drive. In the following example, ANSI.SYS and VDISK.SYS are stored in the subdirectory \DOS of drive C:

```
C:\>copy con: config.sys
device=c:\dos\ansi.sys
device=c:\dos\vdisk.sys
^Z      ←you press Ctrl-Z
    1 File(s) copied
```

ANSI.SYS is an installable keyboard device driver supplied with MS-DOS 2.X and subsequent versions. Use of ANSI.SYS is discussed in chapter 9. VDISK.SYS is an installable device driver for a RAM disk drive. VDISK.SYS is discussed later in Part 2. This section also discusses the installable device drivers RAM DRIVER.SYS, DRIVER.SYS, DISPLAY.SYS, PRINTER.SYS, SMARTDRV.SYS, XMA2EMS.SYS, and XMAEMS.SYS., HIMEM.SYS, and EMM386.EXE.

VDISK.SYS

A *virtual disk*, also called a *RAM disk*, is a portion of random-access memory (RAM) that the operating system treats as a disk drive. A RAM disk is accessed with a drive specifier as if it were a conventional disk drive. The advantage of a RAM disk is that the data on the disk can be accessed much faster than data on a mechanical disk drive. The disadvantage of a RAM disk is that it is not permanent storage for data. Turning off or rebooting your system destroys the contents of the RAM disk. Any data to be saved must be copied to a mechanical disk.

VDISK.SYS is a RAM disk device driver supplied with MS-DOS 2.X, 3.X, and 4.X. (MS-DOS 5 supplies RAMDRIVE.SYS instead). VDISK.SYS performs three functions: (1) installs the RAM disk in memory and assigns it a drive letter, (2) formats the RAM disk so that it can store files (you cannot use the FORMAT command on a RAM disk), and (3) acts as an interface between MS-DOS and the RAM disk. The syntax for installing the device driver is:

```
DEVICE=[path]VDISK.SYS[vvv][sss][ddd][/E[:t]]/X[:t]]
```

The *vvv* parameter in this syntax line sets the size of the virtual disk in kilobytes. The allowable range is from 1 kilobyte up to the size of your system's memory. The default disk size is 64 Kbytes.

If you request too much memory for your RAM disk, VDISK will adjust your request downward to leave 64 Kbytes of memory available after the RAM disk is installed. VDISK will not install the RAM disk if less than 64 Kbytes of memory is available. If the disk size request has been adjusted, VDISK notifies you with the message `Buffer size adjusted`.

The *sss* parameter sets the number of bytes per sector on the RAM disk. Acceptable values are 128, 256, and 512. Any other value will default to 128 bytes per sector. Disk sectors are discussed in chapter 10.

The *ddd* parameter sets the number of entries allowed in the disk directory. The allowable range is 2 to 512, with a default of 64. Each directory entry requires 32 bytes. If necessary, VDISK will adjust your request size upward to fill out a complete sector. For example, if your sector size is 512 and you request 12 directory entries, VDISK will adjust upward and give you 16 directory entries ($16 \times 32 = 512$).

Each RAM disk requires 1 boot sector, 1 FAT sector, 1 directory sector, and 1 data sector. VDISK will adjust your directory entry request downward, if need be, to make room for these required sectors. Any adjustment of the number of directory entries is accompanied by the message `Directory entries adjusted`.

The `/e` switch directs MS-DOS to place the RAM disk in extended memory (see chapter 12). The driver itself is still stored in low memory. You may request more than one RAM disk in extended memory by placing multiple `device=vdisk.sys/e` commands in your CONFIG.SYS file. Each RAM disk in extended memory may be up to 4 megabytes in size.

MS-DOS will display an `Insufficient memory` message if you use the /e switch on a machine that does not have extended memory.

The `/x` switch, implemented in DOS 4.X, directs the operating system to place the RAM disk in *expanded* memory. Use of expanded memory requires both an expanded memory card and an expanded memory device

driver. Expanded memory is discussed in chapter 12. The PC DOS 4.0 implementation of VDISK.SYS works in expanded memory only with an IBM expanded memory board.

If your computer has both extended and expanded memory, you may want to consider putting the RAM disk in extended memory, because there are relatively few programs running under DOS that can use extended memory.

The optional `:t` parameter tells MS-DOS the maximum number of sectors to transfer to extended memory or expanded memory at one time. The range is 1 to 8, with a default of 8. Try adjusting this parameter, as well as the sector size parameter, if you have trouble getting your RAM disk to work properly in expanded or extended memory.

Hardware interrupts are disabled during memory transfers between conventional and extended memory. If your RAM disk is in extended memory, it may interfere with communication programs if the value for `:t` is set too high.

The following example installs a 1000-Kbyte RAM disk:

```
device=vdisk.sys 1000 512 64 /e:4
```

The RAM disk created has a sector size of 512 bytes. The directory may contain up to 64 entries. The RAM disk is placed in extended memory. A maximum of 4 sectors is transferred to extended memory at a time.

RAMDRIVE.SYS

RAMDRIVE.SYS is a RAM disk device driver supplied with MS-DOS 5. Its use is nearly identical to that of VDISK.SYS and in fact, it is the DOS 5 replacement for VDISK.SYS. The syntax and parameters for RAMDRIVE.SYS are as follows:

```
DEVICE=[path]RAMDRIVE.SYS[DiskSize][SectorSize][NumEntries] [/E]|[/A]
```

DiskSize specifies the size of the RAM disk. Allowable values are 14 to 4,096 bytes. The default is 64.

SectorSize can have a value of 128, 256, or 512. The default is 512.

NumEntries is the number of allowable root directory entries. Acceptable values are 2 to 1,024. The default is 64.

The `/E` switch specifies that the RAM drive is to be in extended memory. HIMEM.SYS, or another extended memory manager, must be loaded first.

The /A switch specifies that the RAM drive is to be in expanded memory. The appropriate hardware and software is required for this switch to be effective.

SMARTDRV.SYS

SMARTDRV.SYS is a disk-caching device driver that comes with MS-DOS 5. A *disk cache* is an area of memory that stores large amounts of data from the hard disk, thereby reducing the amount of time a computer spends accessing its hard disk. A disk cache will significantly improve the performance of most computers.

SMARTDRV.SYS is loaded by a DEVICE statement in CONFIG.SYS. The disk cache will be created in either extended or expanded memory. If you want the cache to be in extended memory, the DEVICE statement loading SMARTDRV.SYS must follow the DEVICE statement loading the extended memory manager (such as `device=himem.sys`). If you want the disk cache to be in expanded memory, your computer must have the appropriate expanded memory hardware, and the DEVICE statement loading SMARTDRV.SYS must follow the statement loading the expanded memory manager. SMARTDRV.SYS will use about 15 Kbytes of conventional memory regardless of whether the disk cache is in extended or expanded memory.

On most systems with both extended and expanded memory, you can obtain better performance by placing the disk cache in extended memory. This difference in performance is especially pronounced if you are using EMM386.EXE to emulate expanded memory on your 80386 or 80486 computer.

The syntax for using SMARTDRV.SYS is as follows:

```
DEVICE=[path]SMARTDRV.SYS[InitCacheSize][MinCacheSize][/a]
```

The *InitCacheSize* parameter specifies the size of the memory cache in Kbytes. Allowable values are 128 to 8,192. The default is 256. Generally, performance improves significantly as you increase the size of the cache up to 2,048 Kbytes (2 Mbytes). Beyond 2 Mbytes, performance may continue to improve but not as dramatically. SMARTDRV.SYS will round whatever number you specify down to the nearest multiple of you hard disk's track size.

SMARTDRV.SYS works in a cooperative fashion with Microsoft Windows 3.0 in the management of computer memory. This is an advantage in using SMARTDRV.SYS that other disk-caching programs lack. If you are running SMARTDRV.SYS and Windows 3.0 on your computer, Windows has the ability to reduce the size of your disk cache. The *MinCacheSize* parameter

specifies a minimum size for the disk cache. Windows cannot reduce the cache below the size specified. The default value for this parameter is zero.

The /a command switch specifies that the disk cache is to be created in expanded memory. By default the cache is created in extended memory.

Any time you modify the contents of the cache, SMARTDRV.SYS immediately saves the changes on your hard disk. Therefore, there is little danger of losing work stored in the cache.

If you are using Windows/386 version 2.X, you may have a compatibility problem with SMARTDRV.SYS. Contact your vendor if you can't run the two programs with each other.

DRIVER.SYS

DRIVER.SYS is a disk device driver first supplied with MS-DOS 3.2. It is valuable for two reasons: (1) it can be used to drive all MS-DOS supported drives (including 1.44-megabyte, 3½-inch drives) and (2) it can be used to drive "logical" as well as "physical" drives. To understand how DRIVER.SYS works, you must first understand how MS-DOS addresses disk drives.

Disk Addressing

When you switch on your computer, one of the actions that MS-DOS takes is to determine which peripheral devices are attached to the computer. After making this determination, MS-DOS reads the CONFIG.SYS file to check for any installable device drivers. During this process, MS-DOS assigns a unique drive letter to each disk drive device on the system. The first internal disk drive is assigned A; the second, B. The letters from C on are assigned as other system drives are recognized.

On systems with only one internal disk drive, the single drive is assigned letters A and B. The first fixed disk drive on a MS-DOS computer is always assigned drive letter C.

Disk drives are also given *physical drive numbers*. The first disk drive is assigned physical drive number 0, the second is assigned physical drive number 1, and so on, for the disk drives.

The first fixed disk on an MS-DOS computer is assigned physical drive number 128, the second is assigned 129, and so on, for the fixed disks.

Physical and Logical Drives

A *physical* disk drive is a real disk drive, a piece of hardware. Its existence is totally independent of any computer.

A *logical* disk drive is a product of the logic stored inside a computer. A program (such as the operating system) tells the computer that a logical drive exists at a certain (physical) location, and the computer accepts that information. The logical drive ceases to exist when the computer is turned off.

Drive letters are used to reference logical disk drives. As discussed earlier, if an MS-DOS computer has one disk drive, the drive is assigned drive letters A and B. Logical drives A and B both reside on physical drive 0. MS-DOS assigns logical drive letters, in alphabetical order, to disk drives as each logical drive is initialized.

With this background, we can now discuss DRIVER.SYS.

Using DRIVER.SYS

The following discussion requires some knowledge of disk structure. See chapter 10 if you are unfamiliar with this topic.

The syntax for DRIVER.SYS is

```
DEVICE=DRIVER.SYS /D:ddd[/T:ttt][/S:ss][/H:hh][/C][/F:f]
```

The `/D:ddd` parameter specifies the physical drive number on which the logical disk will reside. Allowable values are 0 to 255, except for DOS 5, which only allows 0 to 127. As discussed, 0 to 127 refers to disk drives and 128 to 255 refers to fixed disk drives. This driver is not intended for fixed drives, which is why DOS 5 now restricts the drive numbers to 0 to 127.

The `/T:ttt` parameter specifies the number of tracks per side of the logical disks. Allowable values are 1 to 999. The default is 80 tracks per side.

The `/S:ss` parameter specifies the number of sectors per track of the logical disk. Allowable values are 1 to 99. The default is 9 sectors per track.

The `/H:hh` parameter specifies the maximum number of heads. Allowable values are 1 to 99. The default is 2 heads.

The `/c` parameter specifies that the drive detect when the drive door has been opened and closed.

The `/n` parameter specifies that the physical device on which the logical device will reside be nonremovable (a fixed disk). The /n parameter is not supported in DOS 5.

The `/F:f` parameter specifies the type of logical device. Allowable values and the corresponding disk type are given in the following list. The default value is 2.

Value	*Disk Type*
`/f:0`	160 Kbytes/180 Kbytes
	320 Kbytes/360 Kbytes
`/f:1`	1.2 Mbytes
`/f:2`	720 Kbytes
`/f:7`	1.44 Mbytes

Adding a Physical Drive

Let's say that you want to add an external 1.44-megabyte, 3½-inch disk drive to a system that has one standard internal disk drive and one fixed disk drive. Physical drive 0 is the internal disk drive. Physical drive 1 is reserved for a second standard internal disk. Therefore, the 3½-inch drive will be physical drive 2. The command to install an appropriate device driver is as follows (assume that DRIVER.SYS is in subdirectory C:\DOS):

```
device=c:\dos\driver.sys /d:2 /f:7
```

The `/d:2` parameter specifies physical drive number 2. The `/f:7` parameter specifies a 1.44-Mbyte disk. Because the DEVICE command is read after drive letters A, B, and C have been assigned, the 3½-disk drive is assigned drive letter D.

Adding a Logical Drive

Sometimes it is useful to create a second logical drive on a physical drive. Assume that you have an AT computer with one 1.2-Mbyte 5¼-inch disk drive, one 3½-inch 1.44-Mbyte disk drive, and one hard disk drive. MS-DOS will assign logical drive letter A to the 5¼-inch drive, logical drive letter B to the 3½-inch drive, and logical drive letter C to the hard disk drive.

Such an arrangement can prove to be inconvenient if you perform an operation that logically requires identical disk drives. For example, say that the system disks are 5¼-inch and you want to create bootable 5¼-inch disks. If drives A and B were both 5¼-inch, you could put the system disk in drive A, the new disk in drive B, then enter the command `sys b:`. Even if the system only had a single 5¼-inch drive (and no 3½-inch drive), the same command could still be used, because DOS would prompt you to swap disks. With the 3½-inch drive on the system, though, logical drive B is assigned to a separate physical drive. It is not available to the 5¼-inch drive.

The way around the problem is to use DRIVER.SYS to create a second logical drive on the 5¼-inch physical drive. The following command, when placed in CONFIG.SYS, instructs DOS to create a new logical drive on the first physical drive:

```
device=c:\sys\driver.sys /d:0 /t:80 /s:15 /h:2 /c /f:1
```

The logical drive is to be on the first physical drive (`/d:0`). It will have 80 tracks per side (`/t:80`), 15 sectors per track (`/s:15`), and two heads (`/h:2`), will detect the door opening (`/c`), and will be a 1.2-Mbyte drive (`/f:1`). Once the system is rebooted with this statement in CONFIG.SYS, the 5¼-inch drive can be referenced by using logical drive letters A and D. In this way, a 5¼-inch disk can be made bootable with the command `sys d:`.

DISPLAY.SYS

DISPLAY.SYS is a code-page-switching device driver first supplied with MS-DOS 3.3. DISPLAY.SYS is used to implement code page switching on a display adapter. For an overview of code pages and code page switching, refer to appendix D.

DISPLAY.SYS is installed in memory by including a statement having the following format in CONFIG.SYS:

```
DEVICE=[d:][path]DISPLAY.SYS CON[:]=(type[,[hwcp][,(n,m)]])
```

or

```
DEVICE=[d:][path]DISPLAY.SYS CON[:]=(type[,[hwcp][,n]])
```

The *type* parameter specifies the display adapter that will support code page switching. The allowable values are `EGA` and `LCD`. EGA refers to both the Enhanced Graphics Adapter and the IBM PS/2 Video Display Adapter. LCD refers to the PC Convertible Liquid Crystal Display Adapter. Code page switching is not currently supported with other types of display adapters.

The *hwcp* parameter specifies the hardware code pages that are to be made available for use. Valid code page numbers are 437 (the default), 850, 860, 863, and 865. Hardware code pages are ready-to-use code pages that are stored in the display device's read-only memory (ROM). Refer to appendix D for further information on hardware code pages, including the meaning of the code page numbers.

The *n* parameter specifies the number of prepared code pages to be supported by the adapter. The allowable range is 1–12. Prepared code pages are discussed in appendix D.

The *m* parameter specifies the number of font sizes to be supported by the adapter. The Enhanced Graphics Adapter can support up to two font sizes (8 × 8 and 8 × 14). The PS/2 Display Adapter can also support up to two font sizes (8 × 8 and 8 × 16). The LCD adapter supports only one font size (8 × 8). The m parameter is not supported in MS-DOS 5. The following command illustrates the use of DISPLAY.SYS.

```
device=c:\dos\display.sys con:=(ega,437,2)
```

This command instructs MS-DOS to load the DISPLAY.SYS driver for use with the Enhanced Graphics Adapter. Along with the driver, hardware code page 437 is to be loaded. In addition, the driver is to support two prepared code pages.

PRINTER.SYS

PRINTER.SYS is another device driver for code page switching that was first supplied with MS-DOS 3.3. As its name implies, PRINTER.SYS supports code page switching on several IBM printers: the IBM Proprinter model groups 4201, 4202, 4207, and 4208, and the IBM Quietwriter III Model 5202. (The 4207 and 4208 models are supported, starting with MS-DOS 4.0.) For an overview of code page switching, please refer to appendix D.

PRINTER.SYS is installed in memory by including a statement of the following format in CONFIG.SYS:

```
DEVICE=[d:][path]PRINTER.SYS LPT#[:]=(type[,[(hwcp1,hwcp2)][,n]])
```

or

```
DEVICE=[d:][path]PRINTER.SYS LPT#[:]=(type[,[hwcp][,n]])
```

The *LPT#* parameter is used to specify a printer device. The valid entries are **PRN**, **LPT1**, **LPT2**, and **LPT3**.

The *type* parameter refers to the printer that will support code page switching. Use **4201** for the IBM 4201 and 4202 Proprinter, **4208** (with MS-DOS 4.X and 5.X) for the IBM Proprinter 4207 X24 and 4208 XL24, or **5202** for the IBM 5202 Quietwriter III.

The *hwcp* parameter specifies the hardware code pages that are to be made available for use. Valid code page numbers are **437** (the default), **850**, **860**, **863**, and **865**. If two or more hardware code pages are specified, they must be enclosed in parentheses. Hardware code pages are ready-to-use code pages that are stored in the printer's read-only memory (ROM). Refer to appendix D for further information on hardware code pages, including the meaning of the code page numbers.

The *n* parameter specifies the number of prepared code pages to be supported by the printer. Prepared code pages are discussed in appendix D.

The following command (which must be in CONFIG.SYS) instructs MS-DOS to load the PRINTER.SYS driver for use with the Quietwriter 5202 printer. Along with the driver, hardware code page 850 is to be loaded. In addition, the driver is to support three prepared code pages.

```
device=c:\dos\printer.sys prn:=(5202,850,3)
```

XMA2EMS.SYS

XMA2EMS.SYS is an expanded memory device driver that is supplied with PC DOS 4.X. XMA2EMS.SYS conforms to the Lotus-Intel-Microsoft Expanded Memory Specification 4.0. A complete discussion of expanded memory is presented in chapter 12. This discussion covers the use of XMA2EMS.SYS. As is the case with other device drivers, XMA2EMS.SYS is written to be used with a specific piece of hardware, namely the IBM Expanded Memory Adapter. XMA2EMS.SYS probably will not work if you have another brand of expanded memory board on your system; however, the discussion of XMA2EMS.SYS is still relevant because, in general, the points covered will apply to the use of other expanded memory device drivers.

As with the other drivers discussed, XMA2EMS.SYS can only be loaded into memory with a DEVICE statement contained in the file CONFIG.SYS. Several parameters can be used in the DEVICE statement to control the manner in which expanded memory is implemented. Each of these parameters will now be discussed.

You can specify the memory location of a single contiguous 64-Kbyte page frame by entering **frame=** followed by the location's segment address. For example, the following statement (which must be in CONFIG.SYS) specifies that a 64-Kbyte page frame is to be located starting at segment address C000. All of the examples in this section assume that the file XMA2EMS.SYS is located in C:\SYS:

```
device=c:\sys\xma2ems.sys frame=c000
```

The default value for `frame` is D000. This means that the 64-Kbyte page frame is loaded beginning at segment address D000H, offset 0000H (D000:0000). As is discussed in chapter 12, the page frame is the area in conventional memory that serves as a window into expanded memory. In some circumstances, there may be a memory conflict between a peripheral device and the default address for the page frame. For example, a network interface card could be located at address D000:0000. In such a situation, the default value for `frame` could be overridden, as illustrated earlier, and the memory conflict avoided.

Instead of a single contiguous page frame, you can specify the starting address of up to four separate physical 16-Kbyte pages. Together, these separate pages will make up the page frame. The four separate pages have the preassigned names of P0–P3. You specify a page's starting address by typing its name, an equal sign, and then the segment address of the page's starting location. As an example, the following statement specifies that four 16-Kbyte pages are to be located at segment addresses C000, C800, D000, and D800:

```
device=c:\sys\xma2ems.sys p0=c000 p1=c800 p2=d000 p3=d800
```

Use of the P0–P3 parameters is useful if conventional memory on your computer is very "crowded" and there are no contiguous 64-Kbyte blocks available. You cannot use the P0–P3 parameters if you use the frame parameter.

The pages P0–P3 are for use by application programs that utilize expanded memory. In addition, there are two other pages that can be specified for use by the operating system. If you specify a location for p254, as shown in the following statement, PC-DOS can use that page to run VDISK.SYS and FASTOPEN in expanded memory. If you specify a location for p255, PC DOS can use that page to run the BUFFERS command in expanded memory:

```
device=c:\sys\xma2ems.sys frame=c000 p254=d000 p255=d400
```

The /x:*size* switch is used to specify the number of 16-Kbyte pages of expanded memory to be used by the system. The minimum value for *size* is 4. The maximum and default value for *size* is the total amount of expanded memory contained in the system.

XMAEM.SYS

XMAEM.SYS is a device driver supplied with PC-DOS 4.X that allows the hardware of a PS/2 Model 80 to emulate an expanded memory card. If you are using XMAEM.SYS, you must load it into memory before you load an expanded memory device driver, such as XMA2EMS.SYS.

XMAEM.SYS has a *size* parameter that controls the amount of PS/2 memory to be used to emulate expanded memory. The value of *size* specifies the number of 16-Kbyte pages. The minimum value for *size* is 4. The maximum and default value for *size* is the total amount of available memory.

If you specify a value for *size* (in XMAEM.SYS), the /x:*size* switch (in XMA2EMS.SYS) will be ignored.

HIMEM.SYS

HIMEM.SYS is an extended memory manager that comes with DOS 5. *Extended memory* on a DOS computer is regular computer memory that exists beyond the 1 Mbyte memory address. Generally, this memory is not available for use by MS-DOS. Extended memory managers provide limited access to this memory for use as a data storage area.

HIMEM.SYS can only be loaded using a DEVICE statement in CONFIG.SYS. HIMEM.SYS must be loaded before the "DOS" command, or any other command, can use extended memory. Refer to the discussion of the "DOS" command in this part for details.

The format for HIMEM.SYS is as follows:

```
DEVICE=[d:][path]HIMEM.SYS /hmamin=size /numhandles=n /int15=xxx /machine:xxxx
/a20control:on|off /shadowram:on|off
```

The `/hmamin=size` switch specifies the amount of memory (in Kbytes) an application must use before HIMEM.SYS permits the application to use the high memory area. The high memory area or HMA is memory between addresses 640 Kbyte and 1 Mbyte. Allowable values for *size* are zero to 63. Zero is the default.

The `/numhandles=n` switch specifies the maximum number of extended memory block handles that can be used simultaneously. Allowable values for *n* are one to 128. The default is 32.

The `/int15=xxx` switch allocates a specified amount of memory to the interrupt 15H interface. Application programs can access extended memory using interrupt 15H. The default value for *xxx* is zero.

The `/machine:xxxx` switch specifies the A20 handler to be used. The following machine names, or their equivalent codes, are acceptable values for *xxxx*:

Machine Name	*Equivalent Code*
at	1
ps/2	2
pt1 cascade	3
hpvectra	4
att6300plus	5
acer 1100	6
toshiba	7
wyse	8

The default equivalent code value is 1.

The `/a20control:on|off` toggle determines whether HIMEM.SYS takes control of the A20 address line if it was on. The A20 address line is used by 80286, 80386, and 80486 CPUs to access extended memory. When the toggle is on (`/a20control:on`), HIMEM takes control as soon as it is loaded. When the toggle is off (`/a20control:off`), HIMEM takes control of the A20 line only if the A20 line was off when HIMEM was loaded.

The `/shadowram:on|off` toggle determines whether extended memory is used to hold the contents of read-only memory (ROM). When the toggle is on (`/shadowram:on`), the ROM contents are copied. When the toggle is off (`/shadowram:off`), ROM is not copied to extended memory. The default for the toggle is on. The toggle only operates on 80386 and 80486 computers.

EMM386.EXE

EMM386.EXE is a device driver that uses conventional memory of 386 and 486 computers to emulate expanded memory, which is desirable for many application programs. EMM386.EXE also provides access to reserved memory (unused memory between 640 Kbytes and 1 Mbyte) for other device drivers and application programs. Refer to the discussion of the commands DEVICEHIGH and LOADHIGH for information on the use of reserved memory.

EMM386.EXE was introduced with MS-DOS 5.0. Even though the program is an EXE file, it must be loaded using a DEVICE command in CONFIG.SYS. The command to load EMM386.EXE must follow the command installing HIMEM.SYS and precede any commands using expanded memory. No additional expanded memory management software should be used with EMM386.EXE. As with other commands in CONFIG.SYS, the loading command must specify the directory in which EMM386.EXE is located if it is not located in the root directory of the boot drive.

The format for using EMM386.EXE is as follows:

```
device = [drive] [path] emm386.exe [memory] [MemoryOptions]
```

Here, *memory* is the amount of memory in Kbytes to allocate to expanded memory. The allowable range is 16 to 32,768. The number specified will be rounded down to the nearest multiple of 16. The default value is 256.

MemoryOptions is a collection of parameters that may be used when you start EMM386.EXE. These parameters can be entered on the command line in any order following the memory parameter. Generally, expanded memory will operate properly without specifying values for these parameters. The *MemoryOptions* parameters are listed in table 1. Refer to chapter 12 for a comprehensive overview of expanded memory.

Table 1. `MemoryOptions` Parameters Used with EMM386.EXE (All parameters are optional)

Parameter	*Function*
`w = [on or off]`	Enable or disable Weitek coprocessor. Default is off.
`Mx`	One-number code for page frame segment base.
x = 1	C000H
2	C400H
3	C800H
4	CC00H
5	D000H
6	D400H
7	D800H
8	DC00H
9	E000H
10	8000H
11	8400H
12	8800H
13	8C00H
14	9000H
`frame=`*`address`*	Specifies page frame segment directly (same as `/P`*`address`*).
`/P`*`address`*	Specifies page frame segment base directly.
`Pn=`*`address`*	Specifies segment address of a specific page.
`X=`*`addressrange`*	Prevents a range of segment addresses being used for an EMS page.Example: `X=1000-7000`.
`B=`*`address`*	Specifies lowest segment address available for EMS banking. Default is 4000H. Allowable range is 1000H to 4000H.
`L=`*`minXMS`*	Specifies minimum amount of extended memory available after loading EMM386.EXE.
`A=`*`altregs`*	Specifies number of fast alternate register sets to allocate to EMM386.EXE. Allowable range is 0 to 254. Default is 7.
`H=`*`handles`*	Specifies number of page handles allocated to EMM386.EXE. Allowable range is 2 to 255. Default is 64.

DEVICEHIGH

Internal
MS-DOS 5

Function: Loads device drivers into reserved memory on 80386 and 80486 computers.

Note: DEVICEHIGH can only be used in CONFIG.SYS.

Format: `DEVICEHIGH [size]=[size][d:][path]filename[.ext]`

Example: `devicehigh=c:\dos\ramdrive.sys`

If you have a 80386 or 80486 computer, you can use DEVICEHIGH to load device drivers into reserved memory, thereby freeing up some conventional memory for use by your application programs.

Reserved memory is the block of memory that lies between memory addresses A0000H (640 Kbyte) and FFFFFH (1 Mbyte). Reserved memory is generally not available for use by application programs. DOS uses reserved memory as the address space for video and hard disk adapters as well as for other hardware functions. However, much of reserved memory is unused under standard DOS operations.

DEVICEHIGH enables you to use some of this otherwise wasted resource by loading device drivers into reserved memory. Unfortunately, DEVICEHIGH only works on 80386 and 80486 computers.

Using DEVICEHIGH

DEVICEHIGH can be set in CONFIG.SYS as a configuration entry after you (1) use the DEVICE command to load HIMEM.SYS, (2) include the command `DOS=UMB`, and (3) use the DEVICE command to load EMM386.EXE or an equivalent 386 memory manager (such as HIMEM.SYS). Each of these commands is discussed elsewhere in Part 2.

Use DEVICEHIGH by entering (in CONFIG.SYS) DEVICEHIGH, followed by an equal sign, followed by the name of the device driver you want to load in reserved memory. A drive letter and/or path specifier may be included.

Setting a Minimum Size

If you try to load a device driver into a block of reserved memory that is too small, DEVICEHIGH can cause your computer to freeze up. You can avoid this problem by specifying a minimum size for a block of reserved memory. The block size is specified with a hexadecimal number.

The following example loads the device driver RAMDRIVE.SYS into reserved memory. The command specifies a minimum reserved memory block size of 4 Kbytes (hexadecimal FFF).

```
devicehigh size = fff c:\dos\ramdrive.sys
```

The device driver will not be loaded if a reserved memory block of at least the specified size is not available.

DIR

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Lists directory entries.

Formats:
```
DIR [d:][filename[.ext]][/P][/W]
DIR [d:][path][filename[.ext]][/P][/W] (MS-DOS 2.X–5.X)
DIR [d:][path][filename[.ext]][/A:attributes]
[/O:sortorder][/S][/B][/L] (MS-DOS 5.X)
```

Examples:
```
dir
dir b:
dir b:\subdir1\*.doc /w
dir c:\ /a:a-h /o:n /s
```

The DIR (DIRectory) command is used to display the filename, filename extension, size, and time/date stamp of the files contained on a disk. The MS-DOS 2.X and subsequent versions of DIR also display the disk's volume identification (if one was specified when the disk was formatted) and the amount of free space remaining on the disk.

To use DIR with MS-DOS 1, simply type **dir**. Notice that if you do not enter a drive designator (such as c: or a:), MS-DOS will display the files on the default drive:

```
C:\>dir
FILE1          BAS         3213     10-02-91   11:42a
PROGRAM1       BAS        12674     10-09-91    9:53a
QBASIC         EXE        57344      6-21-91   10:44a
COMMAND        COM         4879      3-11-91   11:40a
       4 File(s)
```

The first column of the display gives the name of each file. The second column gives the filename extension. The third column shows the size of the file in bytes. The fourth column shows the date that the file was created or last modified, and the fifth column shows the time that the file was created or last modified.

If you are using the DIR command with MS-DOS 2.X, or a subsequent versions, again simply type **dir**. The display will show the same information as the MS-DOS 1 version but will give you additional information about the disk's volume label and the space available for new files. If you do not include a path in the DIR command, MS-DOS will default to the current directory of the specified (or default) drive:

```
C:\>dir

 Volume in drive C is WAITE_DISK1
 Directory of C:\

COMMAND    COM    17664    3-08-90 12:00p
C              <DIR>        1-01-91 12:07a
WS2PATH    BAT       23   10-07-90  8:18a
CONFIG     SYS      128    9-25-91  7:24p
SETCLOCK   COM      853    9-19-91  4:24p
WS             <DIR>        9-08-90  4:27p
       6 File(s)    110269 bytes free
```

In the preceding example, notice that the display shows the volume label `WAITE_DISK1` for the disk in the default drive (`C:`). The volume label is simply the *name* of the disk. The line `Directory of C:\` tells you that the files displayed are in the root directory on drive C. Two of the directory entries contain the notation `<DIR>`. These entries represent subdirectories that are contained in the root directory. The final line says that there are 110,269 free bytes remaining on the disk.

To view the contents of a directory other than the current directory, type **dir** and then type the path to the directory:

```
C:\>dir \ws

 Volume in drive A is WAITE_DISK1
 Directory of C:\WS

.            <DIR>       9-08-90  4:27p
..           <DIR>       9-08-90  4:27a
WS       EXE   60128     6-25-91  7:24p
WS       HLP   45853     6-25-91  7:24p
BATES    DOC    4096     9-17-91  4:27p
GILMORE  DOC    4096     9-18-91  2:15p
       6 File(s)    110269 bytes free
```

Notice the single and double periods that appear in the first two entries. These are shorthand symbols used by MS-DOS in displaying the contents of a subdirectory. The entry in the first column with a single period represents the directory being listed. The entry with two periods represents the listed directory's parent directory. WS is the listed directory. WS's parent directory is the root directory. (See chapter 3 for more information about directories, subdirectories, and parents.)

Using /P and /W with DIR

The DIR command has two optional switches. The /p switch is particularly useful when you wish to view the contents of a large directory. When DIR is directed to display a large number of files, the file information will scroll off the screen faster than you can read it. You can see this by inserting a working copy of your system disk in drive A and entering the command **dir a:** and pressing Enter. You will be unable to study the information before it's gone from view. By using the /p switch, you can instruct MS-DOS to display one "page" of file information at a time. The display will be suspended each time that the screen is filled. The display will resume when you press any key.

The /w switch is used with DIR to display file information in the "wide" mode. The wide mode displays the filename and filename extension of five files on each line of the display screen. File size and file time/date information are not displayed with the wide mode.

Using DIR to List Selected Files

You can specify a particular file in the DIR command. MS-DOS will look for that filename and, if the file is found, will display the corresponding file information:

```
C:\>dir ws2path.bat

 Volume in drive C is WAITE_DISK1
 Directory of C:\

WS2PATH   BAT        23   10-07-91    8:18a
       1 File(s)     110269 bytes free
```

This feature can be useful when you are looking for a specific file among a large number of files. Let's say that you want to know whether there is a file named LETTERS.DOC in the subdirectory WS. You could look for the file in two ways. You could enter the command **dir \ws** and scan the display for LETTERS.DOC, or you could enter the command **dir \ws letters.doc**. If you enter the second command, MS-DOS will do the scanning for you. If LETTERS.DOC exists, MS-DOS will display the file information. If the file does not exist, MS-DOS will let you know.

Wildcards and DIR

Using wildcard characters with DIR, you can have MS-DOS list a specific group of files. Let's say that you want a listing of the files in the root directory of drive B that have a filename beginning with the letter "Q" and a filename extension of DOC. All you have to do is enter the following command:

```
C:\>dir b:\q*.doc
```

MS-DOS will pick out the files that you are looking for and display their names on the screen. (For more information on wildcards, see chapter 2.)

By eliminating the filename extension in a DIR command and entering only the filename, you can instruct MS-DOS to list all files with the specified filename. The following command directs MS-DOS to list all files in the root directory of drive B with a filename of ANIMALS:

```
C:\>dir b:\animals
```

By entering the filename followed by a period and no filename extension, you can instruct MS-DOS to list all files with the specified filename and no filename extension. In the following command, MS-DOS looks for a file having the filename ANIMALS and no filename extension:

```
C:\>dir b:animals.
```

DOS 5 Enhancements

DOS 5 provides several nice enhancements to the DIR command. The DIR command has switches that enable you to specify the attributes of files to be listed, to specify a ordering for the listing, and some other features that are discussed below. DOS 5 also allows you to create an environment variable that records the DIR command switches you wish to use as defaults. A macro that uses several of these enhancements is presented at the end of this discussion. In addition, when you use the `DIR/W` command, directories are listed in square brackets so that they are readily distinguished from files.

Specifying File Attributes

The `/a:`*`attributes`* command switch enables you to specify a set of file attributes for the files you wish to have listed. In the following example, the DIR command is used to list the hidden files in the root directory:

```
dir c:\ /a:h
```

You can specify a set of several attributes for the listing. The following example lists the hidden files that are not system files:

```
dir c:\ /a:h-s
```

In the preceding example, `-s` specifies files that are not system files. Notice that there is no space between the `h` and the `-s`. Table 2 summarizes use of the `/a:`*`attributes`* command switch.

Table 2. Specifying File Attributes for DIR

Attribute	*Files listed*
`/a:` (none)	All files, including hidden and system
`h`	Hidden files
`-h`	Files that are not hidden
`s`	System files
`-s`	Files that are not system files
`d`	Directories
`-d`	Files only
`a`	Files with archive attribute set
`-a`	Files with archive attribute clear
`r`	Read-only files
`-r`	Files that are not read only

Specifying an Order of Listing

The DOS 5 version of DIR enables you to specify criteria to be used in ordering the file listing. Table 3 summarizes the use of the `/o:sortorder` command switch. The following example sorts list files with their archive attribute set. The listing is sorted according to time and date stamp:

```
dir c:\*.* /a:a /o:d
```

Table 3. Specifying a Criterion for Ordering the DIR Listing

Attribute	*Files Listed*
`/o:` (none)	Alphabetically, directories before files
`n`	Alphabetically by name
`-n`	Alphabetically by name, reverse order
`e`	Alphabetically by extension
`-e`	Alphabetically by extension, reverse order
`d`	According to date/time stamp, earliest first
`-d`	According to date/time stamp, most recent first
`s`	By size, smallest first
`-s`	By size, largest first
`g`	Directories listed before files
`-g`	Directories listed after files

Other Command Switches

You can search through a directory and all of its subdirectories using the /s command switch. The following example lists all files with an extension of TXT located in the root directory or any subdirectory on drive C:

```
dir c:\*.txt /s
```

The /s command switch is used in a macro presented at the end of this section.

You can use the /b command switch to list the file names and extensions, one file name and extension per line. Hexadecimal byte values 0Dh and 0Ah are inserted at the end of each line. This format is useful if you want to create

a file containing a list of file names, perhaps to be redirected to another program for processing.

The /L command switch lists file names and directory names in lowercase letters.

The DIRCMD Environment Variable

If you are using DOS 5, you can store those command switches you want as defaults for the DIR command in an environment variable. The name of the variable to use is DIRCMD. You set DIRCMD equal to the DIR command switches you want as defaults. Once the variable is set, all you need to do is enter DIR and the command will execute per the command switches in the environment variable. For example, let's say that you want the DIR command to list all files, including hidden and system files, in alphabetical order, using the wide display mode. The command you would generally need to enter is

```
dir /a /o:n /w
```

Instead you could store the command switches in the DIRCMD environment variable. Then you would not have to enter the switches each time you executed the DIR command. Use the SET command to assign a value to an environment variable. In this case you should enter

```
set dircmd=/a /o:n /w
```

Once the variable is set, all you need to do is enter **DIR**, and the command `DIR /A /O:N /W` will automatically execute. You can put the SET command in AUTOEXEC.BAT so that DIRCMD is automatically initialized whenever you start up DOS.

If DIRCMD is assigned a value and you want to execute the DIR command without using one or more of the stored switches, you have to "negate" the switch on the command line. For example, if DIRCMD is set as in the previous example and you want a listing that does not include the hidden files, you would enter the following:

```
dir /a:-h
```

A File-Searching Macro

The following command uses the DOS 5.0 DOSKEY utility to create a macro that searches a disk for a file:

```
doskey w=dir \$1 /s /b$bmore
```

The macro created is called `w` (for "where is the file?"). The `$1` replaceable parameter will be replaced by the filename entered on the command line. Wildcards are allowed in the filename. The `\` tells DIR to begin looking for the file in the root directory. The `/s` switch tells DIR to search all subdirectories. The `/b` switch tells DIR to list one file per line. The `$b` is the macro symbol for piping. The output from the DIR command is piped to the MORE command so that the display is suspended before the screen starts to scroll.

To illustrate how the macro would be used, let's say that you want to locate all files on the default drive with an extension of TXT. Once the macro has been created, all you would have to enter would be the following: **w *.txt**. All files with an extension of TXT would be listed on the screen, one file per line. Each file would be preceded by its full path specifier.

You could have this macro created each time you start up DOS by including the above DOSKEY command in your AUTOEXEC.BAT file. DOS macros are discussed in chapter 4 of this book.

DISKCOMP

External
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Compares the contents of two floppy disks.

Formats: `DISKCOMP [d:][d:]`
`DISKCOMP [d:][d:][/1][/8]` (MS-DOS 2.X–5.X)

Example:
```
diskcomp a: b:
```

DISKCOMP (COMPare DISK) is a utility program used to compare the contents of two floppy disks. DISKCOMP compares the disks on a sector-by-sector basis. It is most useful in checking the accuracy of copies made with DISKCOPY.

DISKCOMP is used for comparing floppy disks only. It cannot be used with fixed disks, RAM disks, or network disks. Nor can it be used in conjunction with SUBST, ASSIGN, or JOIN.

Before using DISKCOMP, you may wish to read the discussion on disk structure in chapter 10.

Using DISKCOMP

Because DISKCOMP is an external MS-DOS command, a copy of the file DISKCOMP.COM must be available to the system before you can use the

command. This means that either DISKCOMP.COM must be in the current directory of the default drive or that the location of DISKCOMP.COM must have been specified by the PATH command (see the discussion of PATH).

If you are using a system with two disk drives, you will save yourself a lot of disk swapping by including two drive letter designators in the DISKCOMP command:

```
C:\>diskcomp c: b:
```

When you press Enter, MS-DOS will prompt you with the statements `Insert the first diskette in drive A:` and `Insert the second diskette in drive B:`. It does not matter which disk is inserted in which drive. Once the disks are in place, the comparison is started by pressing any key.

If you are using a system with only one disk drive or if you do not enter two drive letter designators in the DISKCOMP start command, MS-DOS will display a prompt telling you when to insert the first disk and when to insert the second disk. It is not important which disk you designate as "first" and which you designate as "second." The important point is to keep the first and second disks straight after the comparison begins.

DISKCOMP compares the disks on a sector-by-sector basis. If all sectors match, MS-DOS will display the message `Diskettes compare ok`. If there is a mismatch, MS-DOS will display the track and side where the errors appear.

At the end of a comparison, DISKCOMP asks whether there are any more comparisons to perform. If you reply **Y**, DISKCOMP prompts you to insert the next pair of disks. If you reply **N**, control is returned to MS-DOS.

DISKCOMP Switches

DISKCOMP has two optional switches. The /1 switch tells DISKCOMP to compare only the first side of each disk. The /8 switch tells DISKCOMP to compare only the first 8 sectors of each track. (See chapter 10 for a detailed discussion of tracks and sectors.)

DISKCOPY

External
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Copies the contents of one floppy disk onto another.

Formats: `DISKCOPY [d:][d:]`
`DISKCOPY [d:][d:][/1]` (MS-DOS 2.X–5.X)
`DISKCOPY [d:][d:][/V]` (MS-DOS 5.X)

Example: `diskcopy a: b:`

DISKCOPY is a utility program used to copy the contents of one floppy disk onto another. It can be used only with floppy disks. MS-DOS will display an error message if you try to use DISKCOPY with a hard disk.

Using DISKCOPY

DISKCOPY is an external MS-DOS command. This means that before you can use DISKCOPY, one of the system drives must contain the file DISKCOPY.COM. In the example used here, DISKCOPY.COM is stored on drive C.

If your system has two disk drives, you will save yourself a lot of disk swapping by including two drive letter designators in the DISKCOPY command.

```
C:\>diskcopy a: b:
```

When the command is entered, MS-DOS will load DISKCOPY.COM into memory and then prompt you to insert the source disk in the first drive specified in the command and the target disk in the second drive specified in the command. The *source disk* is the disk to be copied; the *target disk* is the disk that will contain the copy:

```
Insert source diskette in drive A

Insert target diskette in drive B

Strike any key when ready
```

Once the source and target disks are in place, press any key to begin the DISKCOPY process. If your system does not have two disk drives or if you did not include two drive letter designators in the DISKCOPY command, MS-DOS will prompt you to insert the source and target disks. Remember that the source disk is the original; the target disk is the copy. If you get them confused, you may inadvertently erase the data stored on the original disk. To prevent accidental erasure, you can easily write-protect the source disk by placing a small piece of tape over the notch on the disk's side. MS-DOS will not send data to a write-protected disk.

At the end of the copy process, you will be asked if you wish to copy another disk. If you reply **Y**, the DISKCOPY process is repeated. If you reply **N**, control is returned to MS-DOS.

The MS-DOS 2.X and later versions of DISKCOPY offer an optional /1 switch. Including the /1 switch tells DISKCOPY to copy only the first side of the source disk.

The DOS 5 version of DISKCOPY supports the /V command switch, which verifies that the copy made is correct. Verification significantly increases the time required for the copying process.

Note: Most versions of DISKCOPY will format an unformatted target disk.

DISKCOPY Versus COPY

It is important to recognize the difference between the commands DISKCOPY and COPY. DISKCOPY begins by reading the contents of the first track off the source disk and writing the contents to the first track of the target disk. The contents of the second track are then read and written to the second track in the target disk, and so on. DISKCOPY writes over all preexisting data on the target disk.

COPY begins by reading the contents of the first sector of a file off the source disk and writing the contents to the first available sector on the target disk. The contents of the second sector of the file are then read and written to the next available sector on the target disk. COPY continues in this manner until the entire file has been copied. The only preexisting data on the target disk that is written over by COPY is the files named in the COPY command.

A file that does not occupy contiguous sectors on a disk is called a *fragmented* file. Fragmented files can slow computer performance, because MS-DOS requires more time to read a fragmented file. It is good practice to copy a highly fragmented disk to an empty disk by using the command `xcopy *.* /s` (or `copy *.*`) rather than using DISKCOPY. The XCOPY or COPY command will copy each of the fragmented files to contiguous sectors on the target disk, thus improving computer performance.

DOS

Internal
MS-DOS 5.X

Function: Loads a portion of MS-DOS in the high memory area. Allows device drivers and application programs to be loaded in reserved memory.

Format: `DOS = [high|low],[umb|noumb]`

Example: `dos=high,umb`

Conventional memory is the expression used to describe the lowest 1 Mbyte address space on MS-DOS computers. Conventional memory consists of two parts. Part of the first 640 Kbytes is used in part by DOS to load system files, set up buffers, and for other odds and ends directly related to the operating system. However, most of this first 640-Kbyte area is available to be used by application programs. The remainder of conventional memory, from the 640-Kbyte address (hexadecimal address A0000H), up to the 1-Mbyte boundary (hexadecimal address FFFFFH), is called the *reserved memory area*. The reserved area is used as the address space for video and hard disk adapters as well as for other hardware functions.

Computer memory beyond the 1-Mbyte boundary is called *extended memory*. This memory is not normally available for use by DOS. The first 64 Kbytes of extended memory are known as the *high memory area (HMA)*.

The DOS command has two functions. The first is to allow MS-DOS to load a portion of itself into the HMA. As was mentioned, the operating system normally uses a portion of the 640-Kbyte memory block to load system files, for creating buffers, and for loading the command processor. The DOS command tells the operating system to load 64 Kbytes of this material in the HMA. This gives application programs 64 Kbytes more of conventional memory.

The second function of the DOS command is to allow device drivers and application programs to be loaded into the reserved memory area. As its name implies, this area is generally off limits. Usually though, much of the area is unused and gets wasted. The DOS command enables you to use available reserved memory, thereby freeing up some more of the precious 640-Kbyte block.

Using DOS

The DOS command is not available in MS-DOS versions prior to 5.0. The DOS command can only be used in the CONFIG.SYS file. Use of CONFIG.SYS is discussed in chapter 5.

In order for the DOS command to function, HIMEM.SYS must have been installed by CONFIG.SYS. HIMEM.SYS in the extended memory manager introduced with MS-DOS 5. For now, you need to know that the command to install HIMEM.SYS must precede the DOS command in CONFIG.SYS.

The DOS command has two parameters. The first parameter can be set to equal either HIGH or LOW. The operating system will load a portion of itself into the HMA if CONFIG.SYS contains the statement `DOS = HIGH`. The operating system will only be loaded into conventional memory if the command `DOS = LOW` is in CONFIG.SYS. The default value for this first parameter is LOW.

The second parameter for the DOS command can be set to either UMB (for upper memory block) or NOUMB. Empty portions of reserved memory are made available to device drivers and application programs if CONFIG.SYS contains the command `DOS = UMB`. Reserved memory is unavailable if `DOS = NOUMB` is in CONFIG.SYS. NOUMB is the default.

Both of the DOS command parameters can be set with a single command, such as

```
dos = high,umb
```

If reserved memory is made available, device drivers are loaded into it using the DEVICEHIGH command. Application programs are loaded into reserved memory using the LOADHIGH command. Both of these commands are discussed elsewhere in this book.

DOSKEY

External
MS-DOS 5.X

Functions: Maintains a list of commands previously entered on the command line. Enables you to reexecute commands in the list without having to reenter the command. You can also edit commands in the list and execute the edited command. Enables you to enter more than one command at a time on the command line. Also helps you create DOS command macros.

Format:

```
DOSKEY [/reinstall][/bufsize=size][/dmacs][/dhis]
[insert|overstrike][name = macro commands]
```

Example:
```
doskey
doskey /reinstall /bufsize=1024
doskey move = copy $1 $2 $t del $1
```

Users of the UNIX operating system are familiar with the `history` facility, which allows users to reexecute a command without having to reenter it. For some time there have been DOS programs, available commercially and in the public domain, providing DOS users with this very useful capability. With the release of MS-DOS 5.0, the capability comes as a standard feature in the form of a terminate and stay resident program called DOSKEY.

DOSKEY stores the commands entered on the command line in an area of memory called a *buffer*. The commands can then be listed on the screen with the touch of a key. Any command listed can be reexecuted without having to reenter the command. You can also edit commands on the list and execute the edited command. DOSKEY also allows you to create DOS command macros. A *macro* is a set of one or more DOS commands that is stored in memory. The commands contained in the macro are executed by entering the macro's name on the command line. Macros are similar in many ways to batch files. Use of batch files and DOSKEY macros is discussed in chapter 4. This section discusses the use of DOSKEY to maintain, reexecute, and edit a list of DOS commands.

Using DOSKEY

Load the DOSKEY program into memory by entering **doskey** on the command line. DOSKEY can also be loaded from AUTOEXEC.BAT. You will have to include the path specifier for the file DOSKEY.COM if the specifier is not included in your DOS search path.

Once DOSKEY is loaded, it begins to maintain a record of the commands entered at the command line. To illustrate, let's say that DOSKEY has just been loaded, after which the commands dir /w, ver, and cd \book were entered. The F7 key is used to display the list of stored commands. Long lists are displayed one screen full at a time. In this example, pressing F7 produces this:

```
C:\>
1: dir /w
2: ver
3:>cd \book
C:\>
```

The three commands that were entered after DOSKEY was loaded are listed in the order that they were entered. The > to the left of the third command indicates the command is *current*.

The real value of DOSKEY is that it enables you to reenter a listed command on the command line by using just one or two keystrokes. The Up Arrow key places the current command on the command line. You can then reexecute the command by simply pressing Enter. Pressing the Up Arrow key again displays the preceding command on the command line. The displayed command becomes current. The current command advances to the top of the list each time Up Arrow is pressed. The current position wraps around to the bottom once the top of the list is reached. The Down Arrow, Pg Up, Pg Dn, F8, F9, and Esc keys are also used to place on the command line commands contained in the DOSKEY list. You can thus quickly retrieve and reexecute any stored command. The function of each of these keys is described in table 4.

Table 4. Using the DOSKEY Command List

Key	*Action When DOSKEY Is Loaded*
F7	Displays list of previously entered DOS commands. Alt+F7 clears list.
Up Arrow	Moves current command marker up one position in list and places corresponding command on command line.
Down Arrow	Moves current command marker down one position in list and places corresponding command on command line.
Pg Up	Places oldest command in list on command line.
Pg Dn	Places newest command in list on command line.
F8	Used to search for listed command beginning with text you enter. Type text and then press F8. The search begins with command preceding current command and stops at first command matching entered text. Press F8 again to search further up the list. The search wraps to bottom of the list.
F9	Prompts you to enter list number for command you want. The command will be placed on the command line when you type number and press Enter.
Esc	Erases command displayed on command line.

Command Line Editing and Command Line Editing with DOSKEY

DOS provides a set of standard command line editing keys. These keys can be used to edit the contents of the command line template. The *command line template* is a small area of memory that stores the last command entered on the DOS command line. The command line template has its own cursor, which identifies a position within the template. You can use the standard editing keys to modify the previous command and then execute the resulting command. The standard command line editing keys are described in table 5.

Table 5. Standard Command Line Editing Keys

Key	*Function*
F1	Displays one character from the template on the command line.
F2	Displays the contents of the template on the command line up to a specified character. The specified character is typed after F2 is pressed.
F3	Displays the contents of the template, from the template cursor's position to the end of the line.
F4	Skips over the template until the specified character is found. The specified character is typed after F4. No character is displayed, but the template's cursor is advanced.
F5	Moves the contents of the command line into the template. An "@" indicates the new line is in the template.
Ins	Inserts text into the template, starting at the current position of the template's cursor.
Del	Deletes from the template the character at the template cursor's position.

DOSKEY provides you with the enhanced command line editing features described in table 6. The standard editing features remain available when DOSKEY is loaded.

Table 6. The Enhanced DOSKEY Editing Keys

Key(s)	*Function*
Home	Moves cursor to beginning of command line.
Ctrl-Home	Deletes all characters from cursor to beginning of line.
End	Moves cursor to end of command line.
Ctrl-End	Deletes all characters from cursor to end of line.
Left Arrow	Moves cursor back one character without deletion.
Ctrl-Left Arrow	Moves cursor back to beginning of "word" (a word is a sequence of characters other than a space).
Right Arrow	Moves cursor forward one character without deletion.
Ctrl-Right Arrow	Moves cursor forward to beginning of next "word".
Backspace	If cursor at end of command line, Backspace deletes character to left of cursor and moves cursor one position to left. If the cursor is not at end of, command line, Backspace moves cursor to left without deletion.
Del	Deletes character at cursor. Characters to right shift one position to left.
Ins	Toggles between insert and overstrike mode. See discussion of insert/overstrike modes.

The DOSKEY editing keys move the cursor along the command line and can be used to insert and delete text. The editing keys can be very useful if you are executing a series of similar commands or need to correct a command that was typed incorrectly. As an example, let's say that you entered `cd programs\wp\demo`. The command doesn't work, and you realize that you should have entered `cd \programs\wp\demo`. Rather than typing the command from scratch, you can use the DOSKEY list and the editing keys to correct the bad command. First display the bad command using the keys described in table 4. After this, the bad command appears on the command line with the cursor to the right. Pressing Ctrl and Left Arrow will move the cursor back to the "p" in *programs*. Press Ins to toggle to insert mode, and then type the required "\". The command will now be correct. Press Enter to execute the command. You do not have to move the cursor to the end of the command line before pressing Enter.

The DOSKEY Buffer

DOSKEY maintains its list of commands in the DOSKEY buffer. The number of commands maintained in the list will depend on the size of the buffer, the length of each command, and the number and size of the macros being used (see chapter 4). The default size for the buffer is 512 bytes. The size can be controlled using the switch in the DOSKEY command, with the format `doskey /bufsize=`*`nnnn`*. Use of the switch is illustrated in the following discussion.

Reloading DOSKEY

The /reinstall switch is used to load a second copy of DOSKEY into memory. You might want to do this when DOS tells you that DOSKEY is out of buffer space. The following command installs a second copy of DOSKEY with a 1,024-byte buffer.

```
doskey /reinstall /bufsize=1024
```

You should recognize that in addition to the buffer space, each loading of DOSKEY requires about 3 Kbytes of memory.

Using DOSKEY to Create Batch Files

The /dhist switch lists the commands stored in the DOSKEY buffer. This can be useful in developing batch files. First press Alt-F7 to clear the DOSKEY list. Then, from the command line, enter one by one the commands you think you want in the batch file. When you get the sequence of commands to produce the desired effect enter the following command:

```
doskey /dhist > new.bat
```

The sequence of commands is now stored in NEW.BAT. Of course you can name the batch file whatever you like.

Insert and Overstrike Modes

Insert and overstrike are complimentary editing modes. In insert mode, text at and to the right of the cursor advances as text is entered. In overstrike

mode, text at the cursor is replaced by the new text. Use the /insert and /overstrike switches to set the mode when DOSKEY is loaded. Only one of these switches can be included when DOSKEY is loaded. Overstrike is the default mode. You can use the Ins key to toggle from one mode to the other. The shape of the cursor changes when you go from one mode to another.

Displaying Macros

The /dmacs switch is used to display the DOSKEY macros stored in memory. Macros are discussed in chapter 4.

Entering Multiple Commands

One additional feature of DOSKEY is that when it is loaded you can enter more than one command at a time on the command line. Commands are separated by pressing Ctrl-T, which produces a paragraph character. You may enter as many commands as you like, but the total number of characters cannot exceed 128 (the size of the DOS keyboard input buffer).

DRIVPARM

Internal
MS-DOS 5.X

Function: Redefines device driver parameters for block devices (such as disk drives).

Format: `DRIVPARM =/d:`*`number`* `[/f:`*`factor`*`] [/c] [/h:`*`heads`*`] [/i] [/n] [/s:`*`sectors`*`] [/t:`*`tracks`*`]`

Example:
```
drivparm=/d:1 /c: /f:2 /i
```

DRIVPARM is used to redefine parameters for block device drivers. It was introduced with MS-DOS 5.0. DRIVPARM can only be used as a configuration entry in the CONFIG.SYS file. CONFIG.SYS is discussed in chapter 5 of this book.

Device drivers are discussed in detail in chapter 14 of this book. *Device drivers* are the programs responsible for controlling a computer's peripheral devices (modem, disk drive, monitor, printer, and so on). Device drivers are either built into the computer (as part of the ROM BIOS) or they are supplied by the manufacturer of the particular peripheral device. *Block devices* are devices, such as disk drives and tape drives, that read or write data one block

at a time. Block devices are to be contrasted to *character devices*, such as modems, which read and write a character at a time.

Over the last few years there has been a proliferation of different types of disk drives to use with MS-DOS computers. In many computers on the market today, the ROM BIOS is incapable of supporting this wide variety of disk drives. DRIVPARM is a MS-DOS program that adapts these computers to the drives. In particular, DRIVPARM is intended for computers that do not support 3½ inch disk drives. DRIVPARM does not create a logical drive like DRIVER.SYS. It is used to modify parameters of an existing physical drive. Refer to the discussion of DRIVER.SYS for coverage of physical and logical drives.

Using DRIVPARM

The /d:*number* switch is required when using DRIVPARM. The *number* specifies the physical drive number of the device (0 = A, 1 = B, 2 = C, and so forth).

The other switches used with DRIVPARM are optional and are described in table 7. You will need to refer to information supplied by the manufacturer of your device in order to determine the values to choose for each of these switches.

An example of the use of DRIVPARM is

```
drivparm=/d:1 /f:2 /c: /i
```

This command (which can only be used in CONFIG.SYS) tells DOS that the B drive is a 720-Kbyte, 3½-inch drive, that has change-line support and is not supported by the ROM BIOS installed on this machine.

Table 7. DRIVPARM Switches

Switch	*Function*
/d:*number*	Physical drive number (0 = A, 1 = B, 2 = C, and so on). Required.
/f:*factor*	Form factor index. Specifies the device type. Optional. Default value is 2.
/f:0	160, 180, 320, or 360 Kbytes
/f:1	1.2 Mbytes
/f:2	720 Kbytes (3½-inch)
/f:5	Hard disk drive

continues

Table 7. continued

Switch	*Function*
/f:6	Tape drive
/f:7	1.4 Mbytes (3 1/2-inch)
/c	Drive with removable disk that provides change-line support. The drive can sense when its door has been opened. This can be used to signal that the disk has been changed. Optional.
/h:*heads*	Number of heads on drive (1–99). Optional. Default determined by /f:*factor*.
/n	Specifies a nonremovable block device (hard disk, and so on).
/s:*sectors*	Number of sectors per track (1–99). Optional. Default determined by /f:*factor*.
/i	Specifies 3 1/2-inch floppy drive not supported by ROM BIOS. Optional.
/t:*tracks*	Number of tracks per side. Optional. Default determined by /f:*factor*.

ECHO

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Functions: Allows or prevents the screen display of MS-DOS commands during batch file execution. Displays messages during batch file execution.

Format: `ECHO [ON|OFF|message]`

Examples:
```
echo on
echo off
echo your message here
```

A *batch file* is a group of MS-DOS commands that are executed sequentially. ECHO determines whether the commands in a batch file are displayed on the screen during execution. ECHO can be used in the following ways:

- `ECHO ON` tells MS-DOS to display the MS-DOS commands.

- `ECHO OFF` tells MS-DOS to suppress display of the MS-DOS commands.
- `ECHO [message]` tells MS-DOS to display *[message]*. The message will be displayed regardless of the current ECHO state.
- `ECHO` (with no parameters) tells MS-DOS to display the current ECHO state (ON or OFF).
- The command `echo off` is echoed on the display screen when it is executed from a batch file. In MS-DOS 3.3 and subsequent versions, you can suppress this echoing by replacing the command with `@echo off`.

The use of ECHO in batch files is illustrated in chapter 4.

ERASE

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Erases (deletes) one or more files from a disk.

Formats: `ERASE [d:][path][filename[.ext]]`
`ERASE [d:][path][filename[.ext]] [/P]` (MS-DOS 4.X)

Examples:
```
erase badfile.txt
del badfile.txt
```

The ERASE command is identical to the DEL command. Refer to the DEL command for a description of ERASE.

EXE2BIN

External
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Converts EXE files to standard binary files.

Format: `EXE2BIN [d:][path]filename[.ext][filespec]`

Example: `exe2bin testfile`

Computer programs that operate under MS-DOS are stored as either COM or EXE files (see chapter 11). EXE2BIN is an MS-DOS utility that is used to convert EXE files to COM files. You will not use EXE2BIN unless you are assembling or compiling your own computer programs.

The file EXE2BIN.EXE is not supplied with the PC DOS 4.X system disks. You will have to secure a copy of the Utilities disk that comes with the *Disk Operating System Technical Reference* manual in order to obtain the 4.X implementation of EXE2BIN.

EXE and COM Files

All EXE files contain a *header* (an area at the start of the file) that stores information about the relocatable items within the file. A *relocatable* item is a program variable whose value depends on the location at which MS-DOS loads the program in computer memory. During the loading of an EXE file, MS-DOS refers to the file's header to determine the location of each relocatable item within the file. MS-DOS then modifies the value of each relocatable item according to the memory address of the load.

COM files do not contain any relocatable items; therefore, they do not have a header. A COM file is produced by first creating an EXE file (with either an assembler or a compiler) and then using EXE2BIN to convert the EXE file to a binary file. COM files created with an assembler must begin with the statement `ORG 100H`. This assembler statement tells MS-DOS to load the file at offset address 100H. A COM file is limited in size to 64 Kbytes.

A COM file does not have a header, so converting an EXE file to a COM file will conserve computer memory. Thus, it is advantageous to convert to COM files those EXE files that do not contain relocatable items, that begin with an `ORG 100H` statement, and that are smaller than 64 Kbytes.

Using EXE2BIN

EXE2BIN is an external MS-DOS command. This means that before you can use EXE2BIN, the file EXE2BIN.EXE must be available to the system. Either EXE2BIN.EXE must be in the current directory of the default drive, or the location of EXE2.BIN must have been specified by the PATH command (see the discussion of PATH).

To use EXE2BIN, type **exe2bin**, then type the file specification of the file to be converted, and finally type the file specification of the converted file. A filename must be specified for the file to be converted. If no filename extension is specified for the file to be converted, MS-DOS assumes an extension of EXE. A file specification for the converted file is optional. The default filename is the filename specified for the file to be converted. The default filename extension for the converted file is BIN. The current directory is used if no path is specified for the converted file.

Once you have entered the complete command, press Enter to convert the EXE file. If the EXE file conforms to the requirements of a COM file, the

conversion is made and control returns to MS-DOS. The converted file can then be renamed with an extension of COM if you wish.

If the EXE file does not specify where MS-DOS is to load the file (for example, does not contain an ORG statement), EXE2BIN will convert the EXE file to a standard binary file. If such a file contains any relocatable items, MS-DOS will prompt you to enter a fixup value. The *fixup value* is a hexadecimal number that will be the absolute memory address at which the converted file will be loaded. Such a file can be loaded only by a user application program that specifies where in memory it will be loaded. MS-DOS will be unable to load the file.

If the original EXE file specifies a loading address other than 100H, MS-DOS will display the following message:

```
Files cannot be converted
```

This message will also be displayed if the original file is not a valid EXE file.

FASTOPEN

External

MS-DOS 3.3, 4.X, 5.X

Function: Provides rapid access to recently used subdirectories and files.

Formats: `FASTOPEN d:[=nnn]. . .` (use of "=" is optional)
`FASTOPEN d:[=([nnnn][,mmm])]. . .[/X]` (MS-DOS 4.X, 5.X)

Example: `fastopen c:=100`

FASTOPEN is used to store in memory the physical disk location of recently accessed subdirectories and files. When MS-DOS needs to access a file, FASTOPEN first checks whether the file's location is stored in memory. If it is, the file can be located very quickly.

MS-DOS locates a disk file by processing a *linked list*, which points to the file's physical location on the disk. As an example, let's consider what MS-DOS must do in order to execute the following command:

```
C:\>dir \subdir1\subdir2\subdir3
```

The root directory is always in a specific physical location on the disk. MS-DOS proceeds to this location and scans the root directory for an entry named SUBDIR1. This entry will contain the physical disk location of

subdirectory SUBDIR1. MS-DOS proceeds to this location and scans SUBDIR1 for an entry named SUBDIR2. This entry directs the operating system to the physical location of SUBDIR2. Once SUBDIR2 is located, the location of SUBDIR3 can be read, and MS-DOS can proceed to the physical disk location of SUBDIR3. All of these steps must be carried out before the DIR command can be executed. FASTOPEN provides a way to speed up this process.

Using FASTOPEN

FASTOPEN is invoked by including on the command line the letter specifier for each hard disk on your system, followed by a number from 10 to 999. The number tells FASTOPEN how many subdirectory and file locations to store in memory for that disk. In the following example, FASTOPEN stores 100 locations for drives C and D:

```
C:\>fastopen c:100 d:100
```

FASTOPEN uses 34 as a default if a drive letter is not followed by a number. Each location requires 35 bytes of system memory.

Each time a file or subdirectory is accessed, FASTOPEN checks whether the corresponding disk location is stored in memory. If not, the location is determined and stored in memory. This process continues until the number of locations stored in memory matches the number specified on the command line. Thereafter, any location placed in memory displaces the location corresponding to the least recent disk access.

The MS-DOS 4.X and 5.X implementation of FASTOPEN also stores in memory a record of the disk cluster numbers of recently accessed disk files. Normally, DOS determines a file's clusters by reading the file allocation table. By storing a file's cluster sequence in a memory buffer, DOS decreases the amount of time required to access the file. Each buffer set aside to record a sequence of clusters uses 16 bytes of memory. The default value for the number of cluster sequence buffers is 34.

The 4.X and 5.X versions of FASTOPEN can be loaded into expanded memory by using the /x switch. These versions of FASTOPEN are loaded into conventional memory using an INSTALL statement contained in the CONFIG.SYS file. The following statement, when placed in CONFIG.SYS, loads FASTOPEN. When you are using INSTALL, the specification for FASTOPEN must include the filename extension:

```
install=c:\dos\fastopen.exe c:=(50,250)
```

FASTOPEN will set up 50 buffers to store the location of recently accessed files and directories, plus 250 buffers to store the cluster sequence of recently accessed files.

Note: FASTOPEN may be invoked one time only following system startup (you may want to include it in an AUTOEXEC.BAT file). FASTOPEN is used with hard disks only. It cannot be used with floppy disks or disks defined with the MS-DOS command ASSIGN, JOIN, or SUBST. Nor can it be used with network drives.

FC

External
MS-DOS 5.X

Function: Compares files for differences in content.

Formats: `FC [file1] [file2] [/a] [/c] [/L] [/Lb] [/n] [/t] [/w] [/nnnn]` (ASCII comparisons)
`FC [file1] [file2] [/b` (binary comparisons)

Examples:
```
fc chapter1.txt chapter1.bak
fc program1.com program1.bak /b
```

FC is a file comparison utility that was introduced with MS-DOS 5.0. FC applies one method for comparing ASCII or text files and another method for comparing binary files. You can force FC to compare ASCII files using the binary method and vice versa. FC is much more useful in comparing ASCII files than is COMP, the original DOS file comparison utility that goes all the way back to DOS 1.

ASCII Comparisons

FC compares ASCII files by going through each of the two files on a line-by-line basis (COMP does comparisons on a byte-by-byte basis). A difference is recorded when a specified minimum number of consecutive lines do not match. The default for the minimum number is two. To illustrate, consider the following two text files:

```
1111111
2222222
3333333
4444444
5555555
6666666
7777777
```

```
1111111
2222222
THREE
4444444
5555555
SIX
7777777          file1.txt          file2.txt
```

These files are identical except for two lines. Let's run them through FC to get an idea of how the utility program works. The command and the resulting output follow (this example assumes the DOS search path knows where FC.EXE is located):

```
C:\>fc file1.txt file2.txt
Comparing files FILE.TXT and FILE2.TXT
***** FILE1.TXT
2222222
3333333
4444444
***** FILE2.TXT
2222222
THREE
4444444
*****

***** FILE1.TXT
5555555
6666666
7777777
***** FILE2.TXT
5555555
SIX
7777777
*****
```

FC went through the two files line-by-line. In going from line 2 to line 3, the program noted a difference, namely that the third lines of the files differ. The difference persisted in going from the third to fourth lines, because the third lines are still different. However, in going from the fourth to fifth lines, no difference was noted. Thus, the difference that started in going from the second to third lines terminated in going from the third to fourth lines. This difference between the two files is shown as

```
***** FILE1.TXT
2222222
3333333
4444444
***** FILE2.TXT
```

```
2222222
THREE
4444444
*****
```

Similarly, FC notes the difference in going from the fifth to sixth lines and the sixth to seventh lines and displays

```
***** FILE1.TXT
5555555
6666666
7777777
***** FILE2.TXT
5555555
SIX
7777777
*****
```

Let's carry the example one step further by changing the minimum number of consecutive identical lines to three. We use the same command as before, only we add a switch at the end specifying the new minimum.

```
C:\>fc file1.txt file2.txt /3
Comparing files FILE1.TXT and FILE2.TXT
***** FILE1.TXT
2222222
3333333
4444444
5555555
6666666
7777777
***** FILE2.TXT
2222222
THREE
4444444
5555555
SIX
7777777
*****
```

This time, lines 2–7 are reported as a difference. The reason is that this comparison required three consecutive identical lines for a match.

FC Switches

The */nnnn* switch was just demonstrated. In this format, *nnnn* specifies the minimum number of consecutive lines required for a match. The default is 2.

The /a switch abbreviates the output of differences. The switch directs FC to list the line at the beginning of each difference, followed by an ellipsis (...), followed by the line ending the difference.

The /b switch forces a binary comparison of the two files. Binary comparisons are discussed later.

The /c switch directs FC to ignore the case of letters.

The /L switch forces an ASCII comparison. This is the default if the files do not have extension of EXE, COM, SYS, OBJ, LIB, or BIN.

The /Lb*n* switch sets the buffer used by FC to *n* lines. The default is 100. The comparison terminates if more than *n* consecutive lines differ.

The /n switch directs FC to display the line number of each line that is displayed.

The /t switch directs FC not to expand tabs to spaces. The default is to expand each tab to eight spaces. In dealing with tabs, be aware that some text editors (such as EDIT) expand tabs, whereas others (such as EDLIN) do not.

The /w switch directs FC to compress white space. All tabs and spaces, other than those at the beginning and end of lines, are treated as a single space.

Binary Comparisons

Binary comparisons are performed on a byte-by-byte basis. For each difference, the offset address into the two files and the respective byte values at that address are displayed.

FCBS

Internal
MS-DOS 3.X, 4.X, 5.X

Function: Determines the number of file control blocks that may be used when file sharing is implemented.

Note: FCBS can be used in CONFIG.SYS only.

Format: `FCBS=m,n`

Example: `fcbs=10,5`

Recall from chapter 10 that MS-DOS uses two different mechanisms to access disk files. One of these mechanisms uses a data structure called a *file control*

block (FCB) to store information used by MS-DOS in reading and writing files. If your computer is on a network and you have implemented file sharing (see the SHARE command), MS-DOS limits the number of FCBs that can be open at one time to 4. The FCBS command enables you to increase the number of FCBs that may be open at a time.

When file sharing is *not* implemented, there is no limit on the number of available file control blocks. Therefore, the FCBS command has no effect when file sharing is not implemented.

FCBS is entered with two parameters. The first parameter determines the number of FCBs that may be open at one time. The allowable range is 1 to 255. The second parameter determines the number of FCBs that DOS must leave open (*Note:* This second parameter is not supported in DOS 5):

```
fcbs=10,5
```

This command tells MS-DOS that up to 10 FCBs can be open. In addition, 5 FCBs are protected against automatic closure by MS-DOS. In other words, if 10 FCBs are open and MS-DOS needs to open more FCBs, the operating system may close up to 5 FCBs but must leave the other 5 open.

If CONFIG.SYS does not contain a `fcbs=` command, a default of m = 4, n = 0 is set.

If MS-DOS must automatically close an FCB, it looks for the FCB that was least recently used and closes it. If MS-DOS subsequently attempts to use the closed FCB, the following error message is displayed:

```
FCB unavailable
Abort, fail?
```

FDISK

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Configures the hard disk.

Format: `FDISK`

Example: `fdisk`

FDISK is a utility program that is used to partition (configure) a hard disk assigned to MS-DOS. The use of FDISK is described in chapter 1.

FILES

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Determines the amount of memory that is set aside for file handles.

Note: FILES may be used in a CONFIG.SYS file only.

Format: `FILES=xx`

Example: `files=25`

The FILES command is used to establish the amount of memory for a control block used in managing file handles. The amount of memory set aside for this purpose determines the maximum number of file handles that can exist at one time.

A *file handle* is a 16-bit number that is assigned by MS-DOS to a new file when the file is created or to an existing file when the file is opened. File handles are used by MS-DOS to keep track of the files that an application program is using at any one time. The role of file handles is discussed more fully in chapter 10.

Using FILES

A FILES command may be used only as a configuration entry in your CONFIG.SYS file. CONFIG.SYS is a text file containing one or more commands that are read by MS-DOS during the booting process. Each command in CONFIG.SYS specifies certain parameters under which MS-DOS will operate. In this case, a FILES command establishes the number of file handles that may be used by MS-DOS at one time.

CONFIG.SYS can be created or modified with a text editor such as EDLIN. CONFIG.SYS can also be created by entering the command `copy con: config.sys` (see the COPY command for details).

```
C:\>copy con: config.sys
FILES=10
^Z          ←you press Ctrl-Z, Enter
        1 File(s) copied
```

MS-DOS will set aside memory for eight file handles if no FILES command is read during booting. For most application programs, this is sufficient. MS-DOS will display the message `No free file handles` if an application program requires more than eight file handles. MS-DOS will occupy 39 bytes of memory for each additional file above the default of eight.

The FILES command does not affect the number of user-specified file control blocks (FCBs) that may be set up and used with MS-DOS service functions 0FH–29H (see appendix A).

FIND

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Searches for a specified string of text in a file or files.

Format: `FIND [/V][/C][/N]`*`string`*`[`*`filespec`*`][`*`filespec`*`]. . .`

Examples:
```
find "flint's" sample.txt.
find /v "berkeley" sample.txt
find /c "oakland" sample.txt
find /n "books" sample.txt
```

FIND is an MS-DOS filter that searches the lines of one or more text files for a specified string. The specified string is enclosed on the command line in double quotes (`"like this"`). Alternatively, output from a program or another MS-DOS command can be piped through FIND. The output from FIND can be sent to the standard output or redirected to a device or a file.

FIND is an external MS-DOS command. This means that before you can use the FIND filter, a copy of the file FIND.EXE must be stored in one of the system drives.

FIND Switches

There are three optional switches for FIND. The /v switch causes FIND to display the lines in a text file that do not contain the specified string. The /c switch instructs FIND to display only a count of the number of lines in a text file that contain the specified string. The /n switch tells FIND to display the lines of a text file that contain the specified string; each line is preceded by its relative line number within the file.

Chapter 6 discusses FIND and describes MS-DOS filters, redirection, and pipes.

FOR

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Executes a command repeatedly on a set of parameters.

Format: `FOR %%variable IN (set of parameters) DO command`

Examples:
```
for %%a IN (file1 file2 file3) DO del %%a
for %b IN (example.bat program.txt letter) DO copy %b prn
```

A command can be executed repeatedly on a set of specified parameters by using the command FOR. Each FOR command begins with the word `for`, followed by a dummy variable. If a FOR command is located within a batch file, the dummy variable is preceded by two percentage signs (%%). Only one percentage sign is used if the FOR command is not located in a batch file. During the execution of a FOR command, the dummy variable is sequentially replaced by each of the specified parameters.

The dummy variable is followed by the letters `IN`. Both letters must be entered in uppercase. `IN` is followed by a set of parameters that must be enclosed in parentheses.

Following the set of parameters are the letters `DO`, which must be entered in uppercase. `DO` is followed by the command that will be executed one time for each of the parameters in the set.

In the following example, a FOR command is used to print a copy of the files EXAMPLE.BAT, PROGRAM.TXT, and LETTER:

```
C:\>for %b IN (example.bat program.txt letter) DO copy %b prn

COPY EXAMPLE.BAT PRN
       1 File(s) copied

COPY PROGRAM.TXT PRN
       1 File(s) copied

COPY LETTER PRN
       1 File(s) copied
```

The use of FOR in MS-DOS batch files is discussed in chapter 5.

FORMAT

External
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Initializes floppy disks and hard disks so that they can be used by MS-DOS.

Formats:
```
FORMAT [d:][/S]  (DOS 1.X–5.X)
FORMAT [d:][/1][/8][/V][/B]  (DOS 2.X–5.X)
FORMAT [d:][/4]  (DOS 3.X–5.X)
FORMAT [d:][/N:xx /T:yy]  (DOS 3.3–5.X)
FORMAT [d:][/F:size]  (DOS 4.X–5.X)
FORMAT [d:] [/Q]  (DOS 5.X)
FORMAT [d:] [/U]  (DOS 5.X)
```

Examples:
```
format b:
format b:/s
format c:/s/v
```

Floppy disks and hard disks must be initialized before MS-DOS can use them. This initialization process is called *formatting* and is performed with the command FORMAT.

Formatting divides a floppy disk or hard disk into parcels called *sectors*. Sectors are grouped together into tracks. MS-DOS assigns numbers to the sectors and tracks and uses the numbers as references to find its way around the disk or hard disk.

Formatting places a *boot record* on each disk and hard disk. As you might imagine, MS-DOS uses the boot record whenever it boots up. Formatting also creates a file allocation table and a disk directory on each disk and hard disk. MS-DOS uses these structures as a table of contents to the files stored on the disk or hard disk.

Chapter 10 contains detailed information on sectors, tracks, the boot record, the file allocation table, and the disk directory.

Using FORMAT

Formatting a disk destroys any existing data on the disk. Formatting a hard disk will destroy any data in the MS-DOS partition of the disk. You will need to format any new, blank disks that will be used by MS-DOS. You may occasionally format previously used disks. When you do this, make sure that you copy any files that you want to keep onto another (formatted) disk before using FORMAT. The examples in this section show how to format a floppy disk. The use of FORMAT to format a hard disk is nearly identical. Refer to chapter 1 for information on partitioning and formatting a hard disk.

FORMAT is an external MS-DOS command. This means that before you can begin formatting, a copy of the file FORMAT.COM must be in one of the system drives. FORMAT.COM is one of the files provided on your MS-DOS system disk. The discussion that follows assumes that FORMAT.COM is located on a disk in drive A.

If your system has two disk drives, formatting is most easily accomplished by placing a working copy of your MS-DOS system disk in drive A and the disk to be formatted in drive B. If you are using a system with one disk drive, insert your working copy of the system disk in drive A. The commands that you will enter will be identical to those used on a two-drive system. MS-DOS will prompt you when it is time to change disks.

To begin formatting, enter the following at the system prompt:

```
A:\>format b:
```

MS-DOS will load FORMAT.COM into memory, display some information about the system manufacturer, and then issue a prompt:

```
Insert new diskette for drive B:
and strike any key when ready
```

Press any key to begin formatting. MS-DOS tells you that it is formatting with the following message:

```
Formatting...
```

Formatting a floppy disk takes about one minute, so sit back and relax. MS-DOS will notify you when formatting has been completed:

```
Formatting...Format complete
```

MS-DOS will display a status report with information about the newly formatted disk. In MS-DOS 4 and 5, the status report includes the total amount of disk space, the amount of available disk space, the number of bytes in each allocation unit, and the number of allocation units available on the disk. An allocation unit (or cluster) is the minimum number of disk sectors that is allocated to a file; it varies with the type of disk (or hard disk) used. FORMAT also assigns a serial number to the disk. The number serves no purpose other than to identify the disk. The following is an example of a 4.X and 5.X status report:

```
1213952 bytes total disk space
 107520 bytes in bad sectors
1106432 bytes available on disk
```

```
          512 bytes in each allocation unit
         2161 allocation units available on disk

Volume Serial Number is 2414-12CD
```

After displaying the status report, MS-DOS will ask whether you want to format another disk:

```
Format another (Y/N)?
```

Enter **Y** to format another or **N** to exit FORMAT.

The System Files

The /s switch is used to add the MS-DOS system files and the file COMMAND.COM to a disk or hard disk. The hidden MS-DOS system files have names like IO.SYS and MSDOS.SYS. These two files, along with COMMAND.COM, must be on any disk or hard disk that will be used to boot MS-DOS. The order and the location of the system files on a disk or hard disk are important. A disk or hard disk may not be bootable if you simply use the command COPY to add the system files. The following command will format the disk in drive B and instruct MS-DOS to add the system files and the COMMAND.COM file.

```
A:\>format b:/s
```

MS-DOS responds:

```
Insert new diskette for drive B:
and strike any key when ready

Formatting...Format complete
System transferred

   362496 bytes total disk space
    38912 bytes used by the system
   323584 bytes available on disk

Format another (Y/N)? _
```

Notice that MS-DOS includes the message `System transferred` and that the status report contains information about the amount of disk space occupied by the system files and COMMAND.COM. If you enter the command **dir b:** to examine the newly formatted disk, the directory entry for COMMAND.COM will be displayed. No information will be displayed for the hidden system files.

Adding a Volume Label

The MS-DOS 2.X–5.X versions of FORMAT enable you to assign a *volume label,* or name, to a disk or hard disk. A volume label serves only to identify a disk or hard disk; it cannot be used as a parameter in any MS-DOS commands. The volume label will be displayed whenever the DIR command is used to examine the contents of a disk or hard disk.

To assign a volume label, enter the /v switch in the FORMAT command. At the end of the formatting process, MS-DOS will prompt you to enter a volume label. A volume label can be up to 11 characters long. All characters acceptable in filenames (see chapter 2) are acceptable in volume labels.

```
A:\>format b:/s/v
```

MS-DOS responds:

```
Insert new diskette for drive B:
and strike any key when ready

Formatting...Format complete
System transferred

Volume label (11 characters, ENTER for none)? WAITE_DISK1

   362496 bytes total disk space
    38912 bytes used by the system
  3235684 bytes available on disk

Format another (Y/N)? _
```

You can use **dir b:** to display the volume label and directory entries of the newly formatted disk:

```
A:\>dir b:

 Volume in drive B: is WAITE_DISK1
 Directory of   A:\

COMMAND  COM    15480   3-01-89  2:00a
       1 File(s)    323584 bytes free
```

The MS-DOS 4.X and 5.X versions of FORMAT handle volume labels a little differently. The label is specified as part of the /v switch. The following is an example:

```
format a: /v:book_backup
```

If you do not specify a volume label, MS-DOS will prompt you for one when the formatting process is complete.

Formatting Eight Sectors per Track

FORMAT will normally divide each track of a standard disk into 9 sectors. The /8 switch directs FORMAT to divide each track into 9 or 15 sectors but to use only 8 of the sectors. This feature allows files on disks originally formatted with MS-DOS 1.X to be copied onto disks formatted under subsequent versions of DOS.

Formatting a Single Side

FORMAT determines whether the disk to be formatted is single or double sided and accordingly formats one or two sides. However, if you include the /1 switch in the FORMAT command, only one side will be formatted, regardless of the type of disk or disk drive. The /1 switch can be used only with disks and is not available with the MS-DOS 1 version of FORMAT.

The /B Switch

Some implementations of MS-DOS 2–4 have a /b switch for FORMAT. This switch instructs FORMAT to divide each track on the disk into eight sectors and to allocate space on the disk for the two hidden system files. No files are actually written to the disk. System files can subsequently be copied to the disk by using SYS.

The /U Switch: Unconditional Formatting

The DOS 5 version of FORMAT normally performs a "safe" format. In a safe format, the file allocation table and root directory are cleared, and the disk is checked for bad sectors. However, none of the existing data is erased. It remains on the disk and can subsequently be retrieved using UNFORMAT command implemented in DOS 5. In addition, the FORMAT command writes a hidden file named UNFORMAT.DAT to the formatted disk. This file contains information used in unformatting the disk. Refer to the discussion of UNFORMAT and the discussion of the MIRROR command for details on unformatting a disk.

The /U command switch directs the DOS 5 version of FORMAT to perform an unconditional format. When this switch is used, the file allocation table and root directories are cleared, the disk is checked for bad sectors,

and the data area is erased. In addition, UNFORMAT.DAT is not written to the formatted disk. Disks formatted with the /U switch can be unformatted. However, the results are not as reliable due to the lack of UNFORMAT.DAT.

The /Q Switch: Quick Format

The /Q switch directs the DOS 5 version of FORMAT to clear the disk's file allocation table and root directory. The disk is not checked for bad sectors. The result is that formatting is much quicker. The UNFORMAT.DAT file is created when the /Q switch is used.

The /4 Switch

The /4 switch, first implemented in MS-DOS 3, enables you to format a standard disk on a 1.2-Mbyte drive. (Use the /1 switch and the /4 switch for single-sided disks.) Disks formatted in this fashion can be used only on 1.2-Mbyte drives.

The /N:*xx* and /T:*yy* Switches

The /n and /t switches were first implemented in MS-DOS 3.3. They are used to format a disk at less than the maximum capacity supported by the disk drive. The /n switch sets the number of sectors per track. The /t switch sets the number of tracks. The switches must be used together.

The /n and /t switches are implemented primarily to allow the formatting of 720-Mbyte disks on 1.44-Mbyte disk drives. In the following example, say that your drive D is a 3½-inch, 1.44-Mbyte drive that contains an unformatted 720-Kbyte disk. You would use the following command:

```
C>format d: /n:9 /t:80
```

The /F Switch

The somewhat bewildering number of FORMAT switches is the result of the variety of different types of floppy disks that MS-DOS may format. For example, if you have a 1.2-Mbyte disk drive and want to format a 180-Kbyte disk on it, you will have to enter the command **format a: /1 /4**. The MS-DOS 4.X and 5.X versions of FORMAT makes this process somewhat easier through the use of the /f switch.

With the /f switch you do not have to know that a 180-Kbyte disk is a single-sided (/1), normal density (/4) disk. All you need to know is the capacity of the disk. Then, if the capacity of the drive is the same or larger, you can use the /f switch to specify the disk's capacity. As an example, in MS-DOS 4.X, the 180-Kbyte disk can be formatted as follows:

```
format a: /f:180
```

FORMAT and ERRORLEVEL

ERRORLEVEL is the name of a variable that is maintained by MS-DOS. The value of ERRORLEVEL is set by MS-DOS commands as a way of telling the operating system whether the command executed successfully, and if not, what went wrong. Batch files can determine the value of ERRORLEVEL by using the IF command.

The FORMAT command sets the value of ERRORLEVEL as follows:

Value	*Meaning*
0	FORMAT executed successfully.
3	FORMAT terminated when user pressed Ctrl-Break.
4	FORMAT terminated due to an error.
5	FORMAT terminated when user responded No to the warning about formatting a fixed disk.

GOTO

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Transfers control to a specified location within a batch file.

Format: `GOTO` *`label`*

Example:
```
goto four
```

A *batch file* is a text file that contains a sequence of MS-DOS commands. Each command is entered as one line in the batch file. Lines in MS-DOS 2.X, 3.X, 4.X, and 5.X batch files may be labeled. A label simply serves to identify a line. Batch file labels consist of a colon (:) followed by a string of eight or fewer characters.

GOTO directs a batch file to jump to a specific line within the file and to execute the command at that line. In this example, the GOTO command causes execution of the batch file to loop endlessly:

```
:work
rem i am working!

goto work
```

GOTO and the other batch file commands are discussed in chapter 4.

GRAFTABL

External
MS-DOS 3.X, 4.X, 5.X

Function: Loads a character table into memory.

Formats: `GRAFTABL`
`GRAFTABL [xxx or /STA]` (MS-DOS 3.3, 4.X , 5.X)
`GRAFTABL [?]` (MS-DOS 4.X only)

Examples:
```
graftabl
graftabl 437
```

Normally, when the color graphics adapter (CGA) is in graphics mode, the ASCII characters 128 through 255 cannot be displayed. (This group of characters, listed in appendix G, includes accented letters.) The GRAFTABL command is used to load into memory a character table that allows these characters to be displayed when the CGA is in graphics mode.

With the MS-DOS 3.3 and subsequent versions of GRAFTABL, the user can load a table of graphics characters that are specific to a code page. This allows the display of language-specific characters. The code page is selected by including a valid code page number on the command line. The valid numbers are 437, 860, 863, and 865. Refer to appendix D for an overview of code pages.

Entering `GRAFTABL` with no parameters loads the graphics table for code page 437. You can load another graphics table by entering `graftabl xxx`, where *xxx* is the number of the code page that corresponds to the table you want to load.

The command `graftabl /sta` finds out which code page is currently active.

In MS-DOS 4.X, `graftabl ?` finds out which code page is active as well as what other code pages are available to be loaded.

The MS-DOS 3.3 and subsequent versions of GRAFTABL return the ERRORLEVEL codes in the following list. Such codes are returned by MS-DOS commands to communicate information regarding the outcome of the commands. See chapter 4 for ways that ERRORLEVEL codes can be utilized by MS-DOS batch files.

ERRORLEVEL Code	*Meaning*
0	Code page successfully installed. No code page was previously installed in memory.
1	A code page was previously installed in memory. If a new code page was specified, it was successfully installed.
2	No code page was previously installed in memory. No new code page was installed.
3	Parameter not valid.
4	Incorrect version of MS-DOS

GRAPHICS

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Prints the contents of a graphic screen display.

Formats:
```
GRAPHICS
GRAPHICS[printer][/R][/B] (DOS 3.X–5X)
GRAPHICS[printer][/R][/B] [/LCD] (DOS 3.3–5.X)
GRAPHICS[printer][profile][/R][/B][/LCD]
[/PB:id] (MS-DOS 4.X–5.X)
```

Example:
```
graphics color1
```

One of the more useful features of MS-DOS is its ability to print a full screen of text when you press Shift-PrtSc. The command GRAPHICS expands this capability so that a graphics display can be printed by a dot matrix printer when the Shift-PrtSc combination is pressed. DOS 5 also supports laser printers such as the HP LaserJet III.

GRAPHICS is another of the MS-DOS terminate and stay resident (TSR) utility programs. When the GRAPHICS command is first entered, MS-DOS reads the program into memory and keeps it there as long as the computer

is running. Once GRAPHICS is installed, simply press Shift-PrtSc, and GRAPHICS will go to work. Text or graphics will be printed according to the current display mode.

GRAPHICS Parameters

There are no parameters for the MS-DOS 2 version of GRAPHICS. Starting with MS-DOS 3.0, however, you may specify the type of graphics printer you are using:

Parameter	*Description*
GRAPHICS	IBM PC graphics printer. Epson graphics printer.
COLOR1	IBM PC color printer with black ribbon.
COLOR4	IBM PC color printer with red, blue, green ribbon.
COLOR8	IBM PC color printer with cyan, magenta, yellow, black ribbon.
COMPACT	IBM PC compact printer (MS-DOS 3.3 only).
THERMAL	IBM PC convertible printer.
GRAPHICSWIDE	IBM Quietwriter-wide paper. IBM Proprinter-wide paper.
LASERJETII	HP Laserjet II (DOS 5 only).
PAINTJET	HP Paintjet (DOS 5 only).
QUIETJET	HP Quietjet (DOS 5 only).
QUIETJET PLUS	HP Quietjet Plus (DOS 5 only).
RUGGED WRITER	HP Rugged Writer (DOS 5 only).
RUGGED WRITERWIDE	HP Rugged Writerwide (DOS 5 only).
THINKJET	HP Thinkjet (DOS 5 only).

The default printer parameter is GRAPHICS.

With the /r switch, what appears as black on the screen is printed as black and what appears as white is printed as white. The default is to print black as white and white as black.

The /b switch (valid with printer parameters COLOR4 and COLOR8 only) prints the background color of the screen. The default is to not print the background.

The /lcd switch, implemented first with MS-DOS 3.3, prints images as they appear on a liquid crystal display.

The MS-DOS 4.X and 5.X versions of GRAPHICS use a *graphics profile* file. The graphics profile file contains instructions that guide the printer in printing the contents of the display screen. The file GRAPHICS.PRO, which comes with MS-DOS 4 and 5, is the standard profile file. It is the file that is used if the GRAPHICS command does not specify a profile parameter. GRAPHICS.PRO contains the instructions for the printers listed in the table. Manufacturers of other printers may supply their own graphics profile file. Such a file would provide a means for GRAPHICS to be used with those printers.

MS-DOS 4.X also implements the /PB:*id* switch. Two parameters are valid for *id*:

- LCD for use with LCD displays (/PB:LCD is equivalent to /LCD).
- STD for use with CRT type displays (/PB:STD is the default).

IF

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Executes a command if a specified condition is true.

Format: `IF [NOT] condition command`

Examples:
```
if exist somefile.dat type somefile.dat
if %1==roses goto roses
if not exist file.bak copy file.txt file.bak
```

MS-DOS 2.X, 3.X, 4.X, and 5.X commands can be executed on a conditional basis by including the commands in an IF statement. IF statements are generally used within a batch file. IF can check the following conditions:

```
IF EXIST filespec command
```

Here, the format for IF is used to determine whether a specific file exists in the current directory of a specified (or default) drive. You could enter the following statement, which directs MS-DOS to determine whether a file

named SOMEFILE.DAT exists in the current directory of drive C (the default drive). If the file does exist, MS-DOS is to display (TYPE) its contents on the screen:

```
C>if exist somefile.dat type somefile.dat
```

An IF statement may be used to determine whether two character strings are identical, using the format

```
IF string1==string2 command
```

This type of conditional statement is used to compare a string passed to a batch file as a parameter to a string specified within the batch file. In the next example, you can enter a command to check whether batch file variable %1 is equal to the character string roses. Execution of the batch file branches to the line labeled :roses if the condition is true:

```
C>if %1==roses goto roses
```

ERRORLEVEL provides a way for batch files to conditionally execute based on the outcome of an MS-DOS command or application program. The format is

```
IF ERRORLEVEL number command
```

ERRORLEVEL is a variable that can be set according to the outcome of a program or MS-DOS command.

The value of ERRORLEVEL can be tested with an IF statement. The command specified in the IF statement will be executed if the value of ERRORLEVEL is greater than or equal to *number*. You can use the following IF statement to check the value of ERRORLEVEL and direct MS-DOS to display the disk directory (DIR) if ERRORLEVEL is greater than or equal to 2:

```
C:\>if errorlevel 2 dir
```

Application programmers should refer to MS-DOS functions 31H and 4CH (appendix A) for more information on setting and reading ERRORLEVEL.

The command contained in an IF NOT statement is executed if the condition tested is false, using the format

```
IF NOT
```

An IF NOT statement can test the same conditions as an IF statement. You can enter the following statement to check the current directory of drive C for a file named FILE.BAK. If the file does not exist, MS-DOS will copy the file FILE.TXT and name the copy FILE.BAK:

```
C:\>if not exist file.bak copy file.txt file.bak
```

Refer to chapter 4 for a discussion of the use of IF and IF NOT.

INSTALL

Internal
MS-DOS 4.X, 5.X

Function: Loads and executes DOS commands from CONFIG.SYS.

Note: INSTALL can only be used in the file CONFIG.SYS.

Format: `INSTALL=[d:][path]filename.ext[parameters]`

Example: `install=c:\dos\fastopen.exe c:=(50,250)`

The MS-DOS commands FASTOPEN, GRAPHICS, KEYB, NLSFUNC, and SHARE are *memory resident* utilities. This means that the files containing these external commands remain in memory once they are loaded. They are available for use by the operating system as the need arises, without having to be reloaded from the disk.

INSTALL enables you to load and execute FASTOPEN, GRAPHICS, KEYB, NLSFUNC, and SHARE from the file CONFIG.SYS. CONFIG.SYS is a text file that must reside in the root directory of the disk used to boot MS-DOS. The statements in CONFIG.SYS are read and executed as part of the boot process. The role of CONFIG.SYS is discussed in chapter 5.

Each of the memory resident utilities mentioned can be loaded from the command line or from a batch file. However, when you use the INSTALL command to load them from CONFIG.SYS, the utilities are loaded into a lower memory address than when they are loaded from the command line or a batch file. Loading at a lower address can enhance the performance of the utility.

To use INSTALL, type **install**, followed by an equal sign (=), followed by the filename and extension of the utility, followed by any required parameters. You must include the filename extension. The filename may be preceded by a drive specifier and/or a path specifier.

The following example illustrates the use of INSTALL. Remember that the statement must be used in CONFIG.SYS:

```
install=c:\dos\fastopen.exe c:=(50,250)
```

The statement directs MS-DOS to load FASTOPEN into memory. The file FASTOPEN.EXE is located in directory C:\DOS.

Refer to the individual discussions of FASTOPEN, GRAPHICS, KEYB, NLSFUNC, and SHARE for further information on the use of these commands.

JOIN

External
MS-DOS 3.X, 4.X , 5.X

Function: Creates a logical link between a disk drive and a subdirectory on another disk drive.

Format: `JOIN d1: d2:\directory`

Example: `join a: c:\adrive`

JOIN enables you to reference a disk as though the disk's contents were stored in a subdirectory on another disk. JOIN is useful if you have files located on several disks and you want to avoid changing your current drive.

Say that you have a floppy disk in drive A that contains the files CHAPTER1.DOC, CHAPTER2.DOC, and CHAPTER3.DOC. Drive A can be "linked" to subdirectory ADRIVE on drive C as follows:

```
C:\>join a: c:\adrive

C:\>dir \adrive
 Volume in drive C is HARDDISK
 Directory of C:\ADRIVE

CHAPTER1 DOC  7168  6-23-91  10:22a
CHAPTER2 DOC  9259  6-23-91  5:25p
CHAPTER3 DOC  4527  6-27-91   2:20p
    5 File(s) 587760 bytes free
```

JOIN will create a subdirectory if the one specified does not exist. The subdirectory must be empty and must be located exactly one level below the root directory.

A disk drive cannot be accessed directly while it is joined to a subdirectory. In the preceding example, entering the command `dir a:` will result in an error message.

Displaying and Cancelling JOINs

Using JOIN displays the active links. The /d switch is used to remove a link.

```
C:\>join
A: => A;\ADRIVE

C:\>join a: /d

C:\>join

C:\>
```

Limits on JOIN

JOIN will not work if a network drive is used as a parameter. Furthermore, JOIN is not reliable when you use it in conjunction with the commands SUBST and ASSIGN. The commands BACKUP, RESTORE, FORMAT, DISKCOPY, and DISKCOMP should not be used while a JOIN is in effect, because these commands may perform in an unpredictable fashion when confronted with a JOIN.

KEYB

External
MS-DOS 3.3, 4.X, 5.X

Function: Loads a keyboard device driver that supports non-U.S. keyboards.

Formats: `KEYB[xx[,yyy][,[d:][path]filename[.ext]] ]`
(MS-DOS 3.3–5.X)
`KEYB[xx[,yyy][,[d:][path]filename[.ext]][/ID:zzz]]`
(MS-DOS 4.X–5.X)
`KEYB[xx[,yyy][,[d:][path]filename[.ext]][/ID:zzz][/E]]`
(MS-DOS 5.X)

Examples:
```
keyb
keyb fr,850 c:\dos\keyboard.sys
```

KEYB is a program provided with MS-DOS versions 3.30 through 5.X. KEYB loads into memory a device driver for non-U.S keyboards. It is important to differentiate KEYB from the KEYB*xx* programs supplied with versions of MS-DOS prior to 3.3 (a discussion of the KEYB*xx* programs follows this

section).

KEYB is used to set the *keyboard code* and the *code page* that are active for the CON device (the combination of the keyboard and the display device).

The keyboard code determines the functional layout of the keyboard, assigning significant foreign language characters to specific keys. For example, if KEYB is used to create a functional French keyboard, pressing the "2" key displays é and pressing the "0" key displays à.

Code pages are *look-up tables* that are used to convert into displayable characters the numerical values by which data (including characters) is stored in a computer. Refer to appendix D for further information on code pages.

The format for using KEYB is

```
KEYB [xx[,[yyy,[[d:][path]filename[.ext]]]]
```

The *xx* parameter specifies the keyboard code. The *yyy* parameter specifies a code page number. The code page number must correspond to a code page previously prepared with the MODE command (see appendix D for an explanation of the code page numbers). If a code page is not specified, KEYB uses the default code page for the country specified by the keyboard code.

The following list shows the allowable combination of keyboard code and code page number parameters. See the discussion of the SELECT command for an explanation of the keyboard codes. Refer to your MS-DOS manual for elaboration on various logical keyboard layouts.

Code Page	*Keyboard Code*
437	US, UK, FR, GR, IT, SP, LA, SV, SU, NL
850	US, UK, FR, GR, IT, SP, LA, SV, SU, NL, DK, NO, PO, SF, CF, BE, SG
860	PO
863	CF
865	NO, DK

The *filename*[*.ext*] parameter in the KEYB command refers to the system keyboard definition file. If the filename is omitted, KEYB will look in the root directory for the file KEYBOARD.SYS. Each version of KEYBOARD.SYS is specific for a version of KEYB. For example, the MS-DOS 4.X version of KEYBOARD.SYS is specific for the 4.X version of KEYB.

The following command illustrates the use of KEYB:

```
keyb fr,850,c:\dos\keyboard.sys
```

This command loads into memory a driver for the French keyboard and activates code page number 850 for the CON device.

Once a driver for a non-U.S. keyboard is loaded, the user may switch to the U.S. keyboard layout by pressing Ctrl-Alt-F1. Pressing Ctrl-Alt-F2 switches to the non-U.S. layout.

When you enter **keyb** (with no parameters), MS-DOS displays the keyboard code for whichever non-U.S. keyboard driver is currently active in memory.

The DOS 4.X and 5.X versions of KEYB supports the /ID:*zzz* switch. This switch is used to specify a keyboard code for those countries that have more than one keyboard layout. The values supported for *zzz* are as follows:

- When *xx* is "FR", *zzz* can be 120 or 189.
- When *xx* is "IT", *zzz* can be 141 or 142.
- When *xx* is "UK", *zzz* can be 168 or 166.

The DOS 5.X version of KEYB supports the /E command switch. This switch is used to notify KEYB that an enhanced keyboard (the 101 or 102-key PS/2 or AT keyboard) is being used. You will need to use this switch only if you are using an 8086 computer with an enhanced keyboard.

KEYB returns the following ERRORLEVEL codes. ERRORLEVEL codes are available for processing by batch files (see chapter 4).

ERRORLEVEL Code	*Explanation*
0	Successful execution.
1	Improper keyboard code number, code page number, or syntax.
2	Bad keyboard definition file or definition file not found.
3	Could not load driver into memory.
4	KEYB is unable to communicate with CON device.
5	Code page requested has not been prepared.
6	Code page selected is not contained in keyboard information file.
7	Incorrect version of MS-DOS.

KEYB*xx*

External
MS-DOS 3.0, 3.1, 3.2

Function: Installs keyboard device drivers for non-U.S.keyboard layouts.

Format: KEYB*xx*

Example: `keybfr`

The KEYB*xx*.COM commands supplied with MS-DOS versions 3.0–3.2 serve as installable device drivers for creating keyboards with non-U.S. layouts. As an example, to create a keyboard with a French layout, enter the command **keybfr**. Refer to your MS-DOS manual for further information on the various keyboard layouts available with these commands. Note that the files are external commands; therefore, MS-DOS must be able to locate them on a disk before they can be executed.

The KEYB*xx*.COM files are not compatible with 3.3 and subsequent versions of DOS. The command KEYB operates in a different manner than the KEYB*xx* commands (see the preceding KEYB command).

LABEL

External
MS-DOS 3.X, 4.X, 5.X

Function: Adds, changes, or inspects a disk's volume label.

Format: LABEL [*d*:][*volume label*]

Examples:
```
label c:
label c:newlabel
```

A *volume label* is a string of 11 or fewer characters used to identify a disk or a hard disk. MS-DOS 2.X enables you to add a volume label using the FORMAT command. Unfortunately, it does not modify an existing volume label or add a volume label to a previously formatted disk. The LABEL command provides both of these capabilities.

LABEL, followed by a drive specifier, displays the volume label of the specified disk. The label of the default is displayed if no drive specifier is included. After the label is displayed, a prompt is displayed asking you to enter a new volume label. If you just press Enter, you are asked if you wish

to delete the current volume label. The following examples illustrate the use of LABEL:

```
Volume label (11 characters, ENTER for none)?

C:\>label c:

Volume in drive C is HARDDISK

Volume label (11 characters, ENTER for none)?      ←press Enter

Delete current volume label (Y/N)?n                ←enter "n"

C:\>
```

You can change a volume label by including the label on the command line:

```
C:\>label a:book back1
```

LABEL should not be used in conjunction with ASSIGN or SUBST; these commands can cause LABEL to act unpredictably.

LASTDRIVE

Internal
MS-DOS 3.X, 4.X, 5.X

Function: Sets the last valid drive letter for the system.
Note: LASTDRIVE may be used in a CONFIG.SYS file only.

Format: `LASTDRIVE=`*`drive letter`*

Example: `lastdrive=z`

LASTDRIVE sets the number of drive letters that are valid on a system. The allowable range for *`drive letter`* is A through Z. The minimum acceptable value is the letter corresponding to the number of physical drives on the system (either locally or on a network). For example, if you have a system with two floppy disk drives and one hard disk drive, LASTDRIVE must be greater than or equal to C. The default value for LASTDRIVE is E.

LASTDRIVE determines the drive letters that can be assigned to logical drives created with SUBST. See the discussion of SUBST for further information.

LOADHIGH

Internal MS-DOS 5

Function: Loads application programs into reserved memory on 386 and 486 computers.

Format: `LOADHIGH [d:][path]filename[.ext]`

Example: `loadhigh=c:\wp\wp.exe`

If you have a 80386 or 80486 computer, you can use LOADHIGH to load memory resident (TSR) application programs into reserved memory, thereby freeing up some conventional memory for other use.

Reserved memory is the block of memory that lies between memory addresses A0000H (640 Kbyte) and FFFFFH (1 Mbyte). Reserved memory is generally not available for use by application programs. The DOS operating system uses reserved memory as the address space for video and hard disk adapters as well as for other hardware functions. However, much of reserved memory is unused under standard DOS operations.

LOADHIGH enables you to use some of this otherwise wasted resource by loading application programs into reserved memory. Unfortunately, LOADHIGH only works on 80386 and 80486 computers.

Using LOADHIGH

Use of LOADHIGH requires that CONFIG.SYS contains the following: (1) a DEVICE command to load HIMEM.SYS, (2) the command `DOS=UMB`, and (3) use of the DEVICE command to load EMM386.EXE. Each of these commands are discussed elsewhere in Part 2 of this book.

Use LOADHIGH by entering (on the command line or in AUTOEXEC.BAT) **LOADHIGH**, followed by a space, followed by the name of the application program you want to load in reserved memory. A drive letter and/or path specifier may be included. DOS will load the application into reserved memory if there is an adequate amount of space. Otherwise, the program will be loaded into conventional memory. DOS will not indicate where the program has been loaded.

MEM

External
MS-DOS 4.X and 5.X

Function: Displays information on memory utilization.

Formats: `MEM [/PROGRAM | /DEBUG]` (MS-DOS 4 and 5)
`MEM /Classify` (MS-DOS 5)

Example: `mem /debug`

The MEM command displays information that describes the way in which computer memory is being used by MS-DOS. If you enter **mem** with no additional parameters, MEM tells you how much used and unused memory is available in the systems. Information is displayed for conventional, extended, and expanded memory.

If you enter **mem /program**, MEM tells you which programs and installable device drivers are in memory. MEM tells you where they are loaded and how much space they occupy.

If you enter **mem /debug**, MEM also includes information regarding the standard system device drivers and any expanded memory handles.

The /classify switch, implemented in DOS 5, displays the names of the programs loaded in conventional memory and in the high memory area (HMA). The size of each program is displayed in both decimal and hexadecimal notation. The HMA is the first 64 Kbytes of extended memory.

The /program, /debug, and /classify switches may be entered as /p, /d, and /c.

I wish that MEM had been implemented in MS-DOS 1 rather than in MS-DOS 4. It would have made my initial education about the structure of MS-DOS much easier. For users just starting to delve into the depths of DOS, MEM gives you an opportunity to learn a lot in a hurry. For experienced DOS hackers, MEM is a very useful tool for taking a closer look at the operating system.

Following is the output generated by the command `mem /debug`. Of course the actual output will vary somewhat from one system to the next. That is what makes MEM a useful utility. The majority of the listing is divided into four columns. `Address` refers to an occupied memory address. The addresses are given in hexadecimal notation. We will refer to these addresses in the discussion of this output. The second column in listing 1 is headed

`Name`. The entry in this column contains the name of the item that is stored in memory. The third column contains the item's `Size`, also in hexadecimal notation. The fourth column, labeled `Type`, describes the role of the item stored in memory.

```
Address        Name            Size        Type

000000                         000400      Interrupt Vector
000400                         000100      ROM Communication Area
000500                         000200      DOS Communication Area
000700         IBMBIO          002470      System Program
                   CON                     System Device Driver
                   AUX                     System Device Driver
                   PRN                     System Device Driver
                   CLOCK$                  System Device Driver
                   A: - C:                 System Device Driver
                   COM1                    System Device Driver
                   LPT1                    System Device Driver
                   LPT2                    System Device Driver
                   LPT3                    System Device Driver
                   COM2                    System Device Driver
                   COM3                    System Device Driver
                   COM4                    System Device Driver

002B70         IBMDOS          0088A0      System Program

00B410         IBMBIO          004EA0      System Data
                 ANSI          001190       DEVICE=
                               000380       FILES=
                               000100       FCBS=
                               0029A0       BUFFERS=
                               0001C0       LASTDRIVE=
                               000CD0       STACKS=
0102C0         MEM             0000A0      Environment
010370         IBMDOS          000010      -- Free --
010390         SHARE           0018A0      Program
011C40         COMMAND         001640      Program
013290         COMMAND         000100      Environment
0133A0         MOUSE           0000A0      Environment
013450         MOUSE           002370      Program
0157D0         MEM             012F60      Program
028740         IBMDOS          0778B0      -- Free --

  655360 bytes total memory
  655360 bytes available
  567328 largest executable program size

  393216 bytes total extended memory
  393216 bytes available extended memory
```

An Aside About Addresses

Memory addresses on MS-DOS computers are usually represented by two components: a *segment* address and an *offset* address. The segment address for each address in the output shown here is obtained by deleting the address's initial and final zeros. For example, the address 000400 has a segment address of 0040. Each of the addresses in this sample output has an offset address of 0000.

The MEM Output

Referring to the output, the item stored at the low end of memory (address 000000) is called `Interrupt Vector`. This is the area of memory that stores the *interrupt vector table*. Each time the hardware or software issues an *interrupt*, the operating system must determine the memory address for the handler of that type of interrupt. The function of the interrupt vector table is to store the address of each of these handlers. Each handler's address is stored at a predetermined location within the interrupt vector table. In this way, DOS knows where to look when it is trying to locate the address of a specific handler. Interrupts and interrupt handlers are discussed in appendix A.

The `ROM Communication Area`, which begins at address 000400, is also known as the *BIOS data area*. This area of memory stores data that is used by the basic input output system (BIOS). The BIOS acts as an intermediary between the operating system and the system hardware. It is within the BIOS data area that the BIOS maintains a record of such information as how many columns and rows are on the video display and which keyboard keys are currently being pressed. Application programs can directly access this area of memory, but in general, access is carried out through the use of the *BIOS interrupts* (discussed in appendix A).

The role of the `DOS Communication Area` (address 000500) is similar to the role of the BIOS data area. It is within this area of memory that MS-DOS maintains data that it uses in carrying out certain system functions. For example, the first byte in the DOS Communication Area stores the status of the last print screen operation (the byte equals 0 if the operation was successful, 1 if the operation is in progress, and 255 if the operation failed).

The portion of memory starting at address 000700 has the name `IBMBIO` and is referred to as a `System Program`. This is the portion of memory that stores the standard system device drivers. Each of the system device drivers is listed in the `Name` column (CON, AUX, PRN, and so on). The contents of IBMBIO are stored in the PC-DOS system file IBMBIO.SYS. In MS-DOS, the equivalent file has the name IO.SYS.

The next major block of memory begins at address 002B70. This block has the name `IBMDOS` and is also referred to as a `System Program`. This block contains what is known as the operating system's *kernel*. The kernel is the portion of MS-DOS that does most of the work. Basically, the kernel receives all requests for service functions and channels them to the appropriate device driver. The kernel is stored on disk as the system file IBMDOS.SYS. In MS-DOS, the equivalent file is MSDOS.SYS.

The next block of memory, beginning at address 00B410, contains what is referred to as the *DOS extensions*. These are the installable device drivers and other items that were placed in memory when the file CONFIG.SYS was read during the booting process. The first DOS extension in the output is the device driver ANSI.SYS. The other extensions listed are five parameters that were set during the boot process. Immediately to the left of each parameter's name is the amount of memory occupied by the item specified by the parameter. This information is very useful. It enables you to view the changes that occur in your system's memory configuration as you adjust the values of the system parameters. The role of CONFIG.SYS and the system parameters is discussed in chapter 5.

The remainder of computer memory is available to application programs. The names of the programs in this output are `MEM` (the DOS command that generated listing 1), `SHARE` (the DOS command SHARE, which is loaded into memory to support disk partitions larger than 32 Mbytes), `COMMAND` (the DOS command processor COMMAND.COM), and `MOUSE` (a driver for the computer's mouse). Notice that the programs are listed as type `Program`. Some of them also have an entry that is listed as type `Environment`. This is the memory address of the copy of the DOS environment that was passed to the program when it was loaded into memory.

The block of memory at address 010370 is listed as being `-- Free --`. This portion of memory contained the copy of the DOS environment that was passed to the program SHARE. Because SHARE does not use the environment, it was able to release this block of memory so that it would be available to other applications.

Address 028740 contains a large block of free memory. This is the memory that is currently available to other applications. This block's size in hexadecimal notation is 0778B0 bytes, which translates to a decimal equivalent of 489,648 bytes. The size of the MEM program is hexadecimal 012F60, which translates to 77,664. Adding 489,648 and 77,664 gives 567,312. If you add to this the free memory at address 010370 (000010 equals decimal 16), you get a total of 567,328. This is the number given in the output display as the `largest executable program size`.

MIRROR

External
MS-DOS 5.X

Functions: Maintains information about a disk's FAT, boot record, and root directory. Maintains information about deleted files. Maintains a copy of the disk partition table.

Formats:
```
MIRROR [d:] [/1]
MIRROR [/tdrive][-entries] [/u] [/partn]
```

Examples:
```
mirror c:
mirror /tc
mirror /partn
```

MIRROR is a DOS utility program new with DOS 5 that reduces the chances of a disastrous loss of data. MIRROR performs three separate functions:

- It maintains information about a disk drive's file allocation table (FAT), boot record, and root directory in a file named MIRROR.FIL. The information in this file can be used by the UNFORMAT command in restoring the disk following an inadvertent format.
- MIRROR maintains a file named PCTRACKR.DEL that stores information about files that have been deleted. This information can be used by the UNDELETE command in restoring deleted files.
- MIRROR maintains a file named PARTNSAV.FIL, which stores information about a hard disk's partition table. This information can be used by the UNFORMAT command to restore a partition table that has become corrupted.

Each of these separate functions will now be discussed.

Protection Against Inadvertent Formatting

The DOS 5 version of the FORMAT command will format a disk "safely" unless the /U command switch is used. In a safe format, only the disk's boot record, FAT, and root directory are modified. The rest of the disk, which stores the actual files, is untouched. As a result, it is possible to restore the disk to its state prior to the formatting procedure if certain information is available. This restoration process is called *unformatting*.

One function of MIRROR is to maintain a file that stores information about the disk's boot record, file allocation table, and root directory. This is the information required for unformatting. The actual unformatting process is carried out by the UNFORMAT command, which is discussed separately later in Part 2.

Each time you execute MIRROR, a file named MIRROR.FIL is created that stores the information just described. The information reflects the current conditions on the default drive or, if the command includes a drive specifier, the information on the specified drive. MIRROR.FIL is stored in the root directory of the disk for which it contains information. Thus, you enter the following command to create MIRROR.FIL on disk drive C:

```
C>mirror c:
```

The MIRROR.FIL file will contain current information about the disk's boot record, FAT, and root directory.

Each time MIRROR.FIL is modified, the previous version of the file is saved as MIRROR.BAK. You can suppress the generation of this backup file by using the /1 command switch:

```
mirror c: /1
```

When a disk containing MIRROR.FIL is formatted, the information in the file is copied onto the newly formatted disk in a hidden file named UNFORMAT.DAT. The information is then available should you need to unformat the disk.

You might want to use MIRROR in AUTOEXEC.BAT so that an updated version of MIRROR.FIL is created each time you start your computer.

Undeleting Files

MIRROR can also be used to maintain information about files that get deleted. The recorded information is stored in a file named PCTRACKR.DEL. This information is available for use by the UNDELETE command. UNDELETE is discussed elsewhere in Part 2.

The command with a format `MIRROR /T`*`drive`* maintains information about deleted files. This command loads a memory resident program that modifies PCTRACKR.DEL each time a file is deleted. PCTRACKR.DEL is maintained in the root directory of the specified disk drive.

As indicated in table 8, the size of PCTRACKR.DEL is determined by the size of the specified disk. Once the file is full, the entry for each new deletion replaces the oldest entry in the file. You can override the default size for PCTRACKR.DEL by specifying the number of entries to be stored. You may

specify from 1 to 999 entries, with each entry containing information about one file deletion. The following example loads a memory resident program. The program will record information about files deleted from disk drives A and C. The PCTRACKR.DEL file for drive A will hold up to 100 entries. The following command's tracker file for drive C will hold up to 500 entries:

```
mirror /ta-100 /tc-500
```

Table 8. Default Size of PCTRACKR.DEL

Disk Size (Bytes)	*Size of PCTRACKR.DEL (Bytes)*	*Number of Entries Maintained*
360K	5K	25
720K	9K	50
1.2M	14K	75
1.44M	15K	75
20M	18K	101
32M	36K	202
> 32M	55K	303

The version of DOS 5.0 used in writing this book contained a bug that prevented me from creating a tracking file for my hard drive of any size other than the default. I was able to override the default for tracking files on my floppy drive, though. This bug should be corrected in future implementations of DOS.

You can remove the memory resident program and disable tracking of file deletions by entering **MIRROR /U**. The program can be removed only if it was the last memory resident program loaded. Otherwise, you must reboot DOS to remove the program.

Saving Hard Disk Partition Information

Each hard disk maintains a disk partition table. The partition table contains information that your computer needs in order to read the hard disk. Occasionally, the partition table becomes "corrupted," making the hard disk unavailable. When this occurs, DOS will display a message saying that it is unable to locate the hard disk. Usually, the only way to repair a corrupted partition table is to repartition the hard disk. Unfortunately, this action destroys the files.

MIRROR can protect you against this disaster by storing a copy of your hard disk's partition table on a floppy disk. You can then store the disk in a safe place. If the partition table becomes corrupted, you can use the copy to restore the partition table without having to repartition the hard disk.

To make a copy of your partition table, enter the command **mirror /partn**. DOS will read the partition table's information and then prompt you to insert a floppy disk, which will be used to store a copy of the table. The table is stored in a file named PARTNSAV.FIL. It is critical for you to store this file on a floppy disk and not on your hard disk. If the file is on your hard disk and the partition table ever gets corrupted, the file will be unavailable and you will have to repartition the hard disk.

The DOS command UNFORMAT uses PARTNSAV.FIL to restore the partition table. Use of UNFORMAT is discussed later in Part 2.

MKDIR

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Creates a subdirectory.

Formats:
```
MKDIR [d:]path
MD [d:]path
```

Examples:
```
mkdir \write
md b:\programs\business
```

The MKDIR (MaKe DIRectory) command is used to create a subdirectory. You may enter the command as either **mkdir** or **md**. The MKDIR command may contain a drive letter designator (such as C: or A:) specifying the drive on which the subdirectory will be created. If no drive is specified, the subdirectory will be created on the default drive.

The MKDIR command must specify the path to the subdirectory being created. In the first example, you enter a command that creates a subdirectory named WRITE:

```
C:\>mkdir \write
```

No drive was specified, which means that WRITE will be located on the default drive. The path to the new subdirectory is \WRITE. WRITE will be a subdirectory entry contained in the root directory of the default drive.

The next example creates a subdirectory named \BUSINESS:

```
C:\>md b: \programs\business
```

BUSINESS will be located on drive B. The path to BUSINESS is\PROGRAMS\BUSINESS. This means that BUSINESS is a subdirectory contained in the subdirectory PROGRAMS. PROGRAMS is, in turn, a subdirectory entry contained in the root directory of drive B.

The maximum length of the path specifier created with MKDIR is 63 characters, including the "\" characters. See chapter 3 for further examples of the use of MKDIR.

MODE

External
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Functions: Sets the mode of operation of a parallel printer.
Sets the mode of operation of a graphics/color display adapter.
Sets the protocol for an asynchronous communications.
Redirects parallel printer output to a serial port.
Prepares code pages (MS-DOS 3.3, 4.X, 5.X).
Activates code pages (MS-DOS 3.3, 4.X, 5.X).
Displays the currently active code page (MS-DOS 3.3,4.X, 5.X).
Restores an active code page (MS-DOS 3.3, 4.X, 5.X).

Formats:

```
MODE LPTn:[c][,[m][,P]]
MODE n or MODE [n],m[,T]
MODE COMn:baud[,parity[,databits[,stopbits[,P]]]]
MODE LPTn:=COMn
MODE device CODEPAGE
PREPARE=((cplist)[d:][path]filename[.ext])
MODE device CODEPAGE SELECT=cp
MODE device CODEPAGE /STATUS
MODE device CODEPAGE REFRESH
```

Examples:

```
mode LPT1:80,6,P
mode 40
mode 80,R,T
mode com1:1200,N,7,1
mode LPT2:=com1
mode con codepage prepare=((805,437)c:\dos\ega.cpi)
mode con codepage select=850
mode con codepage /status
```

MODE is an MS-DOS utility program that is used to establish working parameters for the parallel printer and the graphics/color monitor adapter. Beginning with MS-DOS 1.1, MODE is also used to set the parameters of the asynchronous communications port.

MODE is an external command. This means that before you can use MODE, the file MODE.COM must be available to the system. Either MODE.COM must be in the current directory of the default drive or the location of MODE.COM must have been specified by the PATH command (see the discussion of PATH).

Controlling the Printer with MODE

MODE may be used to control the number of characters printed per line and the vertical spacing between lines on the parallel printer. MODE's format is as follows:

```
MODE LPTn: [c][,[m][,p]]
```

where

n	is parallel printer number 1, 2, or 3,
c	is characters per line (80 or 132),
m	is lines printed per vertical inch (6 or 8),
p	instructs MS-DOS to try again when it receives a busy signal from the printer (continuous retry on device timeout).

When you enter the following command, it sets parallel printer 1 to print 80 characters per line with 6 lines printed per vertical inch:

```
C:\>mode LPT1:80,6,p
LPT1: set for 80
Printer lines per inch set
```

The **p** tells MS-DOS to retry continuously to send data to the printer if it receives a busy signal. The retry loop can be halted by pressing Ctrl-Break.

If a parameter is omitted or if an invalid value is specified, the setting for that parameter remains unchanged.

MODE can be used to set the parameters on Epson and Epson-compatible printers only. Trying this command with other printers will yield interesting but unpredictable results.

Use of the MS-DOS 4.X and 5.X versions of MODE in controlling the printer differs slightly from earlier versions. The format for the command is

```
MODE LPTn [cols=p] [lines=m][retry=ra]
```

As with the earlier versions of MODE, LPT*n* may be LPT1:, LPT2:, or LPT3:; *p* may be 80 or 132; and *m* may be 6 or 8.

Allowable values for the *ra* parameter are e (returns an error signal when the printer is busy; this is the recommended setting for printers shared on an IBM PC Local Area Network); b (returns a busy signal when the printer is busy; this is compatible with the "p" parameter in earlier versions of MODE); r (returns a ready signal when the printer is busy; this is the recommended setting for operation compatible with previous versions of MS-DOS).

Use of cols, lines, and retry is not required if commas are used as place holders. For example, the command `mode lpt1: lines=6` can also be entered as `mode lpt1: ,6`.

Graphics/Color Display Adapter

If your system is equipped with a graphics/color display adapter, you may use MODE to set the adapter's parameters. There are two formats for MODE when it is used in this fashion:

```
MODE n
MODE [n],m[,t]
```

Table 9 contains a complete listing of the parameters used with MODE to control the graphics/color display adapter. The next few examples will show you how some of the parameters can be used. Bear in mind, however, that these examples and the information in table 9 are relevant only to systems having a graphics/color display adapter.

Table 9. Parameters Used with MODE to Control the Graphics/Color Display Adapter

Parameter	*Function/Value*
n=40	Sets the graphics/color display adapter width to 40 characters per line.
n=80	Sets the graphics/color display adapter width to 80 characters per line.
n=BW40	Switches the active display to the color/graphics display adapter, disables the color, and sets the display width to 40 characters per line.
n=BW80	Switches the active display to the color/graphics display adapter, disables the color, and sets the display width to 80 characters per line.

continues

Table 9. continued

Parameter	*Function/Value*
n=CO40	Switches the active display to the color/graphics display adapter, enables the color, and sets the display width to 40 characters per line.
n=CO80	Switches the active display to the color/graphics display adapter, enables the color, and sets the display width to 80 characters per line.
n=MONO	Switches the active display to the monochrome display adapter. Monochrome always displays 80 characters per line.
m	Is R or L. Shifts the display right or left.
t	Requests a test pattern that is used to align the display.

If you enter the first sample command, the display width is set to 40 characters per line:

```
C:\>mode 40
```

The next example switches the active display to the graphics/color display adapter, enables the color, and sets the display width to 80 characters per line:

```
C:\>mode co80
```

The *m* and *t* parameters are used to adjust the screen display to the right or left. The following command will shift the display one column to the right in 40-column mode and two columns to the right in 80-column mode:

```
C:\>mode ,r
```

The *t* parameter tells MS-DOS to display a test pattern that can be used as an aid for adjusting the screen display to the right or left. The test pattern consists of the digits 0123456789 repeated four times in the 40-column display and eight times in the 80-column display. After displaying the pattern, MS-DOS asks whether you can see the digit to the far right or the far left, depending on whether you specified right or left adjustment. The following example shows the command and the resultant display in 40-column mode:

```
C:\>mode ,r,t
```

This command requests a right adjustment. The screen will momentarily go blank when the command is entered; then, this test pattern and prompt will appear:

```
01234567890123456789012345678901234567890123456789

Do you see the leftmost 0? (Y/N)
```

Your display needs to be right adjusted if you do not see a `0` at the left side of the screen. If you reply **N**, the display will be shifted one column to the right (two columns in 80-column mode). If you reply **Y**, control is returned to MS-DOS.

The MS-DOS 4.X and 5.X versions of MODE also supports the following format for controlling the display screen:

```
MODE CON [cols=m] [lines=n]
```

The allowable values for *m* are 40 and 80 characters per line (EGA and VGA displays only). The allowable values for *n* are 25 and 43 for EGA, and 25, 43, and 50 for VGA. The ANSI.SYS device driver must be loaded to use MODE in this fashion.

Communications and MODE

MODE may be used to initialize an asynchronous communications port. The format for the pre-4.X versions of the command is

```
MODE COMn:baud[,parity[,databits[,stopbitsn][,p]]]
```

where

n is the asynchronous communications port number (1 or 2); MS-DOS 3.3 and later versions support additional port numbers 3 and 4;

baud is the baud rate (110, 150, 300, 600, 1200, 2400, 4800, or 9600); MS-DOS 3.3 and later versions support an additional baud rate of 19200;

parity is either N (none), O (odd), or E (even);

databits are the number of bits per word (7 or 8);

stopbits are the number of stopbits (1 or 2);

`p` instructs MS-DOS to try again when it receives a busy signal from the port (continuous retry on device timeout).

You must specify the baud rate when using this form of MODE. However, only the first two digits of the baud rate need be entered in the command. All other parameters have defaults that are entered by using a comma in the command. The parity default is even, the databits default is 7, and the stopbits default is 1. The stopbits default is 2 if the baud rate is set at 110.

Inclusion of p tells MS-DOS to continuously retry to send data to the port if it receives a busy signal. The retry loop can be halted by pressing Ctrl-Break. The following example initializes serial port 1 with a baud rate of 1200, no parity, 8 databits, and 1 stopbit. MS-DOS echoes the parameters when the command is entered:

```
C:\>mode com1:12,,8,,
COM1: 1200,e,8,1,-
```

The MS-DOS 4.X and 5.X versions of MODE support the following format for configuring a communications port:

```
MODE COMn: baud=b [parity=p] [data=d] [stop=s] [retry=ra]
```

The values that can be assigned to baud, parity, data, and stop are the same as in earlier versions of MS-DOS. The values that can be assigned to *ra* are "e" (returns an error signal when the port is busy; this is the recommended setting for printers shared on an IBM PC Local Area Network); "b" returns a busy signal when the port is busy; this is compatible with the p parameter in earlier versions of MODE); "r" (returns a ready signal when the port is busy; this is the recommended setting for operation compatible with previous versions of MS-DOS).

Redirecting a Parallel Printer with MODE

You can use MODE to redirect parallel printer output to a serial printer that is connected to an asynchronous communications port. The asynchronous port must first be initialized according to the requirements of the serial printer. The format for redirecting is

```
MODE LPTn:=COMp
```

where

n is the number of the parallel printer,
p is the number of the communications port.

In the following example, communications port 1 is initialized by the first MODE command, and output to parallel printer 1 is redirected to port

1 by the second MODE command. Notice that the port is initialized so that timeout errors are continuously retried:

```
C:\>mode com1:300,n,8,1,p
COM1; 300,N,8,1,P
C:\>mode LPT1:=com1
LPT1: redirected to COM1:
```

Code Pages and MODE

As explained in appendix D, MODE is used to generate *prepared code pages* from the code page information files supplied with MS-DOS 3.3, 4.X, and 5.X. Once a prepared code page is generated, MODE may then be used to select the code page. MODE may also be used to display the set of code pages that are available for a device. Finally, MODE may be used to reestablish an active code page that has been lost. Examples will be presented for each of these applications of MODE.

Generating Prepared Code Pages

The format for generating prepared code pages is

```
MODE device CODEPAGE PREPARE=((cplist)[d:][path]filename[.ext])
```

The *device* parameter is the character device for which the code pages are being generated. The valid values are CON, PRN, LPT1, LPT2, and LPT3.

The *cplist* is a list of one or more valid code page numbers. These numbers are used to specify the code pages that will be prepared for the character device. Valid code page numbers are 437, 850, 860, 863, and 865. Appendix D discusses the meaning of these code page numbers.

The *filename* parameter specifies the code page information file that will be used to generate code pages. The code page information files supplied with MS-DOS 3.3, 4.X, and 5.X and the devices that they support are listed in table 10.

Selecting a Code Page

Once a code page has been prepared for use, MODE may be used to select the code page. Selections make the specified code page active for the specified device. The format for code page activation is

```
MODE device CODEPAGE SELECT=cp
```

The *device* parameter is the device for which the code page is being selected. The *cp* parameter is the code page number being selected. The selected code page number must be either a previously prepared code page or a hardware code page. Hardware code pages are discussed in appendix D.

Table 10. Code Page Information Files and the Devices That They Support

Device	*Code Page Information File*
IBM Proprinter Model 4201	4201.CPI
IBM Proprinter X24 and XL24	4208.CPI (MS-DOS 4.X and 5.X)
IBM Quietwriter III Printer Model 5202	5202.CPI
Enhanced Graphics Adapter	EGA.CPI
IBM Convertible LCD Adapter	LCD.CPI

Consider this example. Before code page switching can be implemented on a display screen, the device driver DISPLAY.SYS must be loaded into memory. Similarly, before code page switching may be implemented on a printer, the device driver PRINTER.SYS must be loaded into memory.

The following command, when placed in CONFIG.SYS, instructs MS-DOS to install DISPLAY.SYS during the booting procedure:

```
device=c:\dos\display.sys con:=(ega,,2)
```

This command tells MS-DOS to load the DISPLAY.SYS driver for use with the CON device. The parameters `(ega,,2)` instruct MS-DOS: (1) that it should enable code page switching for the Enhanced Graphics Adapter Display, (2) that none of the code pages are hardware code pages, and (3) that two of the pages are prepared code pages.

Using the `device=` statement enables code page switching. The next step is to use the MODE command to generate the prepared code pages for use by the EGA display. The following command generates code pages 437 and 850 using information in the file EGA.CPI. MS-DOS displays a message when the preparation is completed:

```
C:\>mode con codepage prepare=((437,850)c:\dos\ega.cpi)
Mode Prepare Codepage function completed

C:\>
```

Once the code pages have been generated, a particular code page may be selected using MODE. The following command selects code page number 850:

```
C:\>mode con codepage select=850
Mode Select Codepage function completed

C:\>
```

Code Page Status

The command `mode con codepage /status` directs MS-DOS to display the codepage status for the CON device. In this case the CON device is the EGA display:

```
C:\>mode con codepage /status
Active codepage for device CON is 850
prepared codepages:
 Codepage 437
 Codepage 850
Mode Status Codepage function completed

C:\>
```

Code Page Refresh

A command with the format `mode device codepage refresh` reestablishes an active code page that has been lost. For example, if you turn off your printer, you may have to use this command to reestablish the active code page.

Requesting Device Status

The MS-DOS 4.X and 5.X versions of MODE display the current status of a device when you enter **mode** followed by the device name. For example, the command `mode con` generates the following:

```
Status for device CON:
----------------------
COLUMNS=80
LINES=25
Code page operation not supported on this device
```

Use the switch /sta when you request the status of a printer, for example, **mode lpt1: /sta**. The reason for this is that if you enter **mode lpt1:**, any redirection for that printer will be canceled.

You can get a status report for all devices by entering **mode** (with no additional parameters).

Setting Keyboard Typematic Rates

The MS-DOS 4.X version enables you to control the rate at which a letter is repeatedly echoed to the screen when you hold a keyboard key down. The format for the command is as follows:

```
MODE CON delay=d rate=r
```

The delay parameter controls the amount of time that the key must be held down before the repeat echoing commences. Allowable values for *d* are 1, 2, 3, and 4. The number specifies the number of 1/4-second periods for the delay.

The rate parameter controls the rate of repetition once the echoing commences. The allowable range for *r* is 1–32. The number represents the approximate number of repetitions per second.

This use of the MODE command is not supported on all computer systems.

MORE

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Outputs 23 lines of data at a time.

Format: `MORE`

Examples:
```
more < sample.txt
more < sample.txt > prn
```

MORE is an MS-DOS filter that displays data 23 lines (one full screen) at a time. A text file can be "filtered" through MORE by using the MS-DOS symbol for redirection of input <. The output from an application program or another MS-DOS command can also be sent through MORE by using the MS-DOS pipe feature. Output from MORE is sent to the display screen unless it is redirected to some other device (such as a file) or piped as the input to another MS-DOS command or an application program. The symbol for redirection of output is >.

Data filtered through MORE is sent out to the display screen (or some other device) 23 lines at a time. After each 23 lines of output, the message `-More-` appears at the bottom of the screen. Pressing any key outputs another 23 lines of data.

MORE is an external MS-DOS command. That means that before you can use the MORE filter, a copy of the file MORE.EXE must be contained in a system drive. The use of MORE is discussed in chapter 6.

NLSFUNC

External
MS-DOS 3.3, 4.X, 5.X

Functions: Specifies the country information file. Provides support for code page switching using the MS-DOS command CHCP.

Format: `NLSFUNC [[d:][path]filename[.ext]]`

Examples:
```
nlsfunc
nlsfunc c:\dos\country.sys
```

The NLSFUNC command is used to specify the system's country information file. The country information file contains country-specific information such as the date, time, and currency formats.

The NLSFUNC command must be invoked before code pages can be set using the CHCP command. Refer to appendix D for an overview of code pages and code page switching.

NLSFUNC remains resident in memory once you invoke it. Therefore, one invocation of NLSFUNC will support all subsequent invocations of CHCP.

If NLSFUNC is entered without specifying a country information file, the file defined by the COUNTRY command is used as the system's country information file.

The format for using NLSFUNC is

```
NLSFUNC [[d:][path]filename[.ext]]
```

The MS-DOS 4.X and 5.X versions of NLSFUNC may be invoked from CONFIG.SYS by using the command INSTALL. The following example illustrates how this can be done:

```
install=c:\dos\nlsfunc.exe c:\dos\country.sys
```

PATH

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Specifies directories that MS-DOS is to search to locate executable files.

Format: `PATH [[d:]path[;[d:]path. . .]]`

Examples:
```
path \program1\business
path b:\program2\write1;b:\program2\write2
```

PATH tells MS-DOS which subdirectories are to be searched if an external command or a batch file is not found in the current directory. The parameters entered in PATH are the paths to the subdirectories to be searched. (Subdirectories and paths are discussed in chapter 3.)

Consider the following situation. Suppose that you have a disk in drive A that contains several files and a subdirectory named PROGRAM1. PROGRAM1 contains a batch file named BUSINESS.BAT. Let's say that the current directory on drive C is the root directory and that you want to execute BUSINESS.BAT.

To start a batch file, you simply enter the filename of the batch file, as follows:

```
C:\>business
Bad command or file name
```

What happens is that MS-DOS searches the current directory of drive C for BUSINESS.BAT. Because the root directory is the current directory, and BUSINESS.BAT is in the subdirectory PROGRAM1, MS-DOS is unable to find the batch file. MS-DOS assumes that BUSINESS.BAT does not exist and the `Bad command or file name` message is displayed.

There are two solutions to this problem. You could change the current directory on drive C. Then MS-DOS would be able to find BUSINESS.BAT when you entered **business**. The drawback to this solution is that changing the current directory on drive C may be inconvenient. It would be to your advantage to keep the root directory as the current directory if most of the files and programs that you are using are in the root directory.

The second solution is to use PATH to tell MS-DOS where to look for BUSINESS. All you have to do is type **path** followed by the path to the directory containing BUSINESS.BAT:

```
C:\>path \program1
```

Once you use a PATH command, MS-DOS knows where to look for a command or batch file that is not in the current directory. The last PATH command entered sets the current path. MS-DOS will display the current path if you enter PATH without any parameters:

```
C:\>path
PATH=\PROGRAM1
```

The current path remains in effect until it is changed by another PATH command.

A PATH command may contain more than one path. Multiple paths are separated by semicolons. MS-DOS searches the paths in the order in which they are listed. In the next example, the PATH command contains two paths on drive B. Once the command has been entered, MS-DOS will look in the subdirectory WRITE1 (which is a subdirectory entry in the subdirectory PROGRAM2) if a command or batch file is not located in the current directory. MS-DOS will then look in the subdirectory WRITE2 (another subdirectory entry in the subdirectory PROGRAM2) if the command or batch file is not contained in WRITE1. Here is a sample of a PATH command line that contains two paths:

```
path b:\program2\write1;b:\program2\write2
```

The current path is canceled if you enter PATH followed by a semicolon:

```
C:\>path
PATH=B:\PROGRAM2\WRITE1;B:PROGRAM2\WRITE2


C:\>path;

C:\>path
No Path
```

PAUSE

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Suspends execution of a batch file.

Format: PAUSE [*comment*]

Example: pause

PAUSE is used to temporarily suspend the execution of a batch file. PAUSE may also be used to display a message up to 121 characters in length. The following message is displayed when MS-DOS encounters a PAUSE:

```
Strike a key when ready . . .
```

Execution of the batch file halts until you press a key. Note that you can strike any key except Ctrl-Break. Pressing Ctrl-Break stops the process.

PAUSE is generally used in a batch file to allow you time to perform a specific task, such as inserting a disk. You will find more information on PAUSE in chapter 4.

PRINT

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Prints a list of files in the "background" while MS-DOS is being used to perform other tasks.

Format:
```
PRINT [[d:][filename[.ext]][/T][/C][/P]. . .]
PRINT [/D:device][/B:buffersize]
[/U:busyticks][/M:maxticks]
[/S:timeslice][/Q:queuesize]
[d:][filename[.ext]]
[/T][/C][/P]. . .] (MS-DOS 3.X–5.X)
```

Examples:
```
print file1.txt
print file?.txt
print file1.txt file2.txt/c file3.txt file4.txt
```

The PRINT command is a utility program that you use to print a set of files while simultaneously using MS-DOS to perform other tasks. The printing is said to occur in the "background" while the other work that you are doing is performed in the "foreground." The MS-DOS 3.X–5.X implementations of PRINT have several enhancements that are discussed at the end of this section.

PRINT is an external MS-DOS command. The first time you invoke the command, PRINT.COM is read from disk and installed in memory. PRINT remains resident in memory until the power is shut off.

Using PRINT

To use PRINT, simply type **print** and then type the file specifications of the files that you want to print. Each file that you enter is placed in a *queue* (list). The files in the queue are printed one at a time, according to their order in the queue. The queue may contain up to ten files at a time. A file is deleted from the queue after it has been printed.

The first time that you use PRINT in a working session, MS-DOS displays the prompt `Name of list device [PRN]:`. MS-DOS is asking you for the device name of the printer. "PRN" is the default device name that MS-DOS assigns to the parallel printer. If you want to use the default, simply press Enter. Otherwise, type the device name and press Enter. (Devices and device names are discussed in chapter 6.)

The first PRINT example instructs MS-DOS to print the files FILE1.TXT, FILE2.TXT, and FILE3.TXT. These files are all located in the current directory of drive C.

```
C:\>print file1.txt file2.txt file3.txt
Name of list device [PRN]:      ←Enter
Resident part of print installed

        C:FILE1.TXT is currently being printed
        C:FILE2.TXT is in queue
        C:FILE3.TXT is in queue

C:\>
```

As you can see, MS-DOS has displayed a queue status report, stating the name of the file currently being printed. The remaining files in the queue are listed in the order in which they will be printed.

MS-DOS displays its system prompt to tell you that another command may be entered. Even though the PRINT command is executing, you may enter another command while printing continues in the background. Any MS-DOS command or program can be executed while PRINT is operating in the background as long as the command or program does not use the printer being used by PRINT.

You can enter additional PRINT commands while PRINT is executing. The effect of these subsequent commands is to either add or delete files from the queue (see the following discussion of the /c, /p, and /t switches).

You can use the wildcard characters * and ? to specify a group of files in the PRINT command. The preceding example could have been entered as

```
C:\>print file?.txt
```

If there are any files in the current directory of drive C that match the wildcard, other than FILE1.TXT, FILE2.TXT, and FILE3.TXT, those files will also be printed by the preceding command. (Wildcards are discussed in chapter 2.)

A PRINT command may specify for printing only files that are located in the current directory of each system drive. After you have issued a PRINT command, you can change the current directory on a drive. You can then issue a subsequent PRINT command that will add files contained in the new current directory to the queue. (Directories and current directories are discussed in chapter 3.)

MS-DOS will display a queue status report if you enter PRINT with no parameters:

```
C:\>print


C:FILE2.TXT is currently being printed
C:FILE3.TXT is in queue
```

The /C Switch

The /c switch may be used in a PRINT command to delete one or more files from the queue. The /c switch is inserted in a PRINT command immediately after a file specification. That file and all subsequent files specified in the PRINT command are then deleted from the queue.

If a command to delete a file from the queue is issued while that file is being printed, printing of the file is halted and the message `<filespec> Cancelled by operator` is sent to the printer. The printer paper then advances to the next page, and printing continues with the next file in the queue.

The following command adds FILE4.TXT to the queue and deletes FILE2.TXT and FILE3.TXT. Remember that /c affects the immediately preceding file and all subsequent files in the PRINT command.

```
C:\>print file4.txt file2.txt/c file3.txt
```

The /P Switch

Most MS-DOS manuals say that the /p switch is used in the PRINT command to "set the print mode." This is a little confusing. It's simpler to think of /p as turning off a previous /c switch. The /p switch is inserted in a PRINT

command immediately after a file specification. That file and all subsequent files specified in the PRINT command are added to the queue.

The following command deletes FILE4.TXT from the queue and adds FILE5.TXT and FILE6.TXT to the queue:

```
C:\>print file4.txt/c file5.txt/p file6.txt
```

You can see how the /p switch turns off the /c switch. If a PRINT command does not contain a /c switch, there is no need to use the /p switch.

A PRINT command can contain a second /c switch that will turn off a previous /p switch. A second /p switch can be used to turn off the second /c switch, and so on.

The /T Switch

The /t switch is used with PRINT to delete all files from the queue and terminate execution of the PRINT command. The command `print /t` halts the printing process, deletes all files from the queue, sends the message `All files cancelled by operator` to the printer, and returns control of the computer to MS-DOS:

```
C:\>print /t
PRINT queue is empty

C:\>
```

MS-DOS 3.X, 4.X, and 5.X Enhancements

There are six PRINT switches implemented in MS-DOS 3.X, 4.X, and 5.X. These switches can be set only when PRINT is loaded into memory. Their use is therefore restricted to the first time the PRINT command is invoked.

You use the /d:*device* switch to specify a valid printing device. If you do not use this switch, MS-DOS will ask you to specify a printer (as is done with the MS-DOS 2 version of PRINT).

The /b:*buffersize* switch sets the size of the print buffer. The print buffer is the area of memory that stores the file's contents prior to sending the contents to the printer. The larger the buffer, the fewer disk accesses that are necessary, and the faster the printing is completed. The default size for the print buffer is 512 bytes.

The /q:*queuesize* switch controls the number of files that may be in the printing queue at any one time. The allowable range is 1 to 32. The default is 10.

The three remaining switches control the way in which the computer's resources are shared between PRINT (the background process) and MS-DOS (the foreground process). When you are using PRINT, it may appear that the computer is doing two things at one time. Actually the computer can execute only one task (or process) at a time, but it switches between processes so rapidly that the two processes seem to execute simultaneously.

Each process is allocated a certain number of system clock ticks to perform its work. The /s:*timeslice* switch determines how many clock ticks the MS-DOS foreground process can run before giving control to the PRINT background process. The allowable range is 1 to 255 clock ticks. The default is 8.

The /m:*maxticks* switch determines how many clock ticks the PRINT process can run before giving control back to the foreground MS-DOS process. The allowable range is 1 to 255 clock ticks. The default is 2.

The /u:*busyticks* switch determines the maximum number of clock ticks that PRINT can wait if the printer is unavailable. If this amount of time elapses and PRINT is still waiting, control is returned to the foreground MS-DOS process. The allowable range for busyticks is 1 to 255 clock ticks. The default is 1.

PROMPT

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Sets the MS-DOS system prompt.

Format: `PROMPT [text]`

Example: `prompt Enter Command:`

A *system prompt* is a signal from MS-DOS to you that all systems are operating and that MS-DOS is ready to receive your command. The standard MS-DOS system prompt consists of an uppercase `A`, `B`, or `C` followed by a colon, a backslash, and the greater than symbol, >. The letter used in the prompt tells you which system drive is the current default. For example, the `C:\>` prompt indicates that the current default drive is drive C. Note that some systems may simply use the drive letter and the greater than symbol, for example `C>`, as the system prompt.

You can use the PROMPT command to change the system prompt. Simply type **prompt** followed by the character string that you want MS-DOS to use as the new system prompt. Once you have entered the PROMPT

command, the new system prompt will be displayed each time that MS-DOS is ready to accept a command. The PROMPT command will remain in effect until you issue another PROMPT or until you reboot MS-DOS. For example, if you wanted the system prompt to be `Enter Command:` instead of `C:\>`, you would enter the following command:

```
C:\>prompt Enter Command:

Enter Command:
```

The new system prompt is now `Enter Command:`. To return to the original prompt `C:\>`, enter **prompt** without any other text:

```
Enter Command:prompt

C:\>
```

MS-DOS provides a set of *metastrings* that can be used with PROMPT to create system prompts containing special characters. A metastring is a dollar sign ($) followed by one of eleven ASCII characters. Table 11 lists the metastrings and the resultant characters.

Many people find it convenient to have the prompt display the current directory on the default drive. This is accomplished by using the PROMPT command and the metastrings $p and $g as follows:

```
C:\>prompt $p$g        ←enter this command
C:\BOOKS\DOS>          ←to produce this prompt
```

This prompt is so useful that many people choose to put the command `prompt $p$g` in their AUTOEXEC.BAT file.

Metastrings may be combined with each other and with other character strings to form system prompts. In the following example, four metastrings are used in a PROMPT command. The PROMPT command will set the system prompt to perform the following: (1) display the message `The current time is:` followed by the current time stored by MS-DOS, (2) perform a carriage return and line feed so that the cursor is at the beginning of the next line, (3) display the drive letter designator of the default drive, and (4) display a > character.

```
C:\>prompt $t$ $n$g

The current time is:  9:27:45.35

C:\>
```

Table 11. Metastrings and the Resultant Character(s) in the System Prompt

Metastring	*Character(s)*
$t	The current time stored by MS-DOS.
$d	The current date stored by MS-DOS.
$p	The current directory of the default drive; if drive C is the default and the root directory is the current directory on drive C, $p in the PROMPT command would place `C:\` in the system prompt.
$v	The version of MS-DOS being used (such as 3.3)
$n	The default drive.
$g	The > character.
$l	The < character.
$b	The ¦ character.
$q	The = character.
$$	The $ character.
$h	A backspace and erasure of the previous character.
$e	The ESCape character; PROMPT and $e can be used to send an ESCape character to the ANSI.SYS device driver (see chapter 8).
$_	Carriage return plus line feed.

MS-DOS now displays the current time whenever the system prompt is displayed. Initially, you must set MS-DOS's internal clock if you want the time displayed to be the current time. (See booting MS-DOS in chapter 1 or the TIME command for details.)

The useful feature of this system prompt is that, besides displaying the current time, the prompt automatically changes when the default drive is changed:

```
C:\>prompt $t$ $n$g

The current time is:   9:27:45.35

C:\>b:
The current time is:   9:28:00.39

B:\>
```

RECOVER

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Functions: Recovers data from files that have bad sectors. Recovers data from an entire disk that has a damaged file directory.
Note: RECOVER cannot be used with network drives.

Formats:
```
RECOVER [d:][path]filename[.ext]
RECOVER d:
```

Examples:
```
recover badfile.txt
recover b:
```

Floppy disks and hard disks used by MS-DOS are divided into storage units called *sectors*. Sectors are created during the formatting process. Each sector stores 512 bytes of data. The larger the file, the more sectors required to store it.

Floppy disks and hard disks each contain a *file directory*. The file directory serves as MS-DOS's table of contents to the files that are contained on the floppy disk or hard disk. The directory, which is created during formatting, is modified each time that a file is added, deleted, or modified. (For further information on sectors, file directories, and related topics, refer to chapters 3 and 10. You should be familiar with this material before using RECOVER.)

Occasionally sectors on a floppy disk or hard disk become damaged. When this happens, MS-DOS may not be able to read the data stored in those sectors. MS-DOS will then display the following message when it comes across a sector that it cannot read:

```
Data error reading C:
Abort, Retry, Ignore?
```

The RECOVER command is used to recover data that MS-DOS is unable to read because of damaged sectors. RECOVER can be used to recover an individual file or an entire disk that is unreadable because of damaged sectors in the file directory.

When RECOVER is used on an individual file, only the data in the undamaged sectors of a file is recovered. The data in the damaged sectors is lost. The damaged sectors are labeled so that MS-DOS will not use them in the future.

Once a file has been recovered, MS-DOS will be able to read it. A recovered file will have the same filename and filename extension as the

unreadable file. A recovered file will usually have some extraneous data attached at the end, because RECOVER produces files that are multiples of 512 bytes (one sector) in size.

RECOVER is limited in its ability to repair damaged files. It is also somewhat awkward to use. Commercial disk utilities, such as PC-Tools, Norton Utilities, and Mace Utilities, are more powerful and easier to use when it comes to repairing damaged files.

Recovering a File

RECOVER is an external command, so a copy of the file RECOVER.COM must be available to the system before you can use the command. This means that either RECOVER.COM must be in the current directory of the default drive or the location of RECOVER.COM must have been specified by the PATH command (see the discussion of PATH).

To use RECOVER, type **recover** and then type the file specification of the file to be recovered. MS-DOS will load RECOVER.COM into memory and then pause to allow you to change disks if necessary. Make any necessary swaps and then press any key. The specified file will be recovered. MS-DOS will display a message that tells you how many bytes from the original file have been recovered. The following is an example:

```
C:\>recover b:badfile.txt

Press any key to begin recovery of the
file(s) on drive B:

x       ←you press the "x" key
900 of 1412 bytes recovered

C:\>
```

If you use wildcard characters to specify the file, MS-DOS will recover only the first file that matches the wildcard.

Recovering a Disk

Using RECOVER to recover all the files on a disk is a drastic measure. Do not use this command on a hard disk that has no damaged files.

RECOVER looks at the file allocation table to determine where each file is located on the floppy disk or hard disk. RECOVER cannot distinguish a damaged directory entry from an undamaged entry; therefore, all files on the disk are recovered.

To recover a disk, type **recover** and then type the letter designator of the drive containing the floppy disk or hard disk to be recovered. MS-DOS will load RECOVER.COM into memory and then pause for any necessary disk swapping. Press a key and all files on the disk will be recovered. The following is an example:

```
C:\>recover b:
Press any key to begin recovery of the
file(s) on drive B:

x
22 file(s) recovered
```

The first recovered file is given the name FILE0001.REC, the second FILE0002.REC, and so on. Any subdirectories are treated as files. All recovered files are placed in the root directory. MS-DOS will display a message if there is not enough room in the root directory for all of the recovered files. If this should happen, copy the recovered files onto another disk and then delete them from the partially recovered disk. Run RECOVER again and there should be enough room in the root directory for the remaining unrecovered files.

Once an entire disk has been recovered, you can use the command DIR to see that all of the files have names like FILE0001.REC, FILE0002.REC, and so on.

REM

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Displays a message during the execution of a batch file.

Format: `REM [`*message*`]`

Examples:
```
rename oldname.ext newname.ext
ren format.com xformat.com
```

The REM (REMark) command is used to display a message or to insert comments during the execution of a batch file. At the appropriate line in the batch file, type **rem** and then type the text of the message. When the batch file is executed and the REM command is read by MS-DOS, the message contained in that line will be displayed on the screen. The message in a REM command may be up to 123 characters long. (See chapter 4 for a discussion of batch files.) In MS-DOS 4.X and 5.X, REM may also be used to insert comments in the CONFIG.SYS file.

RENAME

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Renames a file.

Formats: `RENAME [d:][path]filename[.ext]filename[.ext]`
`REN [d:][path]filename[.ext]filename[.ext]`

Examples:
```
rename file1 file2
ren newfile.txt oldfile.txt
```

RENAME (or REN) is used to change the filename and/or filename extension of an MS-DOS file. It is one of the most frequently used, and most useful, MS-DOS commands.

To change a file's name, type **rename** and then type the file specification of the file, followed by the new filename and filename extension, if any. For example, an existing file on drive A named OLDNAME.EXT would be renamed to NEWNAME.EXT as follows:

```
C:\>rename a:oldname.ext newname.ext
```

MS-DOS will ignore any drive letter specifier preceding the new filename and extension. MS-DOS will display an error message if a path specifier precedes the new filename and extension.

Wildcard characters may be used with RENAME (see chapter 2).

REPLACE

External
MS-DOS 3.2, 3.3, 4.X, 5.X

Function: Selectively replaces or adds files.

Formats: `REPLACE [d:][path]filename[.ext]`
`[d:][path][/A][/P][/R][/S][/W]` (MS-DOS 3.2–5.X)
`REPLACE [d:][path]filename[.ext][d:]`
`[path][/A][/P][/R][/S][/W][/U]` (MS-DOS 4.X and 5.X)

Example:
```
replace ch1.doc c:\ /s
```

REPLACE is an external MS-DOS command that enables you to selectively replace or add files to a target directory. When files are being replaced,

filename[*.ext*] in the command line specifies the files in the target directory that are to be replaced by matching files in the source directory. Only matches are replaced. When files are being added, *filename*[*.ext*] specifies the files in the source directory that are to be added to the target. Files are added only if the target does not already contain a match. The following examples demonstrate the use of the REPLACE command.

Using REPLACE

The examples given here use two directories, TMP1 and TMP2. The contents of the directories are as follows:

```
C:\>dir tmp1 /w

 Volume in drive C is UCSFMIS
 Directory of C:\TMP1

.          ..         TERRY  LET  BRUCE   LET  PAPER  TXT
         5 File(s)   491520 bytes free

C:\>dir tmp2 /w

 Volume in drive C is UCSFMIS
 Directory of C:\TMP2

.          ..         BRUCE  LET
         3 File(s)   491520 bytes free
```

First we will replace TMP2\BRUCE.LET with TMP1\BRUCE.LET:

```
C:\>replace tmp1\bruce.let tmp2

Replacing C:\TMP2\BRUCE.LET

1 file(s) replaced
```

Let's see what happens if we try to replace TMP2\TERRY.LET:

```
C:\>replace tmp1\terry.let tmp2

No files replaced
```

No files are replaced, because TMP2 does not already contain a file named TERRY.LET.

The /A Switch

The /a switch is used to add new files to a target directory (as opposed to replacing existing files).

```
C:\>replace tmp1\terry.let tmp2 /a

Adding C:\TMP2\TERRY.LET

1 file(s) added
```

Files are added only if the target directory does not contain a match:

```
C:\>replace tmp1\bruce.let tmp2 /a

No files added
```

The /S Switch

The following command goes through all of the directories on drive A, replacing any copies of the file SAMPLE.TXT that it finds.

```
C:\>replace sample.txt a:\ /s
```

The /s switch is used to replace all occurrences of a file in a target directory and all subdirectories contained in the target. If the root directory is the target, all occurrences of the file on the disk are replaced. The /a and /s switches cannot be used together.

Other Switches

The /p switch prompts you with `Replace <file name> (Y/N)?` for each *filename* specified as a source file.

The /r switch replaces files that have their read-only attribute set. (See ATTRIB for a discussion of the read-only attribute.)

The /w switch instructs REPLACE to wait for you to insert a disk prior to executing the command.

The /u switch, first implemented in MS-DOS 4.X, replaces those files in the target directory that have an updated version in the source.

REPLACE and ERRORLEVEL

The following list gives the ERRORLEVEL values returned by REPLACE. These values may then be used by batch files or programs running under MS-DOS. See chapter 4 for a demonstration of the use of ERRORLEVEL values.

ERRORLEVEL Value	*Meaning*
2	No source files were found.
3	Invalid source or target path.
5	An attempt was made to access a read-only file without the /r switch.
8	Insufficient memory.
11	Invalid parameters or invalid number of parameters entered on the command line.
15	Invalid drive specified.
22	Incorrect version of MS-DOS.

RESTORE

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Restores one or more files from one disk to another disk.

Formats: `RESTORE d: [d:][path][filename[.ext]][/S][/P]`
`RESTORE d: [d:][path[filename[.ext]][/S][/P]`
`[/B:mm-dd-yy][/A:mm-dd-yy][/M][/N][/L:time][/E:time]`
(MS-DOS 3.3, 4.X, 5.X)

Examples:
```
restore a: \subdir1 \file.doc
restore a: \subdir2
restore a: \subdir3 /s
restore a: \subdir4\*.doc /p
```

The RESTORE command is used to retrieve files that were stored using BACKUP. RESTORE cannot be used on any other types of files.

RESTORE is an external MS-DOS command, so one of the system drives must contain the file RESTORE.COM before you can use RESTORE. In the following examples, it is assumed that RESTORE.COM is stored on the hard disk drive (drive C).

Restoring a File

To restore a file to the hard disk, type **restore** and then type the letter designation of the drive containing the copy of the files to be restored. You may specify the directory path on the hard disk that will contain the restored files. If you do not specify a path, the default is the current directory on the default disk. You may also specify the name of a file to be restored. If no filename is specified, all files in the specified (or default) directory are restored. When you enter a RESTORE command, MS-DOS prompts you to insert the disk containing the files to be restored and then instructs you to press any key to restore the files to the hard disk.

In the first example, the file FILE1.DOC is located in the directory SUB.DIR1. The backup copy of FILE1.DOC, which is stored on the disk in drive A, is restored to the hard disk:

```
C:\>restore a: \subdir1\file1.doc

Insert backup diskette 01 in drive A:
Strike any key when ready

*** Files were backed up 12/11/1991 ***

*** Restoring files from diskette 01 ***
\SUBDIR1\FILE1.DOC

C:\>
```

Wildcard characters may be used in filenames and extensions specified in a RESTORE command. All matching files in the specified (or default) directory will be restored.

Note: With MS-DOS 3.3, 4.X, and 5.X, you can restore from a hard disk, provided, of course, that the hard disk was the target of a BACKUP command.

Restoring a Directory

In the next example, all the files stored on the backup disk that have a path of \SUBDIR1\SUBDIR2 are restored:

```
C:\>restore a: \subdir1\subdir2
```

Restoring All Subdirectories

You may recall from the discussion of the BACKUP command that you can back up an entire hard disk with the command `backup c:\ /s`. The /s switch

of RESTORE tells the command to restore an entire hard disk, including all subdirectories, as follows:

```
restore a: c:\ /s
```

The /s switch directs RESTORE to restore all files in a directory, plus all files in all subdirectories that are descended from that directory.

Selective Restoring with /P Switch

You may not want to restore a file that has been modified since the last time it was backed up, because the restored file would overwrite all the modifications in the file since it was backed up. Using the /p switch at the end of your command will cause MS-DOS to check whether any of the files being restored have been modified since they were last backed up. If so, MS-DOS will warn you that a file is about to be overwritten. A prompt will appear asking you if the (modified) file should be replaced (by the unmodified version). If you respond **N**, the file is not restored and processing continues in the normal fashion. If you respond **Y**, the file is restored with the unmodified copy, and processing continues in the normal fashion.

The MS-DOS 3.X, 4.X, and 5.X versions of the /p switch also prompt you before restoring any read-only files. See the ATTRIB command for information about read-only files.

Other Switches

MS-DOS 3.3, 4.X, and 5.X contain six additional switches that allow further selectivity in the restore process.

The /n switch restores files that have been deleted. The /m switch restores files that have been deleted or modified since they were backed up.

The /b:*mm-dd-yy* switch restores all files modified on or before the specified date. The /a:*mm-dd-yy* switch restores all files modified on or after the specified date.

The /l:*time* switch restores files that were modified at or later than the specified time. The /e:*time* switch restores files that were modified at or earlier than the specified time.

Some Restrictions with RESTORE

RESTORE cannot be used with JOIN, ASSIGN, SUBST, and APPEND. These commands contain bugs that cause RESTORE to act in an unpredictable fashion.

RESTORE and ERRORLEVEL

ERRORLEVEL is a variable that has special meaning to MS-DOS. RESTORE will set the value of ERRORLEVEL as follows:

0	RESTORE command completed in normal fashion.
1	The backup disk did not contain any files matching the file(s) specified in the RESTORE command.
2	Some files were not restored due to sharing conflicts.
3	Execution of the RESTORE command was terminated by the user pressing Esc or Ctrl-Break.
4	The RESTORE command was terminated because of an error in execution.

Once the value of ERRORLEVEL has been set, you can use it in conjunction with the IF command in MS-DOS batch files. ERRORLEVEL enables you to write batch files that are executed according to the outcome of a RESTORE command. (See the discussion of the IF command for further details.)

RMDIR

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Deletes a subdirectory.

Formats:
```
RMDIR [d:]path
RD [d:]path
```

Examples:
```
rmdir \write
rd b:\programs\business
```

The RMDIR (ReMove DIRectory) command is used to delete a subdirectory from a disk. You may enter the command as either **rmdir** or **rd**. However, before MS-DOS can carry out your command, all the files in the subdirectory must be deleted. This is a safety feature that prevents accidental loss of files.

Your RMDIR command may include a drive letter designator (such as C: or A:) that specifies the drive containing the subdirectory to be deleted. MS-DOS assumes that the subdirectory is located on the default drive if no drive is specified.

The RMDIR command must specify the path to the subdirectory that is to be deleted. In the first example, the command is used to delete the subdirectory WRITE:

```
C:\>rmdir \write
```

No drive is specified, so MS-DOS assumes that WRITE is located on the default drive. The path **\write** tells MS-DOS that WRITE is a subdirectory contained in the root directory of drive C.

The next example deletes a subdirectory named BUSINESS:

```
C:\>rd b:\programs\business
```

The command specifies that BUSINESS is located on drive B. The path **\programs\business** tells MS-DOS that BUSINESS is a subdirectory contained in PROGRAMS. PROGRAMS is a subdirectory contained in the root directory of drive B.

The current directory and the root directory of each drive cannot be deleted with RMDIR. (For more information on subdirectories, root directories, current directories, and paths and for more examples of the use of RMDIR, refer to chapter 3.)

SELECT

External
MS-DOS 3.X, 4.X

Function: Creates a country-specific system disk.

Formats: `SELECT aaa yy` (MS-DOS 3.0–3.2)
`SELECT [[A:|B:][d:][path]] xxx yy` (MS-DOS 3.3)

Examples:
```
select 033 fr
select a: c:\dos 033 fr
```

SELECT is used to create a country-specific system disk. At boot time, the new system disk will (1) automatically load country-specific information such as the time, date, and currency formats and (2) automatically configure the keyboard according to a country-specific layout. Country-specific information and country-specific keyboard configuration are discussed under the commands COUNTRY, KEYB, and KEYB*xx*.

Note: The MS-DOS 4.X implementation of the SELECT command is used to install the operating system on a hard disk or floppy disk. Versions 3.0–3.2 of MS-DOS implement SELECT in a different fashion than version 3.3 does. The following paragraphs discuss each implementation separately.

The format for SELECT in versions 3.0–3.2 is

```
SELECT aaa yy
```

The *aaa* parameter is a three-digit country code. The *yy* parameter is a valid keyboard code. The valid combinations of country code and keyboard codes are listed in table 12 at the end of this section.

This implementation of SELECT requires that you insert a system disk in drive A to serve as the *source* in creating the new system disk. The *target* must be another disk that will be swapped with the source in drive A. MS-DOS executes the command by first using DISKCOPY to copy the source to the target. MS-DOS automatically formats the target if necessary. It then prompts the user to change disks in drive A as required. When the copy is completed, MS-DOS uses DISKCOMP to compare the target to the source. Next, a new CONFIG.SYS file is created in the root directory of the target that contains the command `country=aaa`, where *aaa* is the country code entered on the command line. Finally, a new AUTOEXEC.BAT file is created in the root of the target. This file will load the country-specific keyboard driver when the new disk is used to reboot the system.

The format for the MS-DOS 3.3 version of SELECT is

```
SELECT [[A: | B:][d:][path specifier]] xxx yy
```

The *xxx* and *yy* parameters are the country and keyboard codes. The `A:` or `B:` is used to specify the drive containing the source system disk. If no source drive is specified, SELECT uses drive A as the source. The *d:path* parameter is used to specify the destination for the MS-DOS command files on the target. If no drive for the target is specified, drive B is assumed to hold the target disk. If no path is specified for the target system files, the files are copied to the root of the target. This implementation allows a hard disk to be the target.

The 3.3 implementation of SELECT formats the target, then uses XCOPY to copy the system files to the target. A CONFIG.SYS file is created containing the statement `country=xxx`, and an AUTOEXEC.BAT file is created with the following commands:

```
path \;[\path specifier]
keyb yy xxx
echo off
date
time
ver
```

The [*\path specifier*] parameter refers to the optional path parameter that may have been included in the SELECT command line. This is useful if you want to have your system files in a subdirectory (such as \DOS).

Table 12. Valid Combinations of Country and Keyboard Codes

Country/Language	*Country Code*	*Keyboard Code*
Arabic	785	
Australia	061	US
Belgium	032	BE
Canada (Eng.)	001	US
Canada (Fr.)	002	CF
Denmark	045	DK
Finland	358	SU
France	033	FR
Germany	049	GR
Israel	972	
Italy	039	IT
Latin America	003	LA
Netherlands	031	NL
Norway	047	NO
Portugal	351	PO
Spain	034	SP
Sweden	046	SV
Switzerland (Fr.)	041	SF
Switzerland (Ger.)	041	SG
United Kingdom	044	UK
United States	001	US

SET

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Places a string in the MS-DOS environment.

Format: `SET [name=[parameter]]`

Example: `set xyz=abc`

The *environment* is an area of computer memory set aside by MS-DOS to store a series of ASCII strings. Each string in the environment consists of two sets of ASCII characters separated by an equals sign. The characters to the left of the equal sign are referred to as the *name*, those to the right as the *parameter*. The strings are grouped in this area so that they may be easily referenced by MS-DOS as well as by any programs that are running under MS-DOS. MS-DOS stores the segment address of the environment at offset 2CH in the program segment prefix (see appendix A).

Each string in the environment is terminated by a byte of zero. The final string is terminated by 2 bytes of zero. The first string in the environment has the name COMSPEC. The right side of the string contains the path to the file COMMAND.COM (for example, `COMSPEC=\COMMAND.COM`). MS-DOS also stores the last PROMPT and PATH commands issued in the environment.

The SET command is available to programmers who want to place their own strings in MS-DOS's environment. An application program could then search the environment for the string by first looking up the environment's address in the program segment prefix.

To place a string in the environment, type

```
set d1=\subdir1\subdir2
```

The current set of environment strings will be displayed if SET is entered with no other parameters:

```
C:\>set
COMSPEC=\COMMAND.COM
PATH=\SUBDIR1
D1=\SUBDIR1\SUBDIR2
```

To delete a string from the environment, type **set** followed by the string's name followed by an equal sign:

```
C:\>set path=
C:\>set
COMSPEC=\COMMAND.COM
D1=\SUBDIR1\SUBDIR2
```

See chapter 11 for more information on the MS-DOS environment.

SETVER

External
MS-DOS 5.X

Function: Allows application programs that require a specific version of MS-DOS to run under MS-DOS 5.

Formats:
```
SETVER [d:]
SETVER [d:] filename n.mm
SETVER [d:] filename /delete
```

Examples:
```
setver
setver c: wp.exe 4.01
setver c: wp.exe /delete
```

Most application programs, as part of their start-up procedure, check to see what version of DOS is running. Some programs will not run unless a specific version of DOS is running. Some programs that run under DOS 2, 3, and/or 4 will not run under DOS 5. You can use the SETVER command to make an application program believe the required version of DOS is actually running.

The Version Table

DOS 5 maintains a *version table* for each disk drive that contains the file MSDOS.SYS. The version table lists a set of executable files along with the DOS version required by each application. You can display the version table for the default drive by entering SETVER. Include a drive specifier to display the version table of other drives.

Adding an Entry

You can add an entry to a version table by entering SETVER, followed by the name of an executable file, followed by a DOS version number. You may

include a drive specifier (such as c:), but there must be a space between the specifier and the name of the executable file. The name of the executable file cannot be preceded by a path specifier. The DOS version number must be in the range 2.11–9.99. Remember that SETVER is an external command. Make sure the directory containing your DOS files is included in your search path. Any modifications of the version table are not effective until DOS is subsequently rebooted.

In the following example, SETVER is used to add an entry to the version table for drive C. The entry states that DOS 4.01 is required by the executable file WP.EXE:

```
setver c: wp.exe 4.01
```

DOS displays the following warning each time you add an entry to the version table:

```
WARNING! Lying about version numbers to a program
may have bad effects. Microsoft will not be held
responsible in this event.

Version table successfully updated
The version change will take effect the next time you restart
your system
```

Fortunately, the programs I use run fine under DOS 5. But once I saw this warning, I decided I'm not even going to think about using SETVER if Microsoft has such low regard for it that the company disclaims liability for its use.

Deleting an Entry

You can delete an entry from a version table by entering **SETVER** followed by an (optional) drive specifier, followed by the executable file you wish to remove from the table, followed by /**DELETE**. The deletion is not effective until you subsequently reboot DOS.

SETVER and ERRORLEVEL

SETVER returns an ERRORLEVEL value. This value can be useful if you are running SETVER from a batch file. Refer to chapter 4 for a discussion on the use of ERRORLEVEL in batch files. Table 13 discusses the ERRORLEVEL values returned by SETVER.

Table 13. ERRORLEVEL Values Returned by SETVER

Value Returned	*Condition*
0	Successful completion.
1	Invalid command switch entered. /DELETE is the only valid command switch.
2	Invalid file name specified. Path specifiers are not allowed.
3	Insufficient memory available to load the version table.
4	Invalid version number format. 2.11 to 9.99 valid.
5	Entry specified for deletion not in table.
6	System file not found. SETVER must be able to locate MSDOS.SYS.
7	Invalid drive specifier.
8	Too many parameters.
9	Missing parameters.
10	Error reading system file. SETVER must be able to read MSDOS.SYS.
11	Version table corrupt. The version table stored in MSDOS.SYS contains invalid data.
12	The version of MSDOS.SYS on the specified disk does not support a version table.
13	Insufficient space in MSDOS.SYS to store a new entry in the version table.
14	Error writing version table to MSDOS.SYS file.

SHARE

External
MS-DOS 3.X, 4.X, 5.X

Function: Provides support for file sharing, file locking, disk change detection, and hard disk partitions larger than 32 Mbytes.

Format: `SHARE [/F:xxx][/L:yyy]`

Example:
```
share /f:1024 /l:20
```

The SHARE command is used to provide support for *file sharing* on a computer network. Computer programs that use MS-DOS function 3DH to open a computer file will store in memory a *sharing code* that the operating system uses to determine the type of access other programs (on the network) have to the opened file.

Once a program has gained access to a file, it may use MS-DOS function 5CH to place a "lock" on a portion of the file. A lock gives the program exclusive access to that portion of the file.

SHARE sets aside computer memory for sharing codes and locks. The /f:*xxx* flag sets aside *xxx* bytes for sharing codes. The default is 2048 bytes. Each file opened by function 3DH requires storage for its filename plus 11 bytes.

The /l:*yyy* flag sets aside memory for *yyy* file locks. The default is 20 locks.

On systems that generate a signal when the disk door has been opened, the MS-DOS 4.X and 5.X versions of SHARE notify the operating system if a disk change has occurred. If SHARE is loaded in memory, it checks the disk's volume label and volume serial number, and notifies the operating system if the disk has been changed.

The MS-DOS 4.X version of SHARE is also used to support disk partitions larger than 32 Mbytes in size. If your disk drive has such a partition, you can use the MS-DOS 4.X command INSTALL to load SHARE from the CONFIG.SYS file. The following illustrates how this is done:

```
install=c:\dos\share.exe
```

SHARE is not required for large disk partitions with DOS 5. The example assumes that the file SHARE.EXE is in the directory C:\DOS. During the booting process, MS-DOS will attempt to automatically load SHARE into memory if you have a disk drive with a partition larger than 32 Mbytes and you do not use INSTALL to load SHARE from CONFIG.SYS. In order for this to be accomplished, the file SHARE.EXE must be in either the root directory or the directory specified by the SHELL statement in CONFIG.SYS.

If you use SELECT to install DOS 4.0 on a hard disk that has a DOS partition larger than 32 Mbytes, SELECT will place the `install=c:\dos\share.exe` statement in your CONFIG.400 file, ready to be merged into CONFIG.SYS.

See appendix A for more information on MS-DOS functions 3DH and 5CH.

SHELL

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Instructs MS-DOS to load a command processor.
Note: SHELL can be used in a CONFIG.SYS file only.

Format: `SHELL=[d:][path]filename[.ext]`

Example: `shell=custom.com`

The SHELL command is a high-level command generally used only by advanced MS-DOS programmers. SHELL is used when you wish to use a command processor other than COMMAND.COM, the standard MS-DOS command processor. COMMAND.COM, which is loaded into memory during booting, serves as the link between MS-DOS and you. (See chapter 11 for details.)

The SHELL command can be used only as a statement in the CONFIG.SYS file. A SHELL command in CONFIG.SYS alerts MS-DOS that a new command processor will be used.

In the following example, the CONFIG.SYS file is created. The SHELL command that makes up the file tells MS-DOS to load the command processor CUSTOM.COM into memory:

```
C:\>copy con: config.sys
shell=custom.com
^Z          ←you press Ctrl-Z
            1 file(s) copied
```

Using SHELL to Increase the MS-DOS Environment

The MS-DOS environment has a default size of 160 bytes. With MS-DOS 3.1 and subsequent versions, you can use SHELL to increase the environment's size.

The format for the SHELL statement is

```
SHELL=c:\COMMAND.COM /P /E:xxxx
```

In MS-DOS 3.1, *xxxx* is the number of paragraphs (16-byte blocks) in the environment. The allowable range is 10 to 2,048. In MS-DOS 3.2 and subsequent versions, *xxxx* is the actual number of bytes in the environment. The allowable range is 160 to 32,768.

Note: Chapter 11 describes a way to modify the environment's size for MS-DOS versions prior to 3.1.

SHIFT

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Enables you to specify more than 10 batch file parameters.

Format: `SHIFT`

Example: `shift`

A batch file can contain up to 10 dummy variables (%0 through %9). These dummy variables may be sequentially replaced by a list of character strings included in a batch file start command. For example, %0 is replaced by the filename of the batch file, %1 is replaced by the first character string included in the start command, %2 is replaced by the second character string, and so on.

The SHIFT command "shifts" each character string one position to the left, enabling you to pass more than 10 character strings to a batch file. After one SHIFT, %0 is replaced by the first character string in the start command, %1 is replaced by the second string, and so on. Each successive SHIFT moves the parameters one position to the left. The use of SHIFT is demonstrated in chapter 4.

SORT

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Sorts data.

Format: `SORT [/R][/+n]`

Examples:
```
sort <records.txt
sort /+17<records.txt
sort /r+52<records.txt
```

SORT is an MS-DOS filter that reads data from an input device, sorts the data, and then writes the data to an output device. Data is sorted using the ASCII sequence (appendix G), according to the character in a specified column of each line. If no column is specified, the data is sorted according to the first character in each line.

A text file can be input to SORT by using the MS-DOS input redirection symbol, <. The output from an application program or another MS-DOS command can be sent to SORT as input by using the pipe feature. Output from SORT can be redirected or piped using these same features.

SORT is an external MS-DOS command. That means that a system drive must contain a copy of the file SORT.EXE before you can use the SORT filter.

SORT has two optional switches. The /r switch sorts data in reverse order. The /+*n* switch sorts data according to the character located in column *n* of each line.

Chapter 6 describes the use of SORT and discusses MS-DOS filters, redirection, and pipes.

STACKS

Internal

MS-DOS 3.2, 3.3, 4.X, 5.X

Function: Allocates stack frames to handle hardware interrupts.
Note: STACKS can be used in CONFIG.SYS only.

Format: `STACKS=n,s`

Example: `stacks=12,256`

STACKS is used to set the number and size of *stack frames* allocated by MS-DOS to handle hardware interrupts. (Refer to appendix A for a discussion of interrupts and the role that stacks play in the processing of interrupts.)

The format for STACKS is

```
STACKS=n,s
```

where *n* equals the number of stack frames allocated and *s* equals the size of each stack frame in bytes. The allowable range for *n* is 8–64. The allowable range for *s* is 32–512.

If a `stacks=n` command is not included in CONFIG.SYS, MS-DOS defaults to $n = 0$ and $s = 0$ for PC- and XT-type machines; $n = 9$ and $s = 128$ for AT- and PS/2-type machines.

You should use the STACKS command in CONFIG.SYS if you get an `Internal Stack Error` message.

SUBST

External
MS-DOS 3.X, 4.X, 5.X

Function: Assigns a path specifier to a drive letter.

Formats:
```
SUBST d: d:\path
SUBST d: /d
```

Examples:
```
subst e: c:\subdir1\subdir2\subdir3
subst e: /d
```

The SUBST command enables you to assign a path specifier to a drive letter. Once the assignment is made, the drive letter may be used as a substitute for the specifier. SUBST was implemented for use by programs (such as WordStar) that cannot process path specifiers. SUBST can also save you some typing if you are using files located at the end of a long path.

```
A:\>dir \tmp\tmp1\tmp2

 Volume in drive A is UCSFMIS
 Directory of A:\TMP\TMP1\TMP2

.          <DIR>    6-26-89   12:02p
..         <DIR>    6-26-89   12:02p
FOO   .         16  6-26-89    5:00p
    3 File(s)   308224 bytes free

A>subst e: \tmp\tmp1\tmp2

A:\>dir e:

 Volume in drive E is UCSFMIS
 Directory of E:

.          <DIR>    6-26-89   12:02p
..         <DIR>    6-26-89   12:02p
FOO             16  6-26-89    5:00p
    3 File(s)   308224 bytes free
```

The drive receiving the assignment cannot be the current drive or the drive of the path specifier. The receiving drive letter may be any letter up to the value specified by LASTDRIVE in the CONFIG.SYS file (see the discussion in Part 2 of the LASTDRIVE command). The default for LASTDRIVE is E. SUBST cannot be used with network drives.

Displaying and Cancelling Substitutions

SUBST displays the active substitutions. The /d switch deletes them:

```
A:\>subst
E: => A:TMP\TMP1\TMP2

A:\>subst e: /d

A:\>subst

A:\>
```

Problems with SUBST

IBM and Microsoft admonish users that SUBST should not be used with ASSIGN, BACKUP, CHKDSK, DISKCOMP, DISKCOPY, FDISK, FORMAT, JOIN, LABEL, MIRROR, RECOVER, RESTORE, or SYS. Big Blue makes no elaborations, but the obvious implication is that SUBST confuses these other commands. Any system command that interferes with at least nine other commands is to be avoided. Consider staying away from SUBST until IBM and Microsoft rid it of its bugs.

SWITCHAR

Internal
MS-DOS 2.0-2.1

Function: Changes the switch character.
Note: SWITCHAR can be used in CONFIG.SYS only.

Format: `SWITCHAR=`*`character`*

Example: `switchar=\`

The character used to separate an operating system command from an optional switch is called the *switch character*. The forward slash (/) is the standard MS-DOS switch character. Users of other operating systems (most notably UNIX) often prefer to be able to use the same switch character regardless of which operating system they are using. MS-DOS 2.0 and 2.1

implement SWITCHAR, a convenient way to change the switch character. The format for the command (which must be used in CONFIG.SYS) is

```
SWITCHAR=character
```

where *character* is the new switch character.

Changing the Switch Character in MS-DOS 3.X, 4.X, and 5.X

SWITCHAR is not implemented in versions of MS-DOS after 2.10. However, changing the switch character is possible in post-2.10 versions. In the following listing, DEBUG is used to create an assembly language program called SWITCHAR.COM. Refer to chapter 15 for details on using DEBUG. The program uses the undocumented MS-DOS function 37H to set the switch character to the character whose ASCII value is stored in the DL register.

```
C:\>debug
-n switchar.com
-a

3A3D:0100 MOV   DL,2F                     ;default switchar
3A3D:0102 CMP   BYTE PTR [0080],00        ;length of command tail
3A3D:0107 JZ    010D                      ;no tail entered
3A3D:0109 MOV   DL,[0082]                 ;tail entered, dl gets ASCII
3A3D:010D MOV   [012E],DL                 ;copy to message string
3A3D:0111 MOV   AX,3701                   ;set switchar
3A3D:0114 INT   21                        ;call MS-DOS
3A3D:0116 MOV   DX,0122                   ;point to message
3A3D:0119 MOV   AH,09                     ;output string function
3A3D:011B INT   21                        ;call MS-DOS
3A3D:011D MOV   AX,4C00                   ;exit function
3A3D:0120 INT   21                        ;call MS-DOS
3A3D:0122 DB    'switchar= ',AF,' /   ',AE,0D,0A,'$'
3A3D:0134
-rcx
:0000
34
-w
Writing 0034 bytes
-q

C:\>
```

Once the program is created, the switch character is changed by entering **switchar *character***. Entering **switchar** with no parameters sets "/" as the switch character.

SWITCHES

Internal
MS-DOS 4.X, 5.X

Function: Disables enhanced keyboard with applications that won't work properly with that keyboard.

Note: SWITCHES is a configuration command that can only be used in CONFIG.SYS.

Format: `SWITCHES=/K`

Example: `switches=/k`

The SWITCHES command is used to control the activity of enhanced keyboards. These newer keyboards have some keys (F11 and F12 function keys, and a set of cursor keys separate from the number pad) that are not found on the older keyboards. Naturally, the new keys generate scan codes not generated by the older keys. (All keys generate a *make scan code* when pressed and a *break scan code* when released. The make and break scan codes are unique for each key.)

Some application programs are unable to process the scan codes generated by the newer keys. In such cases, these scan codes may confuse the program or even cause the system to crash. This problem can be avoided by placing the command `switches=/k` in CONFIG.SYS. This instructs DOS to simply ignore the scan codes generated by the new keys.

SYS

External
MS-DOS 1X, 2.X, 3.X, 4.X, 5.X

Function: Transfers the system files to a specified disk.

Formats: `SYS d:` (MS-DOS 1.X–5.X)
`SYS [d:] d:` (MS-DOS 4.X, 5.X)

Example: `sys b:`

The MS-DOS system files are two "hidden files" that form an integral part of MS-DOS. The files are described as hidden because you cannot list them with the DIR command. The system files must be contained at a specific location and in a specific order on a disk if you are to use the disk for booting. (More information on the system files is given in chapter 10.)

The SYS (SYStem) command is used to transfer the system files to a disk. The disk receiving the files must be either a blank formatted disk, a disk that has been formatted using the command `format d: /s`, or a disk formatted with the command `format d: /b`. If the disk is a blank formatted one, SYS will be able to place the system files at the required location on the disk. If the disk has been formatted using either the /s or the /b switch, the required location will have been allocated for the system files. Otherwise, SYS would be unable to correctly place the files.

When transferring files with SYS, you should use your working copy of the system disk. In the following example, a working copy of the system disk is in drive A. With your disk in place, type **sys** and then type the letter designator of the drive containing the disk that will receive the system files:

```
A:\>sys c:
System transferred
```

The MS-DOS 4.X and 5.X version of SYS enables you to specify the source drive that contains the system files. For example, if drive A is the current drive and you wish to copy the system files from drive C to drive A, you could enter the following command:

```
sys c: a:
```

MS-DOS assumes that the system files are on the current drive if no drive letter is specified for the source.

Also in DOS 4.X and 5.X, the system files can be copied to the destination disk as long as there are two free root directory entries and enough space on the disk to hold the files. The disk need not have old system files or have been formatted with `format /b`.

TIME

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Functions: Displays the current time known to MS-DOS. Changes the time known to MS-DOS.

Format: `TIME [hh:mm:ss.xx]`

Examples:
```
time
time 11:30
```

The TIME command is used to display and set the current time known to MS-DOS. When a file is created or modified, the current time known to the system is stored in the file directory. This information, along with the current date, forms the file's time-date stamp.

To display the time, type **time**. MS-DOS will display the time and ask if you want to change it:

```
C:\>time
Current time is 11:42:23.07
Enter new time:
```

To enter a new time, use the form

hh:*mm*:*ss*.*xx*

where

hh	is a one- or two-digit number from 0–23 (hours),
mm	is a one- or two-digit number from 0–59 (minutes),
ss	is a one- or two-digit number from 0–59 (seconds),
xx	is a one- or two-digit number from 0–99 (hundredths of a second).

With DOS 4.X and 5.X you cab add an **a** or **p** (for am/pm), so that time can be specified using a 12-hour clock as an alternative to using a 24-hour clock.

To leave the current time unchanged, simply press Enter:

```
C:\>time
Current time is 11:42:23.07
Enter new time:      ← you press Enter
```

The current time may be specified in the TIME command:

```
C:\>time 11:59
```

MS-DOS will prompt for another time if an invalid time is entered. Any fields not specified are set to zero. For example, if the time entered is 2:00, the current time is set to 2:00:00.00.

On machines with permanent clocks, the TIME command in MS-DOS 3.3 and later implementations reset the permanent clock's time. Unfortunately, PC-DOS 3.3 and 4.X set only permanent clocks whose memory address is the same as IBM's clock. TIME has no effect on clocks with a different address.

TREE

External
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Displays the directory paths on the specified drive.

Formats: `TREE [d:][/F]` (MS-DOS 2.X-5.X)
`TREE [d:][path][/F][/A]` (MS-DOS 4.X,5.X)

Examples:
```
tree
tree b: /f
```

The TREE command is used to list the directories on a disk. Each directory on the floppy disk or hard disk is listed by its full pathname. Subdirectories are grouped and listed according to the directory in which they exist.

TREE is an external MS-DOS command. This means that a copy of the file TREE.COM must be in a system drive before you can use the TREE command. To use TREE, type **tree** and then type the letter designator of the drive containing the disk to be analyzed. The default drive is assumed if no drive is specified. MS-DOS will list the files in each directory if you include the /f switch in the command.

The MS-DOS 4.X and 5.X versions of TREE provide the /a switch, which directs TREE to use an alternate character in generating its output. The switch is provided for printers that do not support the characters normally used by TREE.

The 4.X version of TREE also enables you to specify a directory path. TREE will list the directory tree starting at the end of that path. If no path is specified, the tree starting with the current directory will be displayed.

TRUENAME

Internal
MS-DOS 4.X and 5.X

Function: Displays the true name of logical drives and directories created with the commands ASSIGN, JOIN, and SUBST.

Formats: `TRUENAME`
`TRUENAME[d:][path][filename]`

Examples:
```
truename
truename e:
```

The MS-DOS commands ASSIGN, JOIN, and SUBST can be used to assign logical names to drive letters and subdirectories. For example, you can use the SUBST command to assign the directory C:\TMP to drive letter E: as follows:

```
C:\BOOKS\DOS>subst e: c:\tmp
```

The effect of the command is to direct all references for drive E to the directory C:\TMP. Thus, while the following command appears to be reading drive E, it is actually reading C:\TMP.

```
C:\BOOKS\DOS>dir e:\

 Volume in drive E is MINI
 Volume Serial Number is 3C23-15F8
 Directory of  E:\


printing.
.            <DIR>      01-07-91   4:50p
..           <DIR>      01-07-91   4:50p
4U4UIKM  4U            5 01-31-91   6:16p
       3 File(s)   36536320 bytes free
```

The display says that the directory E:\ contains a file named 4U4UIKM.4U. In reality, the file resides in C:\TMP, as the MS-DOS 4.X command TRUENAME demonstrates:

```
C:\BOOKS\DOS>truename e:\4u4uikm.4u
C:\TMP\4U4UIKM.4U
C:\BOOKS\DOS>
```

TRUENAME (an implemented but not documented command) can be entered with a drive specifier, path specifier, and/or filename parameters. The command tells you where the drive, path, or file is actually located. As the following example illustrates, if you enter **truename** with no additional parameters, the command will return the true name of the current directory:

```
C:\BOOKS\DOS>e:          ←change to the "E" drive
E:\>truename             ←what is the "E" drive's true name?
C:\TMP          ←the true name
E:\>
```

TYPE

Internal
MS-DOS 1.X, 2.X, 3.X, 4.X, 5.X

Function: Displays the contents of a file.

Format: `TYPE [d:][path]filename[.ext]`

Example: `type b:letter.txt`

The TYPE command is used to display the contents of a file on the screen. TYPE is generally used only with text (ASCII) files. Attempts at displaying binary files can give unexpected results.

To display a file, enter **type** followed by the filespec of the desired file. MS-DOS will read the file into memory and then display it on the screen:

```
C:\>type b:letter.txt
```

The display will scroll off the screen if the file contains more than 23 lines. To suspend the display, press Ctrl-NumLock. Press any key to resume the display.

To obtain a printout of a file, press Ctrl-PrtSc before entering the TYPE command. This key combination tells MS-DOS to "echo" the screen display to the printer.

Wildcard characters cannot be used with TYPE.

UNDELETE

External
MS-DOS 5.X

Function: Restores deleted files.

Format: `UNDELETE [path] [/list] [/dt] [/dos] [/all]`

Examples:
```
undelete /list
undelete /dt
undelete \book /dos
```

When you use the DEL command to delete a file, DOS merely changes the first character in the file's directory entry to a question mark. The file itself remains untouched. It remains out there on the disk, but DOS considers it to be deleted.

For several years utility programs have been available, both commercially and in the public domain, that enable users to retrieve these "deleted" files. Beginning with version 5.0, DOS provides such a utility in the form of the UNDELETE command.

You can use UNDELETE in three ways:

- To list the deleted files that can be recovered
- To recover deleted files using the deletion-tracking file maintained by the MIRROR command
- To recover deleted files using the file directory

Listing Recoverable Files

You can use the /LIST command switch to display a list of files that have been deleted. The following listing is an example of the information displayed by UNDELETE when there is a copy of PCTRACKR.DEL in the root directory. PCTRACKR.DEL is the name of the deletion-tracking file. It is maintained by the MIRROR command. Refer to the discussion of MIRROR for details.

```
C:\>undelete /list
Directory: C:\
File Specs: *.*
   Searching Delete Tracking file....
   Delete Tracking file contains    4 deleted files.
   Of those,    2 files have all clusters available,
                0 files have some clusters available,
                2 files have no clusters available.
   DOS Directory contains    6 deleted files.
   Of those,    2 files may be recovered.
Using the Delete Tracking file.
      QBASIC   INI        175   7/15/90  1:15p  ...A
      AUTOEXEC BAK  545  11/17/90 10:51a  ...A
   ** ERROR    BAK  13   10/13/90  9:10a  ...A
   ** CONFIG   BAK       333  11/17/90 10:54a  ...A

  "*" indicates some clusters of the file are available.
  "**" indicates no clusters of the file are available.
```

The first line of this listing specifies that files deleted from C:\ will be listed. The second line specifies that all deleted files (`*.*`) will be listed. The command entered by the user could have specified another directory and/or another file specifier. For example, the command `UNDELETE \BOOK\*.DOC /LIST` would list all files deleted from the \BOOK directory with an extension of DOC.

The next five lines of the listing specify that (1) the deletion-tracking file is being searched, (2) the tracking file contains four deleted files, and (3) two of the deleted files have all clusters available and two of the files have no clusters available.

Clusters are areas on the disk that store data. Each file is stored in one or more clusters. When DOS marks a file as deleted, it also marks the file's clusters as available for use by other files. Thus, a deleted file remains on the disk until DOS needs some of its clusters to store another file. This is why your chances of recovering a deleted file decrease dramatically as time goes by. The longer you wait, the higher the probability that DOS will use the clusters to store the data from other files.

In this listing, two of the deleted files still have their clusters intact, but the clusters of two other files have been used for other purposes. The first two files are recoverable. The second two are not.

The next two lines in the listing indicate that the DOS directory contains six deleted files and that two of these files may be recovered. This information is discussed in the next section.

The remainder of the listing contains information about the deleted files. Each file's name, size, date and time stamps, and attributes are listed. The date and time of deletion will also be displayed on your computer but are omitted here due to space limitations. Finally, for each file, the listing indicates whether all, some, or none of the files clusters are still available.

If you enter UNDELETE /LIST, and no deletion-tracking file exists, the file directory is used as the source of information on deleted files, as the following illustrates:

```
C:\>undelete /list

Directory: C:\
File Specs: *.*
    Delete Tracking file not found.

    DOS Directory contains    6 deleted files.
    Of those,    2 files may be recovered.

Using the DOS Directory.

    ?ADHDKAM        0    11/18/90  4:55p  ...A
    ?BASIC   INI   175   17/15/90  1:15p  ...A
    ?UTOEXEC BAK   545   11/17/90 10:51a  ...A
 ** ?RROR    BAK   13    10/13/90  9:10a  ...A
    ?FAMAFFJ        0 1  1/17/90   9:12p     ...A
 ** ?ONFIG   BAK   333   11/17/90 10:54a  ...A
"**" indicates the first cluster of the file
     is unavailable and cannot be recovered
     with UNDELETE.
```

This example assumes that PCTRACKR.DEL does not exist in the root directory. In such a case, UNDELETE looks in the file directory for a record of deleted files. Clearly, the information obtained is limited compared to the previous listing. First of all, the first letter of each file name is unknown, because DOS replaced it with a question mark when the file was deleted. More critically, the information on the availability of clusters is severely limited. We'll see later that UNDELETE cannot perform partial recovery of files when it only has the information stored in the file directory to rely on.

The command `UNDELETE /DOS /LIST` forces DOS to ignore the PCTRACKR.DEL file, if it exists, and to use only the information stored in the file directory. You might have to do that if your PCTRACKR.DEL file is badly out of date.

File Recovery Using PCTRACKR.DEL

Enter the command **UNDELETE /DT** when you need to recover deleted files using the information stored in PCTRACKR.DEL. You can specify a directory and/or a file specifier. The current directory and *.* are the defaults.

DOS will prompt you to confirm the recovery of each file. For each confirmation, DOS will recover the file. If only some of the clusters are recoverable, DOS will recover those clusters and put them in a file with the name of the original file.

Partially recovered *text* files may be useful, because it is often possible to use a word processor or text editor to rebuild the original file. Partially recovered *executable* files are very difficult to work with and will obviously behave in an unpredictable manner. Partially recovered executable files probably should be discarded.

No files will be recovered if `UNDELETE /DT` is entered and PCTRACKR.DEL does not exist in the root directory.

File Recovery Using the File Directory

Enter the command **UNDELETE /DOS** to recover deleted files using the information stored in the file directory. You can specify a directory and/or a file specifier. The current directory and *.* are the defaults.

DOS will prompt you to confirm the recovery of each file. For each confirmation, DOS will prompt you to enter the first letter of the file's name. Remember that DOS knows that the file was deleted because the first character in the file's directory entry is a question mark. You have to tell DOS what to replace the question mark with.

An UNDELETE /DOS command will not recover any clusters in a file if the file's first cluster is not available. This is because the first cluster serves as the only link between the file's directory entry and the file's clusters. Therefore, partial file recoveries do not result when UNDELETE /DOS is used.

The relationship between the file directory and clusters is discussed in detail in chapter 10.

Recovering All Files

The command UNDELETE /ALL directs DOS to recover all files in the current directory without prompting you for confirmation. As usual, you can include a directory and/or file specifier in the command.

UNDELETE /ALL will use the PCTRACKR.DEL file if it exists. Otherwise, the file directory is used. When the file directory is used, DOS inserts a "#" as the first character in the filename. If this creates duplicate file names, DOS uses the characters "%&-0123456789" until a unique file name is formed. If these characters are not adequate, DOS uses, in order, the letters of the alphabet.

UNFORMAT

External
MS-DOS 5.X

Functions: Recovers files from a disk that has been inadvertently formatted. Rebuilds a corrupted hard disk partition table.

Formats:
```
UNFORMATd: [/J]
UNFORMATd: [/TEST] [/P] [/L]
UNFORMATd: [/PARTN] [/L]
```

Examples:
```
unformat c:
unformat c: /j
```

The UNFORMAT utility provides you some protection against a hard disk disaster. UNFORMAT enables you to recover files from a disk that has been inadvertently formatted. UNFORMAT also helps you to rebuild the partition table on your hard disk should the table get corrupted. UNFORMAT was first implemented in DOS 5.

The DOS 5 version of the FORMAT command formats a disk "safely" unless the /U (for "unconditional") switch is used. In a safe format, only the disk's boot record, file allocation table (FAT), and root directory are modified. The rest of the disk, which stores the actual files, is untouched. As a result, it is possible to use UNFORMAT to restore the disk to its state prior to the formatting procedure if certain information is available.

Two cautions are necessary before you proceed. First, UNFORMAT cannot recover a disk that has been unconditionally formatted. An unconditional format writes a hexadecimal byte value of F6 to every location on the disk. All files are obliterated. The second caution is that even under the best circumstances UNFORMAT may not restore your disk perfectly. Therefore, the availability of UNFORMAT is by no means justification for getting careless with the FORMAT command.

UNFORMAT uses two different methods to restore a disk's files. The first method is to use information that has been saved in MIRROR.FIL. MIRROR.FIL is a file created by the MIRROR command. MIRROR is another command new to DOS 5 and is discussed earlier in Part 2. The information in MIRROR.FIL remains available after the formatting process (unless it's an unconditional format) and can be used by UNFORMAT.

UNFORMAT uses a second method for restoration if MIRROR was not used prior to the disk being formatted or for some other reason the information stored by MIRROR is not available. In this case, UNFORMAT uses the contents of the disk's FAT and root directory to restore the disk.

The restoration process is much more reliable, and takes less time, when the MIRROR.FIL information is available. UNFORMAT is unable to completely recover fragmented files when it has to rely on the FAT and root directory. A fragmented file has its contents scattered at more than one location on the disk.

Unformatting Using MIRROR Information

In its default state, UNFORMAT assumes the disk contains the MIRROR.FIL information. UNFORMAT searches the disk until the command finds the information. UNFORMAT then ensures that the information is valid. The date on which the information was stored is then displayed. This is the date MIRROR was last used. A prompt is then displayed asking if you want to use the information to restore the disk. The restoration commences if you enter **Y**.

If you enter **N**, UNFORMAT will search for another information file that has been created by MIRROR. Whenever you use MIRROR, the existing information file is saved before the new file is created. Therefore, there are generally two information files available. You will probably want to use the most recent file. One exception might be when you inadvertently use the MIRROR command after formatting the disk.

If you respond that the second file is not to be used, or if no MIRROR information file is found, you will be asked whether the restoration should commence without relying on MIRROR. If you respond **Y**, the information in the FAT and root directory will be used for the restoration. This process is discussed later in this section.

Even though MIRROR.FIL remains on the disk following a format, the file becomes hidden. Use the command **UNFORMAT /J** to determine whether the disk contains MIRROR information. The command also verifies that the information is compatible with the disk's content. `UNFORMAT /J` does not actually restore the disk.

Unformatting Without MIRROR Information

When there is no MIRROR information available or you direct UNFORMAT not to use the information, UNFORMAT uses the FAT and root directory to restore the disk. Under these conditions UNFORMAT will tell you how many subdirectories it has found to restore. UNFORMAT will also prompt you when it encounters a fragmented file. A prompt asks whether you want to store a truncated portion or delete the entire file.

The /P, /L, and /TEST switches direct UNFORMAT to restore the disk without using the MIRROR information. The /P switch directs all output (such as the subdirectories found and the truncated files encountered) to the printer.

The /L switch lists every file found by UNFORMAT, not just the ones that appear to be fragmented.

The /TEST switch displays the subdirectories and files found by UNFORMAT, but actual disk restoration does not take place. YOU can use the /TEST switch to see what effect UNFORMAT will have.

Partition Table Restoration

Each hard disk contains a disk partition table. This table contains information that the operating system must have in order to use the disk. The DOS FDISK utility is used to create or modify the disk partition table.

Occasionally, the partition table becomes corrupted. When this happens, the disk is not usable and DOS displays the following message: `Invalid drive specification`. You could use FDISK to reinitialize the partition table. Unfortunately, this action destroys any information stored on the disk.

The MIRROR and UNFORMAT commands provide a much more acceptable alternative. *Before* the partition table gets corrupted, use the command **MIRROR /PARTN** to save a copy of the table on a floppy disk. Then, should the need ever arise, you can use the command UNFORMAT /PARTN, along with the information previously stored on the floppy disk, to restore the partition table.

UNFORMAT cannot help you to restore a partition table unless you have previously saved a copy of the table with MIRROR. Therefore, it is good practice to save a copy of the partition table on a floppy disk whenever FDISK is used.

When you enter the command **UNFORMAT /PARTN /L** information from the current drive's partition table is displayed. Here is an example:

```
C:\>unformat /partn /l

Hard Disk Partition Table display.

Drive # 80h has 976 cylinders, 5 heads, 17 sectors (from Bios).

The following table is from cylinder 0, head 0, sector 1:
                Total_size        Start_partition    End_partition
    Type        Bytes  Sectors     Cyl Head Sector   Cyl Head Sector
Rel#
---------    ---------------   --------------   ---------------
HUGE  Boot     40M     82943      0    1    1       975    4    17  17

C:\>
```

The information displayed assumes each disk sector is 512 bytes. `UNFORMAT /PARTN /L` only displays this information. It does not perform any restoration on a disk's files or partition table.

VER

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Displays the MS-DOS version number.

Format: `VER`

Example: `ver`

The VER command tells you the version of MS-DOS that you are currently using. Simply type **ver** if you want MS-DOS to display the version number of MS-DOS that you are working with:

```
C:\>ver
MS-DOS Version   3.30
```

VERIFY

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Turns the write-verify switch on or off.

Format: `VERIFY [ON|OFF]`

Examples:
```
verify
verify on
verify off
```

The VERIFY command is used to turn MS-DOS's write-verify operation on or off. When VERIFY is on, MS-DOS performs a series of checks following each disk-write operation to verify that the data just written can be read without error. During verification, the system will run more slowly. This command serves the same purpose as the /v switch in the COPY command.

To turn VERIFY on, type **verify on**. To toggle VERIFY off, type **verify off**. The current VERIFY state is displayed when you enter **VERIFY** with no parameters:

```
C:\>verify
VERIFY is on
```

VOL

Internal
MS-DOS 2.X, 3.X, 4.X, 5.X

Function: Displays the volume label of the disk in the specified drive.

Format: `VOL [d:]`

Examples:
```
vol
vol b:
```

The VOL (VOLume) command is used to display the volume label of the disk in the specified drive. Simply type **vol** followed by the letter designator of the desired drive. The default is assumed if you do not specify a drive.

```
C:\>vol
Volume in drive C is MS-DOS_BIBLE
```

The DOS 4 and DOS 5 versions of VOL also display the disk's serial number if one exists.

XCOPY

External
MS-DOS 3.2, 3.3, 4.X, 5.X

Function: Provides enhanced file copying capability.

Format: `XCOPY[d:][path]filename[.ext][d:][path][filename][.ext][/A] [/D:mm-dd-yy][/E][/M][/P][/S][/V][/W]`

Example: `xcopy *.* a: /e /s /a`

XCOPY is a greatly enhanced version of the COPY command. It enables you to (1) selectively copy files that have their archive attributes set (see ATTRIB), (2) selectively copy files according to their date stamp, and (3) copy files located in the subdirectories of the specified directory. The following examples demonstrate that XCOPY can also be much faster than COPY. Figure 3 shows the file structure used in the examples.

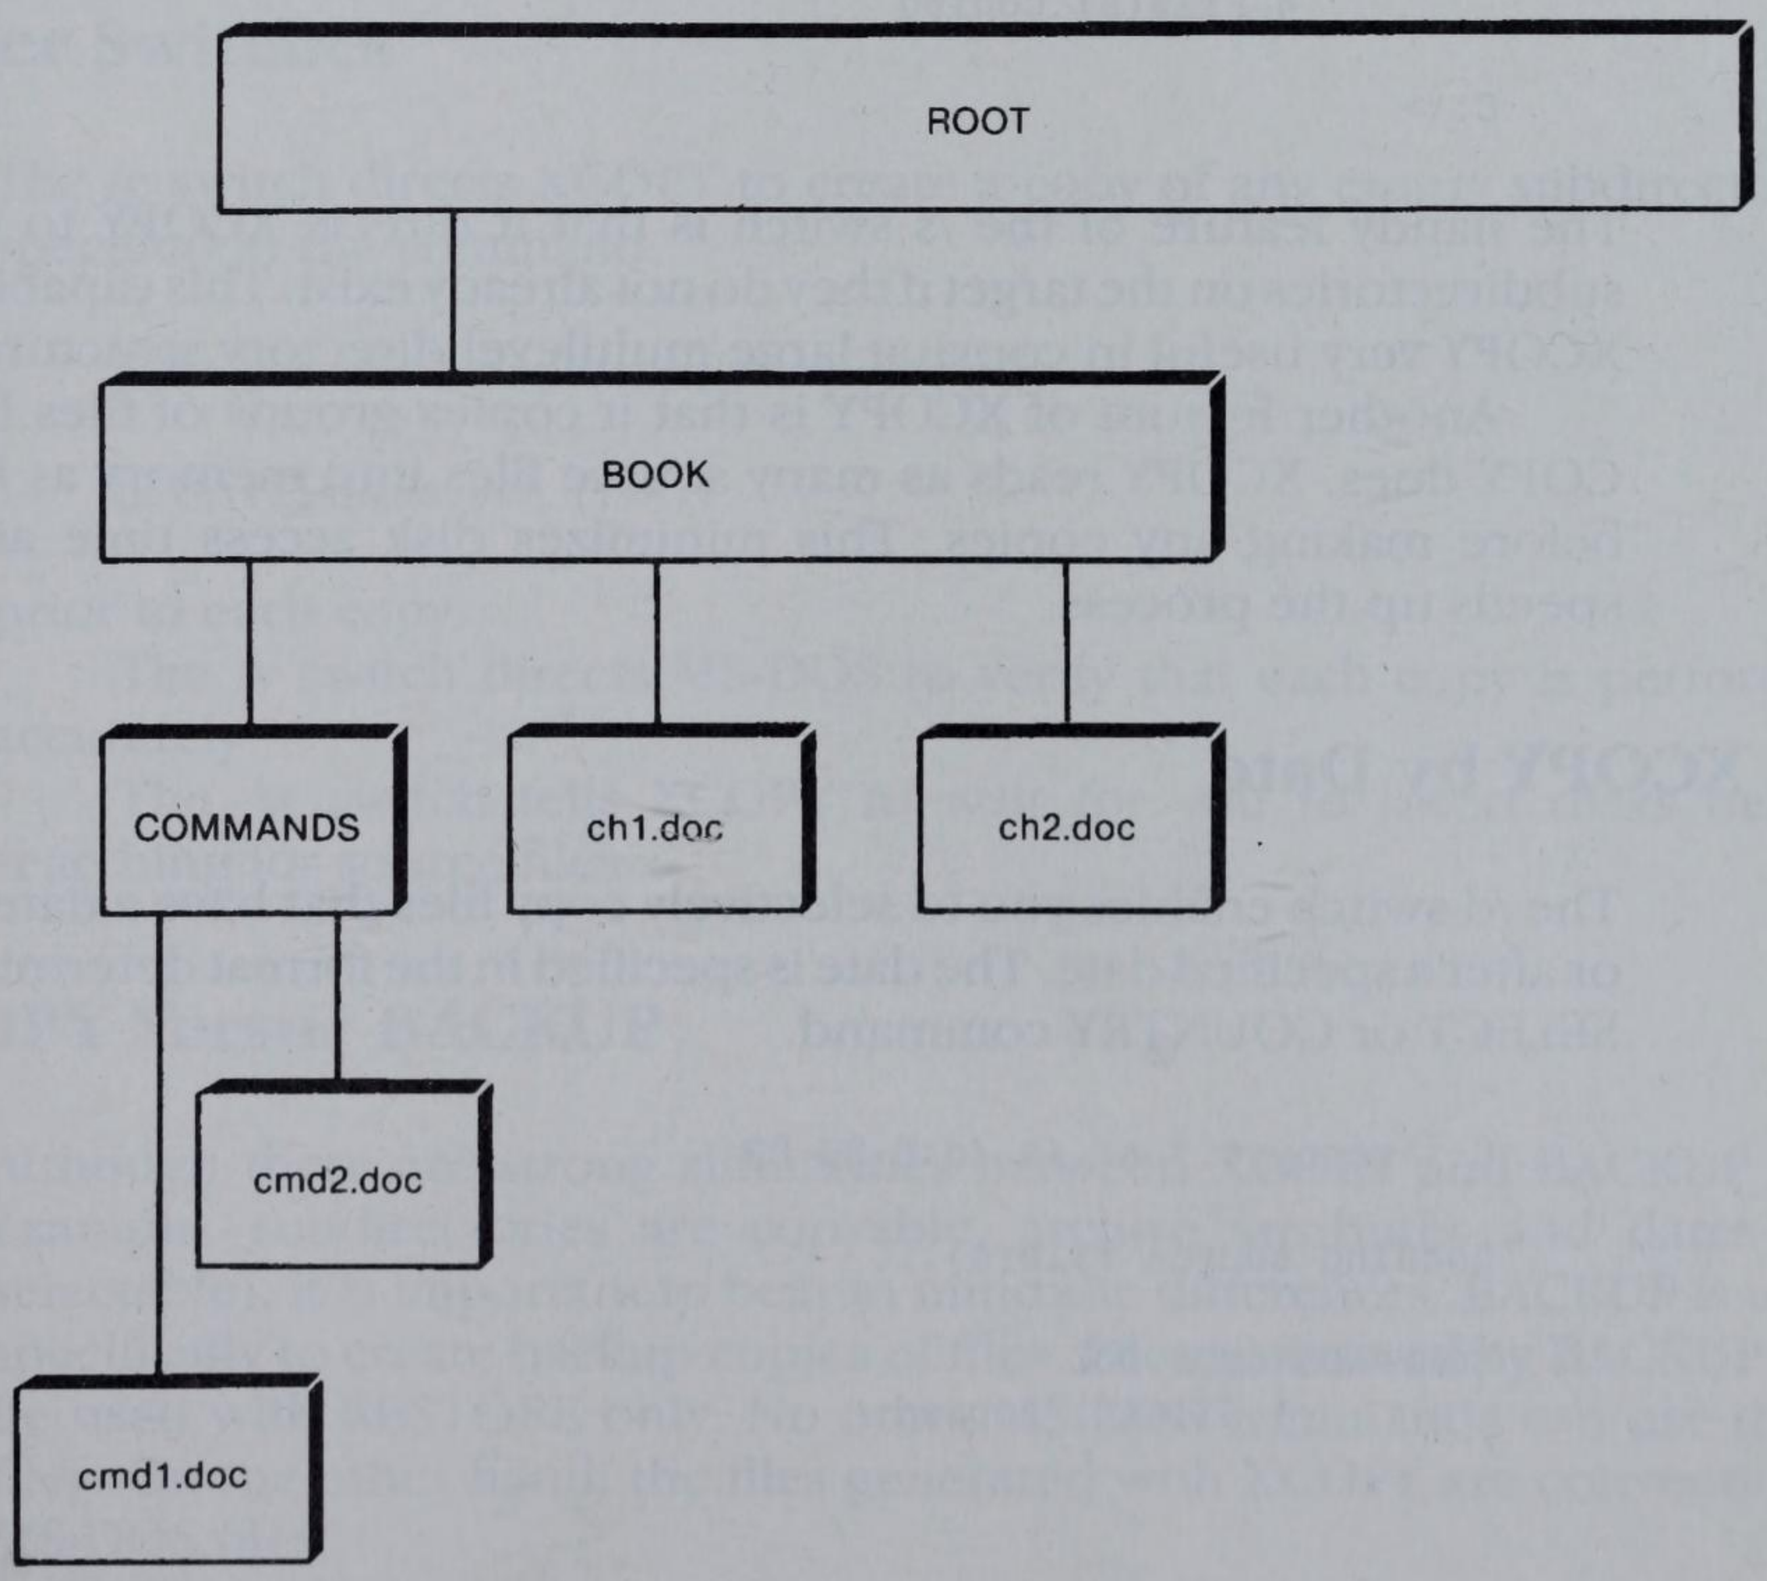

Figure 3. File structure for XCOPY examples.

XCOPY for Copying Subdirectories

Assume that \BOOK is the current directory on drive C and that \COMMANDS is a subdirectory in \BOOK. A major limitation of COPY is that the contents of \BOOK and the contents of \COMMANDS cannot be copied with a single invocation of COPY. The /s switch provides XCOPY with the ability to copy all files in all subdirectories below the specified source directory. The specified source directory in this example is the default BOOK. Remember that because XCOPY is an external command, MS-DOS must be able to read the command from disk before execution. (Internal and external commands are discussed in the beginning of Part 2.)

```
C:\>xcopy *.* a: /s

Reading source file(s)...
CH1.DOC
CH2.DOC
COMMANDS\CMD1.DOC
COMMANDS\CMD2.DOC
        4 File(s) copied

C:\>
```

The handy feature of the /s switch is that it directs XCOPY to create the subdirectories on the target if they do not already exist. This capability makes XCOPY very useful in copying large multilevel directory structures.

Another feature of XCOPY is that it copies groups of files faster than COPY does. XCOPY reads as many source files into memory as is possible before making any copies. This minimizes disk access time and greatly speeds up the process.

XCOPY by Date

The /d switch enables you to selectively copy files that have a date stamp on or after a specified date. The date is specified in the format determined by the SELECT or COUNTRY command.

```
C:\>xcopy *.* a: /s /d:6-29-89

Reading source file(s)...

COMMANDS\CMD2.DOC
        1 File(s) copied
```

XCOPYing Archived Files

XCOPY can be used to selectively copy files that have their archive attributes set (see ATTRIB for a discussion of archive attributes). The /a switch directs XCOPY to copy a file if the archive attribute is set, leaving the attribute unchanged. The /m switch directs XCOPY to copy a file if the archive attribute is set, clearing the attribute in the process. The batch file WRITE.BAT, discussed in chapter 4, uses the command `xcopy /m`.

The /m switch was used daily in the writing of this book. At the end of each day, I would enter the following command:

```
xcopy *.doc a: /m
```

Because all of the files I worked on that day had their archive attribute set, I simply used this one command to copy an entire day's work. Equally neat is that files not worked on were not copied. Also, because the /m flag cleared the archive bit, the files wouldn't be copied until I worked on them again.

Other Switches

The /e switch directs XCOPY to create a copy of any empty subdirectories specified in the command.

The /p switch produces the prompt:

```
path\filename.ext (Y/N)?
```

prior to each copy.

The /v switch directs MS-DOS to verify that each copy is performed accurately.

The /w switch tells XCOPY to wait for you to insert disks before searching for source files.

XCOPY Versus BACKUP

Although there are strong similarities between XCOPY and BACKUP (for example, subdirectories are copyable, archive attributes and dates are selectable), it is important to bear in mind the differences. BACKUP is used specifically to create backup copies of files. Files generated by BACKUP can be used with RESTORE only. No other MS-DOS commands can use these files. On the other hand, the files generated with XCOPY are conventional MS-DOS files.

PART

3

Appendixes

A MS-DOS Interrupts and Function Calls
B Some Undocumented Features of MS-DOS
C Practical Batch Files
D Code Pages and Code Page Switching
E The Edlin Text Editor
F An Assembly Language Primer
G ASCII Cross-Reference Tables

APPENDIX

A

MS-DOS Interrrupts and Function Calls

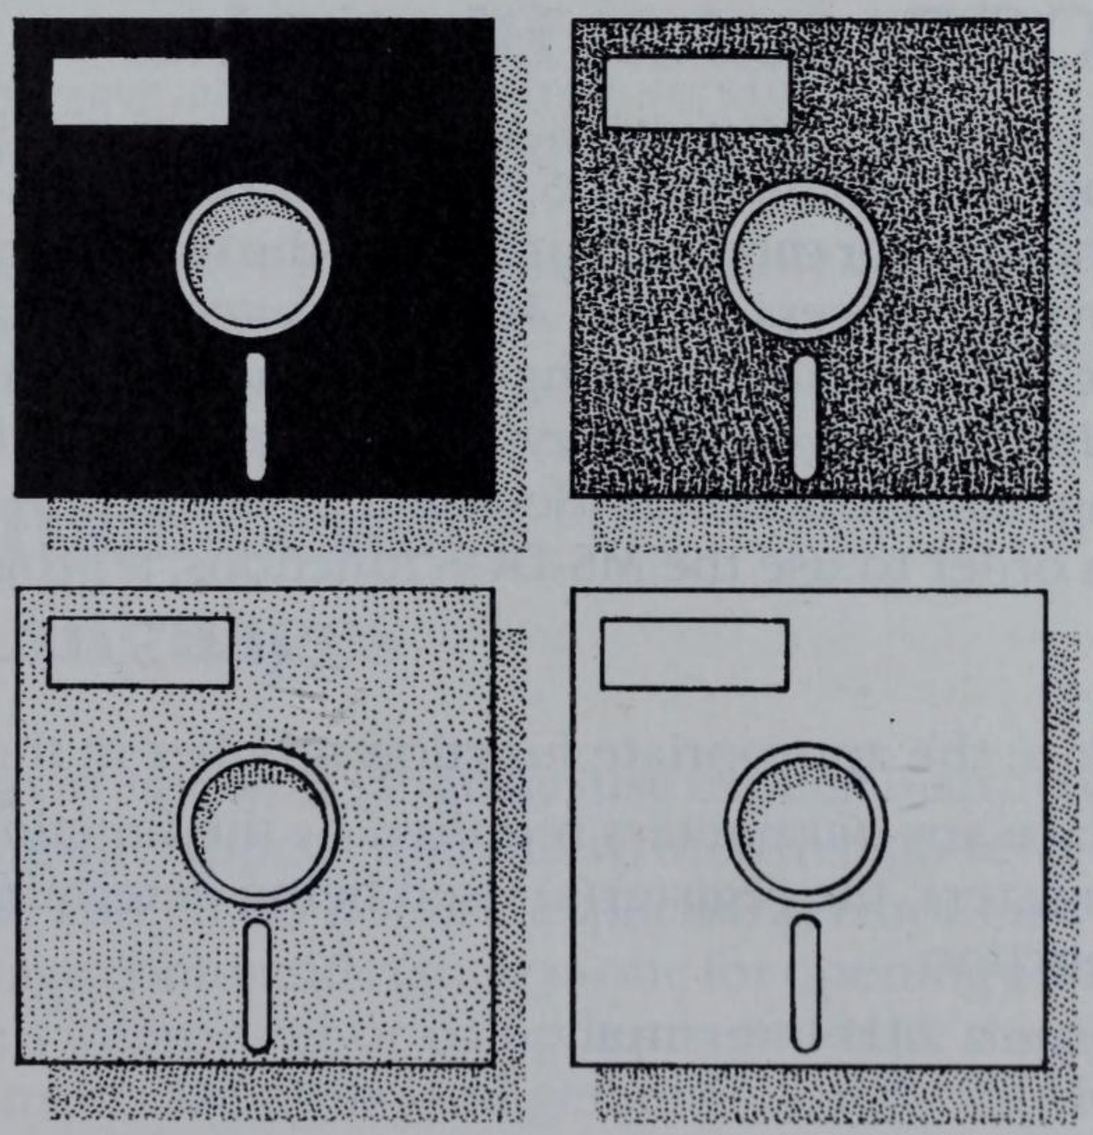

What Is an Interrupt?

An *interrupt (int)* is a signal, generated by either hardware or software, that alerts the central processing unit (CPU) that some function needs to be carried out. For example, each time a key is pressed, the keyboard hardware generates an interrupt that tells the CPU that data was entered from the keyboard.

Each interrupt is assigned a unique number (for example, the keyboard interrupt is "9") that the CPU uses to determine which *interrupt handler* must be used to process the interrupt. By convention, interrupt numbers are expressed in hexadecimal format. See chapter 13 for more information on interrupts, interrupt handlers, and CPU registers.

MS-DOS reserves for its own use interrupts 20H through 2FH (table A-1). This means that programs designed to be portable across different implementations of MS-DOS should use interrupts 20H through 2FH only to perform specific tasks defined by the operating system. The most frequently used MS-DOS interrupt is interrupt 21H, the MS-DOS function dispatcher (table A-2).

The MS-DOS Function Dispatcher

Interrupt 21H is the *MS-DOS function dispatcher*. The function dispatcher is responsible for carrying out most of the work done by MS-DOS. It does this by providing access to the *MS-DOS functions*. Each function performs a specific task, such as opening a file, sending a string to the display screen, allocating a block of memory, or determining which version of MS-DOS is running. Each function is identified by a function number.

In order to use the MS-DOS functions, a program must perform three tasks:

1. Place the appropriate function number in the CPU's AH register.
2. Place any parameters required by the function in other CPU registers, the register(s) used being determined by the particular function.
3. Issue a 21H interrupt.

When the interrupt is issued, control passes from the program to MS-DOS. The operating system determines which function is to be executed by the number stored in the AH register. Any parameters are read from other CPU registers, after which the requested function is carried out. MS-DOS places any return parameters in specific CPU registers and returns control to

the calling program. The program may then inspect the registers to determine the results of the function call.

Each of the MS-DOS functions is discussed in this appendix. For each function, there is a description of: (1) what the function does, (2) which parameters must be sent to the function and which registers must be used, and (3) which parameters are returned from the function to the calling program and which registers are used.

As an example of using functions, let us consider how an assembly language programmer might set up a program so that it could determine which version of MS-DOS was currently running. MS-DOS function 30H is used to obtain the MS-DOS version number. The description of function 30H in this appendix says that the function returns the minor MS-DOS version in the AH register and the major MS-DOS version in the AL register. In other words, if MS-DOS 3.30 is running, 30 is returned in AH and 3 is returned in AL.

```
                ;Determines the version of MS-DOS running.

                                ;Set up to issue interrupt
mov     ah,30h                  ;Requested service
int     21h                     ;Call MS-DOS function dispatcher
                                ;
                                ;Read parameters returned
mov     minor_num,ah            ;Save minor version number
mov     major_num,al            ;Save major version number
```

Note: Those readers with little or no assembly language experience are referred to appendix E.

Interrupts and High-Level Programming Languages

Programs written in assembly language use explicit instructions (such as `int 21H`) when issuing interrupts. Programs written in high-level languages (such as BASIC, Pascal, and C) do not use explicit interrupt instructions. Rather, high-level language commands (such as one for opening a file) are processed by the language's interpreter or compiler to generate the appropriate "int" instructions. In most cases, this arrangement is satisfactory for the high-level language programmer. The loss of "total machine control" provided by assembly language is offset by the ease of programming provided by the natural language structure of high-level programming languages.

In certain cases, though, it is desirable for the high-level language programmer to be able to issue explicit interrupts. The two programs

contained in this appendix are written in Turbo Pascal and Microsoft C. Both programs use explicit interrupts to illustrate how the MS-DOS functions can be accessed from high-level languages. Before getting to the programs, however, we need to discuss the use of interrupts to access the ROM BIOS.

Accessing the ROM BIOS

The ROM BIOS (read-only memory, basic input output system) forms the interface between MS-DOS and the hardware. Programs also access the ROM BIOS through interrupts. For example, when a program needs to send a character to the display screen, the program may issue a call to the MS-DOS function dispatcher by using interrupt 21H. The dispatcher then accesses the ROM BIOS using interrupt 10H, and the BIOS goes on to display the character. In some cases (generally, increased speed of execution), it is desirable for the program to access the ROM BIOS directly. Program BRK_OFF.C (listing A-2) shows how this is done.

Because the ROM BIOS directly interfaces with the hardware, programs that access the BIOS directly tend to be not as portable as those that access the ROM through MS-DOS. You should refer to your computer system's technical manual for detailed ROM BIOS information.

ENVSIZE.PAS

ENVSIZE.PAS (listing A-1) is a program written in Turbo Pascal. The program counts the number of bytes actually stored in the DOS environment. You may find it useful in measuring how efficiently you are using the space reserved for the environment. The MS-DOS environment is discussed in chapter 11. The discussion of the SHELL command in Part 2 describes how to adjust the environment's size.

ENVSIZE.PAS uses the function `MsDos()`, a predefined Turbo Pascal function that can be used to access the MS-DOS function dispatcher. `MsDos()` takes as a parameter a Pascal record of type `registers`, which contains 10 integers. When `MsDos()` is called by the program, the function takes the first integer from the parameter record and places it in the AX register. The function then takes the second integer from the parameter record and places it in the BX register, and so on, for each of the 10 integers (see listing A-1, lines 8–10). `MsDos()` then goes on to call the appropriate function. On return from the function, `MsDos()` takes the value stored in the AX register and places it in the first integer of the parameter record. The BX value is placed in the second integer of the parameter record, and so on. In this program, `dosreg` is declared as a variable of type `registers`.

The body of the program begins (line 73) by calling procedure `vernum`, which will return the major number of the version of MS-DOS being used. Line 19 sets the AX field of `dosregs` to `$3000` (Turbo Pascal denotes hexadecimal numbers by a leading "$" rather than a trailing "H"). The effect of line 19 is to place a value of 30H in the AH register and a value of `00H` in the AL register. This establishes the conditions for a call to function 30H.

Line 20 is a call to the MS-DOS function dispatcher (interrupt 21H) with parameters passed in `dosreg`. On return from the function dispatcher, the major MS-DOS version number is stored in the AL register. Line 21 uses the Turbo function `Lo()` to assign the value in AL (the low byte in `dosreg.ax`) to `vernum`. The major version number is then returned to the main program module, which displays a message and terminates if `vernum` is less than 3.

The procedure `get_envaddr` uses MS-DOS function 62H to obtain the segment address of the program segment prefix and assigns the address to the variable `psp_seg` (lines 32–34). Procedure `vernum` must be called prior to calling `get_envaddr` since service function 62H is not implemented in versions of MS-DOS prior to 3.00.

Listing A-1. ENVSIZE.PAS.

```
 1 program EnvSize;
 2
 3 {This program determines the size of its MS-DOS environment.
 4 The program uses service function 62H. Therefore, MS-DOS 3.0 or
 5 later is required.}
 6
 7 type
 8     registers = record
 9                 ax,bx,cx,dx,bp,si,di,ds,es,flags: integer;
10                 end;
11 var
12     dosreg:    registers;
13    env_seg:        integer; {segment address of environment}
14
15
16 {Returns the version of MS-DOS being used.}
17 function vernum : integer;
18 begin
19     dosreg.ax:= $3000;       {set AH to 30H}
20     MsDos(dosreg);           {call MS-DOS}
21     vernum:= Lo(dosreg.ax); {major version number in AL}
22 end;
23
24
25 {Obtains segment address of PSP using service function 62H.
26 Reads segment address of environment at psp:002CH.}
27
28 procedure get_envaddr;
29 var
```

continues

Listing A-1. continued

```
30      psp_seg : integer;
31  begin
32      dosreg.ax := $6200;
33      MsDos(dosreg);
34      psp_seg := dosreg.bx;
35      env_seg := MemW[psp_seg:$002C];
36  end;
37
38
39  {Returns the number of byte characters stored in the MS-DOS
40  environment. env_seg is global and contains environment's
41  segment address.}
42
43  function get_size : integer;
44  var
45      count :  integer;   {counts characters in environment}
46      firstZero,secondZero : boolean;{flag records if last byte = 00}
47      env_ptr :  ^Byte;              {environment pointer}
48  begin
49      env_ptr := Ptr(env_seg,$0);    {start of environment}
50      count := 0;
51      firstZero := false;
52      secondZero := false;
53
54      while secondZero = false do    {read environment}
55      begin
56      env_ptr := Ptr(env_seg,count); {point to next byte}
57      count := count + 1;
58
59      if env_ptr^ = 0 then           {byte of 00 read}
60      begin
61           if firstZero = true then  {2 consecutive 00s}
62           secondZero := true
63           else firstZero := true    {only 1 byte of 00 read}
64       end
65       else firstZero := false;      {00 byte not read}
66    end;
67
68     get_size := count;
69  end;
70
71
72
73  begin
74      if vernum < 3 then
75            writeln('MS-DOS 3.0 or later required.')
76      else begin
77            get_envaddr;
78            writeln('Environment Size: ',get_size,' bytes');
79      end;
80  end.
```

ENVSIZE.PAS will run under MS-DOS 2.1, and subsequent versions, with a few minor modifications. Change line 32 to

```
dosreg.ax := $5100
```

The result is that MS-DOS now calls undocumented function 51H, which also returns the PSP's segment address in BX. The other change (which is left to the reader) is to have the program check to make sure that MS-DOS version 2.1 or greater is running prior to calling the procedure

```
get_envaddr
```

MS-DOS function 51H is used in the program PSPEEP.PAS, which is presented in chapter 11.

Line 35 uses the predefined array `MemW` to assign the segment address of the MS-DOS environment to the variable `env_seg`. The value of `MemW[psp_seg:$002C]` is the value of the word stored at segment address `psp_seg`, offset address 2CH. As discussed in chapter 11, this is the memory location that stores the segment address of the MS-DOS environment.

The function `get_size` initializes a counter and two boolean flags (lines 50–52) before entering a loop (lines 54–65). On entering the loop, `env_ptr` points to the first byte in the MS-DOS environment. Each traversal of the loop increments the variable count and moves `env_ptr` to the next byte in the environment. The loop is exited when two consecutive bytes of zero are read. Two consecutive bytes of zero indicate that the end of the environment's character strings has been reached. On exiting the loop, the variable `count` stores the number of bytes stored in the environment. Note that this is not the storage capacity of the environment, but a count of the number of character bytes actually stored there. The value of count is assigned to `get_size`, returned to the program's main module, and displayed on the screen (line 78).

BRK_OFF.C

BRK_OFF.C (listing A-2), which is written in Microsoft C, uses the MS-DOS functions to capture any Ctrl-C or Ctrl-Break entered on the keyboard. The program also accesses the ROM BIOS to position the cursor on the screen.

Listing A-2. BRK_OFF.C

```
1 /*This program illustrates how the MS-DOS service functions are
2 *accessed using Microsoft C, version 4.0. The program implements
3 *a keyboard routine that captures Ctrl-C.
4 */
5
6 #include  <stdio.h>
7 #include  <dos.h>
8 #define             TRUE          1
9
10 union     REGS      Regs;                /*general registers*/
11 struct    SREGS     Sregs;               /*segment registers*/
12
13 char      message[] = "Ctrl-C disabled, press X to quit";
14
15 int       x_cur, y_cur;
16
17
18 /*Call to ROM BIOS that returns cursor's x coordinate in the
19 *Regs.h.dh register, the y coordinate in the Regs.h.dl register.
20 *These values are saved in global variables x_cur and y_cur.
21 *Prior to call, current page number is stored in Regs.h.bh.
22 */
23
24 void get_cursor_pos()
25 {
26   Regs.h.ah = 0x03;          /*read cursor function*/
27   int86(0_10,&Regs,&Regs); /*call BIOS*/
28   x_cur = Regs.h.dl;
29   y_cur = Regs.h.dh;
30   return;
31 }
32
33
34 /*Calls ROM BIOS to restore cursor position that has been saved in
35  *global variables x_cur and y_cur. Prior to call, Regs.h.bh
36  *contains active page number.
37  */
38
39 void reset_cursor()
40 {
41   Regs.h.ah = 0x02;          /*set cursor function*/
42   Regs.h.dl = x_cur;         /*DL stores x value*/
43   Regs.h.dh = y_cur;         /*DH stores y value*/
44   int86(0_10,&Regs,&Regs);
45   return;
46 }
47
48
49 /*Calls ROM BIOS to display message at bottom of screen. Current
50  *position of cursor is saved prior to displaying message. Cursor
```

```
 *position is restored after message is displayed.
 */

void display_message()
{
  Regs.h.ah = 0x0f;              /*get active page*/
  int86(0_10,&Regs,&Regs);       /*call BIOS*/
  get_cursor_pos();              /*save cursor position*/

  Regs.h.ah 0_02;                /*set cursor function*/
  Regs.h.dh = 0_18;              /*row position*/
  Regs.h.dl = 0_14;              /*column position*/
  int86(0_10,&Regs,&Regs);       /*call BIOS*/
  printf("%s",message);

  reset_cursor();                /*to current position*/
  return;
}


/*Calls DOS service function 02h to display a character on screen
 *at current position of cursor. Prior to call, Regs.h.al contains
 *byte data for character to be displayed.
 */

void echo()
{
  Regs.h.dl = Regs.h.al;
  Regs.h.ah = 0_02;
  intdos(&Regs,&Regs);
  return;
}


/*Calls ROM BIOS, first to get the active page number in Regs.h.bh,
 *then to position cursor at 0,0. Then endless loop captures Ctrl-C.
 *Loop is broken when "X" typed at keyboard. Other characters are
 *echoed to screen.
 */

break_off()
{
  Regs.h.ah = 0x0f;              /*get active page*/
  int86(0_10,&Regs,&Regs);       /*call BIOS*/

  Regs.h.ah = 0_02;              /*position cursor*/
  Regs.h.dl = 0_00;              /*  to 0,0 */
  Regs.h.dh = 0_00;
  int86(0_10,&Regs,&Regs);       /*call BIOS*/

```

continues

Listing A-2. continued

```
101   while (TRUE)                                  /*loop forever*/
102   }
103           Regs.h.ah = 0_07;                     /*input, no echo*/
104           intdos(&Regs,&Regs);                  /*call MS-DOS*/
105
106           if (Regs.h.al = '^C')
107                 display_message();
108           else if (Regs.h.al != 'X')
109           echo();
110           else break;                                /*break from loop*/
111     }
112     return;
113 }
114
115 main()
116 {
117     break_off();
118     exit(0);
119 }
```

The program declares `Regs` and `Sregs` (listing A-2, lines 10–11) to be variables of types `REGS` and `SREGS`, respectively. `REGS` is a predefined Microsoft C data type that contains eight integer fields, each of which corresponds to one of the CPU's general registers. `SREGS` is a predefined Microsoft C data type that contains four integer fields, each of which corresponds to one of the CPU's segment registers. As will be seen, these data structures perform the same role as the `register` variable used in the preceding Turbo Pascal program.

BRK_OFF.C begins (line 117) by calling `break_off()` (line 91). The first portion of `break_off()` positions the cursor at position 0,0 (the upper left corner) on the screen. In order to do this, the program accesses the ROM BIOS two times.

In Microsoft C, ROM BIOS accesses are carried out using the predefined function `int86()`. This function takes three parameters: (1) an integer that specifies an interrupt number, (2) a `REGS`-type data structure that contains parameters to be passed to the ROM BIOS, and (3) a second `REGS`-type data structure that will store parameters returned from the ROM BIOS to the calling program. The ROM BIOS video services are accessed using interrupt 10H. The number of the video function requested is passed in the AH register.

The first ROM BIOS call (line 94) is performed to determine the active display page. Because the ROM BIOS maintains a cursor position for each display page, the program needs to know which page is active before the ROM BIOS can be instructed to position the cursor. The active display page is returned in the BH register by video function 0FH. Accordingly, line 96 sets the AH field of `Regs` to `0902` (02H). Line 94 is a call to the ROM BIOS service

using `int86()`. On return, `Regs.h.bh` contains the active display page number. Note that Microsoft C allows a program to access: (1) the high-order byte stored in a general register, for example `Regs.h.ah`; (2) the low-order byte stored in a general register, for example `Regs.h.al`; and (3) the 2-byte word stored in a general register, for example `Regs.x.ax`.

Lines 96–99 position the cursor at 0,0. This is accomplished by calling video function 02H. Prior to the call, the *x* coordinate for the cursor is placed in the DL register, the *y* coordinate in the DH register. Function 02H also requires that the BH register contain the active display page number. This was accomplished by the previous ROM BIOS call.

Once the cursor is positioned, the program enters an infinite loop, which begins at line 101. The first part of the loop (lines 103–104) uses MS-DOS function 07H to read a character from the keyboard without echoing it to the screen. The MS-DOS functions are accessed using the predefined function `intdos()`, which does not take an interrupt parameter because all of the MS-DOS service functions are accessed via interrupt 21H.

Line 103 places 07H in `Regs.h.ah`. This will tell MS-DOS that function 07H is requested. Once MS-DOS is called (line 104), the operating system will wait until a character is entered at the keyboard. When a character is entered, MS-DOS returns control to the program, and the byte value of the entered character is stored in `Regs.h.al`.

When control returns from MS-DOS to the program (line 106), BRK_OFF.C first checks whether Ctrl-C was entered. Note that the `^C` in line 106 is a single control character. With most word processors, you can enter a literal control code character into text.

If Ctrl-C was entered, line 106 is evaluated as true, and control is passed to `display_message()`. This function starts by repeating the call to ROM BIOS video function 0FH to determine the active display page. With the display page number back in `Regs.h.bh`, `display_message()` calls `get_cursor_pos()`, which uses ROM BIOS video function 03H to determine the position of the cursor. The cursor's coordinates are saved in the global variables `x_cur` and `y_cur` (lines 28–29), and control is returned to `display_message()`.

The function `display_message()` then uses ROM BIOS video service function 02H to position the cursor at row 18H, column 14H (lines 60–63). The C function `printf` is used to display a message saying that Ctrl-C has been disabled. Line 66 then issues a call to `reset_cursor()`, which uses video service function 02H to restore the cursor to the coordinates saved in `x_cur` and `y_cur`. Control is returned to `break_off()`, which repeats the infinite loop and waits for another character to be entered.

All of this happens (very quickly!) if Ctrl-C is pressed. We need to return to the infinite loop to see what happens if some other character is pressed. If, on return from MS-DOS function 07H, line 106 evaluates as false, the program checks whether "X" was entered. If not, the program issues a call to `echo()`. If "X" was entered, the program breaks out of the infinite loop and returns to `main()`, where program execution terminates.

If neither Ctrl-C nor "X" was entered, `break_off()` issues a call to `echo()`. This function uses MS-DOS function 02H to display the character entered. Line 78 copies to `Regs.h.dl` the character returned by the previous call to MS-DOS. Function 02H is then called to display this character, after which control returns to `break_off()`, and the infinite loop is repeated.

The MS-DOS Interrupts

Table A-1. The MS-DOS Interrupts

Interrupt	*Description*
Int 20H	**General program termination.** This interrupt is one of several ways in which a program running under MS-DOS may terminate. The interrupt restores the terminate, Ctrl-Break, and critical error addresses, which are stored in the program's program segment prefix. This interrupt is a carryover from the early days of MS-DOS. Before issuing int 20H, CS must contain the PSP's segment address. Most programmers use MS-DOS function 4CH to terminate because the function can be used to return an ERRORLEVEL value.
Int 21H	**MS-DOS function request.** This interrupt is used to access the MS-DOS function calls, which are discussed in the next section.
Int 22H	**Program termination address.** This interrupt points to the address in memory to which control is passed when a program is terminated. The address is stored in the program segment prefix of the program.
Int 23H	**Ctrl-Break address.** This interrupt points to the address in memory of the routine that takes control when the user presses Ctrl-Break. The address is stored in the program segment prefix of the program.
Int 24H	**Critical error handler.** This interrupt points to the address in memory of the routine that takes control when MS-DOS encounters a critical error. The address is stored in the program segment prefix. Prior to executing this interrupt, MS-DOS places an error code in the lower half of the DI register:

Error Code	*Description of Error*
0	Write-protected disk.
1	Unknown unit.
2	Drive not ready.
3	Unknown command.
4	Data error.
5	Bad request structure length.
6	Seek error.
7	Unknown media type.
8	Sector not found.
9	Printer out of paper.
A	Write fault.
B	Read fault.
C	General failure.

BP:SI will contain the segment:offset address of the device header control block (see chapter 14) that was involved in the critical error.

Int 25H **Absolute disk read.** This interrupt is used to read logical disk sectors into memory. Prior to calling the interrupt, the following registers must be initialized:

AL	Drive number containing the disk to be read (0 = A, 1 = B, and so on).
CX	Number of sectors to be read.
DX	Number of first logical sector to be read.
DS:BX	Segment:offset address of memory location that will receive the data to be read.

This interrupt destroys the contents of all registers except for the segment registers. If the read is successful, the carry flag will be zero on return. The carry flag will equal one on return if the read was not successful. If there is an error, the AL register will contain the MS-DOS error code. Refer to the discussion of int 24H for an interpretation MS-DOS error codes. This interrupt does not pop the status flags on return. The MS-DOS 4 version of int 25H supports a method for accessing sectors on disk partitions that are larger than 32 Mbytes. With this alternative method, the CX register is set to FFFFH (–1) prior to the call. AL contains the drive number and DS:BX points to a 10-byte-long data structure. The first 4 bytes of the data structure contain the starting sector number. The fifth and

continues

Table A-1. continued

Interrupt	*Description*
	sixth bytes contain the number of sectors to read. The final 4 bytes contain a segment:offset address of a data buffer that will store the data that is read.
Int 26H	**Absolute disk write.** This interrupt is used to write data to logical disk sectors. Except that this is a write operation, its description is identical to that for the preceding interrupt 25H. The DOS 4 version of the interrupt supports a method for writing to large DOS partitions. The details are identical as described for reading with int 25H except for the fact that the data buffer contains data that is written to the disk.
Int 27H	**Terminate but stay resident.** This interrupt is used to terminate the execution of a program while keeping the program resident in memory. Prior to executing the interrupt, the DX register must be set to the offset address of the program's end plus 1 byte. This offset is taken relative to the program's program segment prefix. Int 27H restores terminate, Ctrl-C, and critical error vectors. Therefore, it cannot be used to install critical error handlers. Programs that use int 27H are limited in size to 64 Kbytes. The preferred method for terminate and stay resident (under MS-DOS 2.X and subsequent versions) is MS-DOS service function 31H.
Int 28H	Used internally by MS-DOS (see appendix B).
Int 29H–2EH	Reserved for MS-DOS (see appendix B).
Int 2FH	**Multiplex Interrupt.** This interrupt, implemented in MS-DOS 3.0 and later versions, is used to establish a multiplexing interface between two processes. A *process* is any program or command that is running. In *multiplexing*, the CPU runs one process for a period of time, halts the execution of that process and starts a second, halts the second and restarts the first, and so on, until both processes have finished executing. Int 2FH is used in the implementation of the command PRINT, which allows printing to occur in the background while another program is executing in the foreground (see PRINT in Part 2). Each program that runs under multiplexing (such as PRINT) is given a specific *multiplex number*. MS-DOS has reserved multiplex numbers 00–7FH for its own use. PRINT has been given multiplex number 1. Multiplex numbers 80H–FFH are available for use by application programmers. There is no method for assigning a multi-

Interrupt	Description
	plex number to an application and, as is explained subsequently, each application must have a unique multiplex number. Therefore, IBM and Microsoft recommend that programs be written so that multiplex numbers are changeable. As if to emphasize the importance of changeability, MS-DOS assigns multiplex number B7H to a subfunction that determines if APPEND has been installed. IBM recommends that programs written to run under 3.3 and subsequent versions should use multiplex numbers in the range C0H through FFH. Each multiplexing program installs in memory an int 2FH handler. These handlers form a chain, similar to that formed by installable device drivers (see chapter 14). Prior to calling interrupt 2FH, a program places in the AH register the multiplex number of the handler that the program wishes to access. When MS-DOS receives control, the operating system scans the chain of int 2FH handlers until it locates one with a number matching the value stored in AH. MS-DOS passes control to that handler, which is then responsible for servicing the interrupt. Programs issuing int 2FH also place a *function code* in the AL register. The function code communicates to the handler the type of service requested by the caller. All int 2FH handlers are required to service a *get installed state* request (AL = 00) from the caller. In response to this request, a return code is to be placed in AL: AL = 0 Handler not installed; okay to install. AL = 1 Handler not installed; not okay to install. AL = FF Handler installed.
Int 30H–3FH	Reserved for use by MS-DOS.

The MS-DOS Functions

The MS-DOS functions form the heart of the operating system. All of the functions are accessed by placing their function number in the AH register and issuing an interrupt 21H. See chapter 11 for examples of how functions are used in assembly language programming. The programs presented earlier in this appendix demonstrate accessing the functions using Turbo Pascal and Microsoft C.

Some of the DOS functions listed in this appendix were first implemented prior to the release of DOS 2.0. Many of these early functions have been superseded by newer functions. The superseded functions are identified in the appendix. Application programs should not use superseded functions unless they are written specifically to be compatible with DOS 1.X.

The "Reserved" Functions

Several of the functions are described as "reserved for use by MS-DOS." These functions are used by the operating system, but Microsoft and IBM refuse to officially document what the functions do. Thanks to the combined efforts of many determined hackers, the purpose of some of these functions is known. People who use these functions generally refer to them as "undocumented" rather than "reserved." Several of the undocumented functions are used in programs contained in this book. Appendix B describes some undocumented MS-DOS functions.

Error Codes

Many of the functions implemented in MS-DOS 2.X and later versions set the CPU's carry flag and return an error code in the AX register if an error occurs during the call. These same functions clear the carry flag if no error occurs.

Error Code	*Meaning*
01H	Invalid function number.
02H	File not found.
03H	Path not found.
04H	Too many files opened (no handles left).
05H	Access denied.
06H	Invalid handle.
07H	Memory control block destroyed.
08H	Insufficient memory.
09H	Invalid memory block address.
0AH	Invalid environment.
0BH	Invalid format.
0CH	Invalid access code.
0DH	Invalid data.
0EH	Reserved for use by MS-DOS.

Error Code	*Meaning*
0FH	Invalid drive specification.
10H	Attempted to remove current directory.
11H	Not same device.
12H	No more files.

The following error codes are implemented in MS-DOS 3.00 and subsequent versions:

Error Code	*Meaning*
20H	Sharing violation.
21H	Lock violation.
22H	Invalid disk change.
23H	FCB unavailable.
24H	Sharing buffer overflow.
25H–31H	Reserved.
32H	Network request not supported.
33H	Remote computer not listening.
34H	Duplicate name on network.
35H	Network name not found.
36H	Network busy.
37H	Network device does not exist.
38H	Network BIOS command limit exceeded.
39H	Network adapter hardware error.
3AH	Incorrect response from network.
3BH	Unexpected network error.
3CH	Incompatible remote adapter.
3DH	Print queue full.
3EH	Print queue not full.
3FH	Print file deleted (not enough space).
40H	Network name deleted.
41H	Access denied.
42H	Network device type incorrect.
43H	Network name not found.
44H	Network name limit exceeded.

continues

Error Code	*Meaning*
45H	Network BIOS session limit exceeded.
46H	Temporarily paused
47H	Network request not accepted.
48H	Print or disk redirection paused.
49H–4FH	Reserved by MS-DOS.
50H	File already exists.
51H	Reserved.
52H	Cannot make directory entry.
53H	Failure on int 24H.
54H	Too many redirections.
55H	Duplicate redirection.
56H	Invalid password.
57H	Invalid parameter.
58H	Network device fault.

Table A-2. The MS-DOS Functions

MS-DOS Function	*Description*	*Implemented in Versions*
00H	**Program terminate.** Used to terminate program execution. Restores the terminate, Ctrl-Break, and critical error addresses that were stored in the program's program segment prefix. This function is identical to int 20H. Any files that were opened with FCBs should be closed before you use function 00H. Prior to the call, the CS register must contain the PSP's segment address. Therefore, it is generally used in COM programs only.	1, 2, 3, 4, 5 Superseded by function 4CH.
01H	**Read input with echo.** When this function called, MS-DOS waits for a character to be entered at the standard input device. The character is then echoed to the standard output device, and the ASCII code for the character is returned in the AL register. The function must be called twice to read extended ASCII codes (as generated by the function keys).	1, 2, 3, 4, 5 is Superseded by function 3FH.
02H	**Display output.** Before you execute this	1, 2, 3, 4, 5

MS-DOS Function	*Description*	*Implemented in Versions*
	function, an ASCII value is placed in the DL register. When the function is called, the value in DL is sent to the standard output device.	Superseded by function 40H.
03H	**Auxiliary input.** When this function is invoked, MS-DOS waits for a character to be input from the standard auxiliary device. The ASCII value for the character is returned in the AL register.	1, 2, 3, 4, 5 Superseded by function 3FH.
04H	**Auxiliary output.** An ASCII value is placed in the DL register before you invoke this function. The function then sends the value in DL to the standard auxiliary device.	1, 2, 3, 4, 5 Superseded by function 40H.
05H	**Printer output.** An ASCII value is placed in the DL register before you invoke this function. The function then sends the value in DL to the standard printer device.	1, 2, 3, 4, 5 Superseded by function 40H.
06H	**Direct console I/O.** The role of this function depends on the value stored in the DL register when the function is invoked: If DL has a value of FFH, invoking function 06H directs MS-DOS to check whether a character has been entered at the standard input device. If a character has been entered, the zero flag is set to 0 (cleared) and the ASCII value of the character entered is placed in the AL register. If a character has not been entered, the zero flag is set to 1, and a value of 00H is placed in the AL register. If DL has a value other than FFH, the value in DL is sent to the standard output device. This function does not check for Ctrl-Break.	1, 2, 3, 4, 5
07H	**Console input without echo.** This function directs MS-DOS to wait for a character to be entered at the standard input device. The ASCII value of the character is returned in the AL register. This function does not echo the character to the display screen or check for Ctrl-Break.	1, 2, 3, 4, 5
08H	**Read keyboard.** This function is identical to function 07H, except that it checks for Ctrl-Break.	1, 2, 3, 4, 5

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
09H	**Print string.** Before you invoke this function, DS:DX is set to point to the segment:offset address of an ASCII string. The string must end with "$" (ASCII value 24H). Each character in the string (except the "$") is sent to the standard output device when the function is called.	1, 2, 3, 4, 5 Superseded by function 40H.
0AH	**Buffered keyboard input.** This function is used to set up and use an area of memory as a buffer for input from the standard input device. Prior to invoking the function, you must do the following: 1. Set DS:DX to point to the segment:offset address of the first byte in the buffer. 2. Specify the length of the buffer by placing a value in the buffer's first byte. When the function is called, MS-DOS places characters in the buffer as they are entered at the standard input device. The characters are stored beginning at the third byte of the buffer. Characters are stored in the buffer until carriage return (ASCII 0DH) is entered. If the buffer is filled to one less than the maximum, any remaining characters are ignored and the bell sounds until a carriage return is entered. MS-DOS sets the second byte of the buffer to the number of characters entered (not counting carriage return). The buffer can be edited using the MS-DOS editing keys (see chapter 8).	1, 2, 3, 4, 5 Superseded by function 3FH.
0BH	**Check standard input status.** This function returns a value of FFH in the AL register if there are characters available from the standard input device. AL returns with a value of 00H if no characters are available.	1, 2, 3, 4, 5
0CH	**Flush buffer, read standard input device.** Before you invoke this function, a value of 01H, 06H, 08H, or 0AH is placed in the AL register. When the function is called, the standard input device buffer is cleared and the	1, 2, 3, 4, 5

MS-DOS Function	*Description*	*Implemented in Versions*
	MS-DOS function corresponding to the value in the AL register is invoked.	
0DH	**Disk reset.** This function flushes all file buffers. Files that have been modified in size should be closed (functions 10H and 3EH). It is not necessary to flush a file that has been closed.	1, 2, 3, 4, 5
0EH	**Select disk.** This function selects the drive specified in the DL register (0 = A, 1 = B, and so on) as the default. The number of drives in the system is returned in the AL register. If a system has one disk drive, the one drive is counted as two, because MS-DOS considers the system to have two logical disk drives.	1, 2, 3, 4, 5
0FH	**Open file.** Before you invoke this function, DS:DX must be set to point to the segment: offset address of an unopened file control block (FCB). When the function is called, the disk directory is searched for the file named in the FCB. If a match is found in the directory, the function returns a value of 00H in the AL register and the FCB is filled as follows: If the drive code of the FCB (offset 0) was set to default (00H), MS-DOS changes the code to match the actual drive used (1 = A, 2 = B, 3 = C, and so on). The current block field of the FCB (offset 0CH) is set to zero. The record size field of the FCB (offset 0EH) is set to the default value of 80H. The file size (offset 10H), date (offset 14H), and time (offset 16H) fields of the FCB are set according to information stored in the disk directory. You must set the current record field of the FCB (offset 20H) before performing any sequential disk operations. You must set the relative record field of the FCB (offset 21H) before performing any random disk operations.	1, 2, 3, 4, 5 Superseded by function 30H.

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	You may modify the record size field if a file size of 80H bytes is not appropriate. Function 0FH returns a value of FFH in the AL register if no match is made between the file named in the FCB and the entries in the disk directory. (The file control block is discussed in chapter 10.)	
10H	**Close file.** This function must be used to update the disk directory whenever a file has been modified. Prior to invoking this function, DS:DX must point to the segment: offset address of an opened file control block. When the function is called, the current directory on the disk specified in the FCB is searched for the file named in the FCB. If a match is found, the file's entry in the directory is updated according to the minformation in the FCB and a value of 00H is returned in the AL register. A value of FFH is returned in AL if no match is found.	1, 2, 3, 4, 5 Superseded by function 3EH.
11H	**Search for first match.** Before you invoke this function, DS:DX points to an unopened file control block (FCB). When the function is called, MS-DOS searches the current directory of the disk specified in the FCB for the first file-name matching the filename specified in the FCB. The name in FCB may contain the wildcard characters * and ?. A value of FFH is returned in the AL register if no match is found. Otherwise: A value of 00H is returned in the AL register. An unopened FCB is created for the matching file at the disk transfer address (DTA). You may use MS-DOS function 2FH to obtain the current DTA. DS:DX may point to a standard or an extended FCB (see chapter 10). The FCB created at the DTA will be of the same type. If the attribute byte of an extended FCB is set to zero, only normal files that match will be found. If the attribute byte of an extended FCB specifies hidden, system, and/or directory entries, the search will find the specified types of	1, 2, 3, 4, 5 Superseded by function 4EH.

MS-DOS Function	Description	Implemented in Versions
	entries that match, plus all normal files that match. If the attribute specifies volume label, only the volume label entry is returned. (See chapter 10 for a discussion of file attributes.)	
12H	**Search for next match.** After function 11H has been used, this function finds additional directory entries matching the filename in the FCB at DS:DX. This function is used when the filename in the FCB contains wildcards. Before you invoke this function, DS:DX must point to the segment: offset address of the FCB previously used by function 11H. If an additional match is found, function 12H creates an unopened file control block at the disk transfer area and a value of 00H is returned in the AL register. A value of FFH is returned in AL if no further match is found.	1, 2, 3, 4, Superseded by function 4FH.
13H	**Delete file.** Before you invoke this function, DS:DX points to the segment:offset address of an unopened file control block. When the function is called, MS-DOS searches the current directory of the disk specified in the FCB for an entry with a filename matching the one specified in the FCB. If a match is found, the file is deleted from the directory. If the filename in the FCB contains wildcards, all matching files are deleted. A value of 00H is returned in the AL register if any files are deleted. A value of FFH is returned in AL if no match is found.	1, 2, 3, 4, 5 Superseded by function 41H.
14H	**Sequential read.** Before you invoke this function, DS:DX must point to an opened file control block (FCB). The current block (offset 0CH) and current record (offset 20H) fields of the FCB determine a record within the file that is named in the FCB. The size of the record is determined by the record size field (offset 0EH) in the FCB. When the function is called: The specified record is read into memory at the disk transfer address (DTA). The current block and current record fields are incremented to point to the next record.	1, 2, 3, 4, 5 Superseded by function 3FH.

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	The AL register returns a value of 00H if the read was successful. 01H If an end-of-file mark is read, indicating no more data in the file. 02H If there is not enough room at the DTA to read a record. 03H If an end-of-file mark is read, indicating that a partial record was read and padded with zeros. The DTA is set with MS-DOS function 1AH. The current DTA is returned with MS-DOS function 2FH.	
15H	**Sequential write**. Before you invoke this function, DS:DX must point to an opened file control block (FCB). The data to be written begins at the disk transfer address (DTA). The current block (offset 0CH) and current record (offset 20H) fields of the FCB determine a record within the file that is named in the FCB. The size of the record is determined by the record size field (offset 0EH) in the FCB. When the function is called: The specified record is written to the disk. The current block and current record fields are incremented to point to the next record. The AL register returns a value of 00H If the write was successful. 01H If the disk is full and the write has been cancelled. 02H If there is not enough room at the DTA for one record; therefore, the write has been cancelled.	1, 2, 3, 4, 5 Superseded by function 40H.
16H	**Create file.** Before you invoke this function, DS:DX must point to an unopened file control block (FCB). When the function is called, MS-DOS checks the current directory of the drive specified in the FCB for an entry matching the file specified in the FCB. If a matching entry is found:	1, 2, 3, 4, 5 Superseded by function 3CH.

MS-DOS Function	Description	Implemented in Versions
	The data in the existing file is released, making a file of zero length. The open file function (function 0FH) is then called. If no match is found: MS-DOS looks for an empty entry in the current directory. If an empty entry is available, MS-DOS initializes the file to have a length of zero and calls the open file function (function 0FH). A value of 00H is returned in the AL register. A value of FFH is returned in AL if there are no empty entries in the current directory. A hidden file is created by using an extended FCB with the attribute byte set to a value of 02H (see chapter 10).	
17H	**Rename file.** Before you invoke this function, DS:DX must point to the segment:offset address of a "modified" FCB. The FCB contains a drive number and filename beginning offset 00H. The FCB contains a second filename beginning at offset 11H. When the function is called, MS-DOS searches the current directory of the drive specified in the FCB for an entry matching the first filename in the FCB. If a match is found: The filename in the directory is changed to the second filename in the FCB. If ? characters are used in the second filename, the corresponding positions in the original filename are not changed. A value of 00H is returned in the AL register. If no match is found or if an entry is found matching the second filename: A value of FFH is returned in the AL register.	1, 2, 3, 4, 5 Superseded by function 56H.
18H	Reserved for use by MS-DOS. This function is listed as "obsolete" in Microsoft's DOS 5.X Programmer's Reference.	
19H	**Current disk.** This function returns the number of the current default drive in the AL register (0=A, 1=B, and so on).	1, 2, 3, 4, 5

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
1AH	**Set disk transfer address.** This function is used to set the disk transfer address (DTA). Before you invoke this function, DS:DX must point to the segment:offset address of the first byte in the DTA. MS-DOS establishes a default DTA at offset 80H in the program segment prefix if function 1AH is not invoked.	1, 2, 3, 4, 5
1BH	**Allocation table information.** This function returns information about the default drive's file allocation table (FAT). On return: DS:BX points to the segment:offset address of a memory location that stores the first byte in the FAT. DX contains the number of allocation units on the disk in the default drive. AL stores the number of sectors per allocation unit. CX stores the number of bytes in each sector. In MS-DOS 2.0 and subsequent versions, this function \does not return the address of the complete FAT, because the entire FAT is not stored in memory.	1, 2, 3, 4, 5 Superseded by function 36H.
1CH	**Allocation information for specific drive.** This function is identical to function 1BH, except that before you invoke the function, the DL register contains the number of the drive from which the FAT information will be obtained (0=A, 1=B, and so on).	1, 2, 3, 4, 5 Superseded by function 36H.
1DH–1EH	Reserved for use by MS-DOS.	
1FH	**Get pointer to default drive parameter.** This function is similar to function 32H. The difference is that function 1FH is used to obtain information about the default drive. Function 32H can be used to obtain information about any drive. See the discussion of function 32H in this appendix. Function 1FH is implemented in all versions of DOS but documented for the first time in DOS 5.	1, 2, 3, 4, 5
20H	Reserved for use by MS-DOS.	

MS-DOS Function	*Description*	*Implemented in Versions*
21H	**Random read.** Before you invoke this function, DS:DX must point to the segment: offset address of an opened file control block (FCB). The current block (offset 0CH) and current record (offset 20H) fields of the FCB must be set to agree with the relative record field (offset 21H). When the function is called, the record addressed by these fields is read into memory at the disk transfer address. A value is returned in the AL register as follows: 00H Read completed successfully. 01H No data available in file. 02H Not enough room in DTA to read one record; read cancelled. 03H End-of-file mark encountered. A partial record was read and padded with zeros.	1, 2, 3, 4, 5 Superseded by function 3FH.
22H	**Random write.** Before you invoke this function, DS:DX must point to the segment: offset address of an opened file control block (FCB). The current block (offset 0CH) and current record (offset 20H) fields of the FCB must be set to agree with the relative record field (offset 21H). When the function is called, the record addressed by these fields is written from the disk transfer address to the file specified in the FCB. A value is returned in the AL register as follows: 00H Write completed successfully. 01H Disk full. 02H Not enough room in DTA to write one record; write cancelled.	1, 2, 3, 4, 5 Superseded by function 40H.
23H	**File size.** Before you invoke this function, DS:DX is set to point to the segment:offset address of an unopened file control block (FCB). The record size field (offset 0EH) of the FCB must also be set prior to calling this function. When the function is called, MS-DOS searches the current directory of the drive specified in the FCB for a file that matches the filename in the FCB. If a match is found, the relative record size field	1, 2, 3, 4, 5 Superseded by function 42H.

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	(offset 21H) is set to the number of records in the file, and a value of 00H is returned in the AL register. A value of FH is returned in AL if no match is found.	
24H	**Set random record field.** Before you invoke this function, DS:DX must point to the segment:offset address of an opened file control block (FCB). This function sets the relative record field (offset 21H) of the FCB to point to the record indicated by the combination of the current block (offset 0CH) and current record (offset 20H) fields.	1, 2, 3, 4, 5 Superseded by function 42H.
25H	**Set interrupt vector.** This function is used to set the memory location that receives control when a specific interrupt is invoked. Before you invoke this function, DS:DX is set to point to the segment:offset address of the first byte in the interrupt handling routine, and AL contains the number of the specified interrupt.	1, 2, 3, 4, 5
26H	**Create a new program segment prefix.** Before you invoke this function, DX contains the segment address of what will be a new program segment. When the function is called, the first 100H bytes of the current program segment are copied into the first 100H memory locations of the new program segment. Offset 06H in the new segment is updated to contain the size of the new program segment. The addresses for the termination, Ctrl-Break, and critical error routines are stored in the new program segment beginning at offset 0AH. Programs written to run under MS-DOS 2.0 and subsequent versions should use function 4BH instead of this function.	1, 2, 3, 4, 5 Superseded by function 4BH.
27H	**Random block read.** This function is used to read a block of records from a file. Before you invoke the function, DS:DX must point to the segment:offset address of an opened file control block (FCB). CX must contain the number of records to be read. The size of each	1, 2, 3, 4, 5 Superseded by function 42H.

MS-DOS Function	Description	Implemented in Versions
	record must be stored in the record size field (offset 0EH) of the FCB. The read starts with the record specified in the relative record field (offset 21H) of the FCB. The records are read into memory at the disk transfer address (DTA). A value is returned in the AL register as follows: 00H Read completed successfully. 01H End-of-file mark encountered; no data in record. 02H Not enough room in DTA to read one record; read cancelled. 03H End-of-file mark encountered. A partial record was read and padded with zeros. MS-D0S function 1AH is used to set the DTA. MS-DOS function 2FH returns the current DTA.	
28H	**Random block write.** This function is used to write a block of records to a file. Before you invoke the function, DS:DX must point to the segment:offset address of an opened file control block (FCB). CX must contain the number of records to be written. The size of each record must be stored in the record size field (offset 0EH) of the FCB. The write starts with the record specified in the relative record field (offset 21H) of the FCB. The data written is located at the disk transfer address (DTA). If CX equals zero on entry, no records are written, but the file size stored in the directory is adjusted according to the number of records specified by the relative record field. A value is returned in the AL register as follows: 00H Write completed successfully. 01H Disk full. No records written. 02H Not enough room in DTA to hold one record; write cancelled. 03H End-of-file mark encountered. A partial record was read and padded with zeros. MS-D0S function 1AH is used to set the DTA. MS-DOS function 2FH returns the current DTA.	1, 2, 3, 4, 5 Superseded by function 42H.

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
29H	**Parse filename.** This function is used to parse the information contained in a command line of the form `d: filename.ext` so that the information can be stored in a file control block (FCB). Before you invoke this function, DS:SI points to the segment:offset address of the command line, and ES:DI points to the segment: offset address of what will be an unopened FCB. Parsing is controlled by the status of the first 4 bits in the AL register: If bit 0 = 1, then any leading separator characters (see following text) are ignored. If bit 0 = 0, then parsing stops if a leading separator character is encountered. If bit 1 = 1, then the drive number in the FCB is not changed if the command line does not contain a drive number. If bit 1 = 0, then the drive number in the FCB is set to 00H if the command line does not contain a drive number. If bit 2 = 1, then the filename in the FCB is not changed if the command line does not contain a filename. If bit 2 = 0, then the filename in the FCB is set to eight blank characters if the command line does not contain a filename. If bit 3 = 1, then the extension in the FCB is not changed if the command line does not contain an extension. If bit 3 = 0, then the extension in the FCB is set to three blank characters if the command line does not contain an extension. Filename separators are . ; : = + SPACE and TAB. AL returns a value of 01H if either ? or * appears in the filename or extension. AL returns FFH if the drive number is invalid. ES:DI returns the address of the first byte of the FCB. DS:DI points to the first character following the command line that was parsed.	1, 2, 3, 4, 5

MS-DOS Function	*Description*	*Implemented in Versions*
2AH	**Get date.** This function returns the current date stored by MS-DOS. The CX register returns the year. DH returns the month (1 = January, 2 = February, and so on). D returns the day of the month. AL returns the day of the week (0 = Sunday, 1 = Monday, and so on).	1, 2, 3, 4, 5
2BH	**Set date.** This function sets the current date stored by MS-DOS. Before you invoke the function, the CX register stores the year, DH stores the month (1 = January, 2 = February, and so on), and DL stores the day of the month. When the function is called, AL returns a value of 00H if the date entered was valid. AL returns a value of FFH and the function is cancelled if an invalid date is entered. On machines with permanent clocks, the MS-DOS 3.3 and subsequent implementations of function 2BH resets the permanent clock's date. Unfortunately, PC-DOS 3.3 sets only permanent clocks whose memory address is the same as IBM's clock. 2BH has no effect on clocks with a different address.	1, 2, 3, 4, 5
2CH	**Get time.** This function returns the current time stored by MS-DOS. On return, the CH register stores the hours, CL has the minutes, DH has the seconds, and DL has the hundredths of a second.	1, 2, 3, 4, 5
2DH	**Set time.** This function sets the current time stored by MS-DOS. Before you invoke this function, the CH, CL, DH, and DL registers are set, using the format described for function 2CH. AL returns a value of 00H if the time entered was valid; otherwise, the function is cancelled and AL returns FFH. On machines with permanent clocks, the MS-DOS 3.3 and subsequent implementations of function 2DH resets the permanent clock's time. Unfortunately, PC-DOS 3.3 sets only permanent clocks whose memory address is the same as IBM's clock. 2DH has no effect on clocks with a different address.	1, 2, 3, 4, 5
2EH	**Set/reset verify switch.** Before you invoke this function, the AL register must contain either 00H (verify off) or 01H (verify on). Each disk write	1, 2, 3, 4, 5

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	is checked for accuracy when verify is on. The current state of the verify switch can be determined by using MS-DOS function 54H.	
2FH	**Get DTA.** This function returns the segment: offset address of the current disk transfer address (DTA) in ES:BX.	2, 3, 4, 5
30H	**Get DOS version number.** On return, this function stores the major MS-DOS version number in the AL register and the minor version number in the AH register. It can be assumed that a pre-2.00 version of MS-DOS is being used if AL returns a value of zero.	2, 3, 4, 5
31H	**Terminate and stay resident (Keep process).** This function terminates execution of a program and keeps the program resident in memory. Before you invoke the function, the AL register contains an exit code, and the DX register stores the number of paragraphs (16-byte blocks) of memory to be kept by the program. MS-DOS allocates this memory to the program; it will not be used for other purposes unless it is deallocated. There is no 64-Kbyte limit on the amount of memory that may be kept by the terminating program (compare with int 27H). The exit code passed in AL is retrievable with MS-DOS function 4DH.	2, 3, 4, 5
32H	**Get pointer to drive parameter table.** On the call, DL contains a drive number (0 = default, 1 = A, and so on). On return, if AL is set to 00, the drive exists, and DS:BX points to the drive's parameter table. AL returns a value of FFH if the drive does not exist. Function 32H was first documented in DOS 5. The format of the drive parameter table is as follows (offsets are in hexadecimal):	

Offset	*Function*
00	Drive (0 = A, 1 = B, and so on).
01	Unit within drive (0, 1, 2, and so on).
02–03	Bytes per sector.

MS-DOS Function	Description		Implemented in Versions
	04	Sectors per cluster minus 1.	
	05	Number of times to left-shift (multiply by 2) bytes per sector to obtain bytes per cluster.	
	06–07	First sector containing FAT.	
	08	Number of FAT copies.	
	09–0A	Number of root directory entries.	
	0B–0C	First sector of first cluster.	
	0D–0E	Total number of clusters plus 1.	
	0F–10	Number of sectors used by FAT.	
	11–12	Number of first sector in directory.	
	13–16	Offset and segment address of device driver's header.	
	17	Media descriptor byte (see chapter 14).	
	18	00 if the disk has been accessed.	
	19–1C	Offset and segment address of the next drive parameter table; set to FFFF FFFFH is last block in the chain.	
	1D–1E	Last allocated cluster.	
	1F–20	Number of free clusters.	
33H	**Ctrl-Break check or set.** MS-DOS maintains a Ctrl-Break flag that determines when the operating system checks whether Ctrl-Break has been pressed. If the flag is set, checking occurs each time an MS-DOS function is called. If the flag is not set, checking occurs only when input or output is requested. The AL and DL registers control this function. On entry: AL = 00H The function checks the current Ctrl-Break state. AL = 01H The function sets the Ctrl-Break state. If DL = 0, state is set off. If L = 1, state is set on. On return: DL = 00H Ctrl-Break state is off. DL = 01H Ctrl-Break state is on. AL = FFH Invalid value in AL on entry. The MS-DOS 4 version of this function can also be used to obtain the identification number of the drive used to boot the operating system. Prior to the call, the value in AH is set to 5. On return, DL contains the boot drive's ID number (1 = A, 2 = B,		2, 3, 4, 5

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	and so on). The MS-DOS 5.X version of function 33H can be used to determine what version of DOS is running and where DOS is loaded in memory. Prior to the call, AH is set to 6. On return BL contains the major DOS version and BH contains the minor DOS version. Also on return, the lower three bits of DL contain the revision number, and DH contains the "version flag." The fourth bit of the version flag is set to 1 if DOS is running in ROM. The fifth bit of the flag is set to 1 if DOS is running in the high memory area (HMA).	
34H	**Get address to INDOS flag.** On return, the flag's address is stored in ES:BX. Refer to chapter 13 for details. Function 34H is implemented in DOS 2 and subsequent versions. It was first documented in DOS 5.	2, 3, 4, 5
35H	**Get interrupt vector.** This function is used to obtain the memory address of an interrupt handling routine. Before you invoke this function, the interrupt number is placed in the AL register. The function returns the interrupt's segment: offset address in ES:BX.	2, 3, 4, 5
36H	**Get disk free space.** This function is used to obtain disk information. A drive number (0 = default, 1 = A, and so on) is placed in DL before you invoke the function. Information is returned as follows: BX The number of available clusters on the drive. DX The total number of clusters on the drive. CX The number of bytes per sector. AX The number of sectors per cluster. AX will store FFFFH on return if an invalid drive was specified on entry.	2, 3, 4, 5
37H	Reserved for use by MS-DOS (see appendix B).	
38H	**Retrieve or set country-dependent**	2, 3, 4, 5

MS-DOS Function	*Description*	*Implemented in Versions*

information. Country-dependent information includes specifications for a date format, a currency symbol, and a decimal separator. Countries are specified by a country code, which is typically the international telephone prefix for the country. Country-dependent information may be retrieved with the MS-DOS 2.X implementation of this function. Country-dependent information may be retrieved or set with MS-DOS 3.X and subsequent implementations.

Information is retrieved as follows: The AL register contains the code of the desired country. If AL is set to zero, the information for the current country is retrieved. The MS-DOS 2.X implementation of this function can specify country codes only in the range 0–255. In MS-DOS 3.X and subsequent versions, if a value of FFH is placed in AL, a 16-bit country code can be specified in BX. DS:DX is set to point to a memory buffer that will store the returned information. The format of the returned

The format for the information returned in the MS-DOS 3.X and subsequent implementations is as follows:

Offset	*Value*
0–1	Date format. A value of 00 specifies the USA standard (*mm/dd/yy*), 01 specifies the European standard (*dd/mm/yy*), and 02 specifies the Japanese standard (*yy/mm/dd*).
2–5	Null-terminated currency symbol string.
7	ASCII code for thousands separator.
8	Byte of 00.
9	ASCII code for decimal separator.
10	Byte of 00.
11	ASCII code for date separator.
12	Byte of 00.
13	ASCII code for time separator.
14	Byte of 00.

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	15 Currency format. Bit 1 equals the number of spaces between the currency symbol and the value. Bit 0 equals zero if the currency precedes the value. Bit 1 equals 1 if the symbol follows the value.	
	16 Number of digits after decimal in currency.	
	17 Time format. Bit 1 equals zero if 12-hour format. Bit 1 equals 1 if a 24-hour format.	
	18–21 Case map call address (see following text).	
	22 ASCII code for data list separator.	
	23 Byte of 00.	
	24–33 Reserved by MS-DOS.	
	The case map call address is the segment: offset address of a procedure that converts lowercase characters to uppercase. The function is used to set country information by placing a value of FFFFH in DX prior to the call. The function sets the carry flag and returns a value of 02 in AX if the country code is not valid.	
39H	**Create a subdirectory.** Before you invoke this function, DS:DX points to the segment: offset address of an ASCII string that will be the path specifier of the new subdirectory. The string is terminated with a byte of zero. The function sets the carry flag upon return if an error occurs. The AX register contains information about any errors:	2, 3, 4, 5
	AX = 03H The path specifier was not valid or was not terminated with a byte of zero.	
	AX = 05H No room in parent directory for new subdirectory, the subdirectory already exists, or a reserved device name was used in the path specifier.	
3AH	**Remove a subdirectory.** Before you invoke this function, DS:DX points to the segment: offset	2, 3, 4, 5

MS-DOS Function	Description	Implemented in Versions
	address of an ASCII string that is the path specifier of the subdirectory to be deleted. The string must be terminated by a byte of zero. A subdirectory must be empty before it can be deleted. This function cannot be used to remove the current directory. The function sets the carry flag if an error occurs. The AX register contains information about any errors: AX = 03H The path specifier was not valid, was not found, or was not terminated with a byte of zero. AX = 05H The specified subdirectory was not empty, was not a directory, or was the root directory. AX = 16H The specified subdirectory is the current directory.	
3BH	**Change current directory**. Before you invoke this function, DS:DX points to the segment: offset address of an ASCII string that is the path specifier of a subdirectory. The string must be terminated with a byte of zero. The function makes the specified subdirectory the current directory. The function returns a value of 03H in the AX register if the ASCII string is not a valid path specifier or the string is not terminated with a byte of zero. MS-DOS functions 3CH through 46H allow you to use disk files without the necessity of a file control block. When these functions are used, MS-DOS uses a *file handle* to keep track of files. A file handle is a hexadecimal number that MS-DOS places in the AX register when a file is created (function 3CH) or opened (function 3DH). The following handles are predefined by MS-DOS for peripheral devices. Devices do not have to be opened before reading or writing:	2, 3, 4, 5

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	00H Standard input device.	
	01H Standard output device.	
	02H Standard error device.	
	03H Standard auxiliary device.	
	04H Standard printer device.	
3CH	**Create a file.** Before you invoke this function, DS:DX points to the segment:offset of an ASCII string that specifies a drive, path, and filename for a file to be created. The string must be terminated with a byte of zero. The attribute code for the file to be created is placed in the CX register (see function 43H). If the carry flag is not set on return from this function, the AX register contains the file handle. If the specified file did not previously exist, it is created in the appropriate directory. If the file did previously exist, it is truncated to a length of zero. The carry flag is set on return if an error occurred in execution of the function. AX contains information about any errors: AX = 03H The path specified was not valid. AX = 04H The file was created, but there are no file handles available. AX = 05H CX specified a directory or volume ID attribute, or a directory previously existed with the same name.	2, 3, 4, 5
3DH	**Open a file.** Before you invoke this function, DS:DX points to the segment:offset of an ASCII string that specifies a drive, path, and filename of the file to be opened. The string must be terminated with a byte of zero. AL contains an access code that determines the manner in which the file is opened. In MS-DOS 2.X, only the first two bits of AL are significant; the other bits should be set to zero.	2 3, 4, 5

Bit Setting	*Access Mode*
00	read-only
01	write-only
02	read and write

In MS-DOS 3.X, 4.X and 5.X, other bits are used to determine the type of access to the file that other processes and other network users will have:

bit 7	=	0 if file is to be inherited by any child processes.
	=	1 if file is private to parent.
bits 4–6	=	000 if network processes are denied access.
	=	001 if read/write access is denied to network processes.
	=	010 if write access is denied to network processes.
	=	011 if read access is denied to network users.
	=	100 if full access is allowed to network users
bit 3		Reserved (should equal 0).
bits 0–2	=	000 if read access for owner process.
	=	001 if write access for owner process.
	=	010 if read/write access for owner process.

If the carry flag is clear on return, then AX contains the file handle. Any subsequent reference to the file is through the 16-bit file handle. On return, the file's read/write pointer is set to the file's first byte, and the file's record size is set to 1 byte.

If an error occurs in execution of the function, on return the carry flag will be set and the AX register will contain one of the following error codes:

01 Function number invalid (file-sharing required).

02 File not found.

03 Path not found.

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	04 Too many files open; no handle available.	
	05 Access denied.	
	0CH Access code invalid.	
3EH	**Close a file handle.** Before you invoke this function, the BX register contains a file handle that was returned from functions 3CH, 3DH, or 45H. The corresponding file is closed upon return if the carry flag is not set. The function flushes all internal buffers. If an invalid file handle was specified, the carry flag is set and a value of 06H is placed in the AX register on return.	2, 3, 4, 5
3FH	**Read from a file or device.** Before you invoke this function, BX contains a file handle and DS:DX contains the segment:offset address of a buffer in memory. The number of bytes to be read are stored in the CX register. When the function is called, the specified number of bytes are read into the memory buffer. If the carry flag is not set on return, the AX register contains the number of bytes read. If the carry flag has been set, AX stores an error code: AX = 05H The file handle passed in BX was opened in a mode that does not allow reading. AX = 06H The file handle passed is not open.	2, 3, 4, 5
40H	**Write to a file or device.** Before you invoke this function, BX contains a file handle and DS:DX contains the segment:offset address of a buffer in memory. The number of bytes to be written are stored in the CX register. When the function is called, the specified number of bytes are written from the memory buffer. If the carry flag is not set on return, the AX register contains the number of bytes actually written. If the carry flag has been set, AX stores an error code:	2, 3, 4, 5

AX = 05H The file handle passed in BX was opened in a mode that does not allow writing.

AX = 06H The file handle passed is not open.

Note: If on entry CX stores a value of 00H, function 40H will set the file's size to correspond to the current position of the file's read/write pointer.

41H	**Delete a directory entry.** Before you invoke function, DS:DX points to the segment: offset of an ASCII string that specifies a drive, path, and filename of a directory entry to be deleted. The string must be terminated with a byte of zero. The entry has been deleted if the carry flag is not set on return. The AX register stores an error code if the carry flag has been set: AX = 02H File not found. AX = 05H Access denied.	2, 3, 4, 5 this
42H	**Move file pointer.** MS-DOS establishes a "read/write pointer" for each created or opened file by using functions 3CH and 3DH. When a file is created (or opened), the file pointer is set to the first byte in the file. Each time a read or write is made to the file, the file pointer advances according to the number of bytes in the read or write. Function 42H is used to move a file's read/write pointer without making a read or write. Before you invoke this function, the distance the pointer will be moved is stored as a 4-byte number in the CX and DX registers. The most-significant bytes are stored in CX. The file handle is stored in the BX register. The AL register is set to a value that determines the way in which the pointer is moved: AL = 00H The pointer is moved CX:DX bytes from the beginning of the file. AL = 01H The pointer is moved to its current location plus CX:DX. AL = 02H The pointer is moved to the end of the file plus CX:DX.	2, 3, 4, 5

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	If the carry flag is not set on return, the new pointer location is stored as a 4-byte number in the DX and AX registers. The most significant bytes are in DX. If the carry flag is set on return, AX contains an error code: AL = 01H The number passed in AL on entry is not valid. AL = 06H The handle passed in BX is not open.	
43H	**Get/set file's attribute.** A file's attribute is determined by the bit pattern stored in the eleventh byte of the file's directory entry: *Bit File Attribute If Bit Set (Equals 1)* 0 Read-only file. Any attempt to write to such a file will generate an error. 1 Hidden file. Such a file is not listed during a standard directory search. 2 System file. These files are used to boot MS-DOS and perform many other system operations. 3 Volume label. The filename and filename extension in this directory entry form the disk's volume ID label. Each disk may have only one file with this attribute, and the file must be located in the disk's root directory. 4 Subdirectory. Files with this attribute are subdirectories. 5 Archive. This bit is set if a file has been modified but not copied by BACKUP. Function 43H is used to change a file's attribute. Before you invoke this function, DS:DX is set to point to the segment:offset address of an ASCII string that forms a file's path and filename. The string must be terminated by a byte of zero. AL must be set to 00H or 01H: AL = 00H Calling the function returns the byte value of the current attribute.	2, 3, 4, 5

AL = 01H Prior to entry, CX is set to the byte value of the desired attribute. Calling the function changes the attribute of the file specified by the string at DS:DX.

An error condition exists if the carry flag is set on return. Error information is returned in the AL register:

AL = 01H The entry value of AL was not 00H or 01H.

AL = 03H The file specified was not valid, or the ASCII string was not terminated with a byte of zero.

AL = 05H An attempt was made to modify the attribute of a directory or volume ID label.

44H **I/O control for devices (IOCTL).** This function is used to send information to, and receive information from, input/output control channels. The function is also used to determine the input/output status of peripheral devices. A device (or file) is specified by placing a file handle in the BX register. File handles 0000H through 0004H are reserved by MS-DOS for specific peripheral devices (see the list in function 3BH). 2, 3, 4, 5

Function 44H is divided into 16 subfunctions. A subfunction is selected by placing a value of 00H–0FH in AL prior to calling the function.

If an error is encountered, on return the carry flag will be set and AL will contain one of the following error codes:

AL = 01H Invalid subfunction number, or the Ctrl bit was set to zero.

AL = 04H No handle available.

AL = 05H Access denied.

AL = 06H Invalid handle.

AL = 0DH Invalid data.

AL = 0FH Invalid drive number.

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*

Device Information Subfunctions (00H and 01H)

AL = 00H — Get device channel information. This subfunction returns information in the DX register that describes a device control channel. The device channel is specified by the file handle placed in BX. The interpretation of the value returned in DX is described in figure A-1.

AL = 01H — Set device information. This subfunction is used to set the device information of a control channel. The channel is determined by the file handle placed in BX. The information set is determined by a value placed in DX before you call the function.

Control String Subfunctions (02H Through 05H)

These four subfunctions are used to receive command strings from, or send command strings to, a device.

AL = 02H — Read string from device. Before you invoke this subfunction, AL is set to 02H, a file handle is placed in BX, DS:DX points to a buffer that will receive the read, and CX stores the number of bytes to be read.

AL = 03H — Write string to a device. Before you invoke this subfunction, AL is set to 03H, a file handle is placed in BX, DS:DX points to a buffer that contains the string to be written, and CX stores the number of bytes to be written.

AL = 04H Read string from a disk drive. This subfunction is identical to 02H except that a disk drive number (00H = default, 01H = A, and so on) is placed in BL before your program calls the subfunction.

AL = 05H Write string to a disk drive. This subfunction is identical to 03H except that a disk drive number (00H = default, 01H = A, and so on) is placed in BL prior to calling the subfunction.

Input/Output Status Subfunctions (06H and 07H)

These two subfunctions enable you to see whether a device or a file is ready for input or output.

AL = 07H Get output status. This subfunction is identical to 06H except that it checks output status instead of input status.

Other Subfunctions

AL = 08H Test whether block device has changeable media. The function returns zero in AX if the media is removable, one if the media is fixed. This subfunction is implemented in MS-DOS 3.0 and subsequent versions.

AL = 09H Test whether a drive is local or is remotely located on a network. For local drives, the attribute word from the drive's device header is returned in DX. For remote drives, bit 12 in DX is set on return. This subfunction is implemented in MS-DOS 3.1 and subsequent versions.

continues

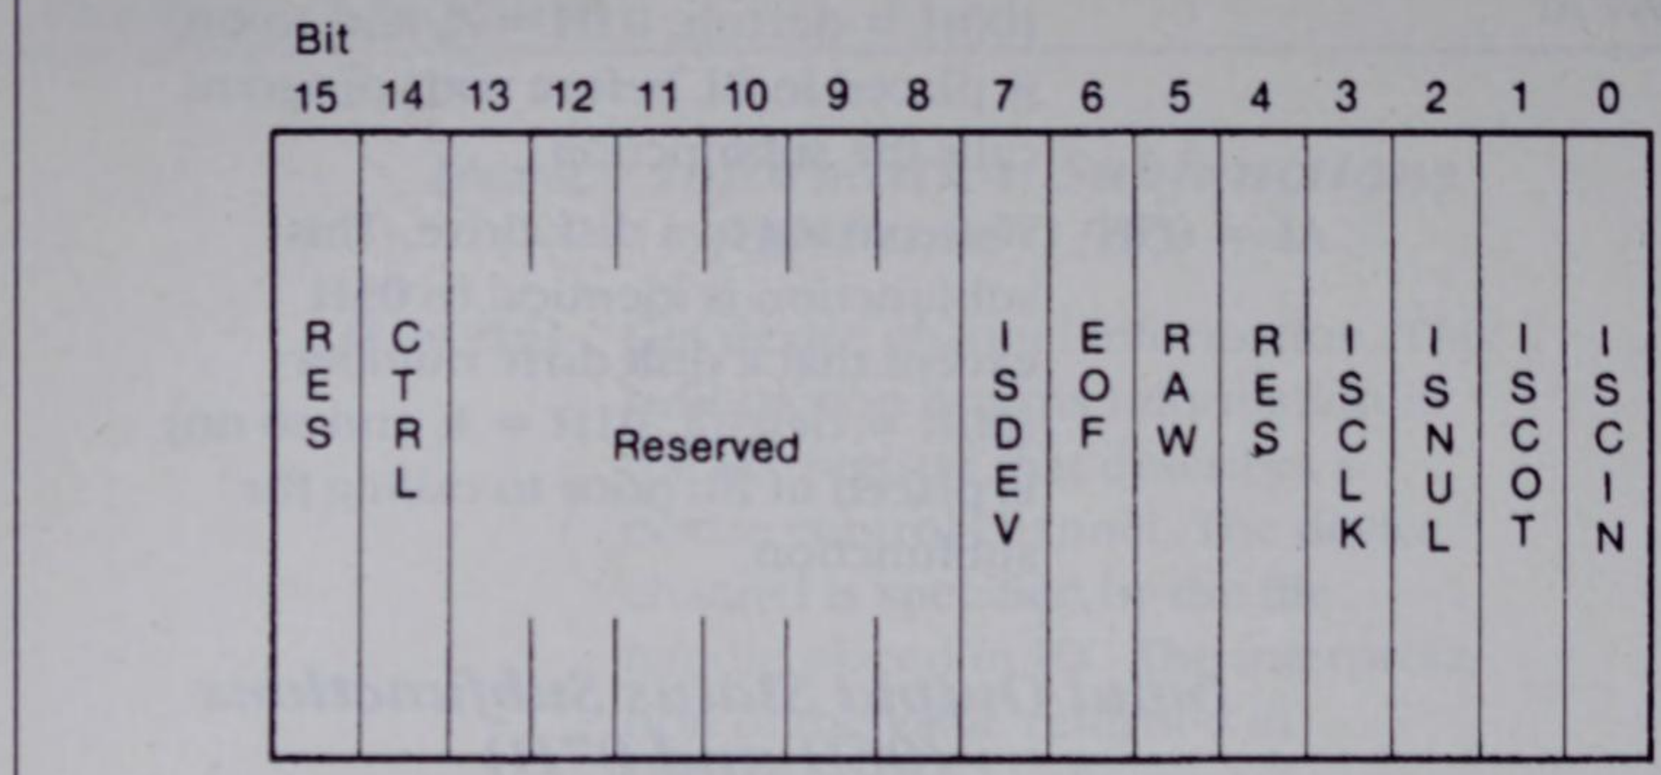

ISDEV=1 if channel is a device. ISDEV=0 if channel is a disk file.

If ISDEV = 1, then:

- EOF = 1 if end of file on input.
- RAW = 1 if operating in binary mode (no check for Ctrl-Z).
- RAW = 0 if operating in ASCII mode (checks for Ctrl-Z as end-of-file mark).
- ISCLK = 1 if the device is the clock device.
- ISNUL = 1 if the device is the null device.
- ISCOT = 1 if the device is the console output.
- ISCIN = 1 if the device is the console input.
- CTRL = 1 if the device can process command strings. This bit cannot be set with function 44H.
- CTRL = 0 if the device cannot process command strings.

If ISDEV = 0, then:

- EOF = 0 if the channel has been written.

Bits 0–5 represent the channel's block device number (0=A, 1=B, etc.).

Figure A-1. Channel information sent (when AL = 00H) and received (when AL = 1H) is determined by the bit pattern of the 2 bytes in the DX register.

AL = 0AH	Test whether a file handle is local or remote. For local handles, the device header's attribute word is returned in DX. For remote handles, bit 15 in DX is set on return. This subfunction is implemented in MS-DOS 3.1 and subsequent versions.
AL = 0BH	Change sharing retry count. This subfunction is used to reset the length of delay between retries and to set the number of retries that can be attempted in carrying out file-sharing operations. Before your program calls this subfunction, CX contains the number of delay loops (the length of the pause), and DX contains the number of retries. The default is delay loops = 1, retries = 3. This subfunction is implemented in MS-DOS 3.0 and subsequent versions.
AL = 0CH	Change code page used by device. This subfunction is used to assign a different code page to a peripheral device. This subfunction is implemented in MS-DOS 3.3 and subsequent versions.
AL = 0DH	Generic IOCTL request. This subfunction is used to perform the following tasks: Get peripheral device parameters. Set peripheral device parameters. Read a track on a logical device. Write a track to a logical device. Format a logical device. For details on the use of this subfunction, refer to the MS-DOS 3.2 (or subsequent) technical reference manual.

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	AL = 0EH Get last logical drive used. This subfunction is used to determine whether a block device has more than one logical device assigned to it. On call, BL contains the block devices drive number (0 = default, 1 = A, and so on). On return, AL contains 0 if there is only one logical device assigned to the block device; otherwise, AL contains the drive number of the last logical drive letter that used the block device. This subfunction is implemented in MS-DOS 3.2 and subsequent versions. The discussion of subfunction 0FH illustrates how subfunction 0EH might be used.	
	AL = 0FH Assign logical device. This function is used to assign a logical device to a block device that is supporting more than one logical device. Before your program calls the function, BL contains the drive number of the logical drive to be assigned (1 = A, 2 = B, and so on). As an example, consider a system with one floppy disk drive. The single drive will be supporting logical drives A and B. Only one logical drive is assigned to the disk drive at a time. If A is assigned to the drive and MS-DOS needs to access B, MS-DOS will display the prompt `Insert diskette for drive B: and strike any key when ready.` An application program can use subfunction 0FH, in conjunction with subfunction 0EH, to suppress this prompt. The following assembly language code illustrates this:	

```
;insert this code prior to accessing drive B

                        ;get logical drive
mov   ah,44h            ;MS-DOS function 44h
mov   al,0eh            ;subfunction 0eh
mov   bl,1              ;drive A
int   21h               ;call MS-DOS
cmp   al,2              ;B already assigned?
je    exit              ;if yes, exit
                        ;set logical drive
mov   ah,44h            ;MS-DOS function 44h
mov   al,0fh            ;subfunction 0fh
mov   bl,2              ;logical drive B int 21
                        ;call MS-DOS
exit:
```

Both subfunctions 0EH and 0FH set the carry flag and place an error code in AL if an error is encountered.

45H **Duplicate a file handle.** Before you invoke this function, BX contains a file handle. On return, AX contains a second file handle for the same file. Both file handles use the original file pointer; moving the pointer using one handle will move the pointer for the other handle. The carry flag is set on return if an error was encountered. AX contains information about any errors: 2, 3, 4, 5

AX = 04H No free file handles available.

AX = 06H The handle passed in BX is not currently open.

46H **Force a duplicate of a handle.** This function is used to assign a specific file handle to an open file. Before you invoke this function, BX contains a file handle and CX contains a second file handle. On return, the CX file handle will refer to the same file as the BX handle. If the CX handle initially referenced another file, that file is first closed. On return, both file handles use the original file pointer; moving the pointer using one handle will move the pointer for the other handle. The carry flag is set on return if an error was encountered. AX contains information about any errors: 2, 3, 4, 5

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	AX = 04H No free file handles available. AX = 06H The handle passed in BX is not currently open.	
47H	**Get current directory.** Before you invoke this function, DS:SI is set to point to the segment:offset address of a 64-byte block of memory and DL contains a drive number (00H = default, 01H = A, and so on). On return, the memory block will contain an ASCII string that is the path specifier of the drive designated by DL. The string will not contain the drive letter and will not begin with a backslash. The string will terminate with a byte of zero. The carry flag is set on return if an invalid drive was specified.	2, 3, 4, 5
48H	**Allocate memory.** This function is used to allocate a block of memory to a process. On entry, BX contains the number of paragraphs (a paragraph is 16 contiguous bytes of memory) to be allocated. On return, AX contains the segment address of the allocated memory block. The carry flag is set on return if an error was encountered. AX contains information about any errors: AX = 07H Memory control blocks destroyed. AX = 08H Allocation failed due to insufficient memory. BX contains the largest block of memory available for allocation.	2, 3, 4, 5
49H	**Free allocated memory.** On entry, ES contains the segment address of a memory block that has been allocated with function 48H. Function 49H returns the memory block to the system pool. The carry flag is set on return if an error was encountered. AX contains information about any errors: AX = 07H Memory control blocks destroyed.	2, 3, 4, 5

	AX = 09H The block passed in ES was not allocated with function 48H.	
4AH	**Modify allocated memory blocks.** On entry, ES contains the segment address of an allocated block of memory and BX contains the number of paragraphs of memory to be contained in the modified block (a paragraph is 16 contiguous bytes). When the function is called, the specified block is adjusted to the size specified in BX. The carry -flag is set on return if an error was encountered. AX contains information about any errors: AX = 07H Memory control blocks destroyed. AX = 08H Modification failed because of insufficient memory. BX contains the largest block of memory available for allocation. AX = 09H The block passed in ES was not allocated with function 48H.	2, 3, 4, 5
4BH	**Load and execute a program.** Through the use of this function, a program can load and execute another program. The original program is called the *parent*; the program that is loaded and executed is called the *child*. MS-DOS commands can be executed from within a program by calling function 4BH and specifying COMMAND.COM (the MS-DOS command processor) as the child. Before you invoke this function, a "function value" is placed in the AL register: AL = 00H Load and execute a program. MS-DOS will construct a program segment prefix for the child, load the program, and execute it. MS-DOS sets the child's terminate and Ctrl-Break addresses to the instruction in the parent that follows the function 4BH call. Register contents are not preserved by this function.	2, 3, 4, 5

continues

Table A-2. continued

MS-DOS Function	*Description*	*Implemented in Versions*
	AL = 01H Load program; do not execute. This subfunction of function 4B is used by DEBUG when it loads a program.	
	AL = 03H Load overlay. MS-DOS does not construct a program segment prefix. The child is loaded at a specified memory location but not executed. Control returns immediately to the parent.	

Before you invoke this function, DS:DX points to the segment:offset address of an ASCII string that contains the drive, path, and filename of the file to be loaded (the child). The string must terminate with a byte of zero.

The third and final requirement prior to calling this function is that ES:BX must point to the segment:offset address of a memory block that contains information required by the function. There is one format for the block used with the load functions (AL = 00H or 01H) and another format for the block used with the overlay function (AL = 03H). In either case, the block must be set up prior to calling the function. The memory block formats are presented in tables A-1 and A-2.

When the parent first receives control, MS-DOS allocates all available memory to it. Before a child can be loaded with function 4BH, some memory must be deallocated with MS-DOS function 4AH. When this function is invoked, MS-DOS uses the loader portion of COMMAND.COM to load the child. The loader is located in the transient portion of the command processor, which is stored in the high end of memory. The carry flag is set by this function if an error is encountered. The AX register contains information about any errors:

AX = 01H The number passed in AL was not 00H, 01H, or 03H.

AX = 02H	The file specified by DS:DX was invalid or not found.
AX = 05H	Access denied.
AX = 08H	There is not enough memory available to load the child process.
AX = 0AH	The environment passed was larger than 32K bytes.
AX = 0BH	The file pointed to by DS:DX contains inconsistent information.

Table A.2 continues on page 613

Table A-3. Load and Execute Memory Block (AL = 00H or 01H)

Address	*Parameter*
ES:BXA	2-byte word that forms the segment address of the "environment" passed to the child. The address is stored with the least-significant byte first. The child will inherit the parent's environment if a value of zero is stored at this address. The *environment* is a series of ASCII strings that are referenced by MS-DOS. The environment always contains a string that begins COMSPEC= followed by the path to COMMAND.COM. MS-DOS references the COMSPEC string when it needs to locate the command processor. Other strings located in the environment include any statements entered with the MS-DOS commands PATH and PROMPT. Each string in the environment is terminated with a byte of zero. The final string in the environment is terminated with 2 bytes of zero. The environment is limited to 32 Kbytes in size. MS-DOS stores the segment address of a program's environment at offset 2CH in the program segment prefix.
ES:BX+2A	4-byte double-word pointer to the segment:offset address of a command line. The offset address is stored at ES:BX+2 (least-significant byte) and ES:BX+3 (most-significant byte). The segment address is stored at ES:BX+4 (least-significant byte) and ES:BX+5 (most-significant byte). The command line will be copied to offset 80H in the child's program segment prefix (PSP).

Table A-3. continued

Address	*Parameter*
	The 128 bytes beginning at offset 80H in the PSP form the "unformatted parameter area." This is the location that MS-DOS commands examine for any information on a command line following the command's name. If the command `edlin sample.txt` is entered, MS-DOS loads EDLIN. EDLIN would then find the string "0B 20 53 41 4D 50 4C 45 2E 54 58 54 0D" beginning at offset 80H in the PSP. The first byte in this string tells MS-DOS the number of characters in the command line. The first character in the command line is a blank (20H). The remaining bytes are the ASCII values of the characters in the string SAMPLE.TXT. The string terminates with a carriage return (0DH).
ES:BX+6A	4-byte double-word pointer to the segment:offset address of a file control block. The offset address is stored at ES:BX+6 (least-significant byte) and ES:BX+7 (most-significant byte). The segment address is stored at ES:BX+8 (least-significant byte) and ES:BX+9 (most-significant byte). The file control block will be copied to offset 5CH in the child's PSP.
ES:BX+10A	4-byte double-word pointer to the segment:offset address of a file control block. The offset address is stored at ES:BX+10 (least-significant byte) and ES:BX+11 (most-significant byte). The segment address is stored at ES:BX+12 (least-significant byte) and ES:BX+13 (most-significant byte). The file control block will be copied to offset 6CH in the child's PSP. Offsets 5CH and 6CH in a program's PSP are the starting addresses of 12-byte "formatted parameter areas." File specifiers contained in the command line at offset 80H are "parsed" and placed in the formatted parameter areas. (Refer to the discussion of MS-DOS function 29H for information on parsing.)
ES:BX+14	A 4-byte double-word pointer to the segment:offset address of the loaded program. This parameter is returned for the "load and do not execute" function only.

ES:BX+18	A 4-byte double-word pointer to the segment:offset address of the loaded program's stack. This parameter is returned for the "load and do not execute" function only.

Table A-4. Overlay Memory Block (AL = 03H)

Address	*Parameter*
ES:BX	A 2-byte word that contains the segment address at which the child will be loaded. The address is stored with the least-significant byte first.
ES:BX+2	A 2-byte word that stores the factor used to modify the memory addresses of any relocatable items in the child. The factor is stored with the least-significant byte first.

Table A-2. continued from page 611

MS-DOS Function	*Description*	*Implemented Versions*
4CH	**Terminate a process.** This function is used to terminate a process passing a return code in the AL register. The return code can be read with an IF ERRORLEVEL within a batch file or by MS-DOS function 4DH. All files are closed by this function.	2, 3, 4, 5
4DH	**Retrieve the return code of a child process**. This function retrieves a return code previously set by a child process. (See the function 4BH for a discussion of parent and child processes.) The function returns the return code set by the child in the AL register. The AH register is set according to the manner in which the child process was terminated: AH = 00H Normal termination. AH = 01H Terminated by Ctrl-Break. AH = 02H Terminated by a critical error. AH = 03H Terminate and stay resident.	2, 3, 4, 5

Table A-2. continued

MS-DOS Function	*Description Versions*	*Implemented*
4EH	**Find first matching file.** This function is used to search a directory for a filename matching one that is specified. The specified filename may contain the wildcard characters ? and *. Before you invoke this function, DS:DX is set to point to the segment:offset address of an ASCII string containing the drive specifier, path specifier, and filename of the specified file. The string must terminate with a byte of zero.An attribute for the file is specified in the CX register (see function 43H). If the function finds a matching file, the current disk transfer address (DTA) is filled as follows:	2, 3, 4, 5

Offset	*Value*
00H–14H	Reserved by MS-DOS for use by MS-DOS function 4FH.
15H	Attribute of file found.
16H–17H	File's time stamp.
18H–19H	File's date stamp.
1AH–1BH	File's size (low word).
1CH–1DH	File's size (high word).
1EH–2AH	Name and extension of file found, followed by a byte of zero.

The carry flag is set on return if any errors are encountered. AX contains information about any errors:

AX = 02H	The string specified by DS:DX was not valid or was not terminated with a byte of zero.
AX = 12H	No matching files found.

4FH	**Find next matching file.** This function is used to find subsequent matching files after function 4EH has been used to find the first match.	2, 3, 4, 5

	Before you invoke the function, the current DTA must contain the information returned by function 4EH. Function 4FH returns any matching files in the manner described for function 4EH. The carry flag is set on return if no subsequent matches are found.	
50H	**Set current process ID.** Prior to the call, BX stores a process ID number. The function designates that process to be current. A program's *ID* is the segment address of the program's PSP. MS-DOS stores the ID of the currently executing program in an internal variable called the current process ID. This function is important in TSRs that use file handles (see chapter 13). Function 50H was first implemented in DOS 2 and first documented in DOS 5.	2, 3, 4, 5
51H	**Get current process ID.** On return, BX stores the current process ID. This function is used, in conjunction with function 50H, in TSRs that use file handles. Function 51H is almost identical to function 62H. The only difference is that 51H is implemented in MS-DOS 2.X. Function 51H was first implemented in DOS 2 and documented in DOS 5.	2, 3, 4, 5
52H–53H	Reserved for use by MS-DOS.	
54H	**Get verify state.** This function returns 00H in the AL register if the verify state is off, 01H in AL if the verify state is on. The verify state can be set with MS-DOS function 2EH.	2, 3, 4, 5
55H	Reserved for use by MS-DOS.	
56H	**Rename a file.** Before you invoke this function, DS:DX points to the segment:offset address of an ASCII string that contains the drive specifier, path specifier, and name of a file to be renamed. ES:DI points to an ASCII string that contains the new path specifier and filename. Both strings must terminate with a byte of zero. This function cannot be used to change the drive specifier. The carry flag is set if an error occurs on execution. The error code is returned in the AX register:	2, 3, 4, 5

continues

AX = 02H File not found.

AX = 03H Path not found.

AX = 05H Access denied.

AX = 11H Not same device.

57H **Get/set a file's time and date stamp.** Before you invoke this function, BX contains a valid file handle. If AL = 00H on entry, then the file's date stamp is returned in DX and the file's time stamp is returned in CX. If AL = 01H on entry, the file's date stamp is set to the value in DX and the file's time stamp is set to the value in CX. A file must be closed before a new time/date stamp can be stored. — 2, 3, 4, 5

The time and date stamps are passed using the format described in function 38H. The high-order byte is stored in DL (or CL), and the low-order byte is stored in DH (or CH).

The carry flag is set if an error occurs. The error code is passed in AX:

AX = 01H The entry value of AL was not 00H or 01H.

AX = 06H The file handle passed in BX is not open.

58H **Get or set allocation strategy.** When a program requests that a block of memory be allocated to it (via function 48H), MS-DOS must search memory to find a block to allocate. There are three "strategies" that MS-DOS can use in selecting a memory block to allocate: — 3, 4, 5

1. *First fit*—beginning at the low end of memory, search until a large enough block is found. Allocate that block.
2. *Best fit*—beginning at the low end of memory, search all of memory, keeping track of each block that is large enough. Allocate the block that is closest in size to the allocation request.
3. *Last fit*—beginning at the high end of memory, search until a large enough block is found. Allocate that block.

Function 58H allows a program to determine what the current allocation strategy is and to set the allocation strategy. To get the allocation strategy, place 00H in AL. The strategy code is returned in AX. To set the allocation strategy, place 01H in AL and one of the strategy codes in BX.

Strategy Codes

00H	First fit
01H	Best fit
02H	Last fit

The function sets the carry flag if an error occurs. An error code of 01H is returned in AX if the function code sent is not valid. The DOS 5 version of function 58H can be used to link a program to the upper memory block (UMB). When the UMB is linked, it can be allocated for use by a program. Prior to the call, set AL to 3 and BX to 1 in order to link to the UMB. Place 0 in BX to unlink the UMB. The carry flag will be set on return if the CONFIG.SYS command DOS=UMB was not executed when DOS was booted. You can determined whether the UMB is linked to a program by setting AL to 2 and calling function 58H. On return, AL equals 1 if the UMB is linked, 0 if the UMB is not linked.

59H **Get extended error information.** Function 59H3, 4, 5 is used to obtain extended information on an error. The error must have occurred on an immediately preceding call to int 24H or to one of MS-DOS functions 2FH–62H. The BX register must be set to 00H before your program calls function 59H.

On return, function 59H places in AX the MS-DOS error code for the preceding error (the int 24H error codes and the MS-DOS function error codes are listed at the beginning of this appendix). Function 59H also returns three types of information: (1) An *error class* is returned in BH. The error class contains some descriptive information about the nature of the error (see the following list). (2) A *recommended action* is returned in BL.

continues

The recommended action (see the following list) can be used by the program in attempting to recover from the error. (3) An *error locus* is returned in CH. The error locus (see the following list) describes the type of hardware that may have been involved in the error.

BH = Error Class

01H	Out of resource (such as storage).
02H	Temporary situation (such as locked file), which should be expected to end.
03H	Authorization problem.
04H	Internal software error.
05H	Hardware failure.
06H	System software problem.
07H	Application program error.
08H	File not found.
09H	Invalid file type.
0AH	File interlocked.
0BH	Wrong disk in drive or bad disk.
0CH	Other error.

BL = Recommended Action

01H	Retry; then prompt user to select ignore or abort.
02H	Retry with delay between tries; then prompt user to ignore or abort.
03H	Get correct information from user.
04H	Abort program in as timely a manner as possible (close files, release locks, and so on).
05H	Abort immediately; system is probably corrupted.
06H	Ignore error.
07H	Retry after user intervention.

CH = Error Locus

	01H Unknown.	
	02H Block device.	
	03H Network related.	
	04H Serial device.	
	05H Memory related.	
5AH	**Create a temporary file.** This function will create a file with a unique name in a specified directory. The function is useful for word processors and other programs that use temporary scratch files. Before your program calls this function, DS:DX points to the segment:offset address of a path specifier string. The string must end with a backslash (\) followed by a byte of zero. On return from the function, DS:DX points to the file specifier for the new file. The file specifier will end with a byte of zero. The carry flag is set if an error occurs. AX holds any error code.	3, 4, 5
	AX *Error*	
	03H Path not found.	
	05H Access denied.	
5BH	**Create new file.** Before your program calls this function, DS:DX contains a pointer to an ASCII file specifier and CX contains a file attribute code. On return, AX contains a file handle that is used to access the new file. This function is identical to function 3CH, except that the function call will fail if the named file already exists. The carry flag is set and AX contains an error code if an error occurs.	3, 4, 5
	AX *Error*	
	03H Path not found.	
	04H No handle available.	
	05H Access denied.	
	50H File exists.	

5CH	**Lock/Unlock file access.** This function is used to temporarily gain exclusive access to a portion of a file. In a network environment, data may be unreliable if simultaneous access to files is not controlled; thus the need for file *locking*. A file is locked by placing 00H in Al prior to the call. Also prior to the call, the handle for the file to be locked is placed in BX, the high-order offset of the region to lock in CX, the low-order offset of the lock region in DX, the high-order of the length of the region to be locked in SI, and the low-order of the length to be locked in DI. On return, the carry flag is set and AX contains an error code if an error occurred. IBM and Microsoft recommend a call to function 59H if an error occurs.	3, 4, 5

AX	*Error*
01H	Function code not valid.
06H	Handle not valid.
21H	All or part of region already locked.

A locked portion of a file is unlocked with the same procedure as that described for locking, with the exception that AH is set to 01H prior to the call. Any region that is locked must be unlocked, or unpredictable results will ensue.

5DH	**Critical error information.** This function has several subfunctions. Subfunctions are selected by placing a subfunction number in AL prior to the call. Subfunction 06H returns the address of the critical flag in DS:SI. The use of this subfunction is demonstrated in chapter 13. Subfunction 0AH sets extended error information. Prior to the call, DS:DX points to three words of error data. Extended error information is retrieved with function 59H. Subfunction 0AH can be used in TSRs that need to preserve and then restore the error information that existed when the TSR was called. Refer to the description of function 59H for further discussion of extended error information. Function 5DH was first implemented in DOS 3 and documented in DOS 5.	3, 4, 5

5E00H **Get machine name.** This function is used only on computers running IBM PC Net or Microsoft Networks. Prior to the call, AX is set to 5E00H and DS:DX points to a memory buffer that will store the computer's network name. 3, 4, 5

On return from the call, DS:DX points to a character string that stores the computer's name; the string is terminated with a byte of zero; CH is set to zero if the computer's name is not defined; and CL returns the NETBIOS name number if CH is nonzero.

The carry flag is set and AX contains an error code if an error occurs.

AX	*Error*
01H	Function code not valid.

5E02H **Set printer setup.** This function is used only on computers running IBM PC Net or Microsoft Networks. It is used to send a control string to a network printer. Once a network user invokes this command for a particular printer on the network, each file that the user subsequently sends to the printer is preceded by the same control string. This allows different users on the network, using the same printer, to each have separate control strings. 3, 4, 5

Before your program calls this function, AX is set to 5E02H, BX is set to the index number in the redirection list of the desired printer (see function 5F03), CX is set to the length of the control string, and DS:SI points to the control string. On return, the carry flag is set and AX contains an error code if an error occurred.

AX	*Error*
01H	Function code not valid.

5E03H **Get printer setup.** This function is used only on computers running IBM PC Net or Microsoft Networks. It returns the printer control string sent with function 5302H. Prior to issuing 3, 4, 5

continues

the call, AX is set to 5E03H, BX is set to the index number in the redirection list (see function 5F03) of the desired printer, and ES:DI points to a buffer that will store the control string. Maximum length of the control string is 64 bytes. On return, CX contains the length of the control string and ES:DI points to the control string.

On return, the carry flag is set and AX contains an error code if an error occurred.

AX	*Error*
01H	Function code not valid.

5F02H **Get redirection list.** This function is used only on computers running IBM PC Net or Microsoft Networks. It provides access to the network's system redirection list (see function 5F03H). Each entry in the list is indexed; the first entry is index entry zero. — 3, 4, 5

Before you call this function, AX is set to 5F02H, BX is set to a redirection list index number, DS:SI points to a 128-byte buffer that stores the local device name, and ES:DI points to a 128-byte buffer that stores the device's network name.

On return, the following conditions exist:

The zero bit in BH is set to zero if the device is valid or set to 1 if the device is not valid.

BL is set to 03H if the device is a printer or to 04H if the device is a disk drive.

CX contains the parameter value that was stored using function 5F03. The contents of DX and BP are destroyed.

DS:SI points to a string that is the device's local name. The string ends with a byte of zero.

ES:DI points to a string that is the device's network name. The string ends with a byte of zero.

On return, the carry flag is set and AX contains an error code if an error occurred.

AX	*Error*
01H	Function code not valid.

5F03 **Redirect device.** This function is used only on computers running IBM PC Net or Microsoft Networks. It establishes an association between a local device name and a network name. The list of associations is called the *redirection list*. The redirection list is indexed. The first local name/network name pair on the redirection list is at index value zero. The redirection list is used by functions 5E02H, 5E03H, 5F02H, and 5F04H. 3, 4, 5

Prior to calling this function, the following holds:

AX is set to 5F03H.

BL is set to 03H if the device is a printer or to 04H if the device is a disk drive.

CX is set to a parameter that will also be stored in the redirection list. in Versions

DS:SI points to a string containing the device's local name. The string ends in a byte of zero.

ES:DI points to three strings, each separated by a byte of zero. The first string contains the device's network name. The second string contains a network path specifier. Network path specifiers must start with two backslashes (\\). The third string is a network password that must be followed by a byte of zero. On return, the carry flag is clear if the function has executed successfully. The carry flag is set and AX contains an error code if an error occurred.

AX	*Error*
01H	Function code not valid, string in wrong format, or device already redirected.
03H	Path not found.
05H	Access denied.
08H	Insufficient memory.

5F04H **Cancel redirection.** This function is used only on computers running IBM PC Net or Microsoft Networks. It removes an entry from the redirection list (see function 5F03H). 3, 4, 5

continues

Prior to calling this function, AX contains 5F04H and DS:SI points to a string that contains either a local device name or a network path specifier (which must begin with \\). The string must be followed with a byte of zero. If a network path specifier is used, this function will close the connection between the local machine and the network.

On return, the carry flag is set and AX contains an error code if an error occurred.

AX	*Error*
01H	Function code not valid or string not valid.
0FH	Redirection paused on server.

62H **Get program segment prefix.** This function allows a program to locate its program segment prefix (PSP). Before your program calls the function, AH stores 62H. On return, BX contains the segment address of the program's PSP. 3, 4, 5

63H **Get lead byte table.** This function obtains the system table of valid byte ranges for extended characters, sets the interim console flag, and gets the interim console flag. This function is implemented in MS-DOS 2.25 only. It is not supported by any other versions of MS-DOS.

Before your program issues a call, AH contains 63H, AL is set to

00H	If getting address of lead byte table.
01H	If setting or clearing interim console flag.
02H	If getting value of interim console flag.

If AL = 01H, then DL = 01H if setting the flag, DL = 00H if clearing the flag.

On return, if getting the address of the lead byte table, DS:SI points to the table. If getting the value of the interim console flag, DL is set to the value of the flag.

65H	**Get global code page.**	3.3, 4, 5
66H	**Set global code page.**	3.3, 4, 5
67H	**Set handle count.** As described in chapter 11, 20 bytes in the PSP are used to store file handles. This sets a limit of 20 on the number of files a process can have open at a time. This function can be used to override this limit. Before your program calls the function, BX contains the desired number of file handles. On return, the carry flag is clear if the function succeeded. The carry flag is set and AX contains an error code if an error was encountered. This function is implemented in MS-DOS 3.3 and subsequent versions. DOS allocates a block of memory to store the new file handle table. The amount of memory allocated is rounded up to the nearest paragraph boundary. In addition, one paragraph of memory (16 bytes) is allocated to serve as a memory control block (see chapter 11).	3.3, 4, 5
68H	**Commit file.** This function flushes all buffers associated with a file handle and updates the file's directory information. Prior to calling the function, BX contains the file handle. On return, the carry flag is cleared if the function succeeded. The carry flag is set and AX contains an error code if an error was encountered. This function is implemented in MS-DOS 3.3 and subsequent versions.	3.3, 4, 5
6CH	**Extended open/create.** This function, first implemented in MS-DOS 4, provides extended control over the processes of file creation and file opening. Before the call, CX contains the attribute of the new file. This value is ignored if an existing file is being opened. The action of the function is controlled by the setting of bit fields in the BX and DX registers, which occurs before the call is made.	4

continues

BX Register Bit Field	*Value/Action*
0–20	0= open/create for reading only
	1 = open/create for writing only
	2 = open/create for reading and writing
3	Reserved
4–6	0= deny all sharing access
	1 = deny read/write sharing access
	2 = deny write sharing access
	3 = deny read sharing access
	4 = allow all sharing access
7	0 = child processes inherit file handle
	1 = child processes do not inherit file handle
8–12	Reserved
13	0 = int 24H enabled
	1 = int 24H disabled
14	0 = disable file commit (function 68H)
	1 = enable file commit
15	Reserved

DX Register Bit Field	*Value/Action*
0–30	0 = return error if file exists
	1 = open file if it exists
	2 = open file and truncate if it exists
4–70	0 = return an error if file not found
	1 = create file if file not found

The function will disable the critical error handler (int 24H) for any I/O involving the handle returned from the call, if bit 13 in BX is set to 1. This allows the program issuing the I/O request to handle any critical error that may occur. If a critical error occurs during I/O, the carry flag is set, and AX contains an error code on return.

Bit 14 of BX is used to enable or disable file commit, which is discussed above under function 68H.

If the call was successful, function 6CH places a file handle in AX. CX is set to 1 if a file was opened, 2 if a file was created and opened, and 3 if an existing file was replaced and opened. AX contains an error code if an error was encountered on the call.

APPENDIX

B

Some Undocumented Features of MS-DOS

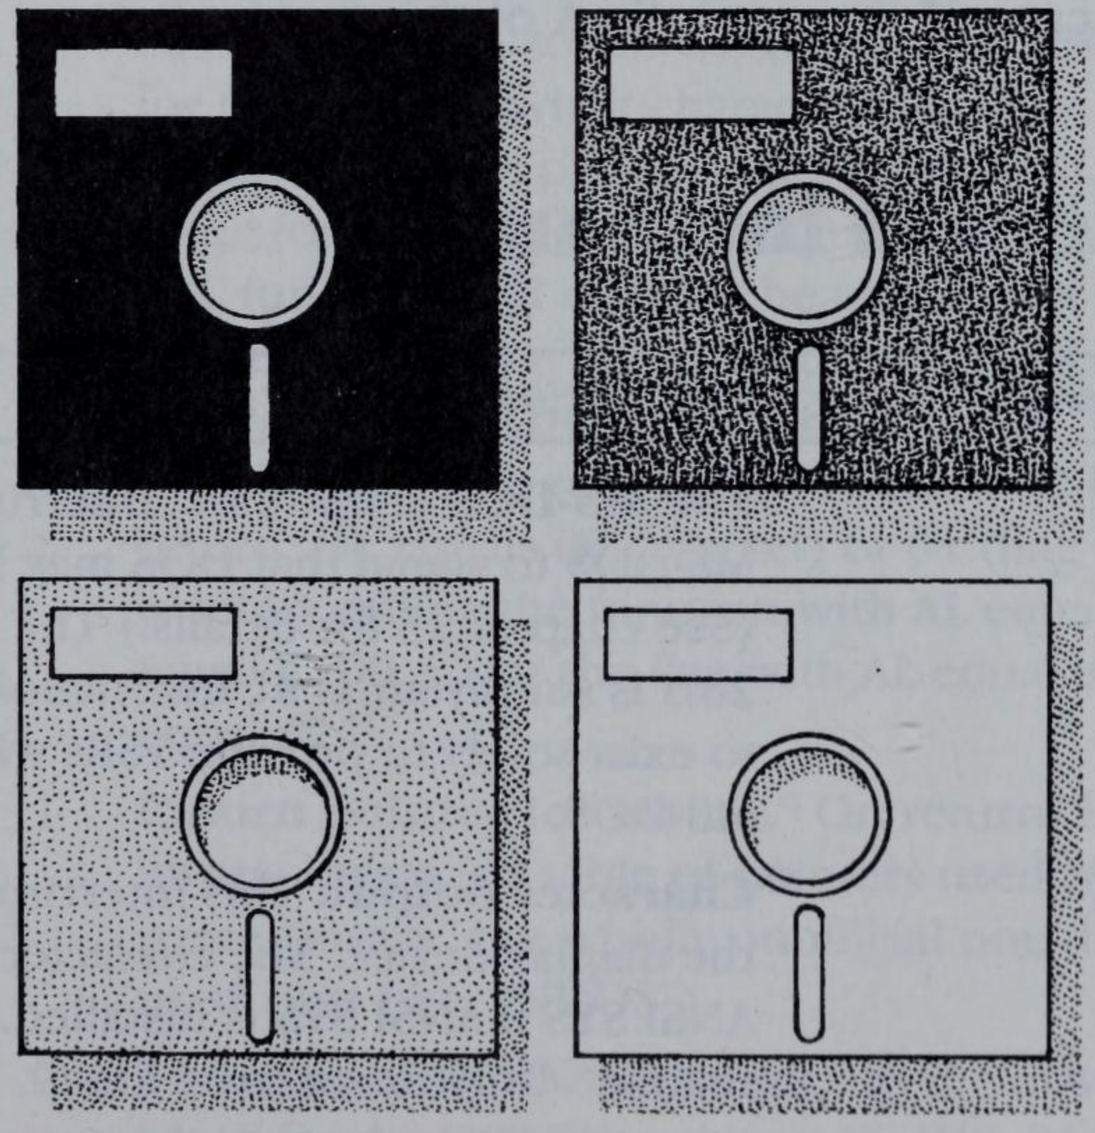

The term "undocumented feature" is applied to those interrupts and function calls that are used by MS-DOS, but whose use is not publicly sanctioned by Microsoft or IBM. Undocumented features are usually discovered by programmers scrutinizing the unassembled machine code that makes up MS-DOS.

There are two potential risks when you use undocumented features. First, because there is no official description of what the feature does or how it does it, unpleasant surprises are always a possibility. Fortunately, the features presented here have been used by enough programmers for a long enough time that their behavior *seems* to be reasonably well understood.

The second potential risk is that Microsoft and IBM are not compelled to support the undocumented features in future versions of MS-DOS. In fact, for precisely this reason, the two companies have repeatedly warned programmers about using undocumented features.

Programmers must consider these risks whenever the use of undocumented features is being considered. Microsoft has published the MS-DOS Encyclopedia, which describes many of the undocumented features discussed here. However, the features remain officially "undocumented" and not fully supported by Microsoft or IBM.

With the release of DOS 5.X, Microsoft has documented previously undocumented functions 1FH, 32H, 34H, 50H, and 5DH. These functions are discussed in appendix A of this book.

Undocumented Interrupts

Interrupt	*Description*
28H	**The MS-DOS scheduler.** Interrupt 28H is generated by MS-DOS to signal that DOS may be carefully reentered. (See chapter 13 for details.) The default handler for int 28H is simply an `iret` instruction. The interrupt appears to exist solely to provide TSRs with a safe access to MS-DOS.
29H	**Character output.** This interrupt sends a character to the display device. The character is sent through ANSI.SYS if ANSI.SYS is installed. Int 29H is much faster than MS-DOS functions 2 and 9. Like these two functions, int 29H advances the cursor after a character is displayed. This makes it easier to use than int 10H. It would be interesting to see whether int 29H can be used safely within a TSR. The best guess is that it could be used safely.

Interrupt	*Description*
	If int 29H is used to sound the speaker (AL = 7), additional output with int 29H is suppressed while the speaker is sounding.

Undocumented Functions

Undocumented functions are called just as are documented functions. The function number is placed in AH; other registers are set as required; and interrupt 21H is called. Functions 32H through 53H are implemented in 2.X and later versions.

MS-DOS Function	*Description*
37H	**Get/set switchar.** The switch character separates a command flag from the rest of the command. The default switch character is "/". To get the current switch character, set AL to 00. On return, the ASCII byte value for the current switch character will be in DL. To set the switch character, place a value of 01 in AL, and the byte value for the desired switch character in DL. In MS-DOS 2.X, function 37H can also be used to set or get the "forced \DEV\ flag." If the flag is set, device names must be preceded by \DEV\. If the flag is clear, \DEV\ is optional. The flag is read with a value of 02 in AL. On return, DL equals 00 (flag set) or 01 (flag clear). The flag is set by calling the function with AL equal to 03 and DL equal to 00. Clear the flag with AL equal to 3 and DL equal to 1.
52H	**Return pointer to "invars."** On return, ES:BX points to invars. Invars is a table of pointers used by MS-DOS. The name "invars" is a wholly unofficial one that is widely used (just like "INDOS"). The value at ES:BX is a pointer to the drive parameter block for drive A. The value at ES:[BX_2] is the location of MS-DOS' first memory control block (MCB).Chapter 11 presents a discussion in which function 52H is used to locate the MCB chain.

continues

MS-DOS Function	Description
	The device drive header for the NULL device is located at ES:[BX+22H]. This is the first header in the system's chain of device driver headers. The first 4 bytes of the header form a pointer to the next header in the chain. Refer to chapter 14 for details on the structure of device driver headers.
53H	**Generate drive parameter table.** On the call, DS:SI contains the address of a bios parameter block (BPB) and ES:BP points to the area that will hold the drive parameter table (see function 32H). Refer to chapter 14 for a discussion of BPBs.

APPENDIX

C

Practical Batch Files

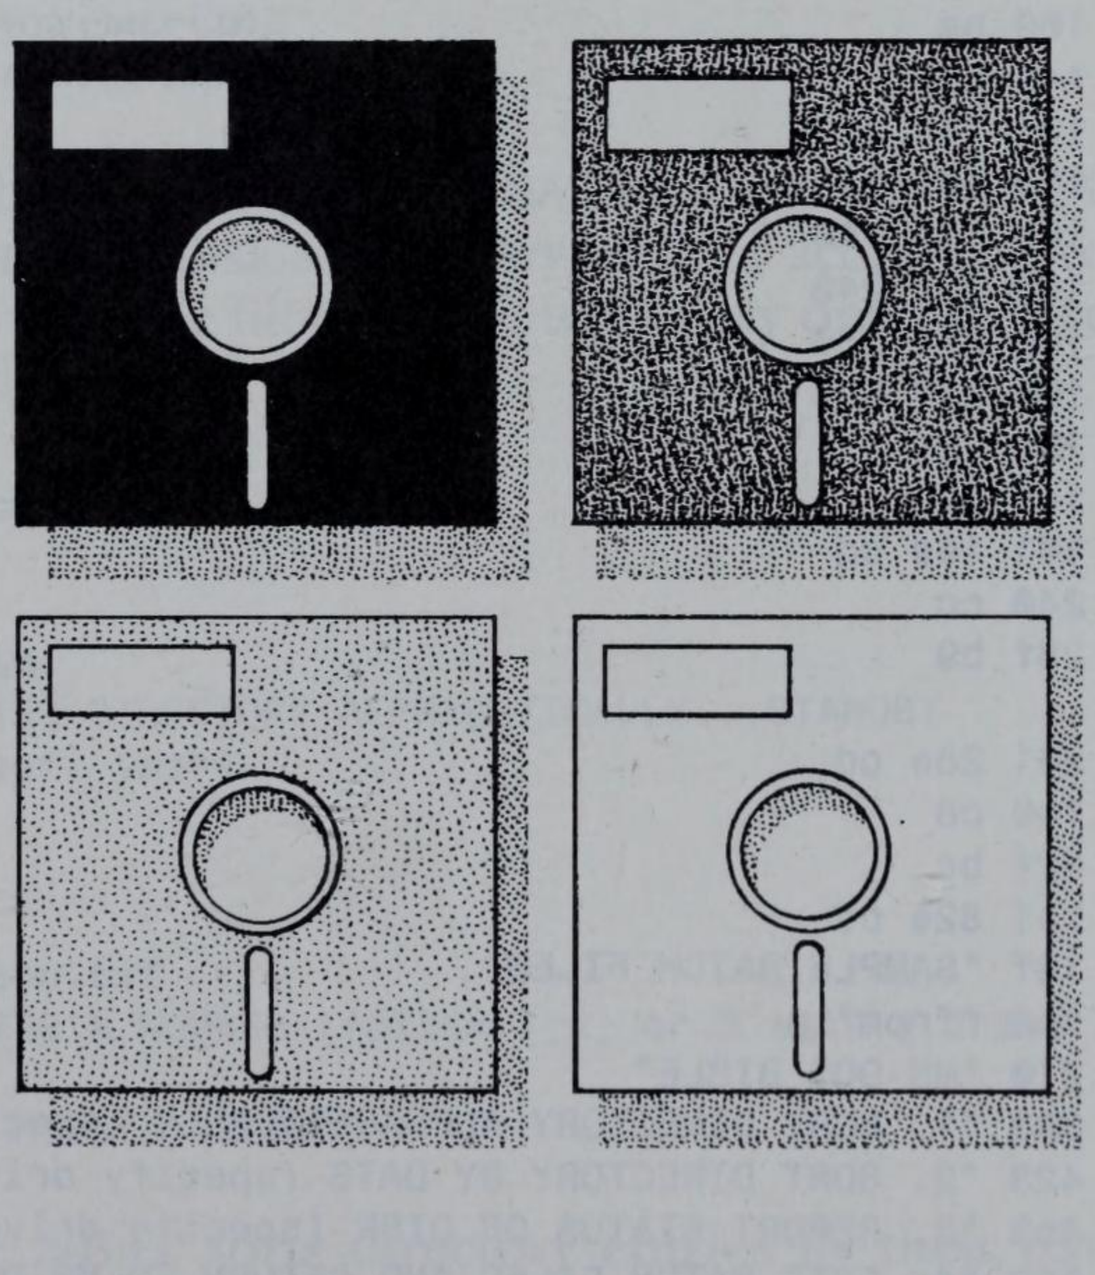

This appendix demonstrates how to create a menu and five batch files that combine many of the principles discussed in this book. The material presented here will provide you with ideas for customizing MS-DOS. It also will illustrate how convenient and flexible MS-DOS batch files are.

The batch files given here require MS-DOS 2.00 or later versions. Because these batch files will be used during booting, you will need to store them on a disk that has been formatted with the MS-DOS system files. The disk must also contain the MS-DOS files SORT.EXE, MORE.COM, TREE.COM, and CHKDSK.COM, because these files will be used by the batch files. The menu and batch files will require approximately 3,000 bytes of disk storage space. (Refer to chapter 4 for a discussion of MS-DOS batch files and to chapters 3 and 6 for a discussion of the commands used in these batch files.)

Before creating the batch files, we will use DEBUG to create a menu for controlling the batch files. Enter the DEBUG commands as they appear in the following program listings. (DEBUG is discussed in chapter 15.) Note that the program listings assume that the root directory of drive C is used to boot MS-DOS.

```
C:\>debug
-e 100 ba
-e 14f ba
-f 101 14e 20
-m 100 14f 150
-m 100 19f 1A0
-m 100 23f 240
-m 100 37f 380
-m 100 32f 600
-e 100 c9
-e 14f bb
-f 101 14e cd
-e 240 cc
-e 28f b9

-f 241 28e cd
-e 7e0 c8
-e 82f bc
-f 7e1 82e cd
-e 16f "SAMPLE BATCH FILES"
-e 1c6 "from"
-e 210 "MS-DOS BIBLE"
-e 383 "1. SORT DIRECTORY ALPHABETICALLY (specify drive)"
-e 423 "2. SORT DIRECTORY BY DATE (specify drive)"
-e 4c3 "3. REPORT STATUS OF DISK (specify drive)"
-e 563 "4. EXIT BATCH FILES AND RETURN TO MS-DOS"
-rcx
cx 0000
:730
```

```
-n batmenu.txt
-w
Writing 0730 bytes
-q
```

You have just used DEBUG to create a file named BATMENU.TXT. This file will serve as a menu for the batch files you are about to create. You can see what the menu looks like by entering the command **type batmenu.txt**.

Now you are ready to create the batch files themselves by entering the command **copy con:** ***filename***. (See the discussion of COPY in Part 2 for details.) The first batch file is named AUTOEXEC.BAT and will be used to set the date and time and then display the menu when MS-DOS is booted:

```
C:\>copy con: autoexec.bat
echo off
cls
date
time
cls
type batmenu.txt
prompt ENTER A NUMBER (follow 1, 2, or 3 with a drive letter) $g
^Z          ←you enter Ctrl-Z
            1 File(s) copied
```

The next batch file is called 1.BAT and uses the MS-DOS filter SORT to alphabetically sort a disk's directory entries according to filenames. The batch file then uses the filter MORE to display one full screen of the sorted directory at a time:

```
C:\>copy con:1.bat
echo off
cls
prompt $n$g
echo SORTING DIRECTORY ALPHABETICALLY...STANDBY
dir %1: ¦sort ¦more
pause
echo off
cls
type batmenu.txt
prompt ENTER A NUMBER (follow 1,2, or 3 with a drive letter) $g
^Z
        1 File(s) copied
```

Batch file 2.BAT sorts directory entries by their date stamp. This is accomplished by sorting the directory entries according to the character in column 24 of each entry. The sorted directory is then displayed one screen

at a time. This technique requires that all of the date stamps be for the same year. It will not work with different years; for example, 6-12-88 would be listed ahead of 12-14-86.

```
C:\>copy con: 2.bat
echo off
cls
prompt $n$g
echo SORTING DIRECTORY BY DATE...STANDBY
dir %1: ¦sort/+24¦ more
pause
echo off
cls
type batmenu.txt
prompt ENTER A NUMBER (follow 1, 2, or 3 with a drive letter) $g
^Z
        1 File(s) copied </pl>
```

Batch file 3.BAT uses the MS-DOS command CHKDSK to check a disk's status. This batch file also uses the command TREE, along with the filter MORE, to display information about the disk's directory and file structure. The information is listed one screen at a time:

```
C:\>copy con: 3.bat
echo off
cls
prompt $n$g
echo STATUS OF DISK IN DRIVE %1
echo ****************************
vol %1:
chkdsk %1:
pause
cls
echo STRUCTURE OF DIRECTORIES AND FILES OF DISK IN DRIVE %1
echo ************************************************************
tree %1: ¦]more
echo off
pause
cls
type batmenu.txt
prompt ENTER A NUMBER (follow 1, 2 or 3 with a drive letter) $g
^Z
        1 File(s) copied
```

Batch file 4.BAT removes the menu from the screen and displays the standard MS-DOS system prompt. Any MS-DOS command may be entered once the standard prompt has been displayed:

```
C:\>copy con: 4.bat
echo off
prompt $n$g
cls
^Z
        1 File(s) copied
```

Our final batch file will display the menu whenever we enter the word *menu*:

```
C:\>copy con: menu.bat
echo off
cls
type batmenu.txt
prompt ENTER A NUMBER (follow 1, 2 or 3 with a drive letter) $g
^Z
       1 File(s) copied
```

Having created the menu and the five batch files, you are ready to go. Type **menu** (or reboot your system) to display the menu. Now simply enter a number to select a batch file for execution. You may specify a drive for selections 1 through 3. For example, you might enter 1 B to get an alphabetical listing of the directory in drive B. The batch file selected will be executed on the default drive if you do not specify a drive letter.

APPENDIX

D

Code Pages and Code Page Switching

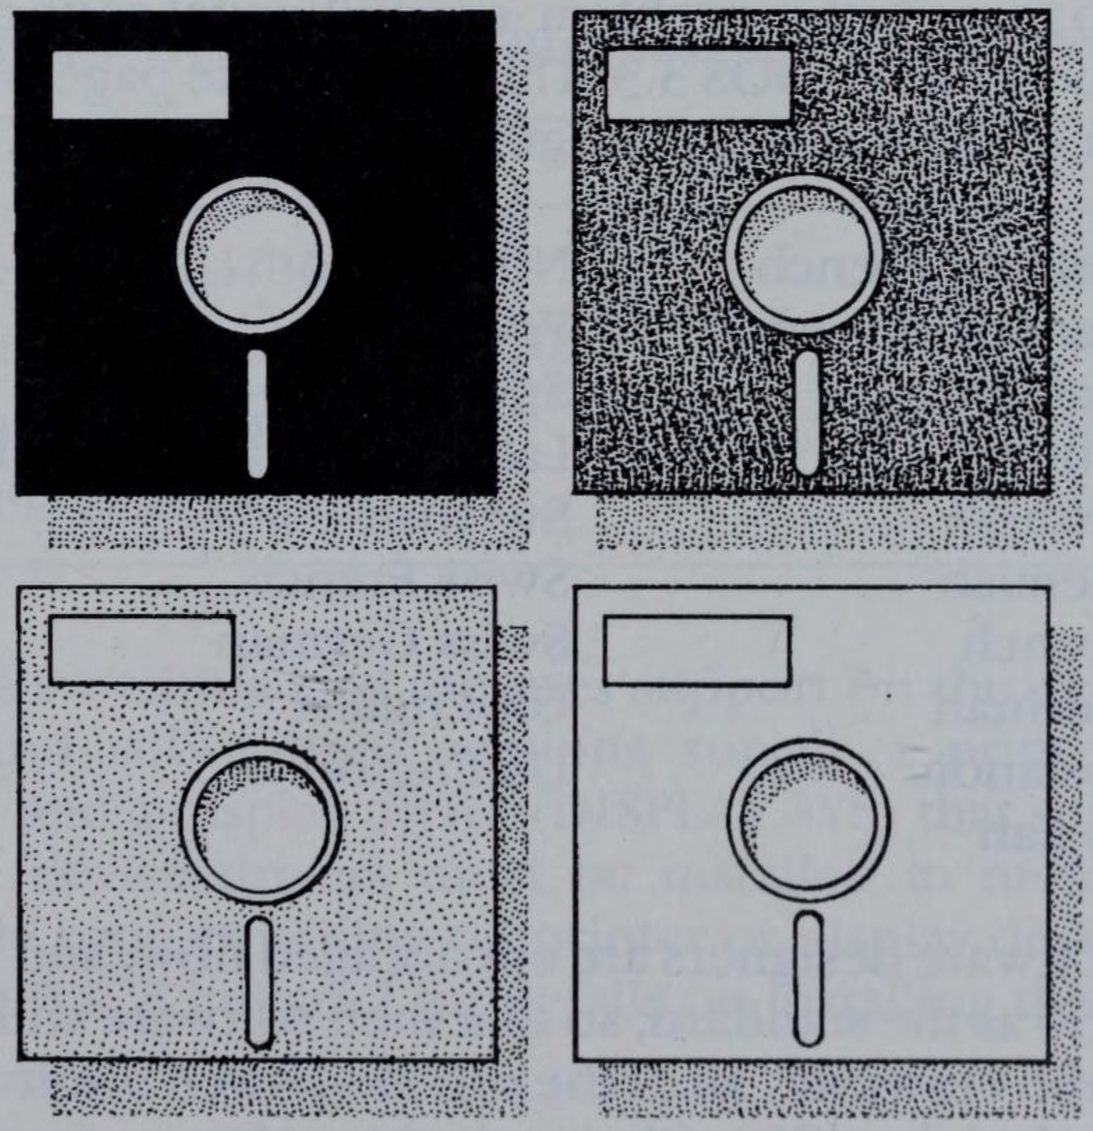

This appendix looks at code pages and the principles and techniques involved in activating, or switching, the code pages. Display devices that support code page switching are listed, and important guidelines from IBM for using code pages are given.

Overview

A *code page* is a table that is used to convert stored numerical data into displayable characters. Designing a single code page that is appropriate for all languages is not possible, since languages differ in the character sets that they require.

Prior to MS-DOS 3.3, there were four different code pages used by MS-DOS. Each copy of MS-DOS had a single fixed code page. Copies of MS-DOS sold in the United States came with a code page appropriate for American English (code page 437). Similarly, copies sold in French Canada or Portugal came with the appropriate code pages (code pages 863 and 860, respectively). Given this situation, problems arose when software written to run with one code page was used with a copy of MS-DOS that had another code page.

To remedy this problem, a multilingual code page (code page 850) was introduced in MS-DOS 3.3. This single code page is designed to transfer data written in the following languages:

Belgian French
Canadian French
Danish
Dutch
Finnish
Flemish
French
German
Icelandic
Italian
Norwegian
Portuguese
Spanish
Latin-American Spanish
Swedish
Swiss French
Swiss German
UK English
US English

Software designers are encouraged now, and in the future, to use code page 850 as the standard, so that their software will have the widest possible audience. However, all of the pre-MS-DOS 3.3 software was written for code pages other than 850. Obviously this software is not going to disappear. To accommodate this base of existing software, *code page switching* was first implemented in MS-DOS 3.3.

What Is Code Page Switching?

Many printers and video display adapters support the use of downloadable fonts. This means that users may select character sets to be used with these devices. Code page switching basically enables the user or the application programmer to activate a particular code page for use with the display adapter, keyboard, and printer. The remainder of this appendix discusses the principles and the various MS-DOS commands involved in code page switching.

Code Page Switching Must Be Supported

Code page switching can be implemented only on devices that specifically support it. Support is provided in the form of code page information (CPI) files. Currently, there are two display adapters and two printers that support code page switching (table D-1). The code page information files for these devices are supplied with MS-DOS 3.3 and subsequent versions. The role of the CPI files is discussed in the next section.

Table D-1. Display Devices That Support Code Page Switching

Display Device	*CPI File*
IBM Proprinter Model 4201	4201.CPI
IBM Quietwriter III Printer Model 5202	5202.CPI
Enhanced Graphics Adapter	EGA.CPI
IBM Convertible LCD Adapter	LCD.CPI

Code page switching also requires support on the device driver level. MS-DOS 3.3 and subsequent versions supply a printer device driver (PRINTER.SYS) and a display driver (DISPLAY.SYS) that support code page switching. The device drivers must be installed in memory before you implement code page switching on printer or display devices. Refer to the discussion of DEVICE in Part 2 for details on installing these drivers.

Hardware and Prepared Code Pages

A device that supports code page switching may have one or more code pages built into its hardware. These *hardware code pages* are prepared for use when the device's driver is installed in memory.

Code pages are also generated by the MODE command, using information contained in the cpi files. Code pages generated in this fashion are called *prepared code pages*. As an example, the following command generates code pages 437 and 850 for use by the display device (con). The code pages are generated using the file EGA.CPI:

```
mode con codepage prepare=((437,850) c:\dos\ega.cpi)
```

Refer to Part 2 of this book for details on using MODE to generate prepared code pages.

Switching Code Pages

There are three ways in which code page switching is actually carried out: (1) the CHCP command, (2) the MODE command, and (3) MS-DOS function 44H.

The CHCP command is used to select a specific code page for as many devices as possible. For example, the following command selects code page 850 for each device that has a code page 850 available to it:

```
chcp 850
```

Recall from the previous section that code pages are made available to a device in two ways: (1) during installation of the device's driver or (2) through use of the MODE command. The MODE command can also be used to select a specific code page for a particular device. The code page must have previously been made available for the device. The following command selects code page 850 for the display (con) device:

```
mode con codepage select=850
```

The use of CHCP and MODE to select code pages is discussed more thoroughly in Part 2 of this book.

Code pages can be selected from an application program by the use of MS-DOS function 44H, subfunction 0CH.

Some Code Page Programming Guidelines

IBM has published a list of guidelines for the applications programmer who uses code pages. Some of the more important guidelines are listed here. For a complete listing, refer to *IBM Personal System/2 Seminar Proceedings* (vol. 5, no. 6, May 1987).

- Make sure that application programs will run on machines that do not support code page switching. One way to do this is to limit the characters used in displaying messages to a set of common characters.
- Restrict the use of graphics characters to those in the common set.
- If you must use a code page element for a control character, choose one that is not an alphabetic element in any of the code pages.
- Construct a table of word delimiters that is not code page specific.

APPENDIX

E

The EDLIN Text Editor

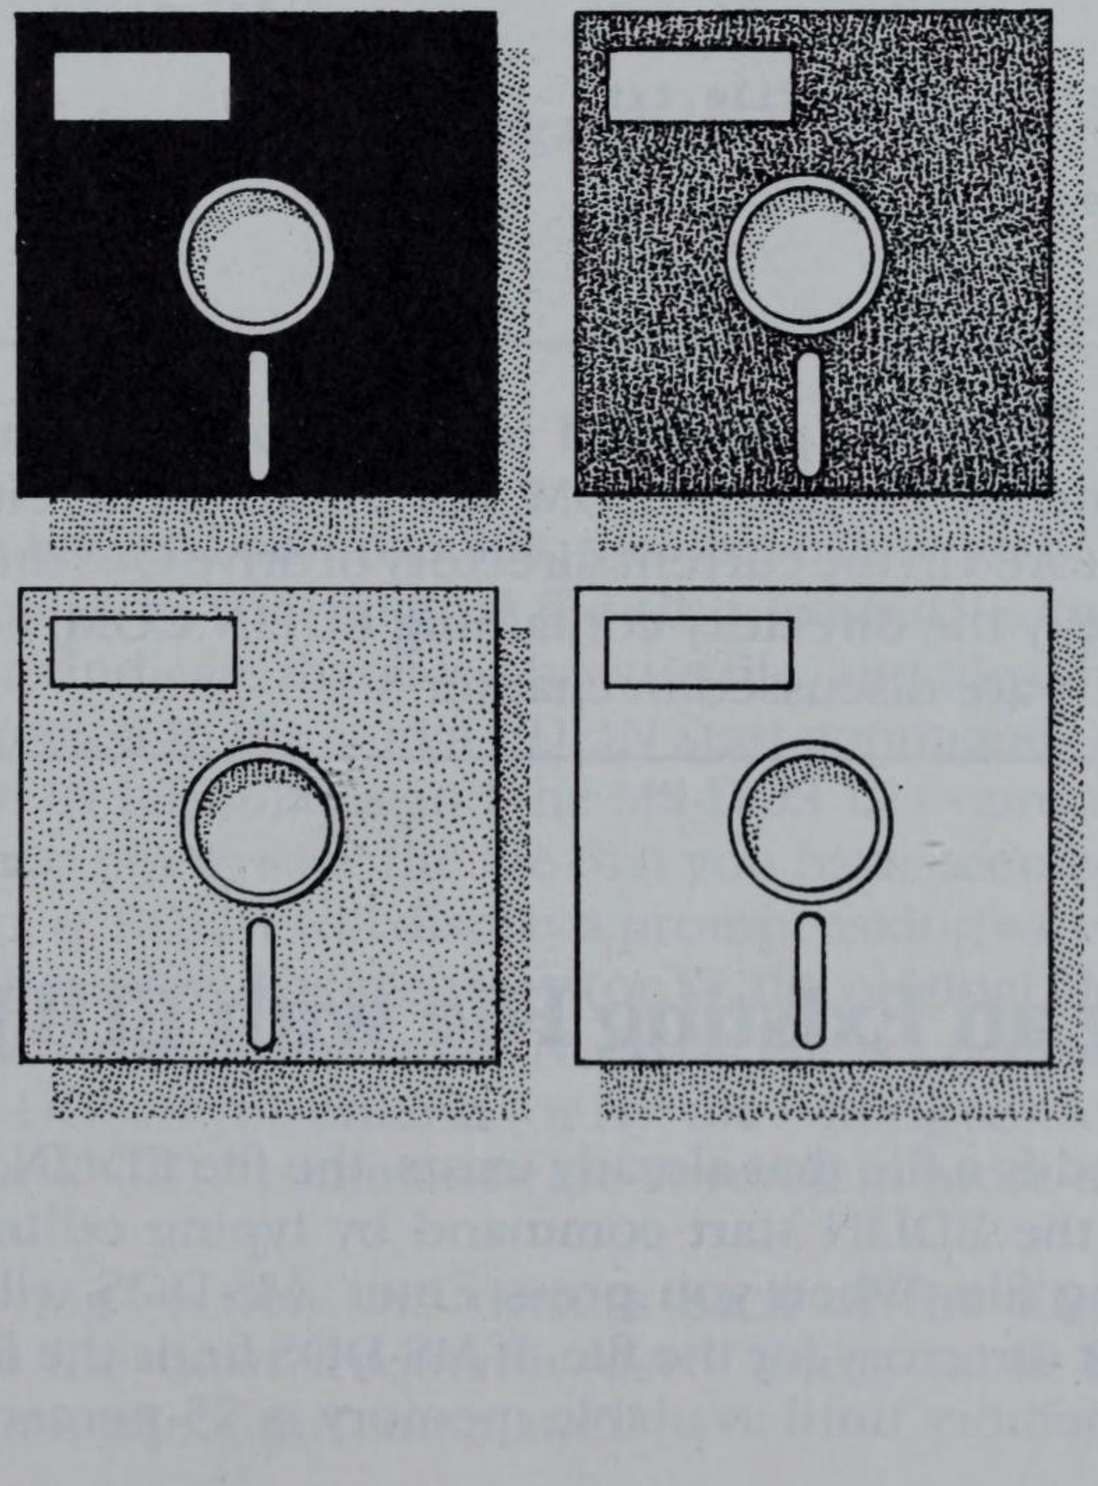

EDLIN is a line-oriented text editor that comes with MS-DOS. As explained in Chapter 8 of this book, DOS 5 now also includes the full-screen EDIT editor. If you have DOS 5 or have any other high-powered processor, you may never need to use EDLIN. EDLIN is definitely not a word processor, or even close to it. If you are doing any sort of document preparation, use a word processor or other editing program, rather than EDLIN. However, if you want a handy tool to write batch files and CONFIG.SYS files, EDLIN is just what you need.

Creating a File with EDLIN

To create a new file with EDLIN, enter **edlin** and the filespec of the file that you are creating (filespecs are discussed in chapter 2). After you press Enter, DOS will load EDLIN into memory, and EDLIN will take control. EDLIN will search the specified or default drive for the filename that was entered in the start command. If it cannot find the file, EDLIN displays the message New file and then displays its prompt (*) to indicate that an EDLIN command may be entered:

```
C:\>edlin newfile.txt
New file
*
```

> The examples presented in this appendix assume that MS-DOS can locate the file EDLIN.COM. For this to occur, either EDLIN.COM must be stored in the current directory of drive C or the PATH command must specify the directory containing EDLIN.COM. Current directories and PATH are discussed in chapter 3.

Modifying an Existing File with EDLIN

To modify a file that already exists, the file EDLIN.COM must be in drive C. Enter the EDLIN start command by typing **edlin** and the filespec of the existing file. When you press Enter, MS-DOS will search the specified or default directory for the file. If MS-DOS finds the file, the file will be loaded into memory until available memory is 75 percent full. If the entire file is

loaded, EDLIN displays the message `End of input file` and then displays its prompt (*) to indicate that an EDLIN command may be entered:

```
C:\>edlin oldfile.txt
End of input file
*
```

If the entire file cannot be loaded into memory, EDLIN will load lines until memory is 75 percent full but will not display a message. The * prompt appears when EDLIN is ready to accept a command.

The B Option

If you use the method just described to load an existing file with EDLIN, the load will stop when EDLIN encounters the first Ctrl-Z character in a file's text. The Ctrl-Z character is an end-of-file marker, indicating the end of a text file. If you wish to edit a file containing embedded Ctrl-Z characters, add **/b** to the end of the EDLIN start command, for example:

```
C:\>edlin oldfile.txt/b
```

EDLIN will load the entire file regardless of any embedded end-of-file markers.

Ending EDLIN

When you have finished editing a file, you can exit from EDLIN by entering the END command **e**. The original file (if it existed) is renamed with the extension BAK to indicate that it is a backup file, and the edited file is stored on the disk specified in the initial EDLIN start command. After the file has been saved, EDLIN terminates and the MS-DOS `C:\>` prompt is displayed.

If you decide not to save the file that you have been editing, enter the QUIT command, **q**. EDLIN will display a prompt asking whether you want to abort the editing session. If you enter **y** (or **Y**), the original file (if one existed) is saved with its original filename. No BAK file is created, and control is returned to MS-DOS. If you enter **n** (or **N**), the editing session will continue. Both the END and QUIT commands are covered in more detail later in the appendix.

The following section will discuss each of the EDLIN commands, beginning with the most frequently used ones. Table E-1 provides an alphabetical summary of the commands.

EDLIN Commands

Before you start using the individual EDLIN commands, you need to know the conventions or rules used by EDLIN. EDLIN commands are invoked by typing a letter and pressing Enter. In addition, most EDLIN commands either allow or require that one or more numbers be included as command parameters. When a command contains more than one number, you must separate each number from the next with a comma or a space. In certain instances, a comma is required. These instances will be pointed out in the discussion of the individual commands.

EDLIN does not differentiate between uppercase and lowercase letters. For example, you can invoke the QUIT command by entering **Q** or **q**; it makes no difference to EDLIN.

EDLIN designates a particular line in the file being edited as the *current line*. The current line serves as a sort of bookmarker that allows EDLIN to keep track of where it is in a file. When EDLIN displays a portion of a file, the current line has an asterisk following the line number.

You can use the pound sign (#) to refer to the last line of a file that is in memory. This can be handy when you want to perform a task involving the last line of a file but you do not know the last line number. For example, the command `50,# d` will delete everything from line 50 to the end of the file.

You can also refer to line numbers relative to the current line. The minus sign (–) is used to indicate a line *before* the current line. The plus sign (+) is used to indicate a line *after* the current line. As an example, the command `5,+5 L` will list the 5 lines before the current line, the current line, and the 5 lines after the current line.

More than one EDLIN command may be entered at a time. With some exceptions, which will be noted, one command can follow another without any special delimiting characters. For example, the command `1,10 d 1,10L` deletes the first 10 lines of a file and then lists the new lines 1 through 10.

Control characters may be entered in a text file by typing "i" (for INSERT) and then pressing Ctrl-V and typing the desired control character in uppercase. For example, to enter Ctrl-Z, type **i**, press Ctrl-V, and then type capital **Z**.

Table E-1. Summary of EDLIN Commands

Command	*Purpose*	*Format*
(A)PPEND	Adds a specified number of lines from disk to the file being edited in memory	[*number*] a [*number*]
(C)OPY	Copies a range of lines to a specified location in a file	,,*line* c [*line1*],,*line* c [*line1*], [*line2*],*line* c [*line1*],[*line2*],*line*, *count* c
(D)ELETE	Deletes a range of lines	d [*line1*] d ,[*line2*] d *[line1],[line2]* d
EDIT	Edits a line of text	[*line*]
(E)ND	Ends EDLIN and saves the edited file	e
(I)NSERT	Inserts lines of text	i [*line*] i
(L)IST	Lists lines of text	L [*line1*] L ,[*line2*] L [*line1*],[*line2*] L
(M)OVE	Moves a range of lines to a specified location	,,*line* m [*line1*],,*line* m ,[*line2*],*line* m [*line1*],[*line2*],*line* m
(P)AGE	Lists lines of text	p [*line1*] p ,[*line2*] p [*line1*],[*line2*] p
(Q)UIT	Ends EDLIN and does not save the edited file	q

continues

Table E-1. continued

Command	*Purpose*	*Format*

(R)EPLACE	Replaces all occurrences of a string in a specified range with a second F6	`r`
		`[line1] r`
		`,[line2] r`
		`[line1],[line2] r`
		`[line1],[line2] r [string1]`
		`string [string2]`
		`[line1],[line2] ? r`
		`[string1] Ctrl-Z [string2]`

(S)EARCH	Searches a specified range of lines in order to locate a string	`s`
		`[line1] s`
		`,[line2] s`
		`[line1],[line2] s`
		`[line1],[line2] s [string]`
		`[line1],[line2] ? s [string]`

(T)RANSFER	Merges the contents of a specified file with the file being edited	`t [filespec]` `[line] t [filespec`
(W)RITE	Writes a number of lines from memory to disk	`w` `[number] w`

Note: Italics indicate items that you must supply. Items in square brackets are optional.

INSERT

The INSERT command is used to insert lines of text into the file being edited. To invoke the command, enter **i** (or **I**) when you see the EDLIN prompt (*). In the following example, INSERT is used to add text to a new file. Starting with the MS-DOS prompt (`C:\>`), type **edlin** followed by the name of the file that will be created (DEMO1.TXT). EDLIN will display its prompt (*) to indicate that it is ready to accept a command:

```
C:\>edlin DEMO1.txt
New file
*
```

The message `New file` tells you that no file named DEMO1.TXT exists on the default disk. Following the * prompt, enter the letter **i** to begin the INSERT command. EDLIN will respond by displaying `1:*`, which is the signal to enter the first line of text.

Each line of text may hold up to 253 characters. To terminate a line, press Enter. EDLIN will insert the ASCII characters for carriage return and line feed at the end of the line. These two characters do not appear on the display screen.

Each time you press Enter, EDLIN stores a line of text in memory and then displays the next line number. You may enter another line of text or end the INSERT command by pressing the Ctrl-Break key combination.

The following example shows how lines of text could be entered in DEMO1.TXT. If you decide to enter these lines on your computer, press Enter to end each line of text (lines 1 through 11).

```
C:\>edlin DEMO1.txt
New file
*i
  1:*This is how you would create a new text file with EDLIN.
  2:*Enter "i" in response to the EDLIN prompt. EDLIN displays
  3:*"1:*". This is your signal to enter the first line of text.
  4:*You may enter up to 253 characters in a line.
  5:*       ←to skip a line press Enter
  6:*To end a line, press Enter. EDLIN will store the line of
  7:*text in memory and display the next line number. You may
  8:*enter another line of text or terminate the INSERT command.
  9:*To terminate, press Ctrl-Break.
 10:*When a command is terminated, EDLIN displays its prompt
 11:*and waits for you to enter another command.
 12:*
 13:*^C         ←you press Ctrl-Break

*         ←EDLIN displays its prompt and waits for your next command
```

Text is inserted before the *current line* when you enter "i" with no other parameters. The current line is the last line in the file that was modified. In the preceding example, line 13 is the current line. Enter **i** to insert text beginning at line 13:

```
*i
 13:*!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
 14:*These 3 lines are being inserted at lines 13, 14, and 15.
 15:*!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
 16:*]C

*
```

You can use the LIST command (enter uppercase **L**) to display a portion of the file:

```
*L
  5:
  6:To end a line, press Enter. EDLIN will store the line of
  7:text in memory and display the next line number. You may
  8:enter another line of text or terminate the INSERT command.
  9:To terminate, press Ctrl-Break.
 10:When a command is terminated, EDLIN displays its prompt
 11:and waits for you to enter another command.
 12:
 13:!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
 14:These 3 lines are being inserted at lines 13, 14, and 15.
 15:!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!

*
```

To suspend scrolling while you are using LIST, press Ctrl-NumLock. To resume scrolling, press any key. Press Ctrl-Break to terminate the listing. (LIST is described in the next section.)

You may specify the line at which text insertion is to begin by preceding the letter "i" with a line number. In this way, text can be inserted between existing lines in the file. Lines following the insertion will be renumbered. For example:

```
*11i
    11:*++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
    12:*These 3 lines are being inserted starting at line 11.
    13:*++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
    14:*]C

*
```

The command 5L tells EDLIN to display the file beginning with line 5:

```
*5L
 5:
 6:To end a line, press Enter. EDLIN will store the line of
 7:text in memory and display the next line number. You may
 8:enter another line of text or terminate the INSERT command.
 9:To terminate, press Ctrl-Break.
10:When a command is terminated, EDLIN displays its prompt
11:++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
12:These 3 lines are being inserted starting at line 11.
13:++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
14:and waits for you to enter another command.
15:
16:!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

```
17:These 3 lines are being inserted at lines 13, 14, and 15.
18:!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
*
```

In the preceding example, three lines have been inserted beginning at line 11. Note that the line numbers following the insertion have been automatically renumbered.

If you precede the letter "i" with a number that is greater than the highest-existing line number in the file or if you specify "#" as the line number, the insertion begins following the last line of the file stored in memory.

LIST

The LIST command (enter uppercase **L**) is used to display a specific range of lines in a file. We will demonstrate this command by using EDLIN to work on the following file:

```
 1: This is line 1.
 2: This is line 2.
 3: This is line 3.
  .
  .
  .

14: This is line 14.
15* This is line 15.
16: This is line 16.
  .
  .
  .

24: This is line 24.
25: This is line 25.
26: This is line 26.
```

The current line (the last line modified by EDLIN) is denoted by an asterisk. In the preceding example, line 15 is the current line. Using the LIST command will not change the current line.

If you enter "L" without any line numbers, EDLIN will display the 11 lines before the current line, the current line, and the 11 lines after the current line, for a total of 23 lines—the maximum number that can be listed at any one time:

```
*L
  4: This is line 4.
  5: This is line 5.
```

```
 6: This is line 6.
 .
 .
 .

14: This is line 14.
15:*This is line 15.
16: This is line 16.
 .
 .
 .

24: This is line 24.
25: This is line 25.
26: This is line 26.

*
```

If there are fewer than 11 lines before the current line, extra lines are displayed after the current line so that a total of 23 lines is displayed.

To list a particular range of lines, specify the starting and ending line numbers of the range in your LIST command. Each number must be separated from the next by a comma or a space and must precede the letter "L". To list lines 1 through 4, enter **1,4L**:

```
*1,4L
   1: This is line 1.
   2: This is line 2.
   3: This is line 3.
   4: This is line 4.

*
```

If you precede the LIST command with only one number, the listing will begin at that line number. A total of 23 lines will be listed. In the following example, the 23 lines from lines 2 through 24 are listed:

```
*2L
     2: This is line 2.
     3:*This is line 3.
     .
     .
     .

    23: This is line 23.
    24: This is line 24.

*
```

If you precede the LIST command with a comma and a line number, the listing will begin 11 lines before the current line and end at the line number that is included in the command:

```
*,16L
    4: This is line 4.
    5: This is line 5.
    .
    .
    .

   14: This is line 14.
   15:*This is line 15.
   16: This is line 16.

*
```

If the line you specify is more than 11 lines before the current line, the display is the same as if you had entered only "L":

```
*,2L
     4: This is line 4.
     .
     .

    15:*This is line 15.
     .
     .
     .

    26: This is line 26.

*
```

You can use the LIST command to obtain a printout of a portion or all of a text file. Try printing out one of the preceding examples. Turn on your printer and press the Ctrl-PrtSc key combination. Then enter the appropriate LIST command. The display that appears on your screen will be sent to the printer.

The display will start to scroll off the screen if you list more than 24 lines. To suspend the listing, press the Ctrl-NumLock key combination. The listing will continue when you press any key. To terminate the listing, press the Ctrl-Break combination.

EDIT

The EDIT command is used to edit a line of text. To specify the line to be edited, simply enter its line number. To specify the current line, enter a period (.). To specify the line following the current line, press Enter.

When you specify a line for editing, EDLIN displays the line number and the text of that line. The line number is then repeated on the line below. For example:

```
*6
   6:*The old gray mare, she ain't what she used to be.
   6:*
```

To edit a line, simply type the new text. The edited line is placed in the file and becomes the current line when you press Enter. If you decide to retain the original line without any changes, press Esc or Ctrl-Break instead of Enter. Pressing Enter with the cursor at the beginning of the line has the same effect as pressing Esc or Ctrl-Break.

If you include the EDIT command on a line with one or more other EDLIN commands, you must use semicolons to separate the commands on the line. For example, the command `22;1,5 d` will first edit line 22 and then delete lines 1 through 5.

When you specify a line for editing, the text of that line forms the template. The *template* is the current structure of the line that is stored by MS-DOS. As the line is edited, the template is modified to reflect the editing changes.

MS-DOS Editing Keys

The MS-DOS editing keys may be used to edit the template. These keys consist of the F1, F2, F3, F4, and F5 function keys, plus the Ins and Del keys.

F1

The F1 function key displays one character in the template. By repeatedly pressing the F1 key (or the → key in some computers) you can cause all or part of the template to be displayed:

```
6:*The old gray mare, she ain't what she used to be.      ←template
6:*The old gray mare, she ain't what      ←press F1 33 times
```

The last line will be placed in the file and will become the current line if Enter is pressed. If Esc is pressed, a backslash (\) will be displayed and the changes entered in the second line will be cancelled:

```
6:*The old gray mare, she ain't what she used to be.      ←template
6:*The old gray mare, she ain't what     ←press F1 33 times; press Esc
```

F2

The F2 function key copies the template up to the first occurrence of a specified character. Nothing is copied if the character specified is not in the template. The last line in the following display is obtained by first pressing the F2 key and then pressing the comma (,) key. The template is copied up to, but not including, the first comma:

```
6:*The old gray mare, she ain't what she used to be.      ← template
6:*The old gray mare_     ← press F2 once;enter comma
```

F3

The F3 function key displays the template from the position of the cursor to the end of the line:

```
6:*The old gray mare, she ain't what she used to be.      ←template
6:*The old gray mare, she ain't what she used to be._     ←press F3 once
```

F4

The F4 function key skips over a template until it encounters a specified character. No characters are skipped if the specified character is not present in the template. In the next example, the F4 key is pressed and then the "s" key is pressed. This deletes the characters in the template up to the first "s". The F4 key does not display any text. To display the new template, press the F3 key:

```
6:*The old gray mare, she ain't what she used to be.      ←template
6:*She ain't what she used to be._      ←press F4, "s", and F3
```

F5

The F5 function key moves the line that is currently being displayed into the template without entering it in the file. An "@" character is displayed to indicate that the new line is now in the template. Once you have entered F5, you can proceed to edit the new template. Pressing Enter stores the new template in the file.

In the next example, a new line of text has been added. The F5 key is then pressed to store the new line as the template. The new template can be edited using the techniques described in this section. The original line of text remains in the file as the current line if Enter is pressed immediately after F5 is pressed:

```
6:*The old gray mare, she ain't what she used to be.      ←template
6:*And now for something completely different@      ←type new template;
        press F5
```

Ins

The Ins key can be used to insert text into the template. Pressing Ins one time turns the insert mode on. Pressing it a second time turns the insert mode off.

When the insert mode is on, any characters that you type are inserted into the template. These characters do not replace characters already in the template. When the insert mode is off, any characters that you type replace characters in the template.

In the following example, the F1 key is pressed three times. The Ins key is then pressed to turn on the insert mode. Five characters (4 letters and a blank) are inserted into the template. The remainder of the template is then copied with the F3 key:

```
6:*The old gray mare, she ain't what she used to be.      ←template
6:*The very old gray mare, she ain't what she used to be._      ←press
        F1, Ins, "very", and F3
```

Del

The Del key can be used to skip over one character in the template at a time

```
6:*The old gray mare, she ain't what she used to be.      ←template
6:*The old gray mare, he ain't what she used to be.      ←press F1 20
        times; press Del, F3
```

Right now you are probably thinking that it is more trouble than it is worth to memorize the functions of the different editing keys. Typing in new lines of text seems to require less thought than remembering which key does what. However, if you spend some time working with the editing keys, you will find that EDLIN will become more productive for you.

DELETE

The DELETE command is used to delete a range of lines. The line following the deleted range becomes the current line. The current line and any subsequent lines are renumbered following a deletion.

To use DELETE, enter **d** (or **D**) in response to the EDLIN prompt. The current line will be deleted:

```
    1: This is line 1.
    2: This is line 2.
    3: This is line 3.
    4: This is line 4.
    5:*This is line 5.
    6: This is line 6.

*d
*L
    1: This is line 1.
    2: This is line 2.
    3: This is line 3.
    4: This is line 4.
    5:*This is line 6.

*
```

In the preceding example, the current line was initially line 5. When **d** was entered, the current line was deleted and the line after the deleted line became the current line. The line following the deleted line was renumbered.

You can specify a range of lines to be deleted by including the beginning and ending line numbers of the range in the DELETE command. The two numbers must be separated by a comma or a space. The line following the deleted range will become the current line:

```
1: This is line 1.
2: This is line 2.
3: This is line 3.
4: This is line 4.
5:*This is line 6.

*2,4d
*L
   1: This is line 1.
   2:*This is line 6.

*
```

Lines 2 through 4 have been deleted, and what was originally line 6 is now the current line.

DELETE can be used to delete a range of lines from the current line through a specified line. The command starts with a comma followed by the last line in the range to be deleted. The first line following the deleted range becomes the current line:

```
   1: This is line 1.
   2: This is line 6.
   3: This is line 7.
   4:*This is line 8.
   5: This is line 9.
   6: This is line 10.

*,5d
*L
   1: This is line 1.
   2: This is line 6.

   3: This is line 7.
   4:*This is line 10.

*
```

The range of lines starting with the current line (line 4) and ending with line 5 has been deleted. The line following the deleted range has become the current line.

SEARCH

The SEARCH command (enter **s** or **S**) searches a range of lines for a specified character string. The first line found to contain the character string becomes the current line.

The SEARCH command can include the starting and ending line numbers of the range to be searched. Each line number must be separated from the next by a comma or a space. The command can also include the character string that is to be the object of the search. The string is specified with its first character in the position immediately following the "s". The string is terminated by pressing Enter.

In the following example, the SEARCH command searches the block of text beginning at line 2 and ending at line 6 for the character string "and". If the string is found within the block, EDLIN will display the first line on which it is located:

```
   1: This is a demonstration file that will be used
   2: to show how the SEARCH command operates. The
```

```
   3: SEARCH command can be very handy. Imagine that
   4: you are writing a paper and you realize that you
   5: have been misspelling the word "gigolo." You could
   6: use the SEARCH command to locate the gigolos in
   7: your paper.

*2,6 sand
   2: to show how the SEARCH command operates. The

*
```

The search began at line 2. The string "and" was located in line 2 as part of the word *command*. Line 2 is now the current line, since it was the first line found to contain the string.

Entering "s" by itself causes EDLIN to search for the last string that was specified with a SEARCH or REPLACE command. The search begins at the line following the current line and ends with the last line of the file that is stored in memory. We can illustrate this application of SEARCH by continuing with the previous example.

Line 2 is the current line, and the last string entered was "and". If we enter "s", EDLIN will begin searching at line 3 for "and":

```
*2,6 sand
   2: to show how the SEARCH command operates. The

*s
   3: SEARCH command can be very handy. Imagine that

*s
   4: you are writing a paper and you realize that you

*s
   6: use the SEARCH command to locate the gigolos in

*s
Not found

*
```

The command "s" was used three times to find the string "and". The string was found in lines 3, 4, and 6. None of the lines in the file beyond line 6 contained the string. Therefore, the fourth time that "s" was entered, EDLIN replied `Not found`.

Rather than reenter "s" each time to continue searching, you can enter a question mark immediately before the letter "s". EDLIN will display the prompt `O.K.?` when it finds a line containing the character string specified in the command. If you respond **y** or press Enter, the line found becomes the current line and the search ends. Pressing any other key continues the

search. Once all of the lines within the range have been searched, the `Not found` message is displayed:

```
*2,6? sand
   2: to show how the SEARCH command operates. The
O.K.? n
   3: SEARCH command can be very handy. Imagine that
O.K.? n
   4: you are writing a paper and you realize that you
O.K.? y

*
```

The string was found in three lines. Each time, EDLIN asked whether the search should be ended. The search was ended at line 4 when the response was **y**.

Both the starting and ending line numbers of the range to be searched can be omitted from the SEARCH command. If the starting number line is omitted, the search begins at the line following the current line. If the ending line number is omitted, the search ends at the last line of the file that is in memory. The ending line number must be preceded by a comma if the starting line number is omitted and the ending line number is specified.

If the SEARCH command is entered on a line along with other EDLIN commands, the string in the command may be terminated by pressing Ctrl-Z rather than Enter.

REPLACE

The REPLACE command (enter **r** or **R**) is used to search a specified range of lines for a character string and replace that string with a second character string. The first string is replaced at each location that it occurs within the specified range. The last line changed by REPLACE becomes the current line.

The starting and ending line numbers of the range to be searched may be specified in the REPLACE command. Line numbers must be separated by a comma or a space. The character string to be replaced and the replacement character string may also be specified in the command. The two strings must be separated by Ctrl-Z.

In the next example, lines 2 through 4 are searched for the string "you". When the string is located within the range, it is replaced with "we":

```
1: This is a demo file to show how the REPLACE command
2: works. REPLACE can be very handy. Imagine that you
3: are writing a paper and you realize that you have
4: misspelled "gigolo" as "jiggloh." You could use the
5: REPLACE command to locate the jigglohs in your paper
6: and replace them with gigolos.
```

```
*2,4 ryou^Zwe
   2: works. REPLACE can be very handy. Imagine that we
   3: are writing a paper and we realize that you have
   3: are writing a paper and we realize that we have
*
```

Notice that the two strings in the command are separated by ^Z. This character can be entered by pressing the F6 function key or by pressing the Ctrl-Z key combination. If you have modified your function keys (see chapter 9), you will have to use the Ctrl-Z combination.

Each time that "you" is located within the specified range, it is replaced with "we". Each time a line is changed, it is displayed. Notice that line 3 is displayed two times, because "you" is replaced twice. Line 4 contains the string "You". However, "You" is *not* replaced because REPLACE differentiates between uppercase and lowercase letters.

As with the SEARCH command, you can use a question mark with REPLACE. The question mark is included immediately before the "r". EDLIN will display the prompt `O.K.?` each time that a line is modified. If you respond by pressing "y" or Enter, the suggested modification is made. The modification is discarded if you press any other key in response to the prompt. In either case, the search continues through the entire range specified in the command. The following example demonstrates this, beginning where the last example ended:

```
   2: works. REPLACE can be very handy. Imagine that we
   3: are writing a paper and we realize that you have
   3: are writing a paper and we realize that we have

*2,4? rwe^Zyou
   2: works. REPLACE can be very handy. Imagine that you O.K.? y
   3: are writing a paper and you realize that we have O.K.? y
   3: are writing a paper and you realize that you have O.K.? y

*
```

You may omit from the command both the starting and ending line numbers of the range to be searched. The search begins with the line after the current line if you omit the starting line number. The search ends with the last line in memory if you omit the ending line number. If you specify only the ending line number in the command, the line number must be preceded by a comma.

One or both of the character strings may be omitted from the REPLACE command. If you omit the second string, EDLIN deletes all occurrences of the first string within the specified range. The first string must end with ^Z. If

you omit both strings, EDLIN will reuse the search string of the most recent SEARCH or REPLACE command and the replace string of the last REPLACE command.

If you include the REPLACE command on a line with one or more other EDLIN commands, the replace string can be terminated by pressing Ctrl-Z rather than Enter.

WRITE

When EDLIN begins to work on an existing file, its first task is to load the file into computer memory. EDLIN will fill up to 75 percent of available memory with the file. EDLIN displays the message `End of input file` followed by the EDLIN prompt if memory is large enough to accommodate the entire file at one time. If the file is too large to be loaded into memory at one time, EDLIN loads a portion of the file and displays only the prompt.

If a file is larger than 75 percent of memory, the WRITE command (enter **w** or **W**) can be used to write a number of lines from memory to a disk. This frees a portion of memory so that additional lines in the file may be loaded into memory using the APPEND command. The WRITE command is meaningful only if the file you are editing is too large to fit in memory.

The WRITE command writes text to the disk beginning with line number 1. You can specify the number of lines to be written by preceding the letter "w" with a number. The next example writes the first 100 lines in memory to the disk that was specified in the EDLIN start command:

```
*100 w
*
```

If you do not specify the number of lines to be written (entering only "w"), EDLIN writes lines until 25 percent of available memory is occupied by the file. No action is taken if less than 25 percent of available memory is occupied by the file. After the lines are written, all lines remaining in memory are renumbered so that the first remaining line in memory becomes number 1.

APPEND

The APPEND command (enter **a** or **A**) is used to add a number of lines to the EDLIN file currently in memory. This command is used after a portion of memory is made available with the WRITE command. The APPEND command is meaningful only if the file being edited is too large to fit in memory. Refer to the previous discussion of the WRITE command for information on when to use the WRITE and APPEND commands.

The APPEND command adds lines of the file to memory starting at the end of the lines already in memory. You can specify how many lines are to be added to memory by preceding the letter "a" with a number. The following example adds 100 lines of a file to the portion of the file already in memory:

```
*100 a
*
```

If you do not specify the number of lines to be added, lines are added until available memory is 75 percent full. No action is taken if available memory is already 75 percent full. (If necessary, you can use the WRITE command to free a portion of memory.)

The message `End of input file` is displayed when the APPEND command has read the last line of the file into memory.

END

The END command (enter **e** or **E**) terminates EDLIN, saves the edited file, and returns control to MS-DOS. The edited file is saved by writing it to the disk and file specified in the EDLIN start command. As you may recall, the original unedited file is saved and given the extension "BAK". However, a BAK file will not be created if you are creating a new file with EDLIN rather than modifying an existing file.

If the disk specified in the command that starts EDLIN does not have enough free space to save the entire edited file, only a portion of the file is saved. The saved portion is given a filename extension of **$$$**, and the remainder of the edited file is lost. The original unedited file is stored with its original extension.

QUIT

The QUIT command (enter **q** or **Q**) is used to terminate EDLIN and return control to MS-DOS. The changes made during the editing session are not saved, and no BAK file is created. QUIT is used only when you want to discard all of the changes made in an EDLIN session.

When you enter the command **q**, EDLIN displays a prompt asking if you want to end the editing session and return to MS-DOS. A response of **y** terminates EDLIN and returns control to MS-DOS. All changes made during the EDLIN session are discarded. Only the original unedited file is saved. A response of **n** returns control to EDLIN, which displays its prompt and waits for you to enter another command.

MOVE

The MS-DOS 2.X and subsequent versions of EDLIN include a MOVE command. With MOVE, you can transfer a range of lines in a text file from one location to another. The first line moved becomes the current line. Lines are renumbered according to the direction of the move.

The starting and ending lines of the block to be moved may be specified in the MOVE command. The block is moved ahead of a third line, which must be specified in the command. All numbers in the command must be separated by commas.

In the next example, lines 2 through 5 are moved ahead of line 9. The first line moved (line 2) becomes the current line, and the lines are renumbered:

```
1: This is line 1.
2: This is line 2.
3: This is is line 3.
4: This is line 4.
5:*This is line 5.
6: This is line 6.
7: This is line 7.
8: This is line 8.
9: This is line 9.
10: This is line 10.

*2,5,9 m
*L
    1: This is line 1.
    2: This is line 6.
    3: This is line 7.
    4: This is line 8.
    5:*This is line 2.
    6: This is line 3.
    7: This is line 4.

    8: This is line 5.
    9: This is line 9.
   10: This is line 10.

*
```

You may omit the first line in the block from the command. If you do this, the block will start at the current line. You can also omit the last line in the block. In this case, the block that is moved will end at the current line.

Consider the command `,,1 m`. The starting line number has been omitted, so the block to be moved begins at the current line. The ending line number has also been omitted, so the block to be moved ends at the current

line. In other words, the block to be moved consists of one line—the current line. The command instructs EDLIN to move the current line ahead of line number 1. The commas must be included in this command.

COPY

The COPY command (enter **c** or **C**) is included in the MS-DOS 2.X, 3.X, 4.X, and 5.X versions of EDLIN. This command is used to duplicate a range of lines.

You may specify the beginning and ending lines of the range to be copied by including the beginning and ending line numbers in the COPY command. The command must include a line number to specify where the copy will be located. All line numbers must be separated by a comma or a space. The first line copied becomes the current line:

```
1: This is line 1.
2: This is line 2.
3: This is line 3.
4: This is line 4.
5:*This is line 5.
6: This is line 6.
7: This is line 7.

*1,2,6 c
*L
   1: This is line 1.
   2: This is line 2.
   3: This is line 3.
   4: This is line 4.
   5: This is line 5.
   6:*This is line 1.
   7: This is line 2.
   8: This is line 6.
   9: This is line 7.

*
```

In the example, the range of lines beginning with line 1 and ending with line 2 is copied ahead of line 6.

A range of lines can be copied more than one time by including a *count* in the command. The count is inserted between the line number that specifies where the copy is to be located and the letter "c". For example, if you wanted to copy lines 1 and 2 twice, you would enter the command **1,2,6,2 c**. Compare this to the command in the previous example, which copied the lines one time. As in the previous example, if no count is included in the command, the range of lines is copied one time.

The starting and/or ending line numbers of the range to be copied may be omitted from the COPY command. The command assumes the omitted line(s) to be the current line:

```
1: This is line 1.
2: This is line 2.
3:*This is line 3.
4: This is line 4.
5: This is line 5.
6: This is line 6.
7: This is line 7.

*1,,6 c
*L
  1: This is line 1.
  2: This is line 2.
  3: This is line 3.
  4: This is line 4.
  5: This is line 5.
  6:*This is line 1.
  7: This is line 2.
  8: This is line 3.
  9: This is line 6.
 10: This is line 7.

*
```

In the example, the range of lines beginning with line 1 and ending with the current line is copied ahead of line 6. The first line copied becomes the current line.

PAGE

The PAGE (enter **p** or **P**) command is included in the MS-DOS 2.X, 3.X, 4.X, and 5.X versions of EDLIN. The PAGE command lists lines of a file. Its actions are similar to those of the LIST command, with one important difference. The LIST command does not change the current line; the PAGE command does. The significance of this difference will be demonstrated in the next example.

The beginning and ending line numbers of the block of lines to be listed can be specified with the PAGE command:

```
*1,5 p
   1: This is line 1.
   2: This is line 2.
   3: This is line 3.
   4: This is line 4.
   5:*This is line 5.

*
```

If you omit the first line number of the block to be listed, the command assumes that the first line is the current line plus one. The usefulness of the PAGE command stems from the fact that the last line listed becomes the current line.

Continuing with the previous example, we find that the current line is line 5. If we invoke the PAGE command without specifying a starting line, the listing will begin with line 6. If we do not specify an ending line number, 23 lines will be listed. The last line listed becomes the current line:

```
*p
  6: This is line 6.
  7: This is line 7.
  .
  .
  .

 27: This is line 27.
 28:*This is line 28.

*
```

In this fashion, we could continue to enter the command "p", paging through the file 23 lines at a time. Try doing this with the LIST command. Repeatedly entering the letter **L** will repeatedly list the same 23 lines. The reason is that LIST does not change the current line.

TRANSFER

The TRANSFER command (enter **t** or **T**) is included in the MS-DOS 2.X, 3.X, 4.X, and 5.X versions of EDLIN. The TRANSFER command merges the contents of a specified file with the file being edited.

You can specify the location at which the merged file is inserted into the file being edited by including a line number in the TRANSFER command. The merged file will be inserted ahead of the specified line. If you do not specify a line number, the merged file is inserted ahead of the current line. As an example, the command `100 t b:demo.txt` merges the file on drive B named DEMOTXT with the file being edited. DEMO.TXT is inserted ahead of line 100 in the file being edited.

The file being merged must be located in the current directory of the specified or default drive. The current directory cannot be changed while EDLIN is running. Refer to chapter 3 for a discussion of current directories.

APPENDIX

F

An Assembly Language Primer

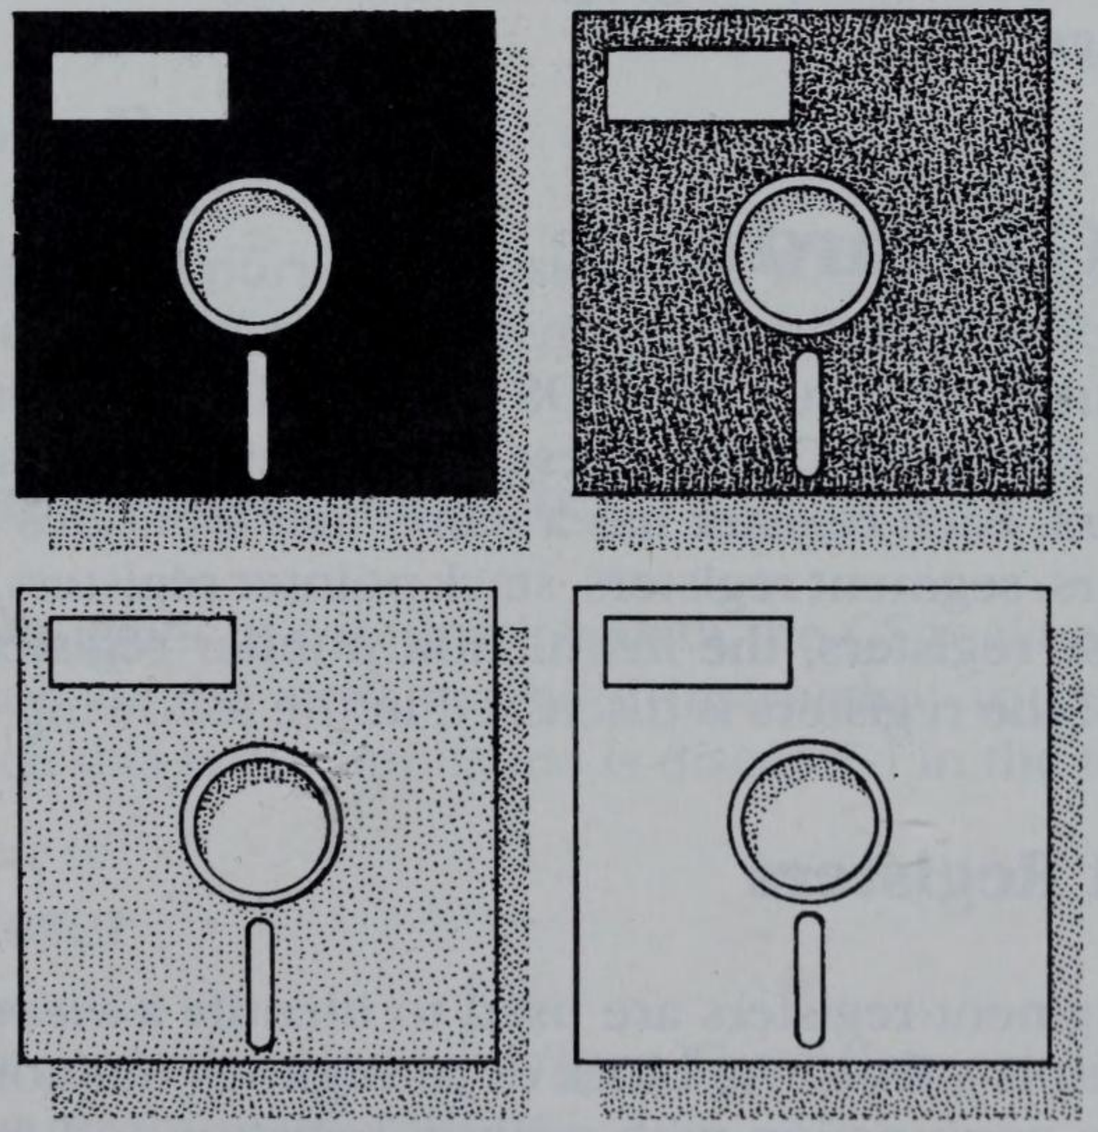

This appendix is provided for those readers with little or no experience with assembly language programming. The information presented here is sufficient to follow chapter 13's presentation of terminate and stay resident programs and chapter 14's presentation of device drivers. You may also wish to consult any of the excellent books available on assembly language programming for MS-DOS computers.

What Is Assembly Language Programming?

Assembly language programming provides the programmer with direct access to, and control of, memory, the central processing unit (CPU), and the peripheral devices. Assembly language programmers like to say that they are "closer" to the computer than are programmers who use a high-level language (such as BASIC or Pascal). This increased intimacy with the computer allows assembly language programmers to write programs that execute faster and require less memory. In addition, programs that are closely linked to MS-DOS (such as device drivers and TSRs) are generally written in assembly language, because MS-DOS itself is written in assembly language.

The MS-DOS Hardware

Computers that run MS-DOS contain CPUs belonging to the 8088/8086/80x86 family of CPUs. These CPUs have internal storage devices called *registers*. Each register has a name that identifies it. There are six types of registers: segment registers, stack pointer registers, index registers, general-purpose registers, the instruction pointer register, and the flags register. Each of the registers is discussed in the following sections.

Segment Registers

The segment registers are used to identify a *memory segment*. A memory segment is a 64-Kbyte block of contiguous memory. Segment registers are used in conjunction with pointer registers and index registers to identify specific memory locations. The method used to accomplish this is discussed in the following sections.

There are four segment registers. The CS register is used to reference the portion of memory containing the program's code (the program itself). The DS register is used to access the portion of memory storing the program's data. The SS register is used to access the portion of memory

known as the *stack*. The stack serves as a temporary storage area for information needed by MS-DOS or the program. The ES register is the extra segment register. It has various functions, some of which are discussed here.

Stack Pointer Registers

There are two stack pointer registers. These registers are used, in conjunction with the SS registers, to define the stack. The SP register, also called the *stack pointer*, is used, in conjunction with the SS register, to identify the *top of the stack*. Similarly, the BP register, also called the *base pointer*, is used, in conjunction with SS, to identify the base (bottom) of the stack.

Index Registers

There are two index registers. The SI and DI registers (source index and destination index) are used, in conjunction with one of the segment registers, to identify a memory location. SI is generally used with DS, and DI is generally used with ES.

General-Purpose Registers

There are four general-purpose registers: AX, BX, CX, and DX. As their class name implies, these registers perform many different functions.

The Instruction Pointer Register

The IP register is used, in conjunction with the CS register, to identify the memory location of the next machine instruction to be executed. The manner in which this is accomplished is discussed in the following text.

The Flags Register

The flags register contains nine 1-bit *flags*. These flags are used to record the status of certain machine operations.

Register Storage Capacity

Each of the registers stores 2 bytes, or 16 bits, of data. The general-purpose registers are actually composites of single-byte registers. Thus, AX is composed of AH, which holds AX's high-order byte, and of AL, which holds AX's

low-order byte. Similarly, BH, BL, CH, CL, DH, and DL are each 1-byte registers.

Accessing Memory

Memory is accessed by combining the contents of one of the segment registers with one of the other registers. The value stored in the segment register is called the *segment address*. The value stored in the other register is called the *offset address*. The actual physical memory location is computed by multiplying the segment address by 16 and adding the offset.

For example, if CS stores a value of 22BH and IP stores a value of 100H, 22BH is the segment address and 100H is the offset. The physical address referenced by the two registers is computed as follows:

segment*16 + offset = physical address

22BH*16 + 100H = 22B0H + 100H = 23B0H

The physical address is usually written as the segment followed by a colon followed by the offset. Thus, in the example this would be:

physical address = segment:offset = cs:ip = 22B:100

Note that numbers in assembly language programs are decimal unless they are followed by an *H* or *h*, in which case they are hexadecimal (base 16).

Assembly Language Statements

Assembly language statements are stored in memory as *machine instructions*. Programs are executed as follows:

1. The instruction at address CS:IP is read and executed.
2. IP is incremented so that CS:IP points to the next instruction.
3. Steps 1 and 2 are repeated until the program terminates.

There are many types of assembly language statements. We will discuss the most common ones here. A *move* (written *mov*) copies data from a register or memory location to another register or memory location. Moves directly from one memory location to another memory location are not allowed. A "mov" is actually a copy, because the original data is unchanged. The following statements illustrate the use of mov.

Statement	*Comment*
`mov ax,bc`	;copy contents of register BX into register AX.
`mov ax,temp`	;copy contents of memory location "temp" in AX.
`mov ax,00A2h`	;copy a value of A2H into AX.

Compares (written *cmp*) are used to compare the value stored in a register or memory location against a value stored in another register or memory location. The following statements illustrate the use of cmp.

Statement	*Comment*
`cmp ax,bx`	;compare the contents of AX to that in register BX.
`cmp dx,0060h`	;compare the contents of register DX to 60H.

The results of a compare are recorded in the CPU status flags. Compares are used in conjunction with conditional "jumps," which are discussed next.

A *jump* (written *jmp*) is used to direct the computer to a memory location that contains the next instruction to be executed. Generally, instructions are executed in a sequential fashion: after a statement is executed, the statement at the next highest memory location is executed. Jumps provide a mechanism for program execution to branch to nonneighboring memory locations. Jumps are either conditional or unconditional. A conditional jump first checks the settings of the status flags. If they are set in a particular pattern, the jump is executed; otherwise, the jump is not executed. Unconditional jumps are executed without checking the status flags. The following statements illustrate the use of unconditional and conditional jumps.

Statement	*Comments*
`jmp Init`	;jump to memory address "Init". ;this jump is unconditional.
`cmp ax,bx`	;compare AX contents to BX contents.
`je exit`	;if the contents are equal, jump to ;memory address "exit".
`cmp cx,0000h`	;compare contents of CX to 0000H.
`jg loop`	;if contents of CX are greater than 0000H, ;jump to memory address "loop".

A *call* (written *call*) is used to execute a set of instructions called a *procedure*. The first instruction in the procedure will generally have a label that is used as an access device. When a call is executed, MS-DOS places the contents of the IP register on the stack. Placing items on the stack is called a *push*. MS-DOS then places the offset address of the procedure being called in IP, and control is passed to the instruction at CS:IP.

The final statement in any procedure is a *return (ret)*. This instruction directs MS-DOS to remove the IP value that was stored on the stack. Removing an item from the stack is called a *pop*. When the IP value is popped, execution continues with the instruction immediately following the original call.

A long call is identical to a regular (or short) call with one exception. With a long call, the called procedure lies outside the current code segment. When the long call is executed, MS-DOS pushes both the CS and IP values onto the stack and replaces them with the segment and offset addresses of the called procedure. When the called procedure terminates (with a far return), the old CS and IP values are popped and execution continues at the instruction following the long call.

Invoking an interrupt is similar to a long call, with one exception. Before the CS and IP values are pushed, the value stored in the flags register is pushed onto the stack. When the interrupt handler terminates (with an `iret` statement), CS, IP, and the flags register are popped, and execution continues with the instruction following the interrupt call.

Interrupts are discussed in more detail in appendix A.

APPENDIX

G

ASCII Cross-Reference Tables

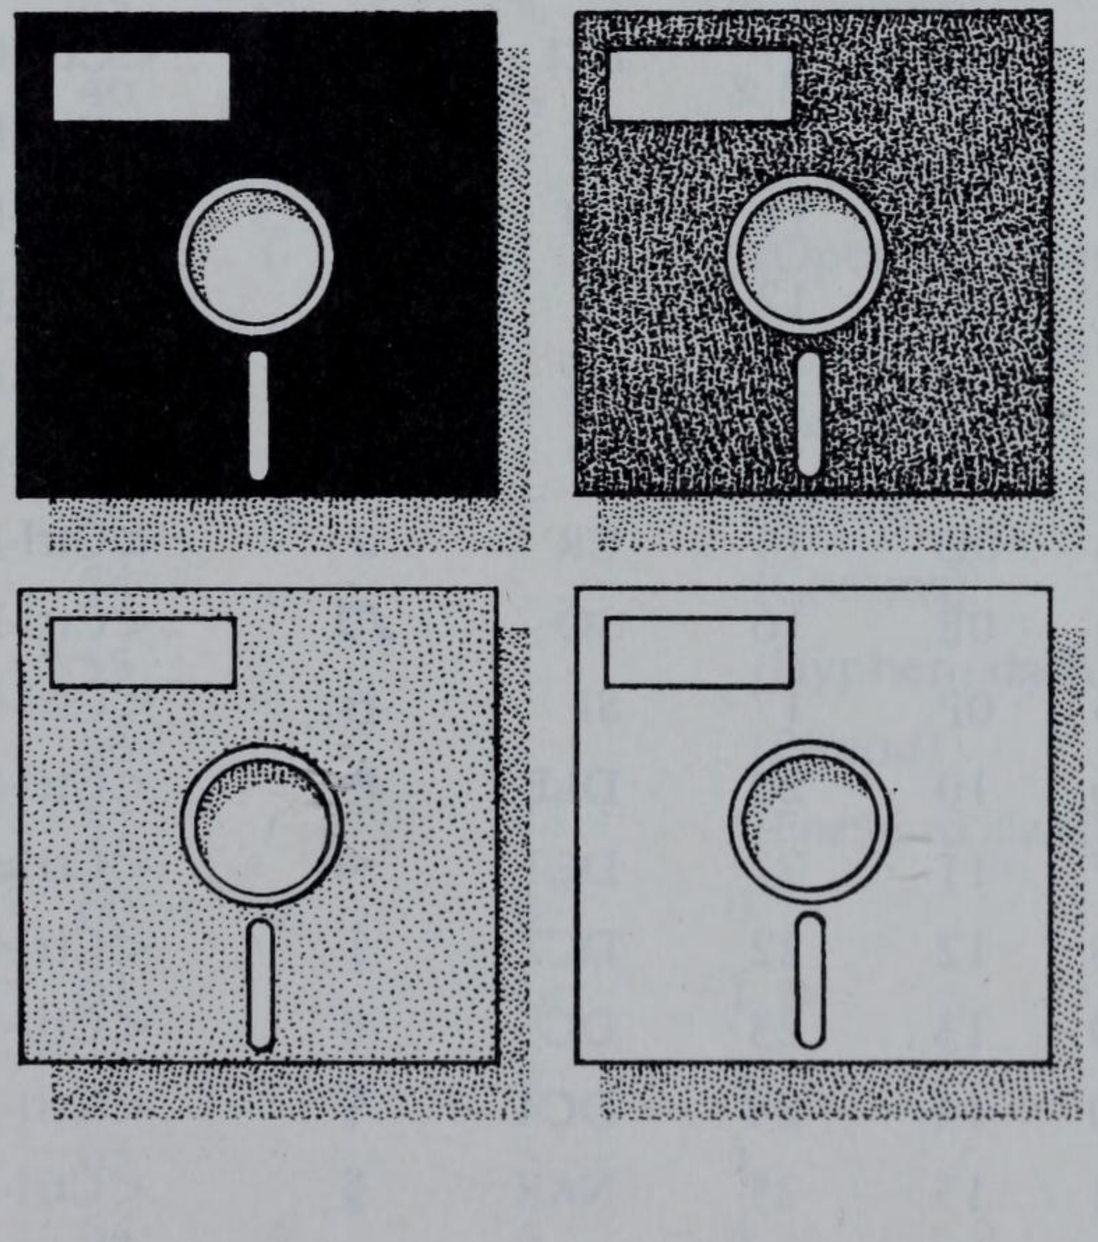

In addition to ASCII (see table G-1) and IBM ASCII extended cross-reference tables (see table G-2), this appendix explains how to convert from decimal to hexadecimal and vice versa.

Table G-3 shows the extended ASCII code.

Table G-1. ASCII Cross-Reference

DEC X_{10}	HEX X_{16}	OCT X_8	ASCII	IBM GRA. CHAR.	Terminal Key *
0	00	00	NUL	(null)	<Ctrl-@>
1	01	01	SOH	☺	<Ctrl-A>
2	02	02	STX	☻	<Ctrl-B>
3	03	03	ETX	♥	<Ctrl-C>
4	04	04	EOT	♦	<Ctrl-D>
5	05	05	ENQ	♣	<Ctrl-E>
6	06	06	ACK	♠	<Ctrl-F>
7	07	07	BEL	•	<Ctrl-G>
8	08	10	BS	◘	<Ctrl-H>
9	09	11	HT	○	<Ctrl-I>
10	0A	12	LF	■	<Ctrl-J>
11	0B	13	VT	♂	<Ctrl-K>
12	0C	14	FF	♀	<Ctrl-L>
13	0D	15	CR	♪	<Ctrl-M>
14	0E	16	SO	♫	<Ctrl-N>
15	0F	17	SI	☼	<Ctrl-O>
16	10	20	DLE	►	<Ctrl-P>
17	11	21	DC1	◄	<Ctrl-Q>
18	12	22	DC2	↕	<Ctrl-R>
19	13	23	DC3	‼	<Ctrl-S>
20	14	24	DC4	¶	<Ctrl-T>
21	15	25	NAK	§	<Ctrl-U>
22	16	26	SYN	_	<Ctrl-V>
23	17	27	ETB	↨	<Ctrl-W>
24	18	30	CAN	↑	<Ctrl-X>

DEC X_{10}	HEX X_{16}	OCT X_8	ASCII	IBM GRA. CHAR.	Terminal Key *
25	19	31	EM	↓	<Ctrl-Y>
26	1A	32	SUB	→	<Ctrl-Z>
27	1B	33	ESC	←	<Esc>
28	1C	34	FS	∟	<Ctrl-\>
29	1D	35	GS	↔	<Ctrl- '>
30	1E	36	RS	▲	<Ctrl-=>
31	1F	37	US	▼	<Ctrl- ->
32	20	40	SP	(Space)	<SPACE BAR>
33	21	41	!	!	! (Exclamation mark)
34	22	42	"	"	" (Quotation mark)
35	23	43	#	#	# (Number sign or octothorpe)
36	24	44	$	$	$ (Dollar sign)
37	25	45	%	%	% (Percent)
38	26	46	&	&	& (Ampersand)
39	27	47	'	'	' (Apostrophe or acute accent)
40	28	50	(	(	((Opening parenthesis)
41	29	51	)	)	) (Closing parenthesis)
42	2A	52	*	*	* (Asterisk)
43	2B	53	+	+	+ (Plus)
44	2C	54	,	,	, (Comma)
45	2D	55	-	-	- (Hyphen, dash, or minus)
46	2E	56	.	.	. (Period)
47	2F	57	/	/	/ (Forward slant)
48	30	60	0	0	0
49	31	61	1	1	1
50	32	62	2	2	2
51	33	63	3	3	3
52	34	64	4	4	4
53	35	65	5	5	5
54	36	66	6	6	6
55	37	67	7	7	7

continues

Table G-1. continued

DEC X_{10}	HEX X_{16}	OCT X_8	ASCII	IBM GRA. CHAR.	Terminal Key *
56	38	70	8	8	8
57	39	71	9	9	9
58	3A	72	:	:	: (Colon)
59	3B	73	;	;	; (Semicolon)
60	3C	74	<	<	< (Less than)
61	3D	75	=	=	= (Equals)
62	3E	76	>	>	> (Greater than)
63	3F	77	?	?	? (Question mark)
64	40	100	@	@	@ (Commercial at)
65	41	101	A	A	A
66	42	102	B	B	B
67	43	103	C	C	C
68	44	104	D	D	D
69	45	105	E	E	E
70	46	106	F	F	F
71	47	107	G	G	G
72	48	110	H	H	H
73	49	111	I	I	I
74	4A	112	J	J	J
75	4B	113	K	K	K
76	4C	114	L	L	L
77	4D	115	M	M	M
78	4E	116	N	N	N
79	4F	117	O	O	O
80	50	120	P	P	P
81	51	121	Q	Q	Q
82	52	122	R	R	R
83	53	123	S	S	S
84	54	124	T	T	T
85	55	125	U	U	U
86	56	126	V	V	V

DEC X_{10}	HEX X_{16}	OCT X_8	ASCII	IBM GRA. CHAR.	Terminal Key *
87	57	127	W	W	W
88	58	130	X	X	X
89	59	131	Y	Y	Y
90	5A	132	Z	Z	Z
91	5B	133	[	[	[(Opening bracket)
92	5C	134	\	\	\ (Reverse slant)
93	5D	135	]	]	] (Closing bracket)
94	5E	136	^	^	^ (Caret or circumflex)
95	5F	137	_	_	_ (Underscore or underline)
96	60	140	`	`	` (Grave accent)
97	61	141	a	a	a
98	62	142	b	b	b
99	63	143	c	c	c
100	64	144	d	d	d
101	65	145	e	e	e
102	66	146	f	f	f
103	67	147	g	g	g
104	68	150	h	h	h
105	69	151	i	i	i
106	6A	152	j	j	j
107	6B	153	k	k	k
108	6C	154	l	l	l
109	6D	155	m	m	m
110	6E	156	n	n	n
111	6F	157	o	o	o
112	70	160	p	p	p
113	71	161	q	q	q
114	72	162	r	r	r
115	73	163	s	s	s
116	74	164	t	t	t
117	75	165	u	u	u

continues

Table G.1. continued

DEC X_{10}	HEX X_{16}	OCT X_8	ASCII	IBM GRA. CHAR.	Terminal Key *
118	76	166	v	v	v
119	77	167	w	w	w
120	78	170	x	x	x
121	79	171	y	y	y
122	7A	172	z	z	z
123	7B	173	{	{	{ (Opening brace)
124	7C	174	¦	¦	¦ (Vertical bar; logical OR)
125	7D	175	}	}	} (Closing brace)
126	7E	176	~	~	~ (Tilde)
127	7F	177	DEL	DEL	<Del>

*Those key sequences consisting of "<Ctrl–>" are typed in by pressing the CTRL key and, while it is being held down, pressing the key indicated. These sequences are based on those defined for the IBM Personal Computer series keyboards. The key sequences may be defined differently on other keyboards. IBM Extended ASCII characters can be displayed by pressing the <Alt> key and then typing the decimal code of the character on the keypad.

Table G-2. IBM ASCII Extended Cross-Reference

BINARY X_2	OCT X_8	DEC X_{10}	HEX X_{16}	Ext. ASCII
1000 0000	200	128	80	Ç
1000 0001	201	129	81	ü
1000 0010	202	130	82	é
1000 0011	203	131	83	â
1000 0100	204	132	84	ä
1000 0101	205	133	85	à
1000 0110	206	134	86	å
1000 0111	207	135	87	ç
1000 1000	210	136	88	ê
1000 1001	211	137	89	ë
1000 1010	212	138	8A	è

BINARY X_2	OCT X_8	DEC X_{10}	HEX X_{16}	Ext. ASCII
1000 1011	213	139	8B	ï
1000 1100	214	140	8C	î
1000 1101	215	141	8D	ì
1000 1110	216	142	8E	Ä
1000 1111	217	143	8F	Å
1001 0000	220	144	90	É
1001 0001	221	145	91	æ
1001 0010	222	146	92	Æ
1001 0011	223	147	93	ô
1001 0100	224	148	94	ö
1001 0101	225	149	95	ò
1001 0110	226	150	96	û
1001 0111	227	151	97	ù
1001 1000	230	152	98	ÿ
1001 1001	231	153	99	Ö
1001 1010	232	154	9A	Ü
1001 1011	233	155	9B	¢
1001 1100	234	156	9C	£
1001 1101	235	157	9D	¥
1001 1110	236	158	9E	P_t
1001 1111	237	159	9F	*f*
1010 0000	240	160	A0	á
1010 0001	241	161	A1	í
1010 0010	242	162	A2	ó
1010 0011	243	163	A3	ú
1010 0100	244	164	A4	ñ
1010 0101	245	165	A5	Ñ
1010 0110	246	166	A6	a
1010 0111	247	167	A7	o
1010 1000	250	168	A8	¿
1010 1001	251	169	A9	⌐

continues

Table G-2. continued

BINARY X_2	OCT X_8	DEC X_{10}	HEX X_{16}	Ext. ASCII
1010 1010	252	170	AA	¬
1010 1011	253	171	AB	½
1010 1100	254	172	AC	¼
1010 1101	255	173	AD	¡
1010 1110	256	174	AE	«
1010 1111	257	175	AF	»
1011 0000	260	176	B0	░
1011 0001	261	177	B1	▒
1011 0010	262	178	B2	▓
1011 0011	263	179	B3	│
1011 0100	264	180	B4	┤
1011 0101	265	181	B5	╡
1011 0110	266	182	B6	╢
1011 0111	267	183	B7	╖
1011 1000	270	184	B8	╕
1011 1001	271	185	B9	╣
1011 1010	272	186	BA	║
1011 1011	273	187	BB	╗
1011 1100	274	188	BC	╝
1011 1101	275	189	BD	╜
1011 1110	276	190	BE	╛
1011 1111	277	191	BF	┐
1100 0000	300	192	C0	└
1100 0001	301	193	C1	┴
1100 0010	302	194	C2	┬
1100 0011	303	195	C3	├
1100 0100	304	196	C4	─
1100 0101	305	197	C5	┼
1100 0110	306	198	C6	╞
1100 0111	307	199	C7	╟
1100 1000	310	200	C8	╚
1100 1001	311	201	C9	╔

BINARY X_2	OCT X_8	DEC X_{10}	HEX X_{16}	Ext. ASCII
1100 1010	312	202	CA	╩
1100 1011	313	203	CB	╦
1100 1100	314	204	CC	╠
1100 1101	315	205	CD	═
1100 1110	316	206	CE	╬
1100 1111	317	207	CF	╧
1101 0000	320	208	D0	╨
1101 0001	321	209	D1	╤
1101 0010	322	210	D2	╥
1101 0011	323	211	D3	╙
1101 0100	324	212	D4	╘
1101 0101	325	213	D5	╒
1101 0110	326	214	D6	╓
1101 0111	327	215	D7	╫
1101 1000	330	216	D8	╪
1101 1001	331	217	D9	┘
1101 1010	332	218	DA	┌
1101 1011	333	219	DB	■
1101 1100	334	220	DC	▄
1101 1101	335	221	DD	▌
1101 1110	336	222	DE	▐
1101 1111	337	223	DF	▀
1110 0000	340	224	E0	α
1110 0001	341	225	E1	β
1110 0010	342	226	E2	Γ
1110 0011	343	227	E3	π
1110 0100	344	228	E4	Σ
1110 0101	345	229	E5	σ
1110 0110	346	230	E6	μ
1110 0111	347	231	E7	τ
1110 1000	350	232	E8	Φ
1110 1001	351	233	E9	Θ

continues

Table G-2. continued

BINARY X_2	OCT X_8	DEC X_{10}	HEX X_{16}	Ext. ASCII
1110 1010	352	234	EA	Ω
1110 1011	353	235	EB	δ
1110 1100	354	236	EC	∞
1110 1101	355	237	ED	ϕ
1110 1110	356	238	EE	ϵ
1110 1111	357	239	EF	∩
1111 0000	360	240	F0	≡
1111 0001	361	241	F1	±
1111 0010	362	242	F2	≥
1111 0011	363	243	F3	≤
1111 0100	364	244	F4	⌠
1111 0101	365	245	F5	⌡
1111 0110	366	246	F6	÷
1111 0111	367	247	F7	≈
1111 1000	370	248	F8	°
1111 1001	371	249	F9	∙
1111 1010	372	250	FA	·
1111 1011	373	251	FB	√
1111 1100	374	252	FC	η
1111 1101	375	253	FD	^{2}
1111 1110	376	254	FE	■
1111 1111	377	255	FF	(blank 'F')

Abbreviations:

DEC = Decimal (Base 10)
HEX = Hexadecimal (Base 16)
OCT = Octal (Base 8)
ASCII = American Standard Code for Information Interchange

Table G-3. Extended ASCII Code

Key(s) Pressed	Extended ASCII Code Generated	Key(s) Pressed	Extended ASCII Code Generated
F1	0,59	Ctrl-F1	0,94
F2	0,60	Ctrl-F2	0,95
F3	0,61	Ctrl-F3	0,96
F4	0,62	Ctrl-F4	0,97
F5	0,63	Ctrl-F5	0,98
F6	0,64	Ctrl-F6	0,99
F7	0,65	Ctrl-F7	0,100
F8	0,66	Ctrl-F8	0,101
F9	0,67	Ctrl-F9	0,102
F10	0,68	Ctrl-F10	0,103
Shift-F1	0,84	Alt-F1	0,104
Shift-F2	0,85	Alt-F2	0,105
Shift-F3	0,86	Alt-F3	0,106
Shift-F4	0,87	Alt-F4	0,107
Shift-F5	0,88	Alt-F5	0,108
Shift-F6	0,89	Alt-F6	0,109
Shift-F7	0,90	Alt-F7	0,110
Shift-F8	0,91	Alt-F8	0,111
Shift-F9	0,92	Alt-F9	0,112
Shift-F10	0,93	Alt-F10	0,113

Hexadecimal to Decimal Conversion

Figure G-1 shows how the hexadecimal number 7D2F is converted to its decimal equivalent.

Each hexadecimal digit is always 16 times greater than the digit immediately to the right.

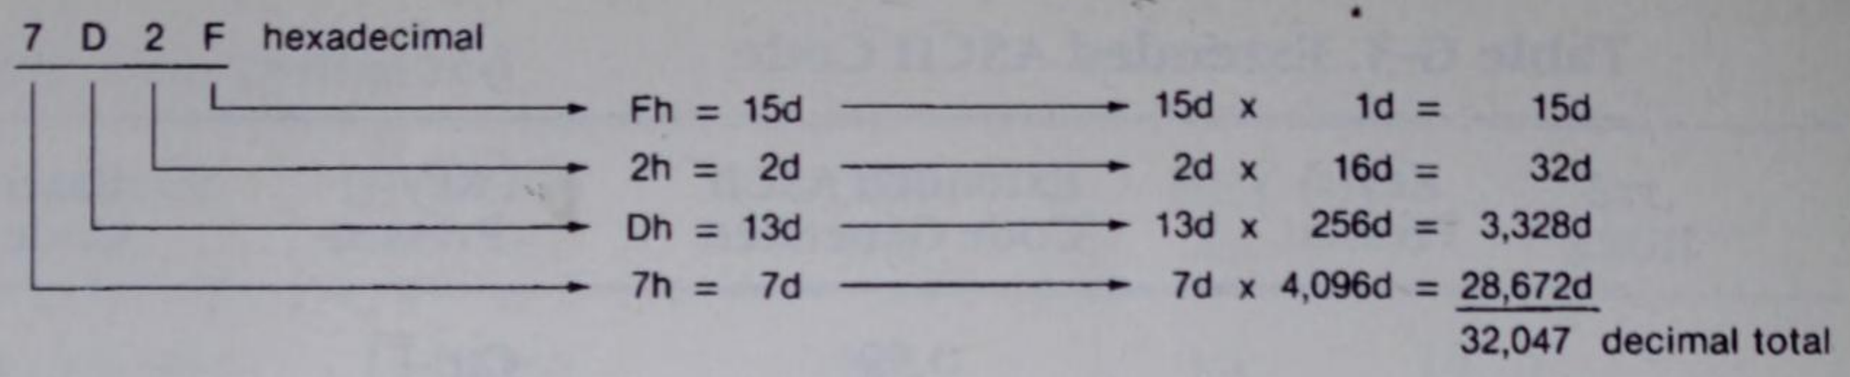

Figure G-1. Converting a hexadecimal number to decimal.

Decimal to Hexadecimal Conversion

The process is reversed when you convert decimal numbers to hexadecimal. Start by selecting the leftmost digit and determine its significance in the number (thousands, hundreds, and so on). Then the decimal is divided by the hexadecimal value of the first digit's relative position. That is, if the first digit is in the thousands position, divide by 4,096 (hexadecimal equivalent of 1,000 decimal). The result is the first hexadecimal digit. Then the remainder is divided by the hexadecimal value of the next digit's relative position (for example, divide the hundreds digit by 256 because 256 is the hexadecimal equivalent of 100 decimal). Figure G-2 shows how the decimal number derived in the previous example is converted back to hexadecimal.

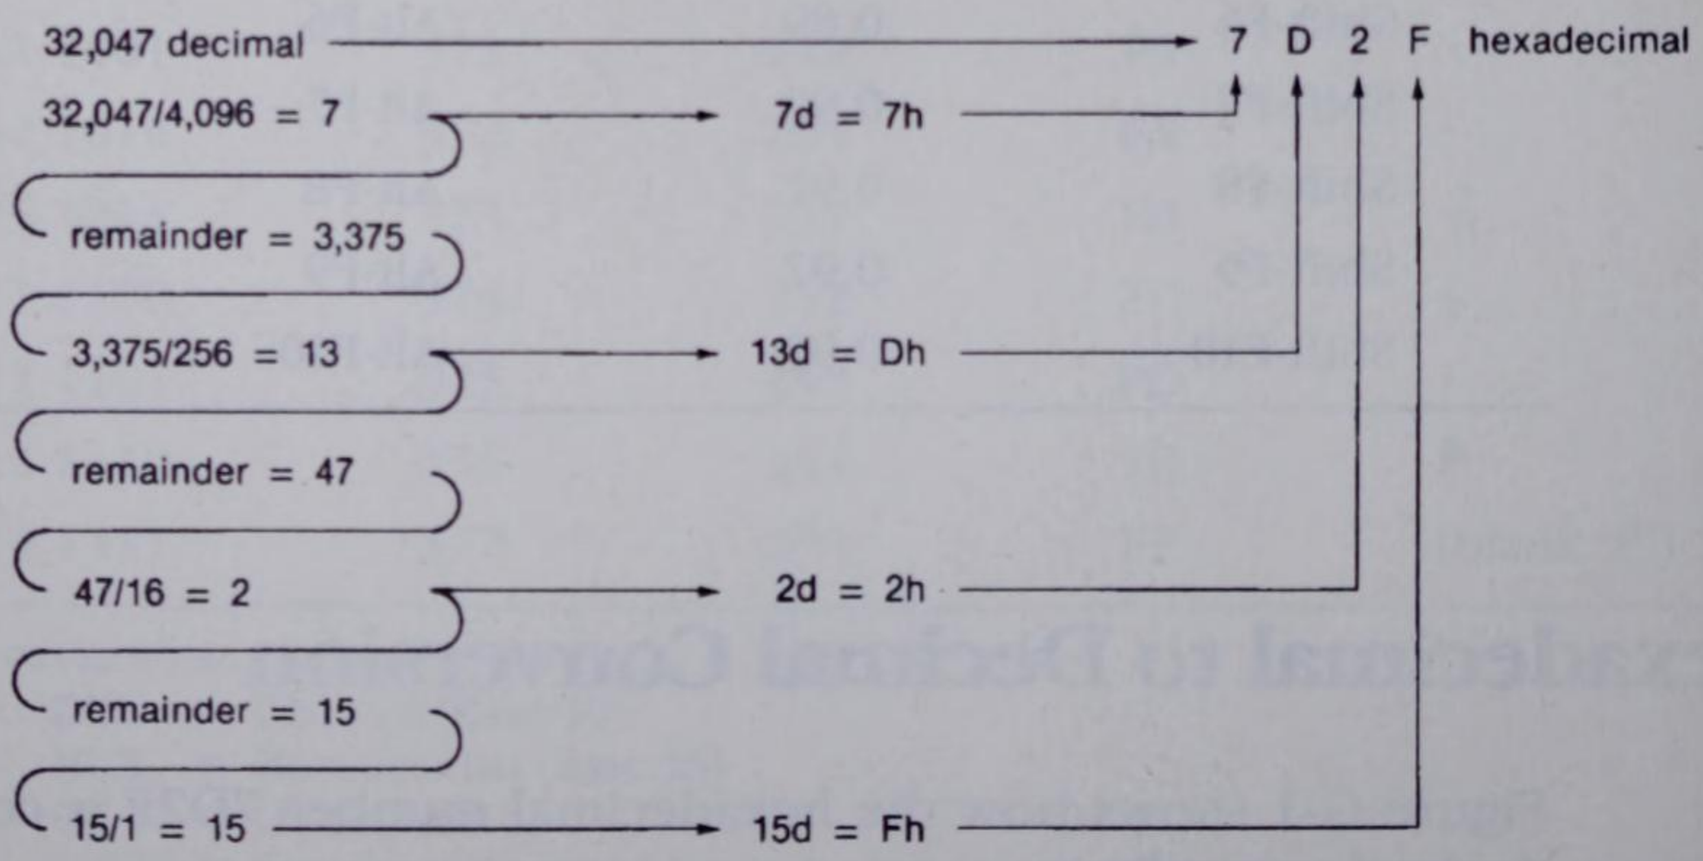

Figure G-2. Converting a decimal number to hexadecimal.

INDEX

/1 switch
  DISKCOMP command, 442
  FORMAT command, 471
/4 switch (FORMAT command), 472
/8 switch (FORMAT command), 471
80286, 80386, 80486 CPUs, 232
8088/86 CPU, 231, 236

A

/A switch (RAMDRIVE.SYS device driver), 422
/a switch
  BACKUP command, 387
  COPY command, 411
  FC command, 462
/a:attributes command switch (DIR command), 438
/a:mm-dd-yy switch (RESTORE command), 523
activating areas in DOSSHELL, 116
active partition, 21-22
Active Task List (DOSSHELL), 145
address space, 231
addresses, memory, 321
All Files command (View menu, DOSSHELL), 121
Allocate memory function, 608
Allocation Error, Size Adjusted error message, 397
Allocation
  information for specific drive function, 584
  table information function, 584
Alter Page Map
  and Call function, 255
  and Jump function, 255
ANSI.SYS file, 162
  attributes, setting, 174-180
  commands, 163-169
  cursor, controlling position, 174-180
  display mode, setting, 174-180
  features, 163
  flags, 162
  reassigning keyboard, 168-174
APPEND command, 48, 373-378
  EDLIN text editor, 664
application programs
  loading into reserved memory, 445-446, 486
  version specific, running under MS-DOS 5, 529-530
AQA EEMS, 236-237
archival form, backups, 383
archiving
  attributes, 191, 380-381
  files, 380
ASCII files, 150
  comparing, 459-461
(A)SSEMBLE DEBUG utility program command, 318, 341-342

assembler, 333
assembly language, 332
  programming, 672
    composing, 341-342
    modifying, 341-342
  statements, 674-676
ASSIGN command, 379
assignment statement, 78
Associate command (File menu, DOSSHELL), 127-130
AST Research/Quadram/Ashton-Tate Enhanced Expanded Memory Specification, *see* AQA EEMS
asterisk (*) wildcard, 31-32, 53-54
asynchronous communications port, initializing, 499-500
ATTRIB command, 133, 380-382
attributes, 133
  archive, 380-381
  file attributes, 380
  hidden, 381
  read-only, 380
  setting, 174-180
  system, 381
AUTOEXEC.BAT file, 5, 93-95, 635
AUX peripheral device, 99
Auxiliary input/output. function, 577

B

/b command switch (DIR command), 439
COPY command, 411
  FC command, 462
  FORMAT command, 471
  GRAPHICS command, 477
/b:buffersize switch (PRINT command), 511
/b:mm-dd-yy switch (RESTORE command), 523
backing up
  directories, 383-385
  disks, 385-386
  files, 383-387
BACKUP command, 383-388
  versus XCOPY command, 555
backup copies, 11
batch files, 50-51, 473
  CALL command, 66-67
  calling
    another batch file, 392
    batch file modules, 66-68
  creating, 51-52, 635-637
  customizing booting process, 635-637
  displaying messages during execution, 517
  ECHO command, 57-60
  environment variables, 68-70
  FOR command, 64-65
  GOTO command, 60-61
  IF command, 62
  IF ERRORLEVEL command, 63
  IF EXIST command, 62-63
  IF NOT command, 64
  line label, 60
  modifying command display during execution, 454
  PAUSE command, 54-56
  REM command, 56-57
  secondary command processor, 67
  SHIFT command, 65
  specifying more than ten parameters, 534
  suspending execution, 508
  transferring control within, 474
binary files, converting EXE files to, 455
BIOS
  data area, 489
  interrupts, 489
block devices, 293
boots
  disk, 5
  record, 185, 467
    layout on disk, 194
    maintaining information about, 491-494

booting, 4-5, 211-214
BREAK command, 389
break scan code, 539
BREAK system parameter, 79, 85-86
BRK_OFF.C program, 565-570
BUFFER
  command, 390-392
  system parameter, 86-87
Buffered keyboard input function, 578
buffers, 447
BUFFERS system parameter, 79
BUILD BPB driver command, 306-307
bytes, 562-565
bytes disk space freed error message, 400

C

/c switch
  COMMAND command, 402
  DRIVER.SYS, 424
  DRIVPARM command, 454
  FC command, 462
  FIND command, 465
  PRINT command, 510
call (call) assembly language statement, 676
CALL command, 66-67, 392
calls, 66
Cancel redirection. function, 624
Cannot CHDIR to file specifier error message, 398
Cannot CHKDSK a Network Drive error message, 398
chaining, 239, 264
Change Attributes command (File menu, DOSSHELL), 133-134
Change command, 160
Change current directory. function, 595
character
  devices, 293
  tables, loading into memory, 474-475
characters
  global, *see* wildcards
  group of, representing, 31
  single, representing, 31
CHCP command, 393, 642
CHDIR command, 39-40, 393-395
Check standard input status function, 578
child programs, 222, 609
  passing environment to, 225
CHKDSK command, 396-397
  error messages, 397-400
clearing screen, 401
clicking, 114
clipboard, 157
Close a file handle function, 598
Close file function, 580
CLS command, 179, 401
clusters, 193-197, 546
code pages, 482, 503, 640
  prepared, 501
  programming guidelines, 643
  selecting, 502-503
    for system, 393
  status, 503
  switching, 641-642
cold boot, 10
Collapse Branch command (Tree menu, DOSSHELL), 148
Color command (Options menu, DOSSHELL), 147
COM file, requirements, 221
COM files, 456
COM1, COM2, COM3, COM4 periphral devices, 99
COMMAND command, 402-404
command
  interpreter, 108, 188
  lines, 9
    interface, 108
    help, 108
    editing keys, 449-450
    templates, 449

processors, 402-403
loading, 89-90, 533
sequences, 163
switch, 23
command-driven operating system, 9, 367
COMMAND.COM
command interpreter, 108, 213-214
system file, 90, 186-188
commands
ANSI.SYS file, 163-169
APPEND, 48, 373-378
EDLIN text editor, 664
(A)SSEMBLE (DEBUG utility program), 341-342
ASSIGN, 379
ATTRIB, 133, 380-382
BACKUP, 383-388
versus XCOPY, 555
BREAK, 389
BUILD BPB driver command, 306-307
BUFFER, 390-392
CALL, 66-67, 392
Change, 160
CHCP, 393, 642
CHDIR, 39-40, 393-395
CHKDSK, 396-400
CLS, 179, 401
COMMAND, 402-405
COMP, 405-407
(C)OMPARE (DEBUG utility program), 346-347
COPY, 407-413
EDLIN text editor, 667-668
COUNTRY, 413-414
CTTY, 414-415
current, 447
DATE, 416-417
DEBUG utility program, 317-320
DEL, 417-418, 544
DELETE (EDLIN text editor), 659-662
DEVICE, 419
DEVICE CLOSE driver command, 310
DEVICE OPEN driver command, 310
DEVICEHIGH, 433-434, 446
DIR, 10-11, 35, 434-436
DOS 5 enhancements, 438
switches, 436-440
wildcards, 437
DISKCOMP, 441-443
DISKCOPY, 443-444
DOS, 445-446
DOSKEY, 447
buffers, 451
command line editing keys, 449-450
command list, 448
entering multiple commands, 452
reloading, 451
driver commands, 303-313
DRIVPARM, 452-454
(D)UMP (DEBUG utility program), 327, 333-334
ECHO, 57-60, 454
EDIT (EDLIN text editor), 656
EDIT text editor, 648-650
END (EDLIN text editor), 665
entering, 9
multiple commands simultaneously, 452
ERASE, 455
EXE2BIN, 455-457
executing
from CONFIG.SYS, 479
only when specified condition is true, 477-479
repeatedly on set of parameters, 466
Exit, 159
external, 368
FASTOPEN, 457-459
FC, 459-462
FCBS, 462-463
FDISK, 463
FILES, 464-465
(F)ILL (DEBUG utility program), 349-350
FIND, 103-105, 465-466

Find, 159
FOR, 64-65, 466
FORMAT, 185, 467-473
formats, 369-370
GENERIC I/O CONTROL driver command, 312
GET LOGICAL DEVICE, 312
(G)O (DEBUG utility program), 336-339
GOTO, 60-61, 474
GRAFTABL, 474-475
GRAPHICS, 475-477
(H)EXADECIMAL (DEBUG utility program), 351
ICTL INPUT driver command, 307-308
IF, 62, 477-479
IF ERRORLEVEL, 63
IF EXIST, 62-63
IF NOT, 64
INIT driver command, 303-304
(I)NPUT (DEBUG utility program), 350
INPUT driver command, 308
INPUT FLUSH driver command, 309
INPUT STATUS driver command, 309
INSERT (EDLIN text editor), 650-653
INSTALL, 79, 88-89, 479
internal, 368
IOCTL OUTPUT driver command, 310
JOIN, 480-481
KEYB, 481-483
KEYBxx.COM, 484
LABEL, 484, 485
LASTDRIVE, 485
LIST (EDLIN text editor), 653-655
(L)OAD (DEBUG utility program), 343-345
LOADHIGH, 446, 486
loading from CONFIG.SYS, 479
maintaining list of commands entered on command line, 447
MEDIA CHECK driver command, 304-305
MEM, 487-490
MIRROR, 491-494
MKDIR, 494-495, 504
MODE, 495-504, 642
  code pages, 501-503, 642
modifying display during batch file execution, 454
MORE, 105, 504-505
(M)OVE (DEBUG utility program), 348-349
MOVE (EDLIN text editor), 666-667
(N)AME (DEBUG utility program), 342-343
network drives, 372
New, 158
NLSFUNC, 505
NONDESTRUCTIVE READ driver command, 308
notation, 370-371
Open, 158
(O)UTPUT (DEBUG utility program), 350
OUTPUT driver command, 309
OUTPUT FLUSH driver command, 309
OUTPUT STATUS driver command, 309
OUTPUT UNTIL BUSY driver command, 311
OUTPUT WITH VERIFY driver command, 309
PAGE (EDLIN text editor), 668-669
PATH, 45, 506-507
PAUSE, 54-56, 508
PRINT, 508-512
Print, 158
PROMPT, 175-176, 512-514
QUIT (EDLIN text editor), 665
RECOVER, 515-517
redirecting, 99-100
(R)EGISTER (DEBUG utility program), 330-332
REM, 56-57, 517
REMOVABLE MEDIA driver command, 311
RENAME, 518

REPLACE, 519-520
REPLACE (EDLIN text editor), 662-664
RESTORE, 521-524
RMDIR, 524-525
Save As, 158
(S)EARCH (DEBUG utility program), 347-348
SEARCH (EDLIN text editor), 660
SELECT, 526-527
SET, 528-529
SET LOGICAL DEVICE driver command, 313
SETVER, 529-531
SHARE, 532
SHELL, 533-534
SHIFT, 65, 534
SORT, 101-103, 535
STACKS, 536
start, 50
SUBST, 536-537
SWITCHAR, 537-538
SWITCHES, 539
switches, 371
SYS, 539-540
TIME, 540-541
(T)RACE (DEBUG utility program), 339-341
TRANSFER (EDLIN text editor), 669
TREE, 43-44, 542
TRUENAME, 543
TYPE, 544
(U)NASSEMBLE (DEBUG utility program), 333-336
UNDELETE, 545-548
UNFORMAT, 548-551
VER, 551
VERIFY, 552
VOL, 552
wildcards, 371
(W)RITE (DEBUG utility program), 345-346
WRITE (EDLIN text editor), 664
XCOPY, 553-555

Commit file function, 625
communications protocol, 81
COMP command, 405-407
(C)OMPARE DEBUG utility program command, 318, 346-347
comparing file's contents, 405-407
computer files, 26
computer memory, *see* memory
CON peripheral device, 99
concatenation, 407
CONFIG.SYS file, 5, 83, 293
creating, 83-84
executing statements within, 85
loading/executing DOS commands from, 479
sample, 92-93
configuration, 78
configuring hard disks, 463
Confirmation command (Options menu, DOSSHELL), 143
Console input without echo function, 577
Contains invalid cluster, file truncated error message, 398
control string subfunctions, 602
conventional memory, 445
Convert directory to file (Y/N)? error message, 398
Convert lost chains to files (Y/N)? error message, 399
COPY command, 407-413
EDLIN text editor, 667-668
Copy command (File menu, DOSSHELL), 130-133, 136
copying
contents of floppy disk from one to another, 443-444
files, 28-30, 407-409
text, 157
COUNTRY command, 413-414
country information file, specifying, 505
COUNTRY system parameter, 79, 87
country-specific system disks, 526-527

cpi (code page information) files, 641
CPU (central processing unit), 210, 229-230, 292
  80286, 80386, 80486, 232
  8088/86, 231, 236
  flags, 330-332
  registers, 330-332
critical errors, 267
CS (code segment), 210
Ctrl-Alt-Del key combination, 10
Ctrl-Break, 51, 85-86
  capturing when entered on keyboard, 565-570
  check or set function, 591
  controlling frequency MS-DOS checks for, 389
Ctrl-C
  capturing when entered on keyboard, 565-570
  controlling frequency MS-DOS checks for, 389
Ctrl-Z character, 647
CTTY command, 414-415
current
  commands, 447
  directory, 38, 393
    changing, 39-40, 117, 393-394
    displaying path, 393-395
  drive, 116
  line, 648
  time, displaying, 540-541
Current disk function, 583
cursor, 5
  positioning, 156, 163-165, 174-180
cylinders, 16, 184

D

/d switch
  BACKUP command, 387
  XCOPY command, 554
/D:ddd switch (DRIVER.SYS), 424
/d:device switch (PRINT command), 511
/d:number switch (DRIVPARM command), 453
data
  area, 300
  displaying 23 lines at a time, 504-505
  moving blocks from one memory location to another, 348-349
  recovering from files/disks, 515-517
  sorting, 535
  storing on disks, 345-346
date
  changing/displaying, 416-417
  default values, 10
  setting, 6-7
  stamp, 6, 10, 191
DATE command, 416-417
DEBUG utility program, 169, 198, 316
  (A)SSEMBLE command, 341-342
  (C)OMPARE command, 346-347
  (D)UMP command, 327, 333-334
  (F)ILL command, 349-350
  (G)O command, 336-339
  (H)EXADECIMAL command, 351
  (I)NPUT command, 350
  (L)OAD command, 343-345
  (M)OVE command, 348-349
  (N)AME command, 342-343
  (O)UTPUT command, 350
  (R)EGISTER command, 330-332
  (S)EARCH command, 347-348
  (T)RACE command, 339-341
  (U)NASSEMBLE command, 333-336
  (W)RITE command, 345-346
commands, 317-320
context saving, 249-253
creating menu for controlling batch files, 634-635
entering data with, 327-329
examining
  FAT, 202-204
  file directories, 198-201
expanded memory, 243, 352

flags, 331
loading, 198
loops, 351-352
mapping context, 249-253
memory dump, 199-201, 322-327
quitting, 321
reading/writing to page frame, 247-248
starting, 244-247, 321
symbols, 331
DEBUG.COM file, 333-334
default
drive, 15
values, 10, 78
DEL command, 417-418, 544
Del key, 658
Delete a directory entry function, 599
DELETE command (EDLIN text editor), 659-662
Delete command (File menu, DOSSHELL), 133, 136
Delete file. function, 581
deleting
subdirectories, 44-45, 524-525
version tables entries, 530
Deselect All command (File menu, DOSSHELL), 134
DESQView, 230
destination index register, 673
device attributes, 294
DEVICE CLOSE driver command, 310
DEVICE command, 419
device
drivers, 78, 186, 292, 452
adding, 293
DISPLAY.SYS, 426-427
DRIVER.SYS, 423-426
EMM386.EXE, 431-432
HIMEM.SYS, 430-431
installable, 81-82
installing, 298, 419
interrupt routine, 301
loading into reserved memory, 433-434, 445-446
locating for peripheral devices, 299
parts, 294
PRINTER.SYS, 427-428
RAMDRIVE.SYS, 421
redefining parameters for block devices, 452-454
skeleton, 301-303
SMARTDRV.SYS, 422-423
standard peripheral devices supported, 292-293
VDISK.SYS, 420-421
XMA2EMS.SYS, 428-429
XMAEM.SYS, 429
header, 294-296
information subfunctions, 602
names, 293, 297
statements, 82
DEVICE OPEN driver command, 310
DEVICEHIGH command, 433-434, 446
/dhist switch (DOSKEY command), 451
dialog boxes, 124, 151
DIR command, 10-11, 35, 434-440
Direct console I/O. function, 577
direct memory access, *see* DMA
directories, 36
analyzing, 396-397
backing up, 383-385
current, 38
changing, 39-40, 117, 393-394
displaying
directory paths on specified drive, 393-395, 542
true name, 543
files, 26-27, 185-186, 189
breakdown of bytes in entries, 190-191
examining with DEBUG utility program, 198-201
directories, 34, 515
listing entries, 434-436
parent, 40, 395
paths, 37
root, 35-36, 84

maintaining information about, 491-494
searching for executable files, 506-507
directory tree selection area (DOSSHELL), 112
Disk error reading drive A error message, 15
Disk error writing FAT x error message, 399
Disk Operating System Technical Reference manual, 456
Disk reset function, 579
disk swapping, 14
DISKCOMP command, 441-443
DISKCOPY command, 443-444
DISKCOPY.COM program, 11
disks, 182
analyzing subdiectories on, 396-397
assigning drives, 423
backing up, 385-386
backup copies, 11-14
boot disk, 5
boot record, 185
layout on disk, 194
buffers, 86-87, 390-392
caches, 422
clusters, 546
country-specific system disk, 526-527
cylinders, 184
detecting changing, 532
directories, 5
double-sided, layout, 195
drive selection area (DOSSHELL), 112
drives
changing, 15-16
linking subdirectory to another disk drive, 480-481
erasing files from, 417-418, 455
file directories, 185-186, 189-191, 515-516
floppy, 182-184
comparing contents, 441-443
copying contents from one to another, 443-444
initializing, 467-469
formatting, 14-15, 185
hard
adding system files to, 469
configuring, 463
formatting, 23-24
initializing, 467-469
installing MS-DOS on, 16
partitioning, larger than 32 Mbytes, 532
platters, 184
high-density, 183
maintaining information about FAT/ boot record, 491-494
partition tables, 493
partitions, 198
RAM, 419
recovering data from damaged file directories, 515-517
restoring files from one disk to another, 521-523
sectors, 182-184, 467, 515-516
relative sector, 198
single-sided, layout, 194
source, 12, 29, 443
storing data on, 345-346
system, 11-14
target, 12, 29, 443
tracks, 182-183
transferring system files to, 539-540
tree structure, 43-44
verifying accuracy of disk writes, 92
virtual, 419
see also RAM disk
volume labels, 484-485
displaying, 552
Display command (Options menu, DOSSHELL), 147
display mode, 167-168, 174-180
Display output. function, 576
display screen, 165-166
DISPLAY.SYS device driver, 426-427
DMA (registers), 256

/dmacs switch (DOSKEY command), 452
DOS
  command, 445-446
  environment, 89-90
    counting number of bytes stored in, 562-565
  extensions, 88-89
  see also, MS-DOS
DOSKEY command, 447
  buffers, 451
  command
    line editing keys, 449-450
    list, 448
  entering multiple commands, 452
  reloading, 451
DOSSHELL, 108-110
  activating areas, 116
  Active Task List, 145
  changing current directory/drive, 116-117
  displays, 112
  exiting, 111
  files, 111, 117, 122-124
  highlighting items, 116
  interface selection areas, 112-114
  menu bar, 112-114, 119
  menus
    Help, 148
    Options, 143-144, 147
    Tree, 147
  programs, 110
    advanced features, 141-142
    creating new programs, 137-140
    list of, 112
    modifying, 142
    program subgroups, 143
    selecting, 117
  selecting items, 116
  starting, 111
  task swapper, 144-147
  double-sided disk, layout, 195
drive letters
  assigning path specifiers, 536-537
  setting, 485
driver commands, 299, 303-313
DRIVER.SYS device driver, 423-424
  adding drives, 425-426
drives
  assigning to disks, 423
  changing current drive, 116
  default, 15
  displaying directory paths, 542
  drive designator, 28
  logical, 17, 423
  physical, 423
  RAM, 84
  reassigning disk operation to another drive, 379
  source, 29
  target, 29
  virtual, 89
DRIVPARM command, 452-454
DS (data segment), 210
/dsallocate switch (LINK utility program), 360
Dual File Lists command (View menu, DOSSHELL), 121
(D)UMP DEBUG utility program command, 318, 322-324, 327, 333-334
Duplicate a file handle function, 607

E

/E switch (RAMDRIVE.SYS device driver), 421
/e switch
  APPEND command, 376
  VDISK.SYS device driver, 420
  XCOPY command, 555
/e:time switch (RESTORE command), 523
/e:xxxxx switch (COMMAND command), 403
ECHO command, 57-60, 454
EDIT command (EDLIN text editor), 656

EDIT text editor, 150, 646
copying text, 157
exiting, 151
modes available for entering text, 154
moving text, 157
replacing text, 158
screen, 151-152
selecting text, 157
starting, 150-151
edit window, 153
EDIT.COM file, 150
editing keys, 656-658
command line, 449-450
EDLIN text editor, 84, 150, 646
commands, 648-650, 660-669
APPEND, 664
COPY, 667-668
DELETE, 659-662
EDIT, 656
END, 665
INSERT, 650-653
LIST, 653-655
MOVE, 666-667
PAGE, 668-669
QUIT, 665
REPLACE, 662-664
SEARCH, 660
TRANSFER, 669
WRITE, 664
creating new files, 646
current line, 648
exiting, 647
modifying new files, 647
EMM, 235
EMM386.EXE device driver, 431-432
obtaining version number, 241
EMS, 235-236
EMS 4.0, 255
END command (EDLIN text editor), 665
enhanced keyboards, 91
disabling, 539
(E)NTER DEBUG utility program command, 318, 327
Entry has bad attribute error message, 399
environment, 79, 222, 528
DOS, 89-90
passing to child program, 225
placing string in, 528-529
size, 222-224
increasing, 534
environment variables, 79-80
storing switches for DIR command, 440
user-defined, 80-81
using in batch files, 68-70
ENVSIZE.PAS program, 562-565
ERASE command, 455
erasing
display screen, 165
files from disks, 417-418
error codes (functions), 574-576
error messages, 397-400
ERRORLEVEL
BACKUP command, 388
REPLACE command, 520
RESTORE command, 524
SETVER command, 530-531
variable, 473
ES (extra segment), 210
escape characters, 163
inserting in files, 169-170
EXE files, 221-222, 456
converting to standard binary files, 455
EXE2BIN command, 455-457
executable files, 45
Exit command, 159
File menu, DOSSHELL, 135-137
exiting
DOSSHELL, 111
EDIT text editor, 151
EDLIN text editor, 647
Expand All command (Tree menu, DOSSHELL), 148
Expand Branch command (Tree menu, DOSSHELL), 147

Expand One Level command (Tree menu, DOSSHELL), 147
expanded memory, 211, 230-234
  allocating expanded memory pages, 242-243
  boards, 235
  checking for, 239-241
  deallocating pages, 255
  DEBUG utility program, 352
  determining
    amount available, 241
    page frame's segment address, 241-242
  emulator, 235
  exploring with DEBUG utility program, 243
  functions, 238
  using, 238-239
Expanded Memory Manager, *see* EMM
Expanded Memory Specification, *see* EMS
extended
  FCB, 204
  memory, 235-236
partitions, 17
Extended open/create function, 626-627
external
  commands, 368
  files, 16

F

/f switch
  BACKUP command, 387
  CHKDSK command, 397
  FORMAT command, 473
/f:1, 2, 5, 6, 7, 0 switches (DRIVPARM command), 453
/F:f switch (DRIVER.SYS), 424
/f:factor switch (DRIVPARM command), 453
FASTOPEN command, 457-459
FAT, 185-186, 193-194
  analyzing, 396-397
  examining with DEBUG utility program, 202-204
  loading, 202
  maintaining information about, 491-494
  reading contents, 196-197
FC command, 459-462
FCBs, 204-207
FCBS command, 462-463
  system parameter, 79, 88
FDISK
  command, 463
  program, 16-18, 22
file
  allocation table, *see* FAT
  attribute (disk file directory), 190
  control block (FCB), 87
    determining number used while file sharing, 462-463
  control blocks, *see* FCBs
  directories, 26-27, 34, 185-186, 189, 515
    breakdown of bytes in entries, 190-191
    examining with DEBUG utility program, 198-201
  handles, 242, 464
  management, 34
    hierarchical, 34-39
    nonhierarchical, 34
  selection area (DOSSHELL), 112
  size (file attribute), 191
    tree-structured, 36-37
    using search path, 46-47
File Display Options command (Options menu, DOSSHELL), 144
File menu, 158
  DOSSHELL, 122
    Associate command, 127-130
    Change Attributes command, 133-134

Copy command, 130-133, 136
Delete command, 133, 136
Deselect All command, 134
Exit command, 135-137
Move command, 130-133
New command, 136
Open command, 124, 136
Properties command, 136
Rename command, 133
Reorder command, 137
Run command, 124, 137
Search command, 126-127
Select All command, 134
View command, 130
File size. function, 585
filename extension (disk file directory), 190
filename is cross-linked:On cluster error message, 399
filenames, 26-28
files, 5
accessing quickly, 457-459
adding, 519-520
ANSI.SYS, 162
attributes, setting, 174-180
commands, 163-169
cursor, controlling position, 174-180
display mode, setting, 174-180
features, 163
flags, 162
reassigning keyboard, 168-174
archive, 380
ASCII, 150
attributes, 133, 190, 380
AUTOEXEC.BAT, 5, 93-95
creating, 635
backing up, 383-387
batch, 50-51, 473
CALL command, 66-67
calling another batch file, 392
creating, 51-52
customizing booting process, 635-637
displaying messages during execution, 517
ECHO command, 57-60
environment variables, 68-70
FOR command, 64-65
GOTO command, 60-61
IF command, 62
IF ERRORLEVEL command, 63
IF EXIST command, 62-63
IF NOT command, 64
modifying commands display during execution, 454
modules, calling, 66-68
PAUSE command, 54-56
REM command, 56-57
secondary command processor, 67
SHIFT command, 65
specifying more than ten parameters, 534
suspending execution, 508
binary, converting EXE files to, 455
clusters, 193-197
COM, 456
requirements, 221
COMMAND.COM, 90
comparing contents, 405-407, 459-461
computer, 26
CONFIG.SYS, 5, 83, 293
creating, 83-84
executing statements within, 85
sample, 92-93
copying, 28-30, 407-409
enhanced capabilities, 553-555
country information, 505
cpi (code page information), 641
creating using EDLIN text editor, 646
DEBUG.COM, 333-334
deleted, restoring, 545-548
displaying contents, 544
DOSSHELL, 111
EDIT.COM, 150
erasing from disks, 417-418, 455
EXE, 221-222, 456

converting to standard binary files, 455
executable, 45
searching directories for, 506-507
external, 16
file handles, 204, 207
determining amount of memory set aside for, 464-465
file specifications, 384
filenames, 26-28
filespecs, 28
FORMAT.COM, 15
fragmented, 444
graphics profile, 477
hidden, 380
inserting escape characters, 169-170
listing
groups, 361
recoverable files, 545-547
selected files, 436
loading into computer memory, 343-345
locking, 532
log, 387
managing, 158-159, 204
extended FCB, 204
FCBs, 204-207
file handles, 207
modifying, 327
using EDLIN text editor, 647
moving with macros, 73-75
naming, 342-343
network file sharing, 87
nonexecutable, directing DOS to, 373-378
placing in subdirectories, 40-43
printing list while DOS performs other tasks, 508-510
QBASIC.EXE, 151
read-only, 380
recovering
data from bad sectors, 515-516
from inadvertently formatted disks, 548-551
renaming, 518
replacing, 519-520
restoring from one disk to another, 521-523
run, 354
searching for
specified text, 465-466
with macros, 440
selecting in DOSSHELL, 117, 122-124
setting number of file handles available, 88
sharing, 532
source, 408
system, 5, 16, 186-190
adding to hard disk, 469
COMMAND.COM, 186
IO.SYS, 186
modifying, 380
MSDOS.SYS, 186
transferring to specified disk, 539-540
target, 408
text, 150
finding specific character sequences, 103-105
sorting lines, 101-103
see also ASCII
transferring data between files, peripheral device, 407-412
transient portion, 80
undeleting, 492-493
VM.TMP, 354
FILES command, 464-465
FILES system parameter, 79, 88
filespecs, 28
(F)ILL DEBUG utility program command, 318, 349-350
filtering, 98
filters, 101
MORE, 105
FIND command, 103-105, 465-466
Find command, 159

Find first matching file function, 614
Find next matching file function, 614
First cluster number is invalid, Entry truncated error message, 400
fixup value, 457
flags, 329
  critical error flags, 267
  in DEBUG utility program, 331
  INDOS, 266-267
  modifying contents, 330-332
  register, 673
floppy disks, 182-184
  comparing contents, 441-443
  copying contents from one to another, 443-444
  initializing, 467-469
Flush buffer, read standard input device function, 578
FOR command, 64-65, 466
Force a duplicate of a handle function, 607
FORMAT command, 185, 467-473
FORMAT.COM file, 15
formats
  commands, 369-370
  wide (/w), 11
formatting, 14, 467
  disks, 14-15, 185
  hard disks, 23-24
fragmented files, 444
Free allocated memory function, 608
full-screen text editors, 150
functions, 560-561, 574-601, 607-627
  calls, processing, 266
  codes, 573
  dispatcher, 560
  error codes, 574-576
  keys, reassigning, 172
  MS-DOS, 375
  reserved, 574
  subfuctions, 602-607
  undocumented, 631-632

G

general-purpose registers, 673
GENERIC I/O CONTROL driver command, 312
Get address to INDOS flag function, 592
Get current directory function, 608
Get current process ID function, 615
Get date function, 589
Get disk free space function, 592
Get DOS version number function, 590
Get DTA function, 590
Get extended error information function, 617-619
Get global code page function, 625
Get Interrupt Vector Method, 240-241
Get interrupt vector function, 592
Get lead byte table function, 624
GET LOGICAL DEVICE driver command, 312
Get machine name function, 621
Get or set allocation strategy function, 616
Get pointer to default drive parameter function, 584
Get pointer to drive parameter table function, 590
Get printer setup function, 621
Get program segment prefix function, 624
Get redirection list function, 622
Get time function, 589
Get verify state function, 615
Get/set a file's time and date stamp function, 616
Get/set file's attribute function, 600
global characters, *see* wildcards
(G)O DEBUG utility program command, 318, 336-339
GOTO command, 60-61, 474
GRAFTABL command, 474-475

graphical user interface, 109
GRAPHICS command, 475-477
graphics profile file, 477
graphics screen display, printing contents, 475-477
graphics/color display adapter, setting mode of operation, 497-499, 504
group of characters, representing, 31
groups, 361
GUI (graphic user interface), 109

H

/h:heads switch (DRIVPARM command), 454
/H:hh switch (DRIVER.SYS), 424
handle, 242
hard disks
  adding system files to, 469
  assigning volume labels, 470-471
  configuring, 463
  formatting, 23-24
  initializing, 467-469
  installing MS-DOS on, 16
  platters, 184
hardware
  code pages, 642
  components, 292
  interrupt signals, 90
    allocating stack frames to handle, 536
head (command line), 9
headers, 204, 456
Help menu (DOSSHELL), 148
help window, 153
(H)EXADECIMAL DEBUG utility program command, 318, 351
hexadecimal numbers, 210
hidden attributes, 381
hidden files, 190
  modifying, 192-193, 380
HIDE.COM assembly language program, 192-193
hierarchical file management, 34-36
  setting up, 37-39
/high switch (LINK utility program), 359
high-density disks, 183
high-level programming languages interrupts, 561
HIMEM.SYS device driver, 430-431
history, MS-DOS, 4

I

/i switch (DRIVPARM command), 454
I/Os
  control for devices (IOCTL) function, 601
  device, 81
IBM Personal System/2 Seminar Proceedings, 643
ICTL INPUT driver command, 307-308
IF command, 62, 477-479
IF ERRORLEVEL command, 63
IF EXIST command, 62-63
IF NOT command, 64
INDOS flag, 266-267
INIT driver command, 303-304
initializing
  floppy disks, 467-469
  hard disks, 467-469
  asynchronous communication ports, 499-500
  TSR programs, 270-271
input, 98
  changing to auxiliary console, 414-415
  restoring to standard keyboard, screen, 414-415
  standard input device, 98
(I)NPUT DEBUG utility program command, 318, 350
INPUT driver command, 308
INPUT FLUSH driver command, 309
INPUT STATUS driver command, 309
input/output status subfunctions, 603

Ins key, 658
INSERT command (EDLIN text editor), 650-653
insert mode, 154, 451
INSTALL command, 79, 88-89, 479
installable device drivers, 81-82, 292
installing, 4, 16
  device drivers, 298, 419
instruction pointer register, 673
Insufficient room in root directoryErase files from root and repeat CHKDSK error message, 400
internal
  commands, 368
  counter, 266-267
  registers, 230
  stacks, 266
interrupts, 560
  28H, 267
  67H, 239
  accessing ROM BIOS, 562
  handlers, 261, 271-274
  routine, 294, 297
  vector table, 261, 489
    chaining, 264
    modifying, 262-263
  vectors, 261
  hardwares, 561-563
  MS-DOS, 570-573
  undocumented, 630
Invalid subdirectory error message, 400
invoking modules, 66
IO.SYS system file, 186
IOCTL OUTPUT driver command, 310
IP (instruction pointer), 210

J-K

JOIN command, 480-481
jump (jmp) assembly language statement, 675
/k flag (ANSI.SYS file), 162
KEYB command, 481-483
keyboards
  code, 482
  device drivers, loading, 481-483
  positioning cursor, 156
  reassigning, 168-174
    function keys, 172
  scrolling, 155
  typematic rates, 504
KEYBxx.COM commands, 484
keys
  break scan code, 539
  Del, 658
  editing, 656-658
    command line, 449-450
  function, reassigning, 172
  Ins, 658
  key combinations
    Ctrl-Alt-Del, 10
    Ctrl-Break, 51, 85-86
  make scan code, 539

L

/L command switch (DIR command), 440
/l flag (ANSI.SYS file), 162
/L switch (FC command), 462
/l switch (BACKUP command), 386-387
l:time switch (RESTORE command), 523
LABEL command, 484-485
LASTDRIVE command, 485
LASTDRIVE system parameter, 79, 89
/Lbn switch (FC command), 462
/lcd switch (GRAPHICS command), 477
libraries, searching for object modules, 354
LIM EMS 3.2/4.0, 236-237
line label, 60
line-oriented text editors, 150
/linenumber switch (LINK utility program), 360
LINK utility program, 354

creating VM.TMP file, 354
starting, 355-359
switches, 359-363
linked list, 457
linking, 221
LIST command (EDLIN text editor), 653-655
/LIST command switch (UNDELETE command), 545-547
list files, groups, 361
Load and execute a program function, 610-613
(L)OAD DEBUG utility program command, 319, 343-345
LOADHIGH command, 446, 486
loading
application programs into reserved memory, 445-446, 486
character tables into memory, 474-475
command processors, 89-90, 533
DEBUG utility program, 198
device drivers into reserved memory, 433-434, 445-446
DOS extensions into memory, 88-89
FAT, 202
files into computer memory, 343-345
keyboard device driver, 481-483
MS-DOS from disk to memory, 5
portions of MS-DOS into high memory area, 445-446
TSR programs, 260-261
Lock/Unlock file access. function, 620
locking files, 532
log file, 387
logical
drives, 17, 423
displaying true name, 543
memory, 234
pages (expanded memory), 234
look-ahead sectors, 86
look-up tables, 482
loops (DEBUG utility program), 351-352
lost clusters found in yyy chains error message, 400
Lotus/Intel/Microsoft Expanded Memory Specification version 3.2, *see* LIM EMS 3.2
LPT1, LPT2, LPT3 peripheral devices, 99

M

/m switch
BACKUP command, 386
XCOPY command, 555
/m:maxticks switch (PRINT command), 512
macros, 50, 70-71, 447
creating, 71-72
file-searching, 440
moving files, 73-75
pipes, 72-73
redirection, 72-73
replaceable parameters, 72-73
Main program group, 114
make scan code, 539
managing files, 158-159, 204
FCBs, 204-207
file handles, 207
managing memory, 225-228
/map switch (LINK utility program), 360-362
mappable conventional memory, 237
mapping, 232, 249
MEDIA CHECK driver command, 304-305
MEM command, 487-490
memory, 210
accessing memory locations, 210-211
addresses, 211, 231, 321
bank switching, 232
BIOS data area, 489
comparing two blocks, 346-347
control block (MCB), 225-228
conventional, 445

determining amount set aside for file handles, 464-465
displaying information on memory utilization, 487-490
dump, 199-201
DEBUG utility program, 322-327
establishing number of disk buffers created in, 390-392
expanded, 211, 230-234
allocating expanded memory pages, 242-243
boards, 235
checking for, 239-241
deallocating pages, 255
DEBUG utility program, 352
determining amount available, 241
determining page frame's segment address, 241-242
exploring with DEBUG utility program, 243
functions, 238
using, 238-239
extended, 235-236
file control block (FCB), 87
filling blocks of with list of values, 349-350
load and execute blocks, 611-613
loading
character tables into, 474-475
files into, 343-345
MS-DOS from disk to, 5
programs into, 213
logical, 234
managing, 225-228
mappable conventional, 237
moving data blocks from one location to another, 348-349
offset, 322
overlay blocks, 613
physical, 234
reserved, 433
loading application programs into, 445-446, 486
loading device drivers into, 433-434, 445-446
resident utilities, 479
searching for list of byte values, 347-348
segment registers, 210
segments, 210, 321, 672-673
stacks, 90-91, 210
virtual, 236
menu bar
DOSSHELL, 112-114, 119
EDIT text editor screen, 151
menus
DOSSHELL
File, 122
File, Associate command, 127-130
File, Change Attributes command, 133-134
File, Copy command, 130-133, 136
File, Delete command, 133, 136
File, Deselect All command, 134
File, Exit command, 135-137
File, Move command, 130-133
File, New command, 136
File, Open command, 124, 136
File, Properties command, 136
File, Rename command, 133
File, Reorder command, 137
File, Run command, 124, 137
File, Search command, 126-127
File, Select All command, 134
File, View command, 130
View, 119
View, All Files command, 121
View, Dual File Lists command, 121
View, Program List command, 121
View, Program/File Lists command, 120
View, Refresh command, 121
View, Single File List command, 120
File, 158
Options, 160
Search, 159

messages
  displaying during batch file execution, 517
  error, *see* error messages
metastrings, 513-514
Microsoft Windows, 109, 230
MIRROR command, 491-494
  undeleting files, 492-493
MKDIR command, 494
mnemonics, 331-332
MODE command, 495-501, 504, 642
  code pages, 501-503, 642
  display mode, 167-168
  insert mode, 154, 451
  overstrike mode, 451
  typeover mode, 154
Modify allocated memory blocks function, 609
modular programming, 66
MORE command, 105, 504-505
mouse
  clicking, 114
  scrolling, 156
  selecting, 115-116
move (mov) assembly language statement, 674
MOVE command (EDLIN text editor), 666-667
Move command (File menu, DOSSHELL), 130-133
(M)OVE DEBUG utility program command, 319, 348-349
Move file pointer function, 599
moving
  files, 73-75
  text, 157
MS-DOS
  Bible, 4
  controlling frequency for checking Ctrl-C/Ctrl-Break, 389
  directing to nonexecutable files, 373-378
  displaying version number, 551
  establishing number of disk buffers created in mem, 390-392
  functions, *see* functions
  history, 4
  interrupts, 570-573
  loading portions into high memory area, 445-446
  printing list of files while performing other task, 508-510
  versions, 108
    MS-DOS 4, 369
    MS-DOS 5,, 438
MSDOS.SYS system file, 186
/MSG switch (COMMAND command), 403
multiple sets of mapping registers, 256
multiplexing, 572

N

/n switch
  DRIVER.SYS, 424
  DRIVPARM command, 454
  FC command, 462
  FIND command, 465
  FORMAT command, 472
  RESTORE command, 523
(N)AME DEBUG utility program command, 319, 342-343
naming files, 342-343
nested hardware interrupt signalS, 90
network
  drives, 372
  file sharing, 87
New command, 158
  File menu, DOSSHELL, 136
next device header, 294
NLSFUNC command, 505
/no switch (LINK utility switch), 363
NONDESTRUCTIVE READ driver command, 308
nonexecutable files, directing DOS to, 373-378

nonhierarchical file management, 34
NUL peripheral device, 99

O

/o:sortorder command switch (DIR command), 439
objects
  code, 354
  modules
    searching for, 354
    source statements, 360
offset
  addresses, 231, 674
  memory, 322
Open a file function, 596
Open command, 158
  File menu, DOSSHELL, 124, 136
Open file. function, 579
Open Handle Method, 239-240
Options menu, 160
  DOSSHELL, 143
    Color command, 147
    Confirmation command, 143
    Display command, 147
    File Display Options command, 144
    Select Across Directories switch, 144
    Show Information command, 144
options, *see* switches
output, 98
  changing to auxiliary console, 414-415
  redirecting parallel printer output
    to serial ports/printers, 500-501
  restoring to standard keyboard, screen, 414-415
  standard output device, 98
(O)UTPUT DEBUG utility program command, 319, 350
OUTPUT driver command, 309
OUTPUT FLUSH driver command, 309
OUTPUT STATUS driver command, 309
OUTPUT UNTIL BUSY driver command, 311
OUTPUT WITH VERIFY driver command, 309
overstrike mode, 451

P

/p switch
  COMMAND command, 403
  DIR command, 436
  PRINT command, 511
  REPLACE command, 520
  XCOPY command, 555
PAGE command (EDLIN text editor), 668-669
page frame (expanded memory), 233
  determining segment address, 241-242
  reading/writing to with DEBUG utility program, 247-248
pages (expanded memory), 233
parallel printers
  redirecting output
    to serial port, 504
    to serial printers, 500-501
  setting mode of operation, 504
parameters, 52, 369
  replaceable, 52-53
    within macros, 72-73
  specifying more than 10 batch file parameters, 534
  system, 78-79
    BREAK, 79, 85-86
    BUFFER, 86-87
    BUFFERS, 79
    COUNTRY, 79, 87
    FCBS, 79, 88
    FILES, 79, 88
    LASTDRIVE, 79, 89
    SHELL, 79, 89-90
    STACK, 90-91
    STACKS, 79
    SWITCHES, 79, 91
    VERIFY, 79, 92

parent directories, 40
shorthand, 395
program, 222, 609
Parse filename. function, 588
partition tables (disks), 493
rebuilding corrupted tables, 548-551
partitions, 16-22, 198
passwords in DOSSHELL programs, 140
PATH command, 45, 506-507
path specifiers, 38
APPEND command, 374
assigning to drive letters, 536-537
/path switch (APPEND command), 377
paths, 37
managing files, 46-47
PAUSE command, 54-56, 508
/pause switch (LINK utility switch), 362
PC-DOS, *see* MS-DOS
peripheral devices, 81, 98, 292
locating applicable device driver, 299
reserved names, 98-99
standard devices supported by device drivers, 292-293
transferring data between peripheral devices, 407-412
transferring data from one path to another, 412-413
physical
addresses, 231
disk drives, 423
drive numbers, 423
memory, 234
pages (expanded memory), 234
pipes, 105-106
macros, 72-73
piping, 98
versus redirection, 106
platters, 16, 184
pointers, 224
pop, 676
POPCLOCK TSR program, 269-270, 277-290
initializing, 270-271
prepared code pages, 501, 642
primary partitions, 17
PRINT command, 508-512
Print command, 158
Print string function, 578
Printer output function, 577
PRINTER.SYS device driver, 427-428
printers
controlling output, 496-497, 504
parallel, 500-501, 504
serial, 500-501
printing
contents of graphics screen display, 475-477
list of files while DOS performs other tasks, 508-510
PRN peripheral device, 99
Probable non-DOS diskContinue (Y/N)? error message, 400
procedures, 676
TSR programs, 274-275
(P)ROCEED DEBUG utility program command, 319
processes, 572
Program List command (View menu, DOSSHELL), 121
Program terminate function, 576
Program/File Lists command (View menu, DOSSHELL), 120
programs
applications
loading into reserved memory, 445-446, 486
version specific, running under MS-DOS 5, 529-530
assembly language
composing, 341-342
modifying, 341-342
BRK_OFF.C, 565-570
child, 222, 609
passing environment to, 225
DEBUG utility, 198, 316

(A)SSEMBLE command, 341-342
(C)OMPARE command, 346-347
(D)UMP command, 322-324, 327, 333-334
(F)ILL command, 349-350
(G)O command, 336-339
(H)EXADECIMAL command, 351
(I)NPUT command, 350
(L)OAD command, 343-345
(M)OVE command, 348-349
(N)AME command, 342-343
(O)UTPUT command, 350
(R)EGISTER command, 330-332
(S)EARCH command, 347-348
(T)RACE command, 339-341
(U)NASSEMBLE command, 333-336
(W)RITE command, 345-346
commands, 317-320
context saving, 249-253
creating menu for controlling batch files, 634-635
entering data with, 327-329
expanded memory, 243, 352
loading, 198
loops, 351-352
mapping context, 249-253
memory dump, 199-201, 322-327
quitting, 321
reading/writing to page frame, 247-248
starting, 244-247, 321
DEBUG utility program, 169
DISKCOPY.COM, 11
DOSSHELL, 110
advanced features, 141-142
creating new programs, 137-140
list of, 112
modiyfing, 142
program subgroups, 143
selecting, 117
ENVSIZE.PAS, 562-565
FDISK, 16-18, 22
groups, 114
HIDE.COM assembly language, 192-193
LINK utility program, 354
creating VM.TMP file, 354
starting, 355-359
switches, 359-363
linking, 221
loader, 213
loading into memory, 213
machine language, executing, 336-341
parent, 222, 609
QBasic, 150
segments, 215
segment prefixes (PSP), 215-221, 330
selection area (DOSSHELL), 112
shells, 108
task swappers, 110, 144-147
TSRs (terminate and stay resident), 258
interrupt handlers, 271-274
loading, 260-261
making TSR current program, 268-269
POPCLOCK, 269-290
procedures, 274-275
ROM BIOS video service, 275-277
working with unitasking operating systems, 263-264
UNHIDE.COM assembly language, 192-193
utility, 16
PROMPT command, 175-176, 512-514
Properties command (File menu, DOSSHELL), 136
push, 676

Q

/Q switch (FORMAT command), 472
/q:queuesize switch (PRINT command), 512
QBasic program, 150
QBASIC.EXE file, 151

question mark (?) wildcard, 31, 53-54
QUIT command (EDLIN text editor), 665
(Q)UIT DEBUG utility program
command, 319
quitting DEBUG utility program, 321

R

/r switch
GRAPHICS command, 476
REPLACE command, 520
RAM
disk, 419
drive, 84
RAMDRIVE.SYS device driver, 421
Random block read function, 586
Random block write function, 587
Random read function 585
Random write function 585
Read from a file or device function, 598
Read input with echo function, 576
Read keyboard function, 577
read only file (file attribute), 190
read-ahead buffer, 391
read-only attributes/files, 380
RECOVER command, 515-517
Redirect device function, 623
redirecting commands, 99-100
redirection, 98
for macros, 72-73
versus piping, 106
reentry problems, 264-266
Refresh command (View menu,
DOSSHELL), 121
registers, 329, 672
DMA, 256
modifying contents, 330-332
multiple sets of mapping, 256
storage capacity, 673
/reinstall switch (DOSKEY
command), 451
relative
sector, 198
start address, 360
stop address, 360
relocatable module, 354
REM command, 56-57, 517
REMOVABLE MEDIA driver
command, 311
Remove a subdirectory. function, 594
Rename a file. function, 615
RENAME command, 518
Rename command (File menu,
DOSSHELL), 133
Rename file function, 583
renaming files, 518
Reorder command (File menu,
DOSSHELL), 137
REPLACE command, 519
ERRORLEVEL, 520
switches, 520
REPLACE command (EDLIN text editor),
662-664
replaceable
parameters, 52-53
within macros, 72-73
variables, 53-54
replacing text, 158
request header, 298-300
(R)EGISTER DEBUG utility program
command, 319, 330-332
reserved
bytes (file attribute), 191
functions, 574
memory, 433
loading application programs into,
445-446, 486
loading device drivers into, 433-434
memory area, 445
RESTORE command, 521-524
Retrieve or set country-dependent
information. function, 592
Retrieve the return code of a child
process. function, 613

return (ret) assembly language
statement, 676
reusable batch file modules, 66-67
RMDIR command, 524-525
ROM BIOS
accessing, 562
accessing to position cursor on screen, 565-570
video service for TSR programs, 275-277
root directory, 35, 84
maintaining information about, 491-494
see also directories
Run command (File menu, DOSSHELL), 124, 137
run files, 354

S

/s command switch (DIR command), 439
/s switch, 186
ATTRIB command, 382
BACKUP command, 385
FORMAT command, 469
REPLACE command, 520
XCOPY command, 554
/s:sectors switch (DRIVPARM command), 454
/S:ss switch (DRIVER.SYS), 424
/s:timeslice switch (PRINT command), 512
Save As command, 158
screen , clearing, 401
scrolling, 154-156
SEARCH command (EDLIN text editor), 660
Search command (File menu, DOSSHELL), 126-127
(S)EARCH DEBUG utility program command, 319, 347-348
Search for first match function, 580
Search for next match function, 581
Search menu, 159
search path, managing files, 46-47
secondary command processor, 67, 403
sectors, 14, 182-184, 467, 515
look-ahead, 86
relative, 198
segments, 210-360
address, 231, 674
determining for page frame, 241-242
memory, 321
registers, 210, 329, 672-673
combining, 211
relative start address, 360
relative stop address, 360
Select Across Directories switch (Options menu, DOSSHELL), 144
Select All command (File menu, DOSSHELL), 134
SELECT command, 526-527
Select disk function, 579
selecting
DOSSHELL programs, 117
files in DOSSHELL, 117
items with mouse, 115-116
text, 157
Sequential read function, 581
Sequential write function, 582
serial
ports, 504
printers, 500-501
SET command, 528-529
Set current process ID function, 615
Set date. function, 589
Set disk transfer address function, 584
Set global code page function, 625
Set handle count function, 625
Set interrupt vector function, 586
SET LOGICAL DEVICE driver command, 313
Set printer setup function, 621
Set random record field function, 586

Set time. function, 589
Set/reset verify switch function, 589
setting current date/time, 6-8
SETVER command, 529-530
  ERRORLEVEL, 530-531
SHARE command, 532
sharing files, 532
SHELL command, 533-534
shell program, 108
SHELL system parameter, 79, 89-90
SHIFT command, 65, 534
Show Information command (Options menu, DOSSHELL), 144
single characters, representing, 31
Single File List command (View menu, DOSSHELL), 120
single-sided disk, layout, 194
SMARTDRV.SYS device driver, 422-423
SORT command, 101-103, 535
sorting data, 535
source
  disks/drives, 12, 29, 443
  files, 408
  index register, 673
  statements, 360
SP (stack pointer), 210
special characters within system prompt, 513-514
SS (stack segment), 210
STACK system parameter, 90-91
/stack:[number] switch (LINK utility switch), 362
stacks, 90-91, 210
  frames, 536
  pointer register, 673
STACKS command, 536
STACKS system parameter, 79
standard input/output device, 98
start commands, 50
starting
  cluster (file attribute), 191
  DEBUG utility program, 244-247, 321
  DOSSHELL, 111
  EDIT text editor, 150-151
  LINK utility program, 355-359
statements within environment, 222
status bar and line (EDIT text editor screen), 152
strategy routines, 294-295
strings, placing in DOS environment, 528-529
subdirectories, 35
  accessing quickly, 457-459
  analyzing any on disk, 396-397
  copying, 554
  creating, 38-39, 494-495, 504
  deleting, 44-45, 524-525
  file attributes, 191
  linking between disk drives, 480-481
  placing files within, 40-43
  see also directories
subfunctions, 603-607
SUBST command, 536-537
switch character, 537-538
SWITCHAR command, 537-538
switches, 9, 371
  /1 switch
    DISKCOMP command, 442
    FORMAT command, 471
  /4 (FORMAT command), 472
  /8 switch
    DISKCOMP command, 443
    FORMAT command, 471
  /A (RAMDRIVE.SYS device driver), 422
  /a switch
    BACKUP command, 387
    COPY command, 411
    FC command, 462
  /a:attributes command (DIR command), 438
  /a:mm-dd-yy (RESTORE command), 523
  /b switch
    COPY command, 411
    FC command, 462
    FORMAT command, 471
    GRAPHICS command, 477

/b command (DIR command), 439
/b:buffersize (PRINT command), 511
/b:mm-dd-yy (RESTORE command), 523
/c switch
  COMMAND command, 402
  DRIVER.SYS, 424
  DRIVPARM command, 454
  FC command, 462
  FIND command, 465
  PRINT command, 510
/d switch
  BACKUP command, 387
  XCOPY command, 554
/D:ddd (DRIVER.SYS), 424
/d:device (PRINT command), 511
/d:number (DRIVPARM command), 453
/dhist (DOSKEY command), 451
/dmacs (DOSKEY command), 452
/dsallocate (LINK utility program), 360
/E (RAMDRIVE.SYS device driver), 421
/e switch
  APPEND command, 376
  VDISK.SYS device driver, 420
  XCOPY command, 555
/e:time (RESTORE command), 523
/e:xxxxx (COMMAND command), 403
/f switch
  BACKUP command, 387
  CHKDSK command, 397
  FORMAT command, 473
/f:0 (DRIVPARM command), 453
/f:1 (DRIVPARM command), 453
/f:2 (DRIVPARM command), 453
/f:5 (DRIVPARM command), 453
/f:6 (DRIVPARM command), 454
/f:7 (DRIVPARM command), 454
/F:f (DRIVER.SYS), 424
/f:factor (DRIVPARM command), 453
/h:heads (DRIVPARM command), 454
/H:hh (DRIVER.SYS), 424
/high (LINK utility program), 359
/i (DRIVPARM command), 454
/L (FC command), 462
/l (BACKUP command), 386, 387
/L command (DIR command), 440
/Lbn (FC command), 462
/lcd (GRAPHICS command), 477
/linenumber (LINK utility program), 360
/LIST command switch (UNDELETE command), 545-547
/m switch
  BACKUP command, 386
  XCOPY command, 555
/m:maxticks (PRINT command), 512
/map (LINK utility program), 360-362
/MSG (COMMAND command), 403
/n switch
  DRIVER.SYS, 424
  DRIVPARM command, 454
  FC command, 462
  FIND command, 465
  FORMAT command, 472
  RESTORE command, 523
/no (LINK utility switch), 363
/o:sortorder command (DIR command), 439
/p switch
  COMMAND command, 403
  DIR command, 436
  PRINT command, 511
  REPLACE command, 520
  XCOPY command, 555
/path (APPEND command), 377
/pause (LINK utility switch), 362
/Q (FORMAT command), 472
/q:queuesize (PRINT command), 512
/r switch
  GRAPHICS command, 476
  REPLACE command, 520
/reinstall (DOSKEY command), 451
/s switch, 186
  ATTRIB command, 382
  BACKUP command, 385
  FORMAT command, 469

REPLACE command, 520
XCOPY command, 554
/s command (DIR command), 439
/s:sectors (DRIVPARM command), 454
/S:ss (DRIVER.SYS), 424
/s:timeslice (PRINT command), 512
/stack:[number] (LINK utility switch), 362
/T (PRINT command), 511
/t switch
BACKUP command, 387
FC command, 462
FORMAT command, 472
/t:tracks (DRIVPARM command), 454
/T:ttt (DRIVER.SYS), 424
/u (REPLACE command), 520
/U command (FORMAT command), 471
/u:busyticks (PRINT command), 512
/v switch
CHKDSK command, 397
COPY command, 411
FIND command, 465
XCOPY command, 555
/w switch
DIR command, 436
FC command, 462
REPLACE command, 520
XCOPY command, 555
/x switch
APPEND command, 375-376
BUFFERS command, 391
VDISK.SYS device driver, 420
l:time (RESTORE command), 523
storing for DIR command in environment variable, 440
SWITCHES command, 539
system parameter, 79, 91
SYS command, 539-540
system
attributes, 381
disks, 11
backing up, 11-14
country-specific, 526-527
files, 5, 16, 186-190
adding to hard disk, 469
modifying, 380
transferring to specified disk, 539-540
parameters, 78-79
BREAK, 79, 85-86
BUFFER, 86-87
BUFFERS, 79
COUNTRY, 79, 87
FCBS, 79, 88
FILES, 79, 88
LASTDRIVE, 79, 89
SHELL, 79, 89-90
STACK, 90-91
STACKS, 79
SWITCHES, 79, 91
VERIFY, 79, 92
prompt, 8, 214, 512-514
special characters within, 513-514

T

/T switch (PRINT command), 511
/t switch
BACKUP command, 387
FC command, 462
FORMAT command, 472
/t:tracks switch (DRIVPARM command), 454
/T:ttt switch (DRIVER.SYS), 424
tail (command line), 9
target
disks, 12, 29, 443
drive, 29
file, 408
task list selection area (DOSSHELL), 112
task swapper, 110
DOSSHELL, 144-146
limitations, 146-147
Technical Reference manual, 355

templates, 656
  command line, 449
Terminate a process. function, 613
Terminate and stay resident
    function, 590
terminate and stay resident programs,
    see TSR programs
text, manipulating, 157-160
text editors, 150
EDIT, 150, 646
  copying text, 157
  exiting, 151
  moving text, 157
  replacing text, 158
  selecting text, 157
  starting, 150-151
EDLIN, 150, 646
  APPEND command, 664
  COPY command, 667-668
  creating new files, 646
  current line, 648
  DELETE command, 659-662
  EDIT command, 656
  END command, 665
  exiting, 647
  INSERT command, 650-653
  LIST command, 653-655
  modifying new files, 647
  MOVE command, 666-667
  PAGE command, 668-669
  QUIT command, 665
  REPLACE command, 662-664
  SEARCH command, 660
  TRANSFER command, 669
  WRITE command, 664
  full-screen, 150
  line-oriented, 150
text files, *see* ASCII files
TIME command, 540-541
time
  default values, 10
  displaying current time, 540-541
  setting, 7-8
  stamp, 7, 10, 191
    updating, 411
(T)RACE DEBUG utility program
    command, 320, 339-341
tracks, 16, 182-183
TRANSFER command (EDLIN text
    editor), 669
transient portion of files, 80
TREE command, 43-44, 542
Tree menu (DOSSHELL), 147
tree-structured file management, 36-37
TRUENAME command, 543
TSR programs, 258
  loading, 260-261
  making TSR current program, 268-269
  POPCLOCK, 269-270, 277-290
    initializing, 270-271
    interrupt handlers, 271-274
    procedures, 274-275
    ROM BIOS video services, 275-277
  working with unitasking operating
      systems, 263-264
TYPE command, 544
typeover mode, 154

U

/U command switch (FORMAT
    command), 471
/u switch (REPLACE command), 520
/u:busyticks switch (PRINT
    command), 512
(U)NASSEMBLE DEBUG utility program
    command, 320, 333-336
unassembler, 333
  invoking, 333-336
UNDELETE command, 545-548
undeleting files, 492-493
undocumented
  features, 630
  functions, 631-632
  interrupts, 630

UNFORMAT command, 548-551
UNHIDE.COM assembly language program, 192-193
unit code, 299
unitasking operating system, 263
updating time/date stamp, 411
user-defined environment variables, 80-81
utility programs, 16

V

/v switch
  CHKDSK command, 397
  COPY command, 411
  FIND command, 465
  XCOPY command, 555
values, 78
variables
  environment, 79-80
    user-defined, 80-81
    using in batch files, 68-70
  replaceable, 53-54
VDISK.SYS device driver, 420-421
VER command, 551
VERIFY
  command, 552
  system parameter, 79, 92
version tables, 529-530
View command (File menu, DOSSHELL), 130
View menu (DOSSHELL), 119-121
virtual
  disks, 89, 419
    see also RAM disk
  memory, 236
VM.TMP file, 354
VOL command, 552
volume labels, 191, 470, 484-485
  assigning to hard disks, 470-471
  displaying, 552

W

/w switch
  DIR command, 436
  FC command, 462
  REPLACE command, 520
  XCOPY command, 555
warm boot, 10
wide (/w) format, 11
wildcards, 30, 53-54, 132, 371
  asterisk (*), 31-32
  question mark (?), 31
  using with DIR command, 437
Windows, 109-110
windows, 232
  edit, 153
  help, 153
WRITE command (EDLIN text editor), 664
(W)RITE DEBUG utility program command, 320, 345-346
Write to a file or device. function, 598
write-verify switch, 552

X-Z

/x flag (ANSI.SYS file), 162
/x switch
  APPEND command, 375-376
  BUFFERS command, 391
  VDISK.SYS device driver, 420
XA DEBUG utility program command, 320
XCOPY command, 553-555
XD DEBUG utility program command, 320
XM DEBUG utility program command, 320
XMA2EMS.SYS device driver, 428-429
XMAEM.SYS device driver, 429
XS DEBUG utility program command, 320

Dear Reader:

Thank you for considering the purchase of our book. Readers have come to know products from The Waite Group for the care and quality we put into them. Let me tell you a little about our group and how we make our books.

It started in 1976 when I could not find a computer book that really taught me anything. The books that were available talked down to people, lacked illustrations and examples, were poorly laid out, and were written as if you already understood all the terminology. So I set out to write a good book about microcomputers. This was to be a special book, very graphic, with a friendly and casual style, and filled with examples. The result was an instant best-seller. Today the Waite Group has over 70 computer books on the market, and many more are published each year. And no matter what your level of computer interest and expertise, we think The Waite Group has a title you'll like. Our books cover the DOS and Unix operating systems, as well and the C, C++, BASIC, and 80x86 assembler languages. Our titles cover the most popular compilers including those from Microsoft and Borland.



THE
WAITE
GROUP

We have honed the reader levels of our books into a number of best-selling approaches: our *Primer Plus*® and *Programming Primers* guide beginners from the introductory concepts through to a working knowledge of writing professional programs. Our *Bibles* have evolved into comprehensive reference books that appeal to intermediate and advanced programmers and power users. They include standard formats that make looking up any command or function quick and easy, provide clear examples, compatibility information, understandable syntax statements, jump tables and concise tutorials. Power users and programmers should check out our *Tricks of the Masters* books. These titles provide hints, tips, examples, and in-depth discussions that go far beyond the basic principles and facts found elsewhere. You'll discover obscure nuggets of information, work-arounds, and compelling discussions by experts that will hone your programming skills.

We're sure that you'll get to know the signature of "The Waite Group" on a book title as a stamp of a first quality book. A catalog of our titles can be obtained by filling out our reader response card, found in this book.

Thanks again for considering the purchase of this title. If you care to tell me anything you like (or don't like) about the book, please use our reader response card.

Sincerely,

Mitchell Waite
President

Primer Plus is a registered trademark of The Waite Group, Inc.

100 Shoreline Highway Suite A-285 Mill Valley, California 94941 415-331-0575 Fax 415-331-1075

Sams—Covering The Latest In Computer And Technical Topics!

Audio

udio Production Techniques for Video $29.95
udio Systems Design and Installation $59.95
udio Technology Fundamentals $24.95
ompact Disc Troubleshooting and Repair $24.95
andbook for Sound Engineers:
The New Audio Cyclopedia $79.95
troduction to Professional Recording Techniques $29.95
odern Recording Techniques, 3rd Ed. $29.95
rinciples of Digital Audio, 2nd Ed. $29.95
ound Recording Handbook $49.95
ound System Engineering, 2nd Ed. $49.95

Electricity/Electronics

asic AC Circuits $29.95
ectricity 1, Revised 2nd Ed. $14.95
ectricity 1-7, Revised 2nd Ed. $49.95
ectricity 2, Revised 2nd Ed. $14.95
ectricity 3, Revised 2nd Ed. $14.95
ectricity 4, Revised 2nd Ed. $14.95
ectricity 5, Revised 2nd Ed. $14.95
ectricity 6, Revised 2nd Ed. $14.95
ectricity 7, Revised 2nd Ed. $14.95
ectronics 1-7, Revised 2nd Ed. $49.95

Electronics Technical

ctive-Filter Cookbook $19.95
amcorder Survival Guide . . . . . .$ 9.95
MOS Cookbook, 2nd Ed. $24.95
esign of OP-AMP Circuits with Experiments . .$19.95
esign of Phase-Locked Loop Circuits
with Experiments $19.95
lectrical Test Equipment $19.95
lectrical Wiring $19.95
ow to Read Schematics, 4th Ed. $19.95
C Op-Amp Cookbook, 3rd Ed. $24.95
C Timer Cookbook, 2nd Ed. $19.95
C User's Casebook $19.95
adio Handbook, 23rd Ed. $39.95
adio Operator's License Q&A Manual, 11th Ed. $24.95
F Circuit Design $24.95
ransformers and Motors $24.95
TL Cookbook $19.95
ndergrounding Electric Lines $14.95
nderstanding Telephone Electronics, 2nd Ed. . .$19.95
CR Troubleshooting & Repair Guide $19.95
ideo Scrambling & Descrambling
for Satellite & Cable TV $19.95

Games

eyond the Nintendo Masters . . . . . .$ 9.95
lastering Nintendo Video Games II . . . . . .$ 9.95
ricks of the Nintendo Masters . . . . . .$ 9.95
ideoGames & Computer Entertainment
Complete Guide to Nintendo Video Games . .$ 9.50
Vinner's Guide to Nintendo Game Boy . . . . .$ 9.95
Vinner's Guide to Sega Genesis . . . . . .$ 9.95

Hardware/Technical

lard Disk Power with the Jamsa Disk Utilities . .$39.95
BM PC Advanced Troubleshooting & Repair . .$24.95
BM Personal Computer
Troubleshooting & Repair $24.95
BM Personal Computer Upgrade Guide $24.95
licrocomputer Troubleshooting & Repair $24.95
nderstanding Communications Systems, 2nd Ed. $19.95
nderstanding Data Communications, 2nd Ed. . .$19.95
nderstanding FAX and Electronic Mail $19.95
nderstanding Fiber Optics $19.95

IBM: Business

est Book of Microsoft Works for the PC, 2nd Ed. $24.95
est Book of PFS: First Choice $24.95
est Book of Professional Write and File $22.95
irst Book of Fastback Plus $16.95
irst Book of Norton Utilities $16.95
irst Book of Personal Computing $16.95
irst Book of PROCOMM PLUS $16.95

IBM: Database

Best Book of Paradox 3 . . . . . $27.95
dBASE III Plus Programmer's Reference Guide $24.95
dBASE IV Programmer's Reference Guide . . . $24.95
First Book of Paradox 3 . . . . . $16.95
Mastering ORACLE
Featuring ORACLE's SQL Standard $24.95

IBM: Graphics/Desktop Publishing

Best Book of Autodesk Animator $29.95
Best Book of Harvard Graphics $24.95
First Book of DrawPerfect $16.95
First Book of Harvard Graphics $16.95
First Book of PC Paintbrush $16.95
First Book of PFS: First Publisher $16.95

IBM: Spreadsheets/Financial

Best Book of Lotus 1-2-3 Release 3.1 . . . . . $27.95
Best Book of Lotus 1-2-3, Release 2.2, 3rd Ed. . $26.95
Best Book of Peachtree Complete III $24.95
First Book of Lotus 1-2-3, Release 2.2 . . . . . $16.95
First Book of Lotus 1-2-3/G $16.95
First Book of Microsoft Excel for the PC $16.95
Lotus 1-2-3: Step-by-Step $24.95

IBM: Word Processing

Best Book of Microsoft Word 5 . . . . . $24.95
Best Book of Microsoft Word for Windows . . . $24.95
Best Book of WordPerfect 5.1 . . . . . $26.95
Best Book of WordPerfect Version 5.0 . . . . . $24.95
First Book of PC Write $16.95
First Book of WordPerfect 5.1 . . . . . $16.95
WordPerfect 5.1: Step-by-Step $24.95

Macintosh/Apple

Best Book of AppleWorks $24.95
Best Book of MacWrite II $24.95
Best Book of Microsoft Word for the Macintosh $24.95
Macintosh Printer Secrets $34.95
Macintosh Repair & Upgrade Secrets $34.95
Macintosh Revealed, Expanding the Toolbox,
Vol. 4 . . . . . $29.95
Macintosh Revealed, Mastering the Toolbox,
Vol. 3 . . . . . $29.95
Macintosh Revealed, Programming with the Toolbox,
Vol. 2, 2nd Ed. $29.95
Macintosh Revealed, Unlocking the Toolbox,
Vol. 1, 2nd Ed. $29.95
Using ORACLE with HyperCard $24.95

Operating Systems/Networking

Best Book of DESQview $24.95
Best Book of DOS $24.95
Best Book of Microsoft Windows 3 . . . . . $24.95
Business Guide to Local Area Networks $24.95
Exploring the UNIX System, 2nd Ed. $29.95
First Book of DeskMate $16.95
First Book of Microsoft QuickPascal $16.95
First Book of MS-DOS $16.95
First Book of UNIX $16.95
Interfacing to the IBM Personal Computer,
2nd Ed. $24.95
Mastering NetWare $29.95
The Waite Group's Discovering MS-DOS . . . $19.95
The Waite Group's Inside XENIX $29.95
The Waite Group's MS-DOS Bible, 3rd Ed. . . $24.95
The Waite Group's MS-DOS Developer's Guide,
2nd Ed. $29.95
The Waite Group's Tricks of the MS-DOS Masters,
2nd Ed. $29.95
The Waite Group's Tricks of the UNIX Masters $29.95
The Waite Group's Understanding MS-DOS,
2nd Ed. $19.95
The Waite Group's UNIX Primer Plus, 2nd Ed. . $29.95
The Waite Group's UNIX System V Bible . . . $29.95
The Waite Group's UNIX System V Primer,
Revised Ed. $29.95
Understanding Local Area Networks, 2nd Ed. . $24.95
Understanding NetWare $24.95
UNIX Applications Programming:
Mastering the Shell $29.95
UNIX Networking $29.95
UNIX Shell Programming, Revised Ed. $29.95
UNIX System Administration $29.95
UNIX System Security $34.95
UNIX Text Processing $29.95
UNIX: Step-by-Step $29.95

Professional/Reference

Data Communications, Networks, and Systems . .$39.95
Gallium Arsenide Technology, Volume II $69.95
Handbook of Computer-Communications Standards,
Vol. 1, 2nd Ed. $39.95
Handbook of Computer-Communications Standards,
Vol. 2, 2nd Ed. $39.95
Handbook of Computer-Communications Standards,
Vol. 3, 2nd Ed. $39.95
Handbook of Electronics Tables and Formulas,
6th Ed. $24.95
ISDN, DECnet, and SNA Communications $44.95
Modern Dictionary of Electronics, 6th Ed. $39.95
Programmable Logic Designer's Guide $29.95
Reference Data for Engineers: Radio, Electronics,
Computer, and Communications, 7th Ed. . . .$99.95
Surface-Mount Technology for PC Board Design .$49.95
World Satellite Almanac, 2nd Ed. $39.95

Programming

Advanced C: Tips and Techniques $29.95
C Programmer's Guide to NetBIOS $29.95
C Programmer's Guide to Serial Communications $29.95
Commodore 64 Programmer's Reference Guide .$19.95
DOS Batch File Power $39.95
First Book of GW-BASIC $16.95
How to Write Macintosh Software, 2nd Ed. $29.95
Mastering Turbo Assembler $29.95
Mastering Turbo Debugger $29.95
Mastering Turbo Pascal 5.5, 3rd Ed. $29.95
Microsoft QuickBASIC Programmer's Reference $29.95
Programming in ANSI C $29.95
Programming in C, Revised Ed. $29.95
QuickC Programming $29.95
The Waite Group's BASIC Programming
Primer, 2nd Ed. $24.95
The Waite Group's C Programming
Using Turbo C++ $29.95
The Waite Group's C++ Programming $24.95
The Waite Group's C: Step-by-Step $29.95
The Waite Group's GW-BASIC Primer Plus . . .$24.95
The Waite Group's Microsoft C Bible, 2nd Ed. . .$29.95
The Waite Group's Microsoft C Programming
for the PC, 2nd Ed. $29.95
The Waite Group's Microsoft Macro
Assembler Bible $29.95
The Waite Group's New C Primer Plus $29.95
The Waite Group's QuickC Bible $29.95
The Waite Group's Turbo Assembler Bible . . .$29.95
The Waite Group's Turbo C Bible $29.95
The Waite Group's Turbo C Programming
for the PC, Revised Ed. $29.95
The Waite Group's TWG Turbo C++Bible . . .$29.95
X Window System Programming $29.95

For More Information, Call Toll Free

1-800-257-5755

All prices are subject to change without notice.
Non-U.S. prices may be higher. Printed in the U.S.A.

Enhance Your Operating System With Books From Sams And The Waite Group!

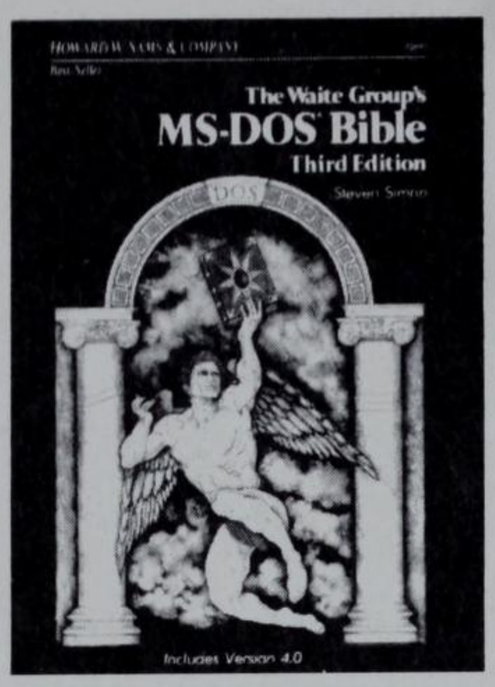

The Waite Group's MS-DOS Bible, Third Edition
Steven Simrin
This edition of the popular Waite Group title explores in detail DOS commands and functions. Coverage includes expanded batch file language, improved disk formatting, and resident memory programming.
650 pages, 7 3/8 x 9 1/4, $24.95 USA
0-672-22693-6

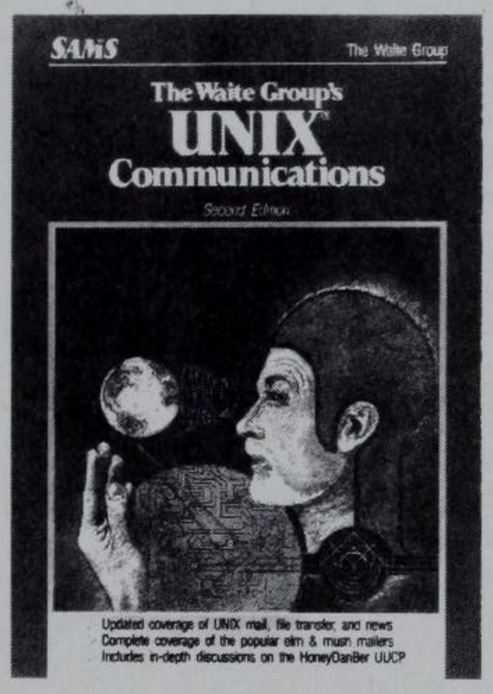

The Waite Group's UNIX Communications, Second Edition
Bart Anderson, Bryan Costales, and Harry Henderson, The Waite Group
Tailored for the latest advances in UNIX mail, file transfer, and news, this book is the perfect companion for both new and experienced UNIX users.
675 pages, 7 3/8 x 9 1/4, $29.95 USA
0-672-22773-8

The Waite Group's MS-DOS Developer's Guide, Second Edition
John Angermeyer & Kevin Jaeger
600 pages, 7 3/8 x 9 1/4, $29.95 USA
0-672-22630-8

The Waite Group's Discovering MS-DOS, Second Edition
Kate O'Day and Harry Henderson
300 pages, 7 3/8 x 9 1/4, $19.95 USA
0-672-22772-X

The Waite Group's Inside Xenix
Christopher Morgan, The Waite Group
336 pages, 7 3/8 x 9 1/4, $29.95 USA
0-672-22445-3

The Waite Group's Tricks of the MS-DOS Masters, Second Edition
The Waite Group
768 pages, 7 3/8 x 9 /4, $29.95 USA
0-672-22717-7

The Waite Group's Tricks of the UNIX Masters
Russell G. Sage, The Waite Group
416 pages, 7 3/8 x 9 1/4, $29.95 USA
0-672-22449-6

The Waite Group's Understanding MS-DOS, Second Edition
Kate O'Day, John Angermeyer, and Harry Henderson, The Waite Group
384 pages, 7 3/8 x 9 1/4, $19.95 USA
0-672-27298-9

The Waite Group's UNIX Primer Plus, Second Edition
The Waite Group
500 pages, 7 3/8 x 9 1/4, $29.95 USA
0-672-22729-0

The Waite Group's UNIX System V Bible
Stephen Prata & Donald Martin, The Waite Group
528 pages, 7 3/8 x 9 1/4, $29.95 USA
0-672-22562-X

The Waite Group's UNIX System V Primer, Revised Edition
Mitchell Waite, Donald Martin, and Stephen Prata, The Waite Group
456 pages, 7 3/8 x 9 1/4, $29.95 USA
0-672-22570-0

SAMS

To order books, call 1-800-428-5331.

Waite Group Reader Feedback Card

Help Us Make A Better Book

To better serve our readers, we would like your opinion on the contents and quality of this book. Please fill out this card and return it to *The Waite Group*, 100 Shoreline Hwy., Suite A-285, Mill Valley, CA, 94941.

Name _____

Company _____

Address _____

City _____

State _____ ZIP _____ Phone _____

1. How would you rate the content of this book?

☐ Excellent ☐ Fair
☐ Very Good ☐ Below Average
☐ Good ☐ Poor

2. Please mark an L for things you liked and a D for things you disliked about this book.

___ Pace ___ Examples ___ Cover
___ Content ___ Index ___ Price
___ Writing Style ___ Listings ___ Quizzes
___ Accuracy ___ Ease of Use ___ Construction
___ Jump Tables ___ Design ___ Appendixes
___ Compat. Boxes ___ Illustrations ___ Ref. Card

3. Please explain the one thing you liked *most* about this book. _____

4. Please explain the one thing you liked *least* about this book. _____

5. How do you use this book? For work, recreation, look-up, self-training, classroom, etc?

6. What is your level of computer expertise?

7. How did you learn about this book? _____

8. Where did you purchase this particular book?

☐ Book Chain ☐ Direct Mail
☐ Small Book Store ☐ Book Club
☐ Computer Store ☐ School Book Store
☐ Other: _____

9. Can you name another similar book you like better than this one, or one that is as good, and tell us why?

10. How many Waite Group books do you own? _____

11. What are your favorite Waite Group books?

12. What topics or specific titles would you like to see The Waite Group develop?

13. What operating system and version are you using?

14. What programming languages do you know?

15. Any other comments you have about this book or other Waite Group titles?

16. ☐ Check here to receive a free Waite Group catalog.

Title of this book _____ ISBN: _____

Fold Here

From:

_____

_____

_____

Place Stamp Here

The Waite Group, Inc.
100 Shoreline Highway, Suite A–285
Mill Valley, CA 94941-3650

Staple or tape here

Information Jump Table *(continued from inside front cover)*

MS-DOS (General Information)

- Append, *48, 373-378*
- Command interpreter, *108-188*
- Commands, *9, 99, 367-553*
- Configuring the system, *77, 93*
- Description of MS-DOS, *3-4*
- Directories, *33-47*
- Disk Structure, *181-207*
- DOSSHELL, *108-110*
- Files, *25-31*
- History of MS-DOS, *4*
- Internal vs external commands, *368*
- Interrupts and functions, *559-574*
- Invoking a secondary command interpreter, *108-188*
- Memory structure, *209-210*
- Programming under MS-DOS, *272*
- Search path, *46-47*
- Starting MS-DOS, *5-10*
- System prompt, *8*
- Undocumented features of MS-DOS, *629-631*

Peripheral Devices/Device Drivers

- Description of a device driver, *292*
- Description of a peripheral device, *81, 98, 292*
- Device driver commands, *303*
- Expanded memory device drivers, *239*
- Function of device drivers, *298-301*
- Installable device drivers, *298*
- Structure of device drivers, *298*

Procedures

- Backing up the system disk, *11-13*
- Booting (starting) MS-DOS, *5-10*
- Changing disk drives, *15*
- Copying a file, *28-30, 407-409*
- Copying an old disk, *443-444*
- Copying the system disk, *11-14*
- Deleting a file, *417-418, 455*
- Displaying the contents of a file, *544*
- Entering a command, *9, 367*
- Formatting a disk, *14-15, 185*
- Initializing a hard (fixed) disk, *467-469*
- Installation on a hard disk, *16*
- Installation with SELECT, *526-527*
- Printing a video display with Ctrl-PrtSc, *475-477*
- Printing the screen with Shift-PrtSc, *10*
- Rebooting with Ctrl-Alt-Del (warm boot), *10*
- Suspending the video display with Ctrl-NumLock, *51, 85-86*
- Terminating command execution with Ctrl-Break, *51, 85-86*
- Using wildcards in commands, *437*

Programming under MS-DOS

- ASCII cross-reference tables, *677-688*
- Assembly language primer, *671-674*
- Hexadecimal/decimal conversion, *687-688*
- Interrupts and function calls, *599-574*
- Terminate and stay resident programming, *257-274*
- Undocumented features of MS-DOS, *629-631*

System Configuration

- Role of AUTOEXEC.BAT, *93*
- Role of CONFIG.SYS, *83-92*
- Use of SELECT for system configuration, *526-527*
- What is system configuration?, *77*

Utility Programs

- BACKUP, *382*
- DEBUG, *315-352*
- DISKCOPY, *442*
- EDIT, *149-160*
- EDLIN, *645-669*
- FDISK, *463*
- FORMAT, *467*
- LINK, *353-363*
- MEM, *487*
- MODE, *495*
- RESTORE, *521*
- SELECT, *525*
- SYS, *539*
- XCOPY, *553*

Wildcards

- Substituting "*" for a group of characters, *31*
- Substituting "?" for a single character, *31*

The Waite Group's®
MS-DOS® Bible
Fourth Edition

MS-DOS is more popular than ever. For expert support, *The Waite Group's MS-DOS Bible*, Fourth Edition, offers you complete coverage of the powerful MS-DOS 5 and the revamped DOS Shell.

Packed with easy tutorials, hands-on examples, and loads of valuable reference pages, this book offers you a guaranteed path to DOS 5 success! You learn how to work with the improved graphics interface, the DOS Editor, and the various extended memory capabilities. You start with a quick introduction to DOS 5—where information jump tables quickly take you to commands, procedures, or topics of your choice. After you become familiar with the terminology, you get hands-on advice. You learn how to implement expert file management techniques, how to create batch files, and how to modify your MS-DOS system. Plus, complete chapters on the DOS Shell and the DOS 5 text editor show you how to really boost your system performance.

The book also presents performance-based advice. You learn great techniques for memory structure and management, building device drivers, and programming your computer with the Debug and Link commands.

DOS power is in your hands with *The Waite Group's MS-DOS Bible*, Fourth Edition!

The Waite Group is a developer of computer science and technology books. Acknowledged as a leader in the field, the Waite Group creates book ideas, finds authors, and provides development support, including editing and reviewing for each title. The Waite Group has produced more than 70 titles, including numerous best-sellers.

22789

***The Waite Group's MS-DOS Bible*, Fourth Edition, shows you how to:**

- **Operate DOS 5 and your computer**
- **Navigate the DOS Shell**
- **Customize your DOS 5 system to your specific needs**
- **Build streamlined hierarchical directories**
- **Automate your software and your system with batch files and macros**
- **Complete advanced text editing with the DOS Editor**

SAMS

INFORMATION CENTER

BEG | INT | ADV

HOW TO | REFERENCE

IBM COMPATIBLE | MAC

OPERATING SYSTEM

MS-DOS | 3.X | 4.X | 5

$29.95 US/$37.95 CAN

ISBN 0-672-22789-4

9 780672 227899 90000